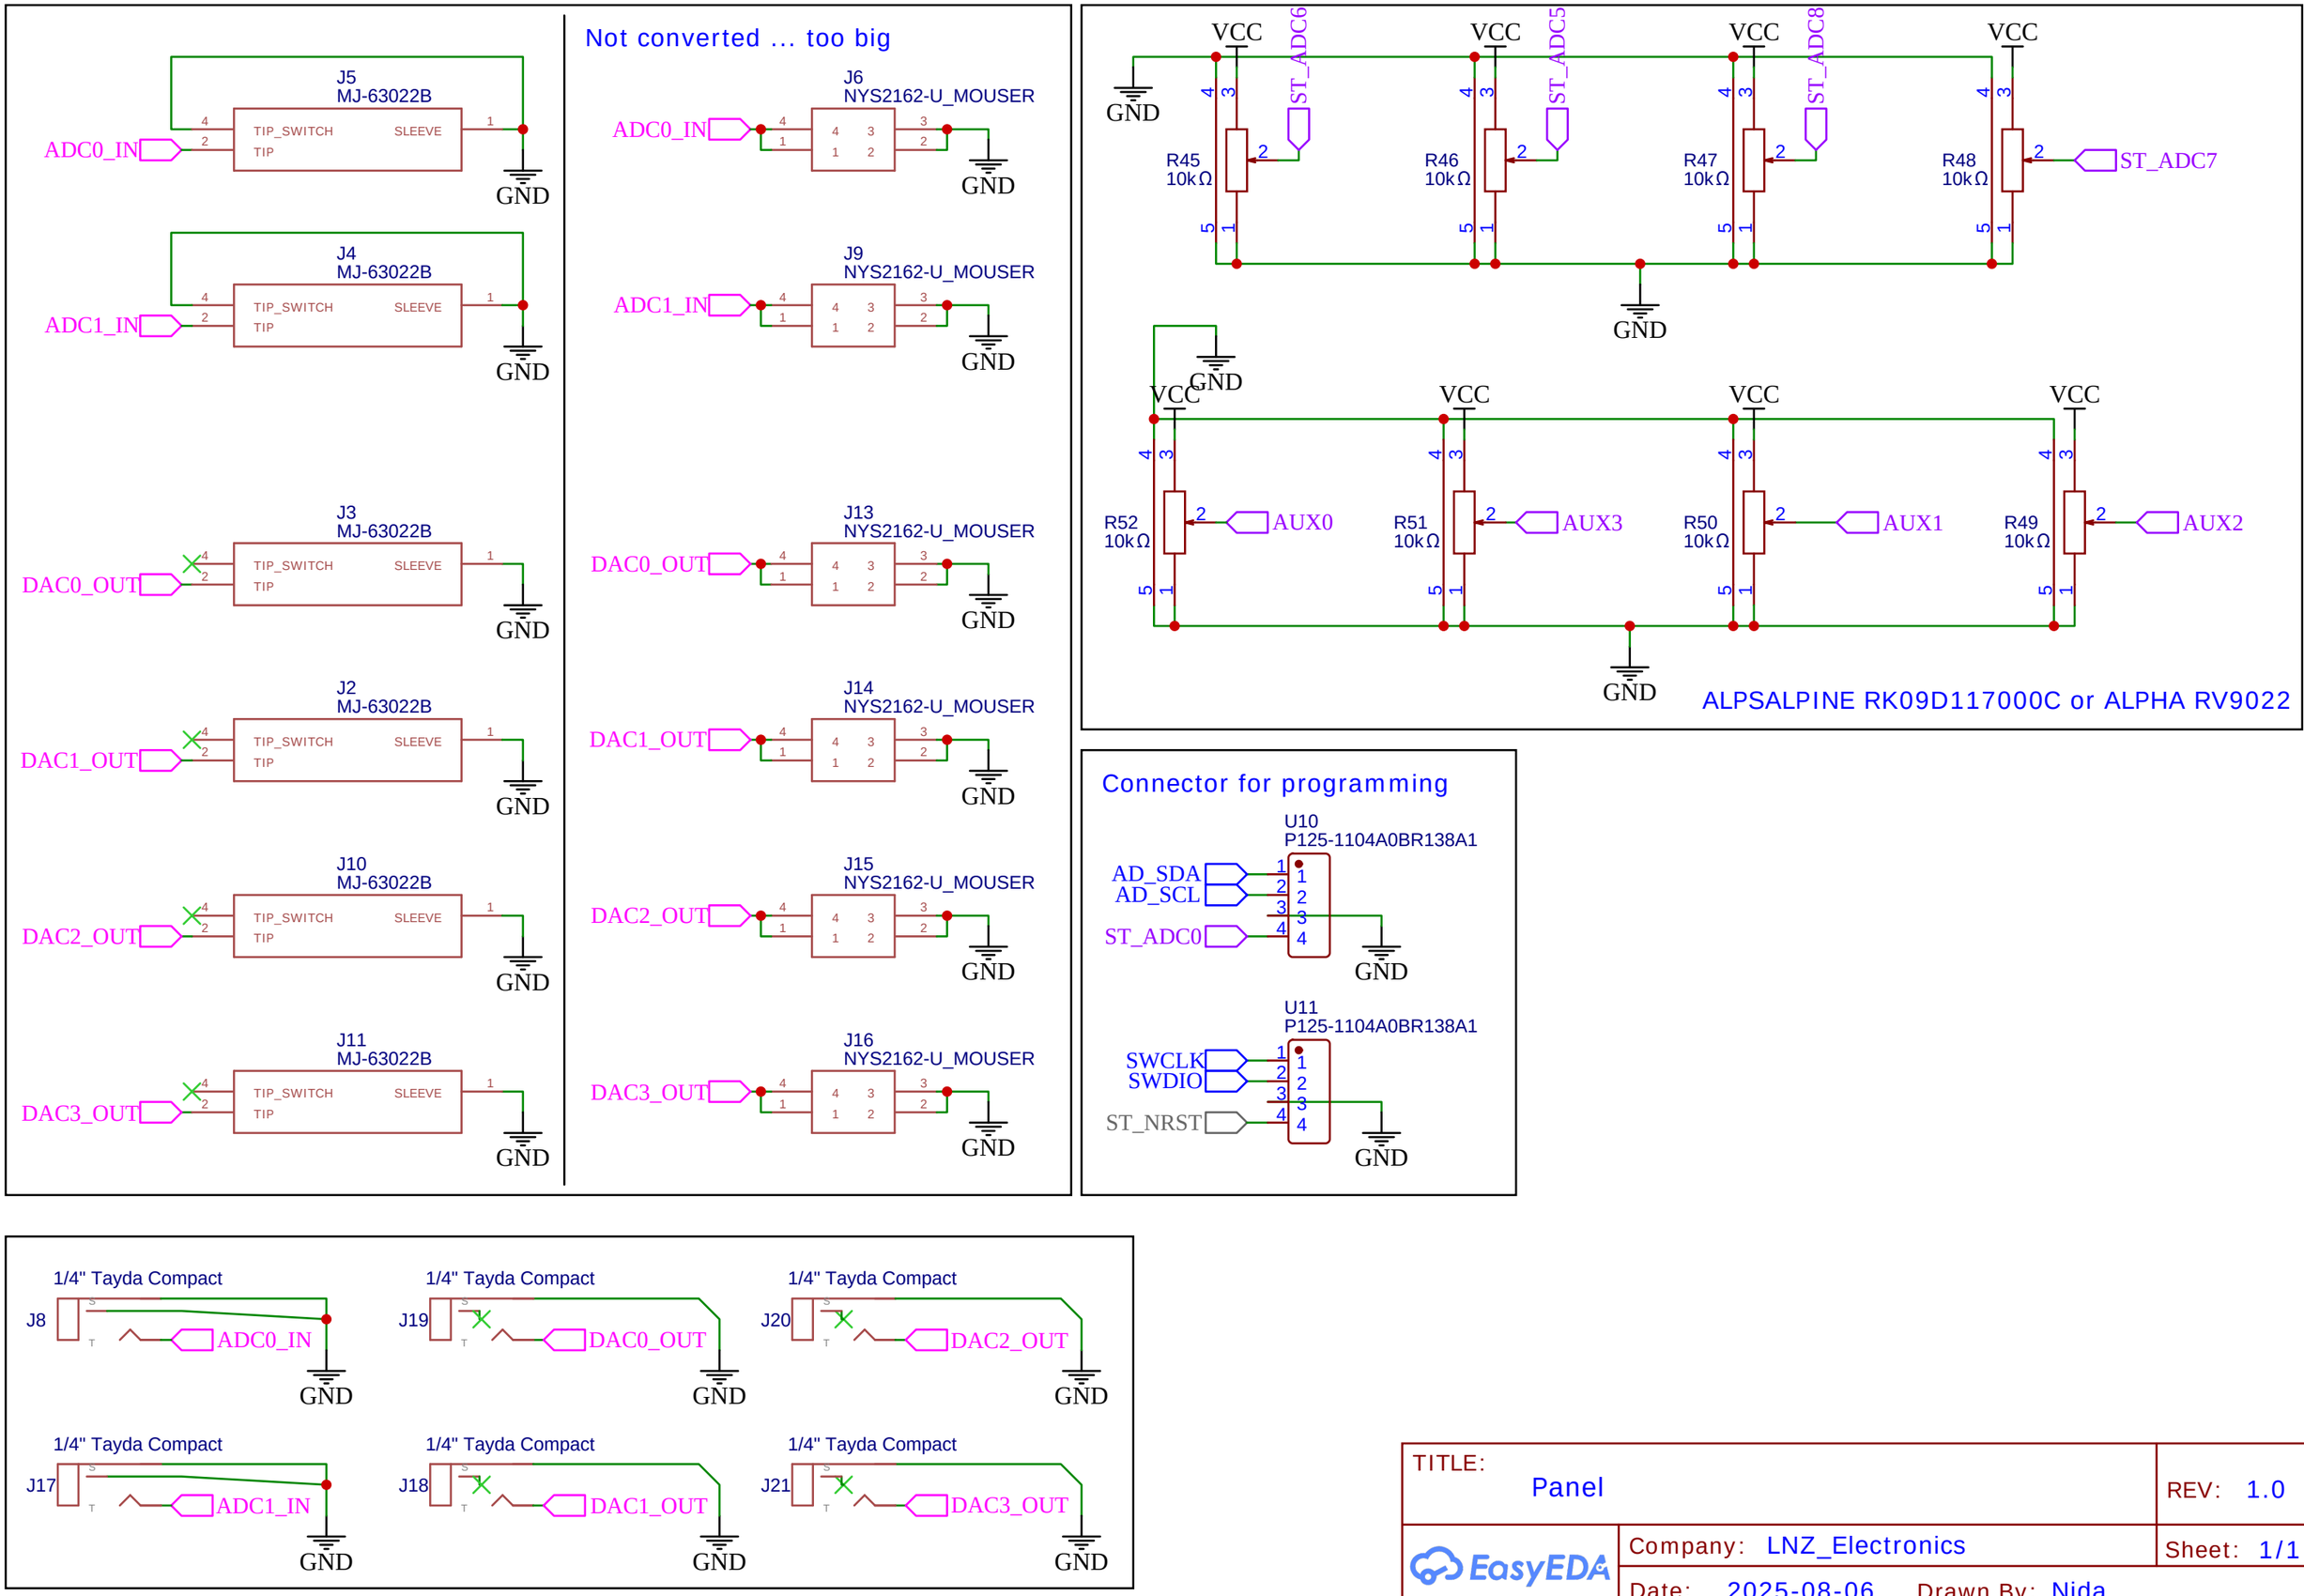


TITLE: Panel			REV: 1.0
EasyEDA	Company: LNZ_Electronics		Sheet: 1/1
	Date: 2025-08-06	Drawn By: Nida	

If battery is connected device is always on.

694106301002_C5441017

DC1

SS12D10G6-WJ
U9

BATT_CONN
H1

GND

Q7
AO3401A

BZT52C10S_C19077446

D2

R82
330Ω

C33
47uF

C35
1uF

+9V

U17
L78M05ABDT-TR

C17
1uF

C34
100nF

+5VA

U18
L78M05ABDT-TR

C19
1uF

C36
100nF

+5VD

J7
DNP
TAYDA 2.1MM A-7137

U16
TLV76133DCYR

C39
1uF

SS34_C8678
D4

C40
2.2uF

VCC

U12
TLV76133DCYR

C42
1uF

SS34_C8678
D5

C41
2.2uF

VCCA

D3.3V and A3.3V supplies

SS8550_C8542
Q2

R81
49.9kΩ

1kΩ
R57

MP5

SW1
TS665CJ

LED2
LED-TH-5mm_R

R62
120Ω

SS8550_C8542
Q3

R63
49.9kΩ

1kΩ
R59

MP4

SW2
TS665CJ

LED1
LED-TH-5mm_R

R44
120Ω

U1
91302-67-067R2M

MP5
MP4
SWCLK
SWDIO

AD_SDA
AD_SCL
ST_ADC9
ST_ADC8
ST_ADC7
ST_ADC6
ST_ADC5
ST_ADC4
RX
TX
ST_ADC1
ST_ADC0


ADC1
ADC0
TIM1_CH1
TIM1_CH2
AUX0
AUX3
AUX2
AUX1
DAC0
DAC1
DAC2
DAC3


M-Key


ST_NRST

Connector for M.2 ADAU1701 SoM

TITLE: Connector & Power supply		REV: 1.0
EasyEDA	Company: LNZ_Electronics	Sheet: 1/1
	Date: 2025-07-27 Drawn By: Nida	

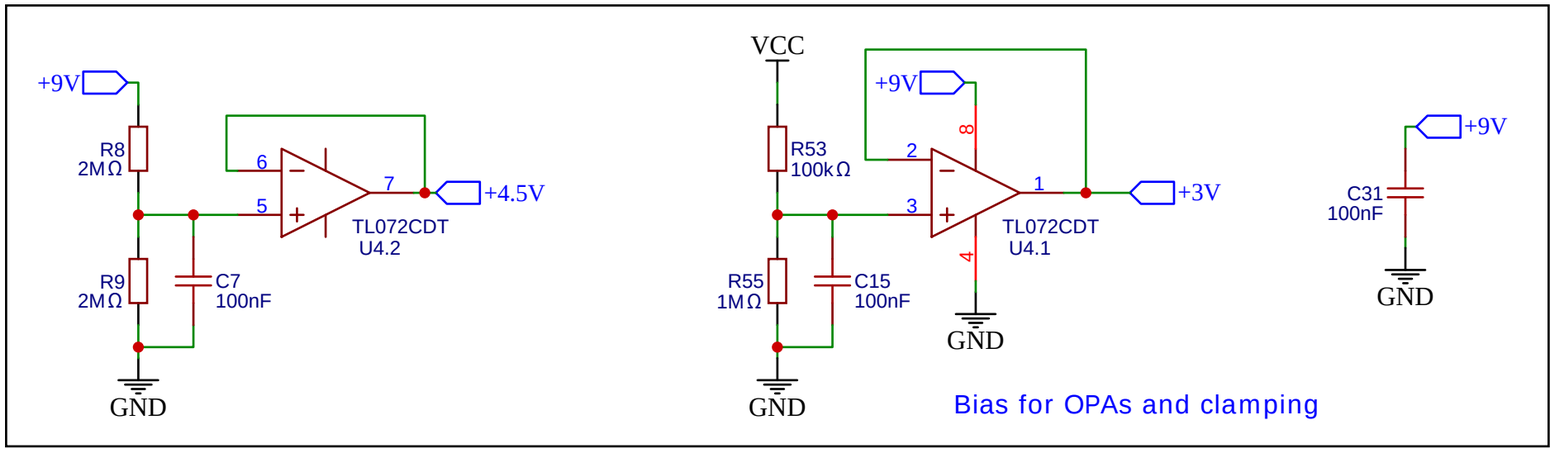


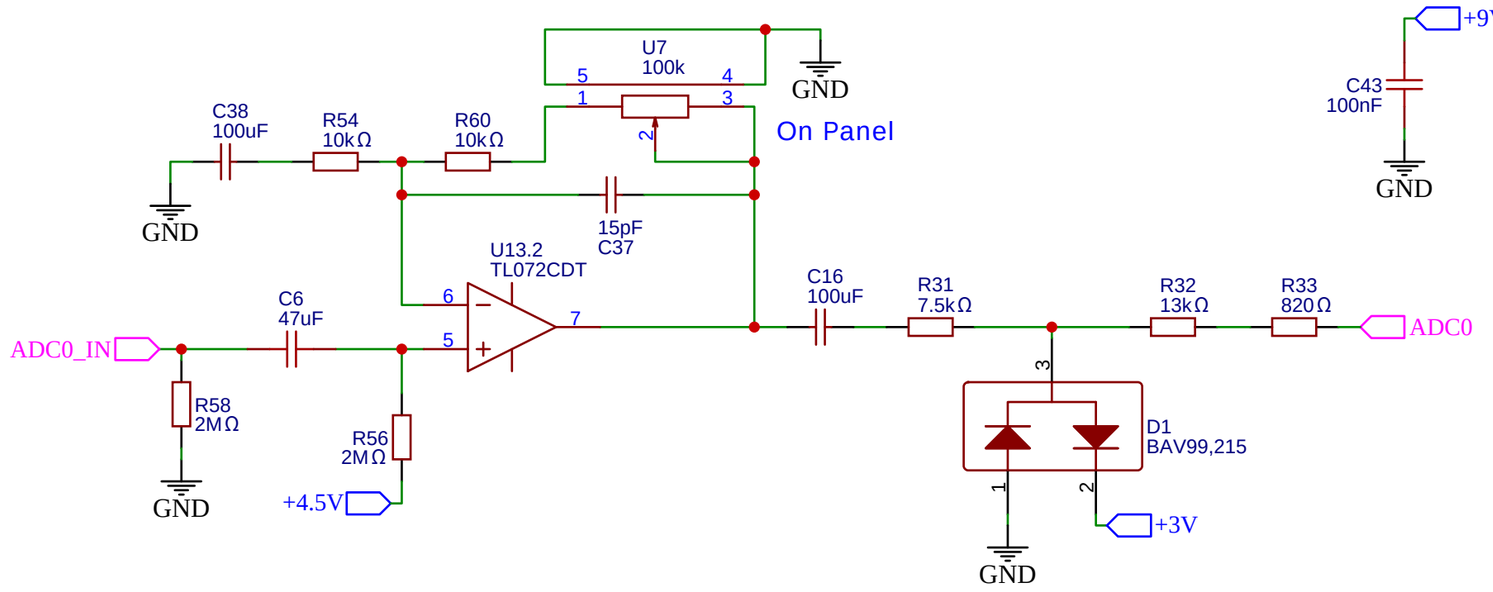


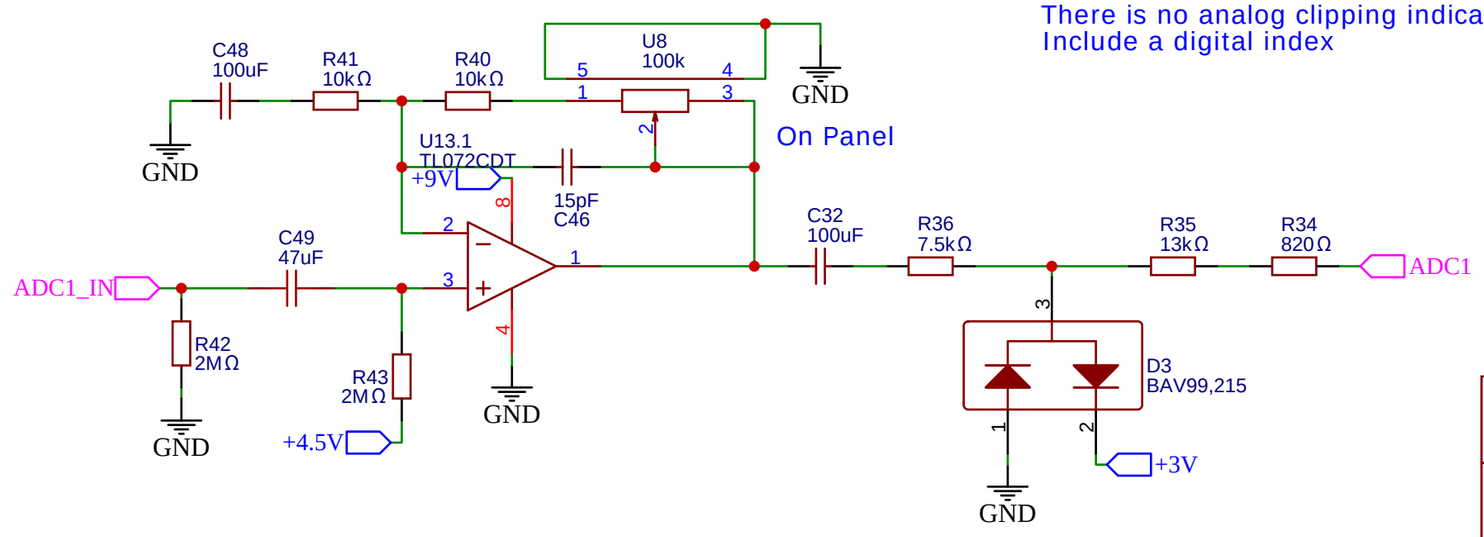



ADCx pins are 1.5V CM, Imax = 283 uA, Vmax = 5,657 Vpp with 20k input impedance)
DACx pins are 1.5V CM, Vmax = 2.5 Vpp (0.9Vrms)
Pedal: Vpp(max)=8.5V --> 9 = 3.18Vrms,
G=5.657/9=0.628, Rin=31.82k
Instrument level 160-260mVrms -->
Gmax=20, leaving headroom Gmax=15


TITLE: ADC0-1 / DAC0		REV: 1.0
EasyEDA	Company: LNZ_Electronics	Sheet: 1/1
	Date: 2025-07-28 Drawn By: Nida	

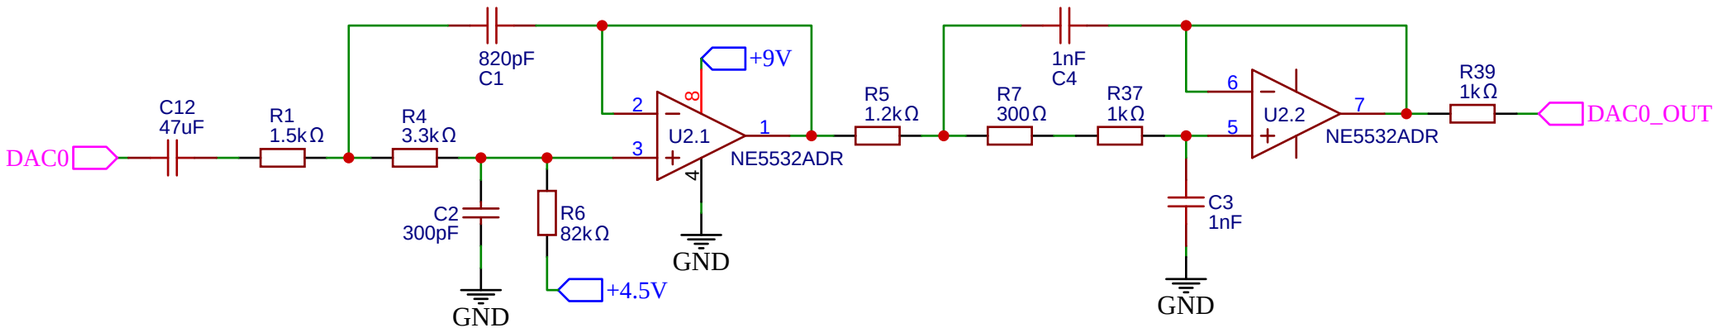





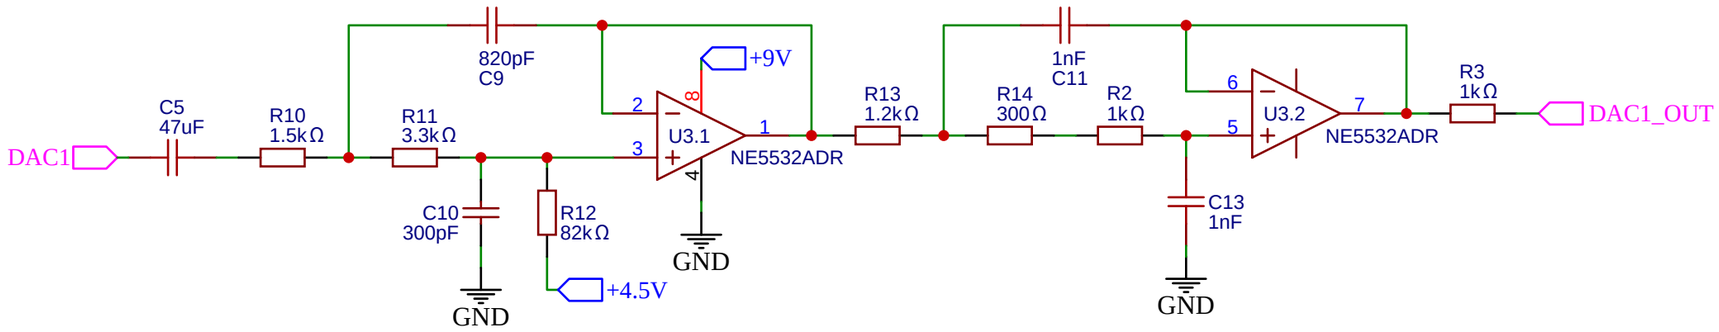




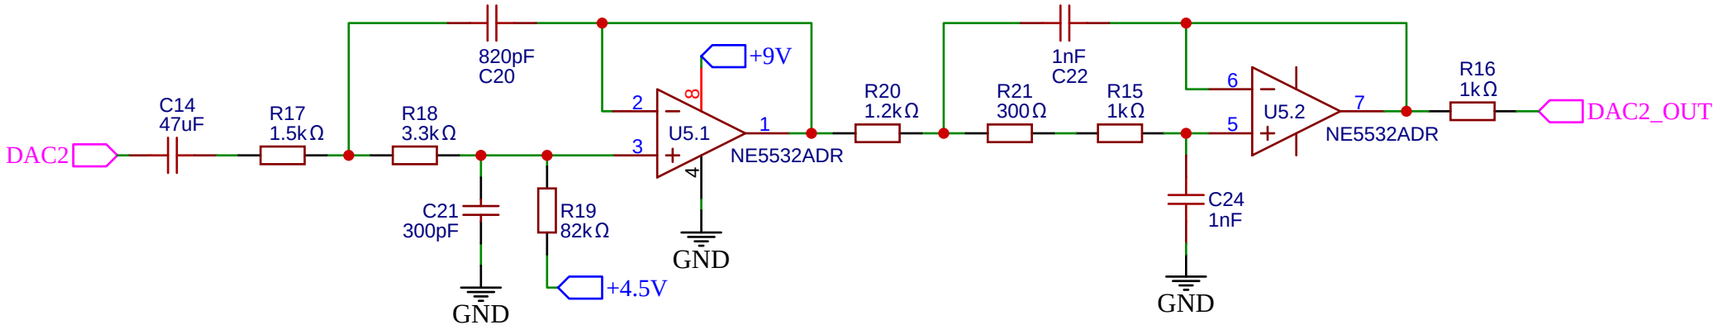



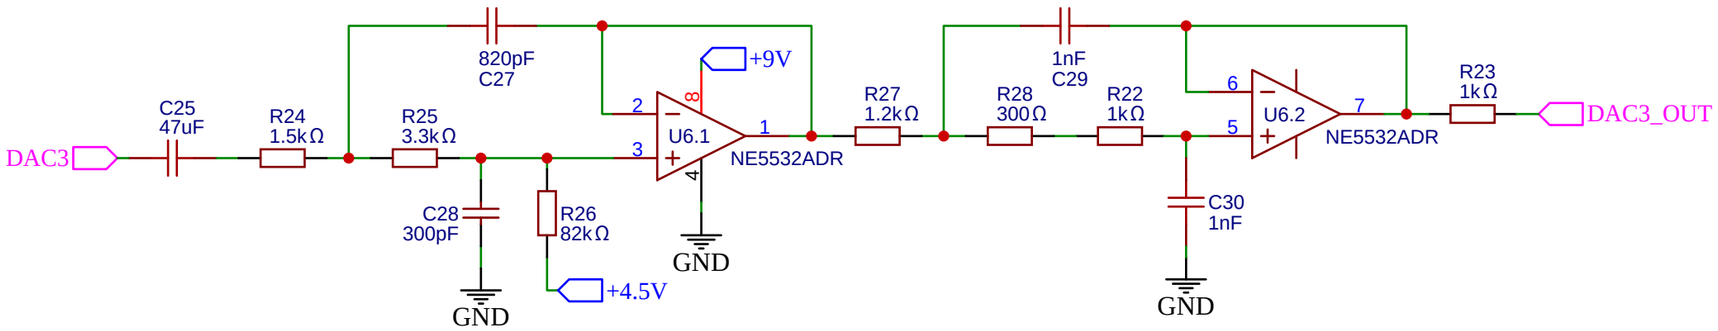



TITLE: DAC1-3		REV: 1.0
EasyEDA	Company: LNZ_Electronics	Sheet: 1/1
	Date: 2025-08-05 Drawn By: Nida	