



USB_PWR
USB_P
USB_N
CH_SDA
CH_SCL
CH_OTG
CH_NCE
CH_INT
File: USB_PWR.kicad_sch
MCU_Core
USB_P
USB_N
I2C2_SDA
I2C2_SCL
CHRG_OTG
CHRG_NCE
CHRG_INT
VDDA
VDD
VDDA_MCU
VDD_MCU
SA1_MCLK_A
SAI1_FS_A
SAI1_SCK_A
SAI1_SD_B
SAI1_SD_A
I2S_MCLK_A
I2S_FS_A
I2S_SCK_A
I2S_DOUT
I2S_DIN
SPI
TLV_NRST
I2C1_SCL
I2C1_SDA
EINK_NPWRON
EINK_NBUSY
EINK_NRST
EINK_DC
SPI2_CS
SPI2_SCK
SPI2_MOSI
SD_CK
SD_D3
SD_D2
SD_D1
SD_D0
SD_CMD
SD_DETECT
File: MCU_Core.kicad_sch
Audio_Codec
+1V8
VDD
VDDA
TLV_AVDD
TLV_IO_VDD
TLV_VDD
C25105
33R
R1009
R1007
R1006
R1008
R1010
MCLK
WCLK
BCLK
DIN
DOUT
NRST
TLV_SCL
TLV_SDA
File: Audio_Codec.kicad_sch
E-Ink_Display
NPWR_ON
NBUSY
NRST
Data/Command
NCS
SCL
MOSI
File: E-Ink_Display.kicad_sch
SD_Card
VDD_SD
CLK
DAT3
DAT2
DAT1
DAT0
CMD
SD_DETECT
File: SD_Card.kicad_sch
Stack-up Considerations
File: Stack-up Considerations.kicad_sch
Sheet: /
File: STM32H7_Codec_Board_Rev0.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 9.0.6
Id: 1/7


USB_Connector

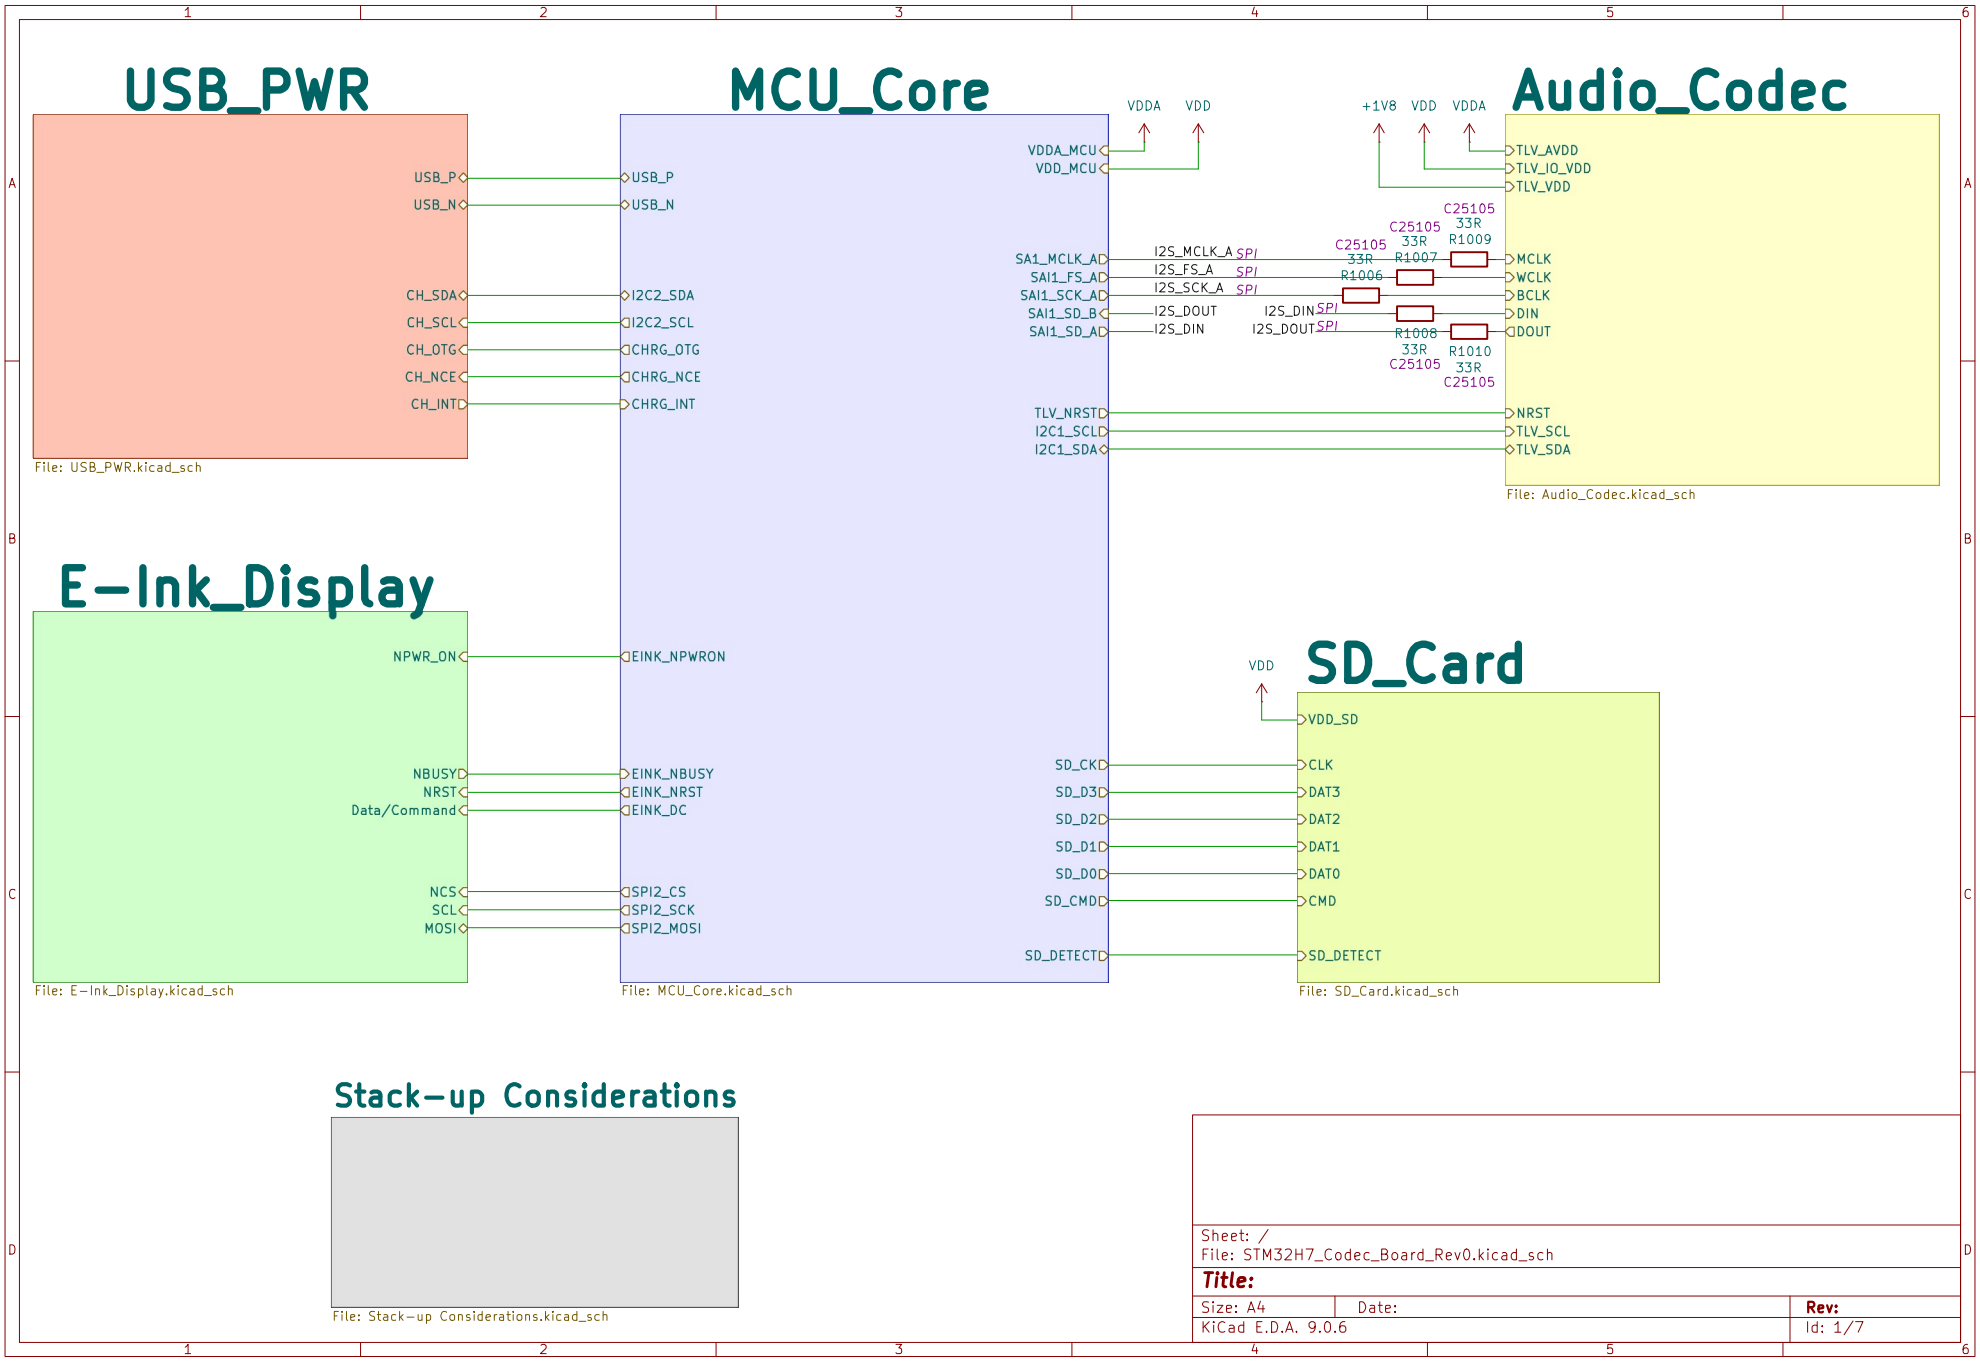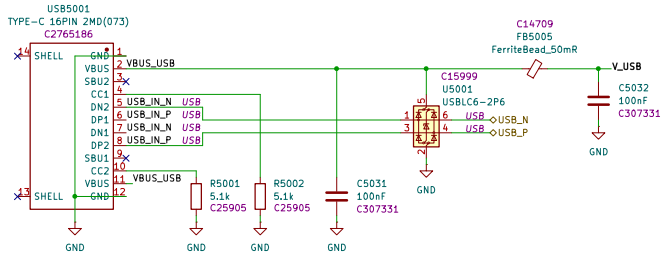


DC_IN

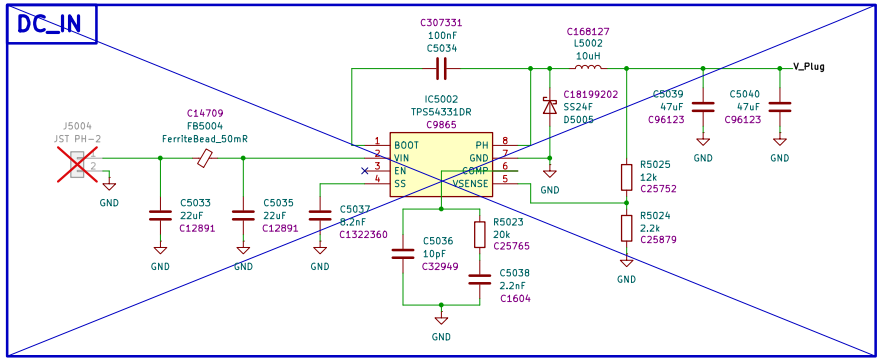


PSU_ORing




Battery Charger

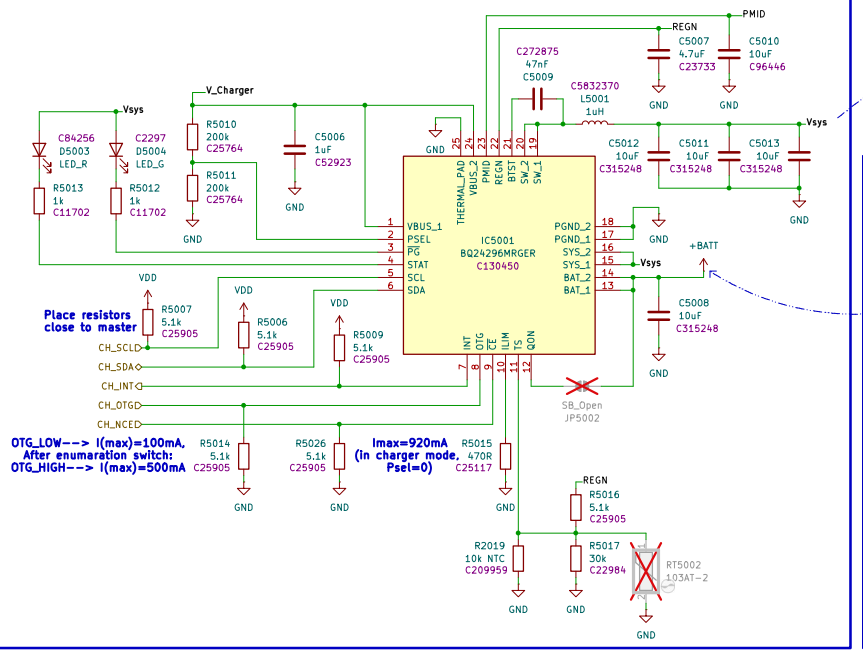


Battery Input

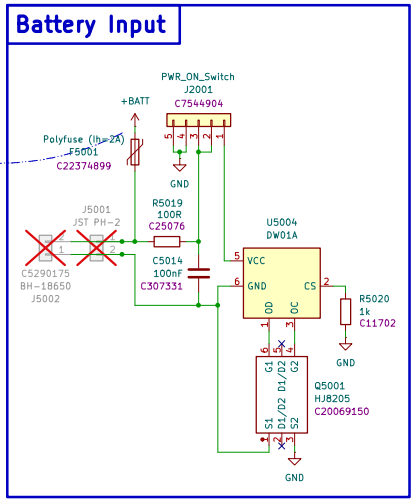

LDOs

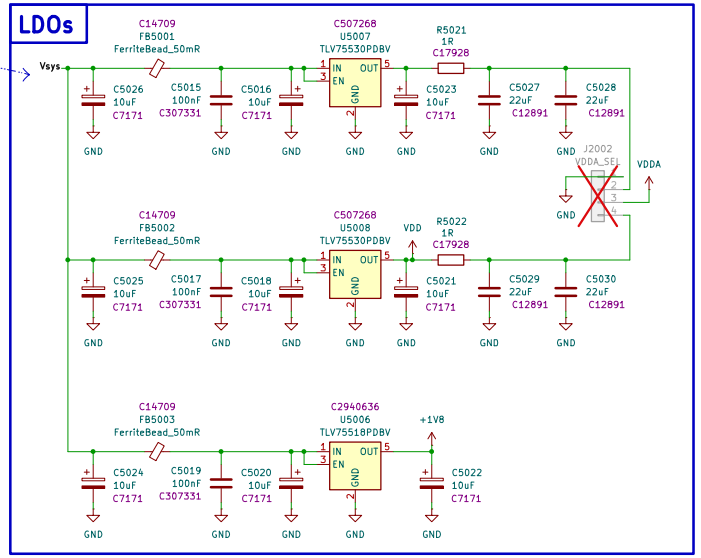

Sheet: /USB_PWR/	
File: USB_PWR.kicad_sch	
Title:	
Size: A3	Date:
KiCad E.D.A. 9.0.6	Id: 2/7

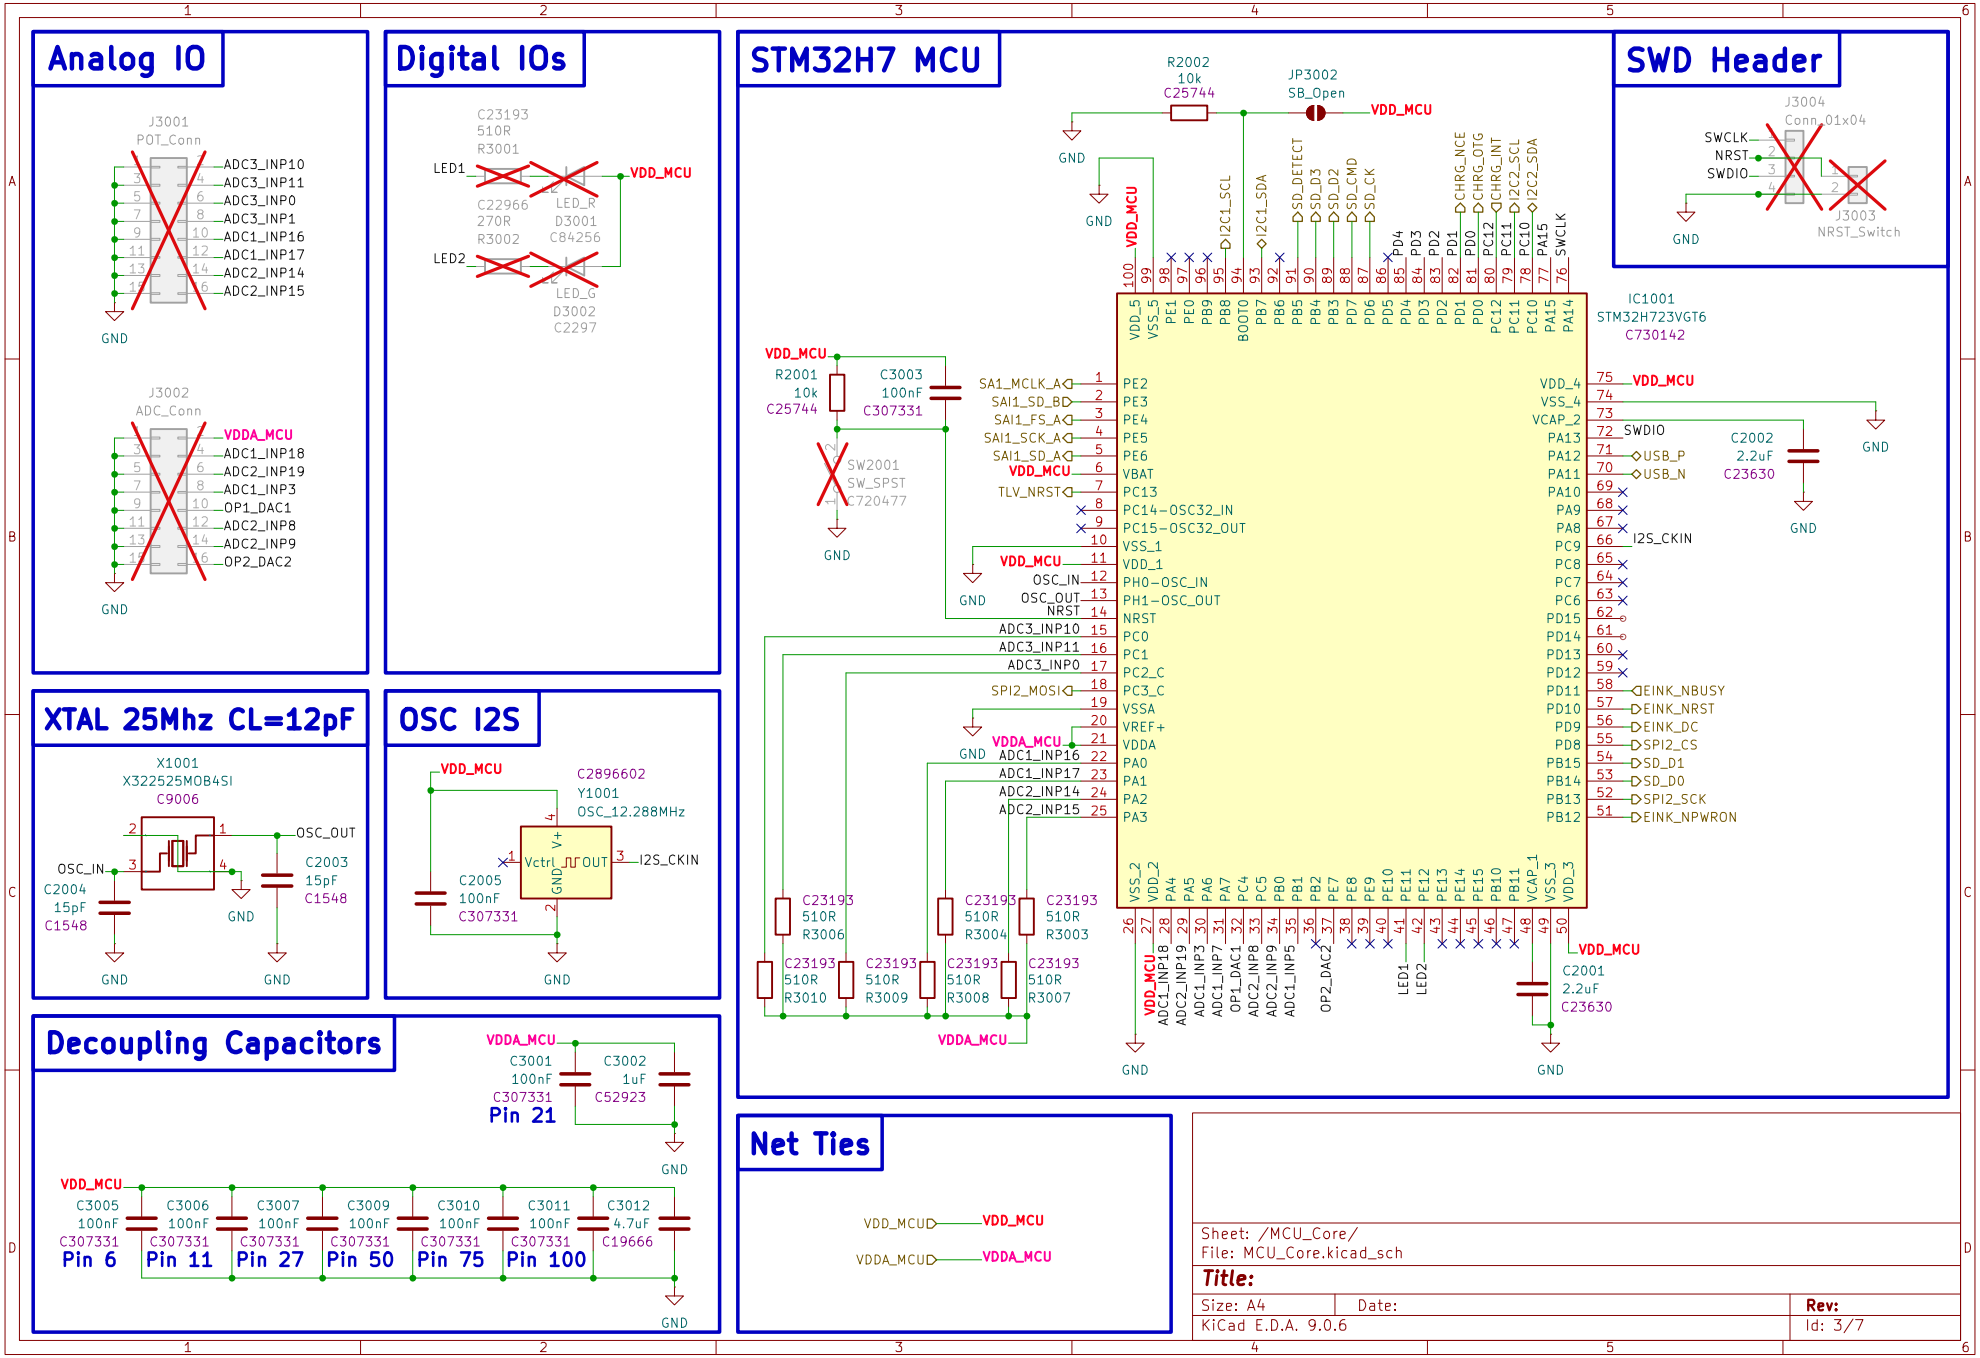


Sheet: /MCU_Core/
File: MCU_Core.kicad_sch


Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 9.0.6		Id: 3/7


Headphones_OUT

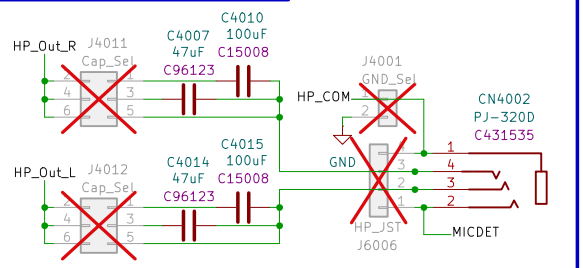


Line Outputs

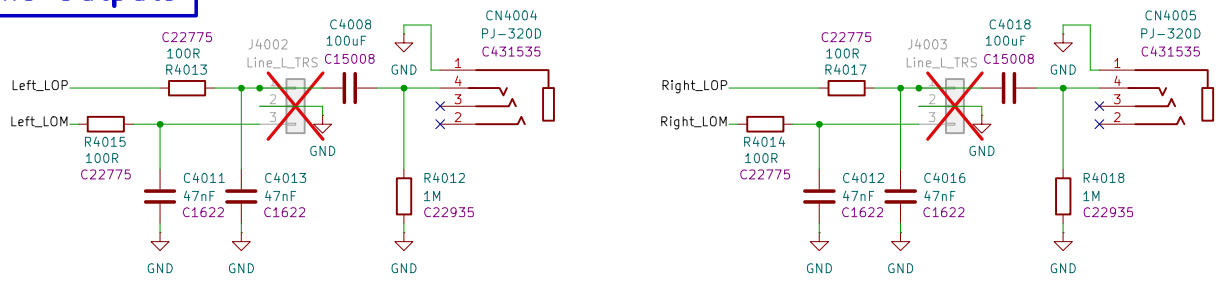


TRS_Inputs / LR_Input

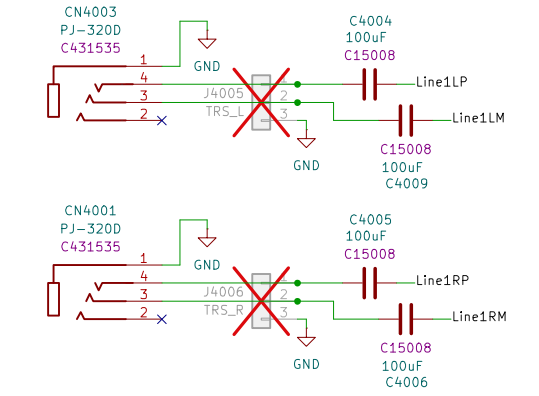


Decoupling caps

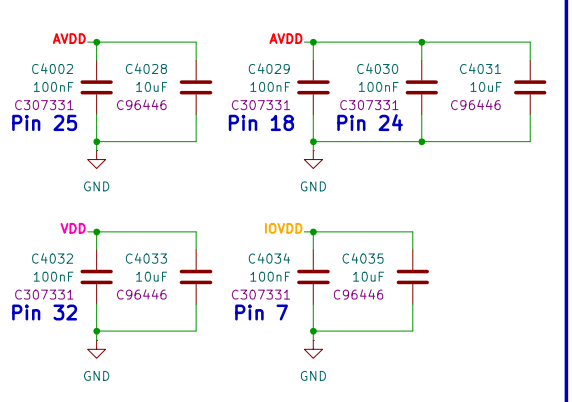

Audio_Codec

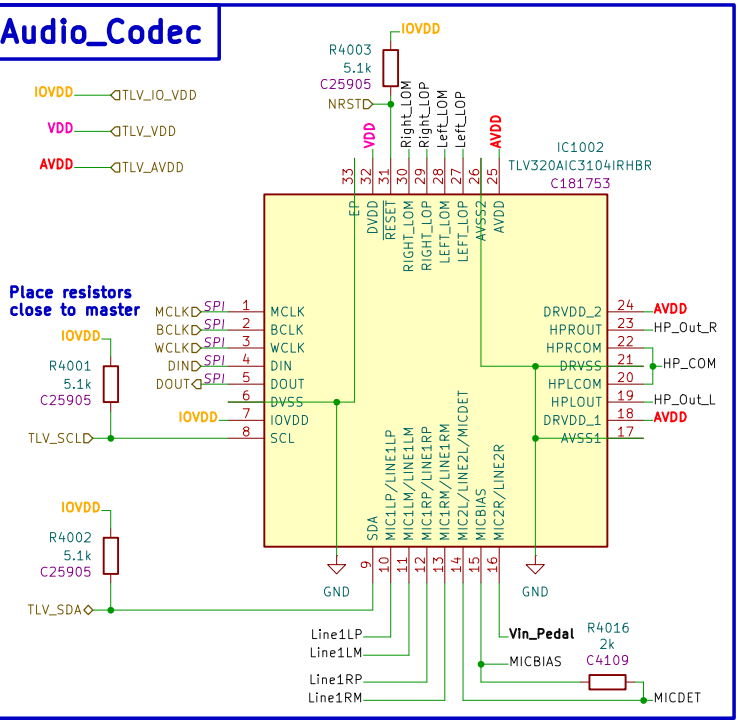


Pedal / Eurorack Inputs

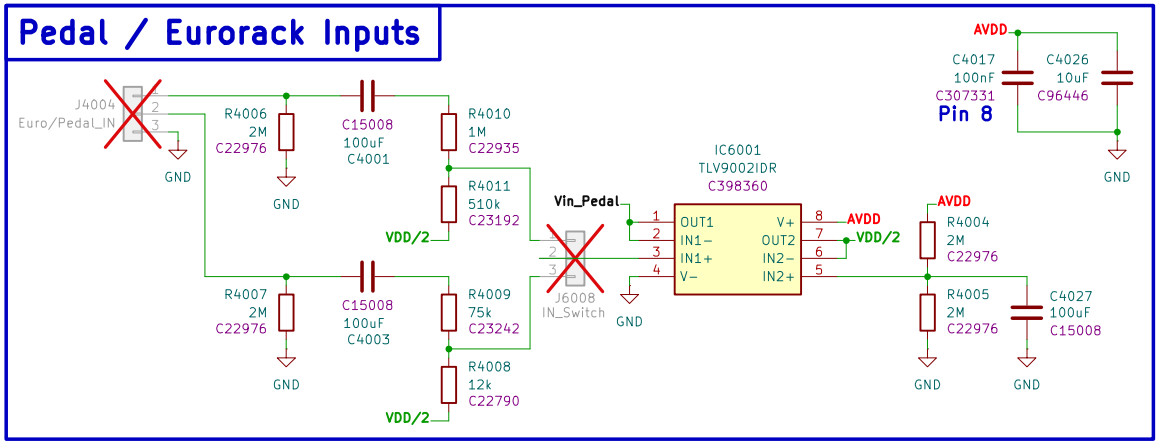

Sheet: /Audio_Codec/
File: Audio_Codec.kicad_sch


Title:

Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.6		Id: 4/7

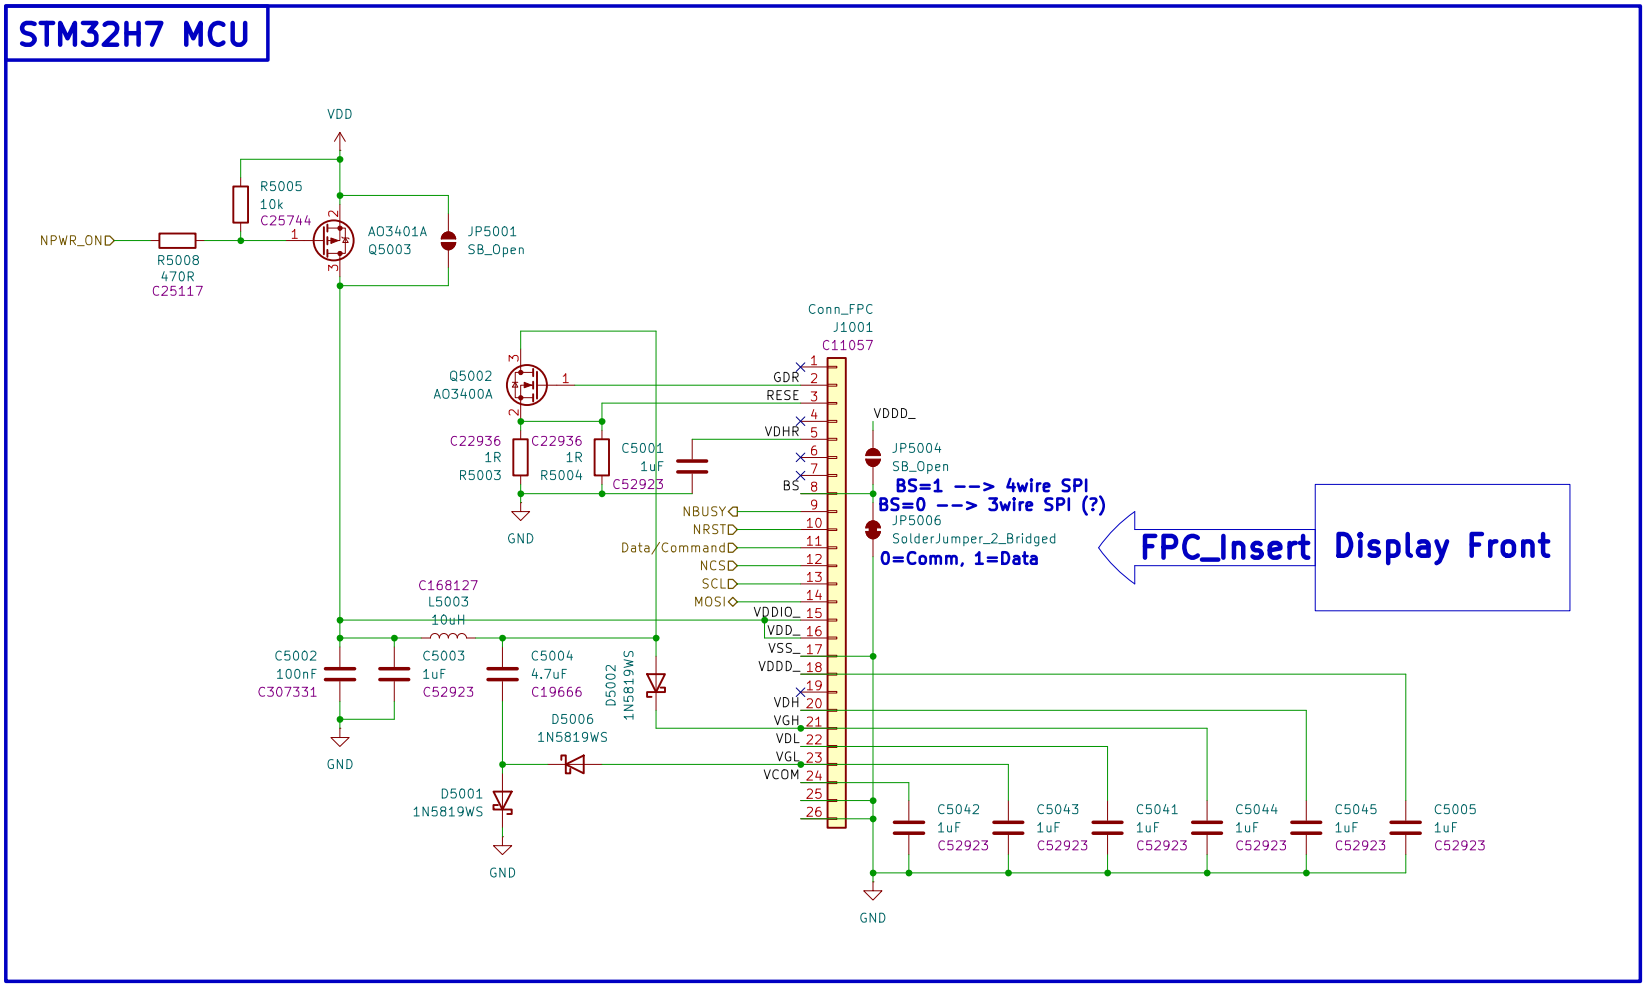


Sheet: /E-Ink_Display/		
File: E-Ink_Display.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 9.0.6		Id: 5/7


Net Ties




Decoupling



SD Connector

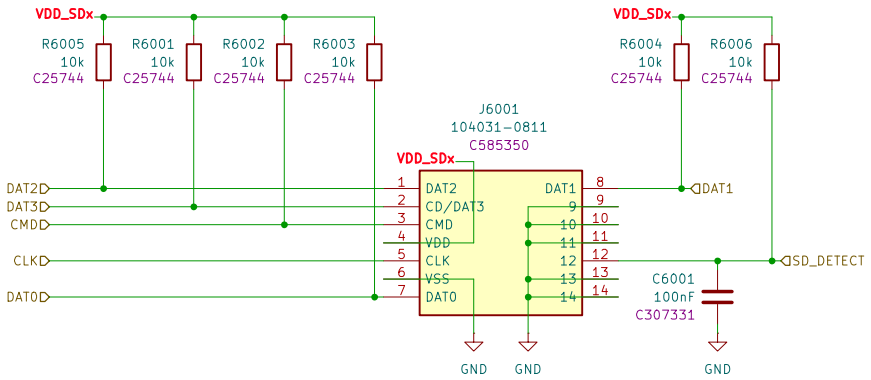

ESD Protection

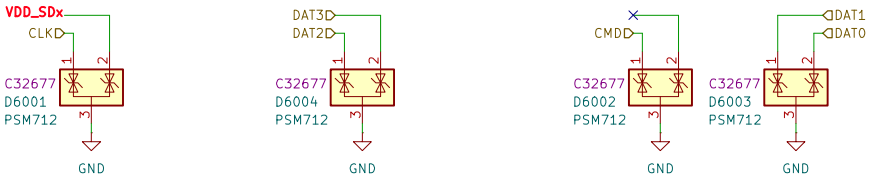

Sheet: /SD_Card/
File: SD_Card.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 9.0.6		Id: 6/7

Impedance (Ω)	Type	Signal Layer	Top Ref	Bottom Ref	Trace Width	Trace Spacing	Impedance trace to copper
90	Differential Pair (Non coplanar)	L1	/	L2	0.2840	0.2000	/

Layer	Material	Thickness (mil)	Thickness (mm)
L1	Outer Copper Weight1oz	1.38	0.0350
Prepreg	7628, RC 49%, 8.6 mil	8.28	0.2104
L2	Inner Copper Weight	0.60	0.0152
Core	1.1mm H/HOZ with copper	41.93	1.0650
L3	Inner Copper Weight	0.60	0.0152
Prepreg	7628, RC 49%, 8.6 mil	8.28	0.2104
L4	Outer Copper Weight1oz	1.38	0.0350

Impedance (Ω)	Type	Signal Layer	Top Ref	Bottom Ref	Trace Width	Trace Spacing	Impedance trace to copper
60	Single Ended (Non coplanar)	L1	/	L2	0.2390	/	/

Layer	Material	Thickness (mil)	Thickness (mm)
L1	Outer Copper Weight1oz	1.38	0.0350
Prepreg	7628, RC 49%, 8.6 mil	8.28	0.2104
L2	Inner Copper Weight	0.60	0.0152
Core	1.1mm H/HOZ with copper	41.93	1.0650
L3	Inner Copper Weight	0.60	0.0152
Prepreg	7628, RC 49%, 8.6 mil	8.28	0.2104
L4	Outer Copper Weight1oz	1.38	0.0350

JLC04161H-7628 Stack-up
Support Economic Assembly

Sheet: /Stack-up Considerations/
File: Stack-up Considerations.kicad_sch

Title:

Size: A4 | Date: | **Rev:**
KiCad E.D.A. 9.0.6 | Id: 7/7