

Deep CCS: Moving Beyond 90% Carbon Dioxide Capture

Matthew N. Dods, Eugene J. Kim, Jeffrey R. Long,* and Simon C. Weston*



Cite This: *Environ. Sci. Technol.* 2021, 55, 8524–8534



Read Online

ACCESS |



Metrics & More




Article Recommendations



Supporting Information

ABSTRACT: The large-scale deployment of carbon capture technologies is expected to play a crucial role in efforts to meet stringent climate targets set forth by the Paris Agreement, but current models rely heavily upon carbon dioxide removal (CDR) strategies for which viability at the gigatonne scale is uncertain. While most 1.5 and 2 °C scenarios project rapid decarbonization of the energy sector facilitated by carbon capture and sequestration (CCS), they generally assume that CCS units can only capture ~90% of the CO₂ in coal and natural gas combustion flues because this was previously considered the optimal condition for aqueous amine scrubbers. In this Perspective, we discuss a small but growing body of literature that examines the prospect of moving significantly beyond 90% capture—a concept we term deep CCS—in light of recent developments in materials and process design. The low incremental costs associated with performing varying degrees of deep CCS suggest that this approach is not only feasible but may also alleviate burdens placed upon CDR techniques facing significant barriers to large-scale deployment. We estimate that rapid deployment of deep CCS in deep decarbonization pathways could avoid more than 1 gigatonne of CO₂ globally each year. The principles of deep CCS could also be applied directly to the CDR strategy of employing bioenergy with CCS, which could lead to a significant alleviation of the land and freshwater burden associated with this technology.

KEYWORDS: deep decarbonization, capture rate, carbon dioxide removal

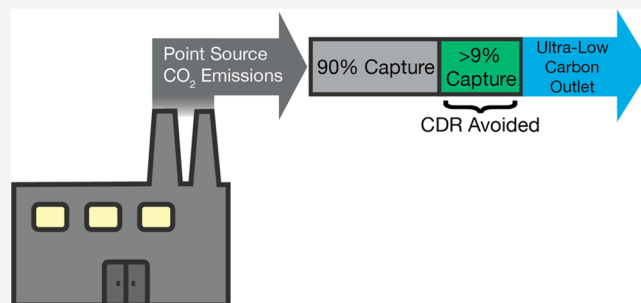

1. INTRODUCTION

Global anthropogenic CO₂ emissions now exceed 40 Gt/yr,¹ ~75% of which derive from the combustion of fossil fuels.² In order to keep average surface temperatures well below 2 °C of preindustrial values, as set forth by the Paris Agreement, integrated assessment model (IAM) scenarios (see [Supporting Information \(SI\) Table S1](#) for a glossary of commonly used terms) have underscored the need for rapid decarbonization of the power generation sector.^{3,4} Variable renewable energy technologies are prevalent in these scenarios, although their penetration into the global energy portfolio is still limited by technoeconomic and sociopolitical hurdles.^{5–12} Principal among these obstacles are the costs associated with the construction of infrastructure for renewable electrical generation and the need to balance inflexible supply with time-varying demand.^{13–18} Although many 1.5 and 2 °C IAM scenarios project rapid scale-up of variable renewables by midcentury,^{3,19} the growing need to curb anthropogenic CO₂ emissions has motivated the deployment of alternative low-carbon technologies in the near-term.

Carbon capture and sequestration (CCS) is one leading strategy that has been proposed as a means to substantially mitigate CO₂ emissions²⁰ and refers to a set of technologies that capture CO₂ directly from the flue exhaust of point sources (such as fossil-fueled power plants) and store it underground in geological formations. Currently, the most

commercially mature technology for capturing CO₂ from point sources involves absorbing the CO₂ into aqueous amine solutions.²⁰ In many cases, existing coal- and natural gas-fired power stations can be retrofitted with carbon capture units, and thus it would not be necessary to overhaul or replace all existing fossil-fuel burning plants to reap the benefits of CCS. Plants that are retrofitted with carbon capture units may also be operated flexibly in response to changes in electrical demand.^{18,21–24} While 1.5 and 2 °C IAM scenarios have frequently projected that CCS will be instrumental in minimizing the cost of climate change mitigation,²⁵ commercial deployment of CCS has not yet reached the scale projected by these scenarios. This disparity is due in part to cost overruns and technical obstacles faced by first-of-a-kind CCS facilities as well as past limited public and private support. Until now, these factors have restricted the deployment of CCS to <50 MtCO₂/yr globally, with a large portion of these plants performing enhanced oil recovery with the captured CO₂.^{26–32} However, the near tripling of large-scale CCS capacity in

Received: November 3, 2020

Published: June 23, 2021



ACS Publications

© 2021 American Chemical Society

8524

<https://doi.org/10.1021/acs.est.0c07390>
Environ. Sci. Technol. 2021, 55, 8524–8534

development between 2017 and 2020 suggests that this technology is now entering a new period where large-scale commercial deployment will soon be feasible.³²

Although CCS can in principle decarbonize a substantial portion of the power generation sector, it is unable to mitigate emissions from disperse sources, such as those derived from the transportation and residential sectors. By contrast, techniques capable of actively removing CO₂ from the air can ameliorate these disperse emissions, and are widely deployed in deep decarbonization pathways.^{33–35} These techniques, collectively referred to as carbon dioxide removal (CDR), describe an array of natural and artificial strategies for removing CO₂ from ambient air. Currently, the most commonly explored CDR strategies for large-scale deployment include afforestation/reforestation, bioenergy with CCS (BECCS), and direct air capture with sequestration (DACS), among others.^{36–41} Briefly, afforestation describes the process of planting trees on land where there was not recently forestry, whereas reforestation describes the planting of trees on recently deforested land.^{42–45} BECCS describes the capture and storage of CO₂ produced from the conversion of biomass or biomass-derived fuels into energy,^{46–49} and DACS encompasses the direct removal and storage of CO₂ from ambient air via engineered processes.^{50–53} Although these techniques are commonly expected to remove >100 Gt of CO₂ cumulatively by the end of the century (Figure 1),^{4,38,54} their feasibility for large-scale deployment remains highly uncertain. For BECCS and afforestation/reforestation, this uncertainty is primarily due to concerns over land and freshwater availability at the levels needed for large-scale CDR and the ecological and ethical risks that arise from the dedication of fertile land for

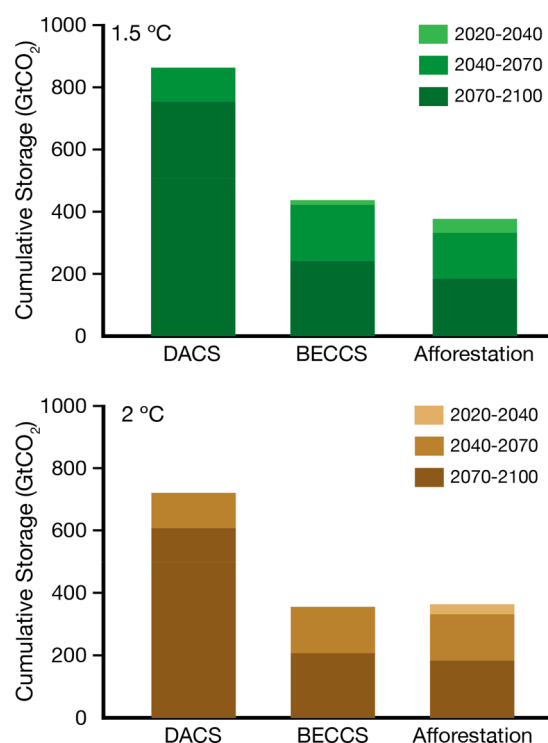


Figure 1. Cumulative carbon dioxide removal for 1.5 °C (upper) and 2 °C (lower) scenarios. Data are from the Grantham Institute TIMES Integrated Assessment Model in ref 54. Until recently, integrated assessment modeling of technological CDR other than BECCS has been uncommon.^{63–68}

this purpose.⁵⁵ Given these biogeophysical and socioeconomic constraints and the uncertain practical potential of afforestation/reforestation and BECCS, substantial investigation into alternatives, such as DACS, is underway in order to satisfy the global CDR requirement.^{37,56} DACS offers some alleviation of the land/water burden because it does not require arable land or nearly as much water as afforestation/reforestation or BECCS. However, commercial DACS operations are currently hampered by substantial costs, primarily arising from the need to regenerate CO₂ from strongly binding capture media.^{50,57–59} The direct air capture company Carbon Engineering recently published a conceptual analysis of its pilot plant that estimates an overall levelized cost for DACS in the range \$113–232 per tonne of CO₂ captured, with the lower end of this estimate corresponding to designs for which low-carbon electricity is available at low cost.⁶⁰ Although this is a significant improvement upon previous cost estimates for DACS (e.g., \$600/tonne of CO₂),^{52,61} it is still more expensive than the majority of estimates for conventional point-source CCS technologies (e.g., \$36–53/tonneCO₂ for coal CCS and \$48–111/tonneCO₂ for natural gas combined cycle CCS).⁶² While there are circumstances under which DACS could become cost-competitive with other decarbonization measures in the near-term,^{63,64} most 1.5 and 2 °C IAM scenarios project that fossil CCS will hold a central role in decarbonizing the power generation sector in the next few decades.

In these scenarios, decarbonization of the power generation sector is typically only partially achieved with CCS. One fundamental reason is that the capture fractions considered in most designs and IAMs are well below the values of ~99% and ~99.7% for natural gas combined cycle (NGCC) and pulverized coal combustion, respectively, that would be needed to achieve outlet CO₂ compositions equal to the ~410 ppm in ambient air (commonly referred to as “carbon-zero” or “carbon neutral” capture fractions). Thus, residual CO₂ emissions still escape fossil fuel-fired units, despite the presence of carbon capture. Although ~90% capture is commonly assumed in designs and models irrespective of plant size or the composition of the flue gas, it is not necessarily the most cost-effective capture fraction for these circumstances (Figure 2a).^{69–72} Recent studies^{72–75} have demonstrated that pursuing capture significantly beyond 90% in point-source CCS, hereafter referred to as deep CCS, may be associated with only marginal increases in plant capital and operating expense. In this Perspective, we assess the pursuit of such deeper capture targets in light of the global carbon budget and propose that the residual emissions avoided may dramatically alleviate burdens placed upon CDR techniques. We note that our discussion hinges upon the assumption that deep CCS would be implemented only after the successful deployment of conventional CCS. Our hope is that this article will broadly motivate scientists and engineers to consider >90% capture in their investigations of carbon capture materials and process configurations, and that it will encourage the modeling community to move beyond the artificial assumption of 90% in their representations of CCS.

2. TECHNOECONOMIC BENEFITS OF DEEP CCS

Deep CCS may offer an inexpensive route toward deep decarbonization of the fossil-fueled energy sector because it requires only minor adjustments to conventional (~90% capture) designs. Although the operating expense per tonne of CO₂ avoided in deep CCS will be larger than in conventional

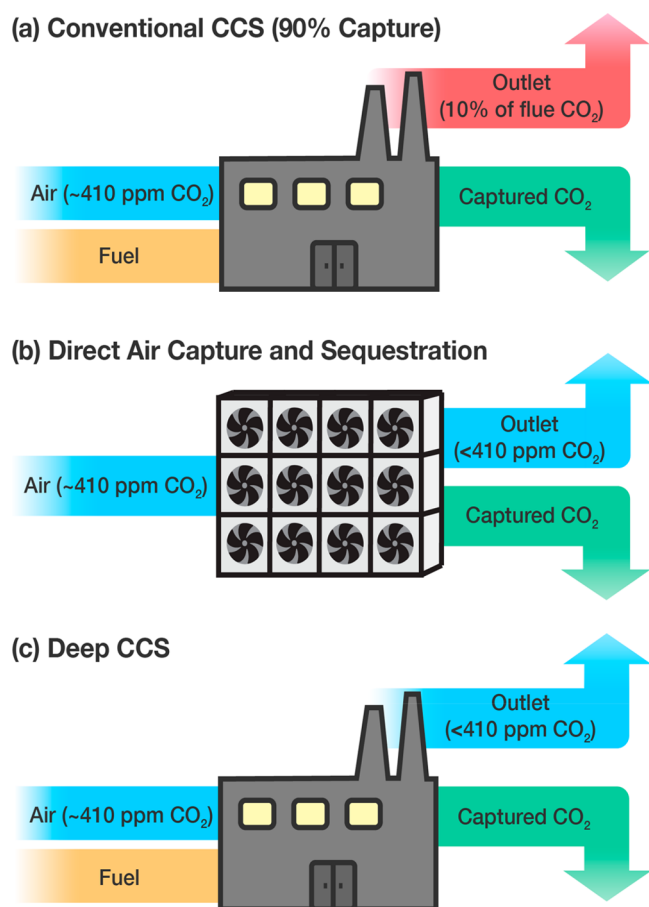


Figure 2. (a) In conventional CCS, typically only ~90% of the CO₂ from the power plant exhaust is captured. (b) The outlet CO₂ composition resulting from DACS must necessarily be less than the inlet composition (~410 ppm of CO₂). (c) With deep CCS, it is possible to achieve an outlet composition of <410 ppm of CO₂. However, note that there may be circumstances where it is more feasible to pursue outlet compositions ≥ 410 ppm in deep CCS. Because deep CCS generally describes capture significantly beyond 90%, it can yield carbon positive, carbon negative, or net carbon zero/carbon neutral outlets.

CCS due to the need to overcome incremental kinetic and thermodynamic limitations, the increase in minimum separation work per mole of CO₂ captured upon moving from 90% to ~100% capture is relatively small, namely ~0.48 and ~0.57 kJ/molCO₂ for pulverized coal combustion and NGCC, respectively (all calculations are performed at a temperature of 25 °C; for more details, see SI Section 2). The energetic palatability of deep CCS arises from the logarithmic dependence of the minimum separation work on the composition of the inlet stream (SI Figure S2), which is ~11–15% CO₂ for coal and ~4–6% for NGCC flues. By contrast, the energy needed to compress the additional ~10% of CO₂ scales linearly with the amount of CO₂ captured (provided that the purity of the desorbed stream is unchanged upon moving from 90% to ~100% capture), and is only ~12 kJ/molCO₂. Although entropic irreversibilities prohibit practical attainment of these thermodynamic minima for separation and compression,^{76,77} this simple calculation demonstrates that the operating expense for deep CCS may closely approach that for conventional CCS if incremental efficiency losses can be minimized upon exceeding ~90% capture.

These incremental efficiency losses can indeed be kept small in aqueous amine scrubbers, for which the operating expense is dominated by the reboiler duty for solvent regeneration. Higher capture fractions can be achieved by increasing the interfacial area of the absorber and by modulating the column hydrodynamics with increased liquid:gas ratios, although absorber intercooling can reduce the liquid flow rates needed. Provided that mass transfer limitations are not prohibitive, the rich loading is unlikely to vary substantially with capture fraction, and the reboiler duty will scale with the increased solvent flow.^{21,23,78} Rochelle and colleagues recently demonstrated that 99.1% capture from coal combustion flue can be accomplished with only a 20% increase in solvent flow rate and less than 5% increase in the reboiler duty with the advanced flash stripper design, both relative to 90% capture.⁷⁴ A recent modeling study from Jiang et al.⁷³ further demonstrated that the advanced flash stripper design can enable 99.7% capture from coal combustion flue gas with an increase in the cost of CO₂ avoided by only \$2.6/tonne and an increase in the levelized cost of electricity by only \$8.1/MWh (both relative to 90% capture). Even without extensive thermal integration of the scrubbing system, capture fractions exceeding 99% can be achieved with minimal added cost, but thermal degradation of the amine solutions in the high-temperature stripper remains a critical concern.^{79–81}

Many of the amine solvents that have shown promise for fossil CCS are thermodynamically capable of capturing CO₂ at compositions well below 410 ppm. However, mass transfer limitations arising from these ultradilute CO₂ compositions mandate large absorption interfacial areas with associated capital expense, imposing a practical upper limit on the capture fraction. In the same study referenced above from Jiang et al.,⁷³ the authors found that approximately half of the absorber column is needed to achieve just 3.2% of the overall CO₂ capture. In scrubbers treating NGCC flue gas, which is more dilute in CO₂ than coal flue gas, the interfacial areas needed to achieve a 410 ppm outlet may become unfeasibly large and may dominate the incremental capital expense. Considering that many 1.5 and 2 °C IAM scenarios project that NGCC with CCS will occupy a substantial portion of the global energy portfolio in 2100,¹⁹ efforts should be directed toward the development and testing of materials capable of performing low-cost deep CCS from NGCC flues.⁸²

The superior diffusional kinetics and high volumetric capacities of porous adsorbents make them excellent candidates in this context, as the overall land footprint of deep CCS units utilizing these materials can be kept fairly small.²⁰ Modular designs may also be possible, wherein conventional (i.e., ~90% capture) contactors can be appended with deeper capture units in a multistage configuration that alleviates some of the financial risk in adopting deep CCS. Indeed, these deeper capture units could be financed by incentives and regulatory frameworks aimed at residual emissions reductions at a later time. Such an approach might enable a reduction in incremental capital and operating expenses, given that smaller contactors could be used for the higher concentration separation upstream and thermodynamic tuning of the stages could be optimized to minimize heat transfer inefficiencies. The immense diversity of amine-functionalized adsorbents renders them particularly well suited for this application, because the capture material (and hence the Gibbs energy of adsorption) can be varied at different stages to achieve the desired capture fraction, assuming kinetic

limitations are not governing.^{83–85} In particular, amine-appended metal–organic frameworks exhibiting cooperative adsorption could enable precise control over the adsorption enthalpies in each stage, which may lead to considerable energy savings for the overall unit, especially if direct-contact steam stripping is used for regeneration.^{86–90} Research into these adsorbents is only now emerging, and will benefit from the development of new models and technoeconomic analyses to establish realistic cost and energy considerations that will guide their development for deep CCS. For additional discussion of potential sorbent materials and process configurations for deep CCS, see SI Section 3.

Given that deep CCS will produce outlet streams with CO₂ concentrations similar to that in ambient air, the deployment of materials and process configurations in deep CCS may synergistically inform cost reductions for DACS through technological learning.^{27,91,92} We anticipate that for suitable coal and NGCC units, the cost of implementing deep CCS will be lower than that for DACS for a number of reasons. For example, unless wind currents can be harnessed effectively,⁹³ DACS requires pressurization of the inlet air with the aid of large fans operating with low-carbon electricity (Figure 2b). In the ~1 MtCO₂/yr design from Carbon Engineering, 61 kWh/tonne CO₂ of electricity is needed to support an air velocity of 1.4 m/s in a fan with inlet area of 45 000 m².⁶⁰ In contrast, deep CCS does not require sizable fans, because it draws directly from a pressurized flue. Another requirement for direct air capture plants is that they operate at ambient temperature, given the impracticality of heating large quantities of ambient air. Therefore, for a temperature-swing process, large amounts of sensible heat would be required to regenerate the sorbents, which typically have large heat capacities and/or low thermal conductivities. On the other hand, the temperature of a deep CCS inlet can be controlled with direct contact coolers that are already employed commercially. The above-ambient sorption temperatures that could be utilized in deep CCS would require less sensible heat relative to DACS and may also enable a stark reduction in water coadsorption in solids, due to the exponential dependence of relative humidity on temperature.^{94,95}

We note that DACS also offers advantages that are otherwise inaccessible with deep CCS. For example, direct air capture can ameliorate legacy emissions from unmitigated fossil fuel combustion. Additionally, DACS operations are inherently more flexible in their geographical placement than CCS technologies, and as such the cost of transporting and storing CO₂ may be lower for DACS than for CCS operations. Additionally, direct air capture does not require pretreatment of the incoming air to protect the capture media from toxic gases (e.g., SO_x and NO_x), which can be particularly problematic for coal capture units.^{96,97} Although these economic benefits are unlikely to surmount the intrinsic cost differential between DACS and deep CCS, there are scenarios where the large-scale deployment of DACS may be justified in the near-term.^{63,64,98} An improved understanding of all factors influencing deployment of DACS relative to deep CCS is direly needed in conjunction with research into materials and process configurations devoted to each approach.

3. THE PROSPECT OF NEGATIVE EMISSIONS

Conservation of mass requires that the CO₂ composition of a DACS outlet be less than the inlet air composition. DACS and deep CCS both obey the same thermodynamic limit of 100%

capture, and thus while it is commonly thought that fossil CCS is at best carbon neutral (~410 ppm outlet), there is no fundamental reason why a deep CCS exhaust cannot be carbon negative with respect to the inlet air supply (Figure 2c). However, even for a ~ 0 ppm of CO₂ deep CCS outlet, the negative emissions achieved inside the plant boundaries (which we define as starting at the point of fuel combustion and ending at the exhaust of the CO₂ capture unit) will be small compared to the current and anticipated lifecycle emission rates for the coal and natural gas supply chains in the United States (SI Section 7). As such, deep CCS should not be viewed as a CDR technique, but the pursuit of sub-410 ppm outlet compositions can still offset a portion of the upstream emissions and is warranted if the incremental cost can be kept low. Because the proportion of CO₂ in NGCC flue streams is smaller than that in coal flue gas, it may be more suitable to target these sub-410 ppm levels in NGCC combustors (SI Section 6). With regards to process design, the weak mass-transfer driving forces associated with capturing CO₂ from sub-410 ppm streams will likely require use of capture media with rapid diffusional kinetics (e.g., certain porous adsorbents).⁷²

BECCS is one proposed strategy where lifecycle negative emissions can theoretically be achieved, and which may additionally benefit from the pursuit of deeper capture targets. The extent of negative emissions achievable in BECCS is intertwined with direct/indirect land use changes and the carbon footprint of the biomass.^{99–106} Achieving deeper capture targets in the BECCS unit could synergistically reduce the amount of biomass that must be processed upstream to achieve a fixed negative emission rate, albeit at some reduction in energy efficiency due to the need to overcome the increased parasitic load.^{48,107} Consider the direct firing of European *Miscanthus* as a representative energy-dedicated crop. In order to remove 1 MtCO₂ equivalents per year (MtCO₂e/yr) on a lifecycle basis, we estimate that achieving a 99.5% capture fraction with deep BECCS requires 3900 fewer hectares of arable land relative to 90% capture (a savings of ~10%), without taking into account land use changes that could further magnify these reductions (see SI Section 4). Additionally, since the freshwater demand for BECCS is expected to be dominated by losses due to evapotranspiration during biomass cultivation, the transition from 90% to 99.5% capture could save more than 15 Mth₂O/yr, or ~10% of the freshwater needed for 90% capture. Although the additional parasitic load incurred in achieving this deeper capture target would decrease electrical production, this inefficiency is ameliorated in part by the embodied energy saved in consuming less biomass. The incremental parasitic load associated with deep BECCS is expected to decrease over time with the development of new technology, bringing the lifecycle energy efficiency of deep BECCS closer to that for conventional BECCS. Co-generation of bioenergy with a low-carbon fuel, such as natural gas, may close this efficiency gap without substantially reducing the lifecycle carbon negativity.^{108,109} Ultimately, the calculations described here are order-of-magnitude estimates obtained using the average multiplicative factors detailed in SI Section 4, and are intended to motivate further research into deep BECCS. Detailed investigations of the technoeconomics and food–energy–water implications of deep BECCS are needed in order to more accurately assess the practical potential of this concept.

4. THE POTENTIAL FOR DEEP IMPACT

All of the IAM scenarios featured in the 27th Energy Modeling Forum required cumulative sequestration of at least 600 GtCO₂ by 2100 to meet 2 °C warming targets, but to the best of our knowledge, none of these scenarios considered capture fractions significantly beyond 90% during peak deployment, or the period of time during which the maximum number of plants are outfitted with fossil CCS.^{20,110–118} Indeed, while 90% capture is not a strict limit in IAMs, it is frequently informed by technoeconomic assessments developed for first-generation CCS designs.^{70,71} Given the stringent carbon budgets of 1.5 °C scenarios, the residual emissions from conventional fossil CCS units could necessitate an accelerated transition to renewables or other technologies with lower lifecycle emissions.^{19,25,119,120} Alternatively, the rapid development and commercialization of deep CCS may provide a smoother transition toward renewables and, by minimizing residual emissions from the fossil-fueled power generation sector, may obviate a substantial amount of CDR over the century.^{35,121}

Working with published results from the IAM MESSAGE GLOBIOM,¹²² we estimate that replacing existing fossil CCS units with deep CCS units worldwide could avoid an additional ~1.8 GtCO₂/yr in the 2 °C scenario at peak deployment. In the 1.5 °C scenario, which projects lower overall deployment of CCS, the CO₂ avoided is reduced to only ~770 Mt/yr (SI Section 5). However, if cost reductions over the next ~40 years can enable the implementation of deep CCS in existing coal and NGCC units for which conventional CCS is currently considered uneconomical, the impact of deep CCS in the 1.5 °C scenario can be significantly augmented. Indeed, if deep CCS is ultimately recognized as a technique for reducing the need for CDR, the number of coal and NGCC plants deemed suitable for CCS may exceed current projections. We emphasize that deep CCS should not be regarded as a replacement for CDR, because there are circumstances where CDR can provide economic, social, and/or environmental benefits that are otherwise inaccessible with deep CCS.^{36,53,123–125} However, in some cases, deep CCS has the potential to serve as a viable and cost-effective alternative to replace certain CDR strategies that currently face significant technical or economic hurdles. Note that the above analysis represents at best an order-of-magnitude estimate of the impact of deep CCS in these particular scenarios, and ultimately, the detailed incorporation of deep CCS into IAM frameworks will be needed in order to determine the circumstances under which CDR can truly be avoided by deep CCS.¹²⁶

In an initial evaluation of potential emissions avoided from retrofitting coal and NGCC fleets with deep CCS, we focused on plants in the United States, which in 2017 generated 14.5% of global combustion CO₂ emissions.² Working with 2018 data from the Energy Information Administration,^{127,128} we identified plants potentially suitable for deep CCS retrofit by categorizing operational coal and NGCC units by electrical production and age. Assuming conservative fuel-based parasitic loads of 13% for NGCC and 21% for coal,⁶² we estimate that a combined total of 128 MtCO₂/yr of emissions can theoretically be avoided. Due to the assumptions made in this analysis (see SI Section 6), this calculation should be regarded as an order-of-magnitude estimate of impact. More accurate assessments can be achieved with plant-specific

considerations and improved parametrizations of CCS technoeconomic models to account for deep capture targets.^{22,129}

As discussed above, although deep CCS can achieve negative emissions inside the plant boundaries, these removals are likely to be outweighed by supply chain emissions upstream that are bounded by extraction, transportation, and processing of the fuel. These supply chain emissions include fugitive (unintentional) and vented (intentional) emissions from coal mines, natural gas reservoirs, pipelines, railcars, ships, and process equipment.^{130–135} However, the increment between 90 and ~100% capture *can* be carbon negative if supply chain emissions can be kept small. Even if this increment is not carbon negative, it could still alleviate dependences on some of the least viable CDR strategies projected by current 90% model scenarios, so long as the residual emissions captured exceed the supply chain emissions (Figure 3). Working with

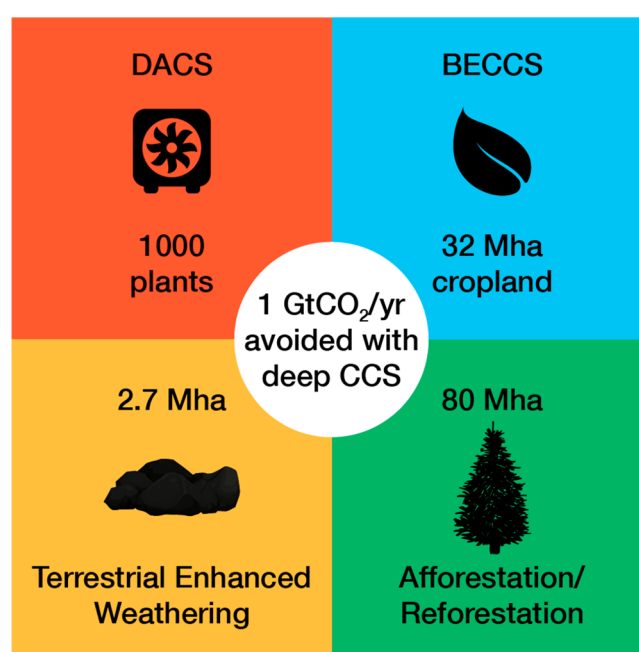


Figure 3. We estimate that deep CCS can avoid ~1 GtCO₂/yr of residual emissions globally, which translates to 80 Mha of forest (with a mean carbon uptake of 3.4 tCeq/ha/yr), 2.7 Mha of land for terrestrial enhanced weathering (assuming a potential of 0.1 GtCeq/yr/Mha), 32 Mha of cropland for BECCS with an energy-dedicated crop (assuming a mean carbon uptake of 8.6 tCeq/ha/yr), or 1000 DACS plants (assuming a net CDR rate of 1 MtCO₂/yr per plant).^{56,60,140}

lower bound emission factors of 12.4 kgCO₂e/MWh (derived in SI Section 7) and 3.6 gCO₂e/MJ for the coal¹³⁶ and natural gas¹³⁷ supply chains, respectively, we find that the incremental carbon intensity for a 100 ppm deep CCS outlet is −1.3 MtCO₂e/yr (coal) and −2.3 MtCO₂e/yr (NGCC) for the plants considered for retrofit in the United States. In comparison, one of the DACS designs from Carbon Engineering requires 8.81 GJ of natural gas per tonne of CO₂ captured,⁶⁰ and our calculations show that the associated supply chain emissions reduce the effective CDR rate from 966 to 931 ktCO₂/yr, again assuming the emission factor of 3.6 gCO₂e/MJ from ref 137.¹³⁷ Given that the net carbon intensities of deep CCS and DACS are expected to be highly sensitive to upstream emissions, it will be imperative to reduce

these emissions to maximize the overall impact of both technologies.^{71,138,139}

5. OUTLOOK

Targeting CO₂ capture fractions significantly beyond 90% is technoeconomically feasible and could reduce the need for large amounts of costly or unfeasible CDR if implemented at scale in the near term. The technological learning gained from commercializing deep CCS could synergistically inform designs for DACS and deep BECCS, alleviating some of the uncertainty in accessing large-scale technological CDR. We note that the principles of deep CCS can be extended in some cases (e.g., iron and steel manufacturing) to the industrial sector, which in 2017 was responsible for 24% of global combustion CO₂ emissions.^{2,141–146} Additionally, we highly encourage reparametrization of IAMs to more thoroughly investigate the potential of deep CCS/deep BECCS for various socioeconomic and technological assumptions, particularly given that the artificial assumption of ~90% capture may necessitate a shift to suboptimal power generation mixes in deep decarbonization pathways.^{25,98} Although materials capable of performing deep CCS already exist, continued improvements in process efficiency are warranted to bring the intrinsic costs of deep CCS even closer to those of conventional CCS, especially as natural gas continues to occupy a larger portion of the global energy portfolio.^{82,147} Although the incremental costs associated with performing deep CCS can be kept low relative to the base cost of conventional CCS, widespread deployment of deep CCS will be predicated on the successful implementation of conventional CCS.

■ ASSOCIATED CONTENT

SI Supporting Information

The Supporting Information is available free of charge at <https://pubs.acs.org/doi/10.1021/acs.est.0c07390>.

Computational details and additional information (PDF)

■ AUTHOR INFORMATION

Corresponding Authors

Jeffrey R. Long – Department of Chemical and Biomolecular Engineering and Department of Chemistry, University of California, Berkeley, California 94720, United States; Materials Sciences Division, Lawrence Berkeley National Laboratory, Berkeley, California 94720, United States; orcid.org/0000-0002-5324-1321; Email: jrlong@berkeley.edu

Simon C. Weston – Corporate Strategic Research, ExxonMobil Research and Engineering Company, Annandale, New Jersey 08801, United States; orcid.org/0000-0002-7439-5055; Email: simon.c.weston@exxonmobil.com

Authors

Matthew N. Dods – Department of Chemical and Biomolecular Engineering, University of California, Berkeley, California 94720, United States

Eugene J. Kim – Department of Chemistry, University of California, Berkeley, California 94720, United States

Complete contact information is available at: <https://pubs.acs.org/doi/10.1021/acs.est.0c07390>

Author Contributions

All authors have given approval to the final version of the manuscript.

Notes

The authors declare the following competing financial interest(s): J.R.L. has a financial interest in and serves on the board of directors of Mosaic Materials, a start-up company working to commercialize metal-organic frameworks for gas separations.

Biographies



Jeffrey R. Long is a Professor of Chemistry and Chemical & Biomolecular Engineering at the University of California, Berkeley and a Faculty Senior Scientist in the Materials Sciences Division at Lawrence Berkeley National Laboratory. His research involves the synthesis and physical characterization of new materials with potential applications in sustainable energy and environmental remediation, and his 360 publications have received more than 76 000 citations. He cofounded and directs the start-up company Mosaic Materials, which is developing metal-organic frameworks for low-energy carbon dioxide separations, with particular focus on its direct removal from air.



Simon Weston is a Senior Research Associate at the Corporate Strategic Research Laboratories of ExxonMobil Research and Engineering and dedicated to creating new materials for application in molecular separations, storage and catalysis. Although originally trained as an organic chemist, he has a multidisciplinary background in coordination chemistry, inorganic chemistry, high throughput experimentation, informatics, and CO₂ capture research. He has led several research teams bridging industrial and academic work with a focus on how scientific fundamentals can lead us to better materials for a given application.

■ ACKNOWLEDGMENTS

We acknowledge ExxonMobil Research and Engineering Company for financial support of this work. We gratefully acknowledge George Walchuk, Dr. Haroon Kheshgi, and Dr. Bryan Mignone of ExxonMobil Research and Engineering Company for helpful discussions, and Dr. Katie Meihaus for editorial assistance.

■ REFERENCES

- (1) Friedlingstein, P.; Jones, M. W.; O'Sullivan, M.; Andrew, R. M.; Hauck, J.; Peters, G. P.; Peters, W.; Pongratz, J.; Sitch, S.; Le Quéré, C.; Bakker, D. C. E.; Canadell, J. G.; Ciais, P.; Jackson, R. B.; Anthoni, P.; Barbero, L.; Bastos, A.; Bastrikov, V.; Becker, M.; Bopp, L.; Buitenhuis, E.; Chandra, N.; Chevallier, F.; Chini, L. P.; Currie, K. L.; Feely, R. A.; Gehlen, M.; Gilfillan, D.; Gkritzalis, T.; Goll, D. S.; Gruber, N.; Gutekunst, S.; Harris, I.; Haverd, V.; Houghton, R. A.; Hurtt, G.; Ilyina, T.; Jain, A. K.; Joetzjer, E.; Kaplan, J. O.; Kato, E.; Goldewijk, K. K.; Korsbakken, J. I.; Landschützer, P.; Lauvset, S. K.; Lefèvre, N.; Lenton, A.; Lienert, S.; Lombardozi, D.; Marland, G.; McGuire, P. C.; Melton, J. R.; Metzl, N.; Munro, D. R.; Nabel, J. E. M. S.; Nakaoka, S. I.; Neill, C.; Omar, A. M.; Ono, T.; Peregón, A.; Pierrot, D.; Poulter, B.; Rehder, G.; Resplandy, L.; Robertson, E.; Rödenbeck, C.; Séférian, R.; Schwinger, J.; Smith, N.; Tans, P. P.; Tian, H.; Tilbrook, B.; Tubiello, F. N.; Van Der Werf, G. R.; Wiltshire, A. J.; Zaehle, S. Global Carbon Budget 2019. *Earth Syst. Sci. Data* **2019**, *11* (4), 1783–1838.
- (2) International Energy Agency. CO₂ Emissions from Fuel Combustion 2011; 1–92. DOI: 10.1670/96-03N.
- (3) Intergovernmental Panel on Climate Change. *Fifth Assessment Report*, 2014; DOI: 10.1017/cbo9781107415416.
- (4) Intergovernmental Panel on Climate Change. *Special Report: Global Warming of 1.5 °C*, 2018.
- (5) Clack, C. T. M.; Qvist, S. A.; Apt, J.; Bazilian, M.; Brandt, A. R.; Caldeira, K.; Davis, S. J.; Diakov, V.; Handschy, M. A.; Hines, P. D. H.; Jaramillo, P.; Kammen, D. M.; Long, J. C. S.; Morgan, M. G.; Reed, A.; Sivaram, V.; Sweeney, J.; Tynan, G. R.; Victor, D. G.; Weyant, J. P.; Whitacre, J. F. Evaluation of a Proposal for Reliable Low-Cost Grid Power with 100% Wind, Water, and Solar. *Proc. Natl. Acad. Sci. U. S. A.* **2017**, *114* (26), 6722–6727.
- (6) Narayanan, A.; Mets, K.; Strobbe, M.; Devellder, C. Feasibility of 100% Renewable Energy-Based Electricity Production for Cities with Storage and Flexibility. *Renewable Energy* **2019**, *134*, 698–709.
- (7) Hansen, K.; Breyer, C.; Lund, H. Status and Perspectives on 100% Renewable Energy Systems. *Energy* **2019**, *175*, 471–480.
- (8) Esteban, M.; Portugal-Pereira, J.; Mclellan, B. C.; Bricker, J.; Farzaneh, H.; Djalilova, N.; Ishihara, K. N.; Takagi, H.; Roeber, V. 100% Renewable Energy System in Japan: Smoothing and Ancillary Services. *Appl. Energy* **2018**, *224* (April), 698–707.
- (9) Djorup, S.; Thellufsen, J. Z.; Sorknæs, P. The Electricity Market in a Renewable Energy System. *Energy* **2018**, *162*, 148–157.
- (10) Sgouridis, S.; Csala, D.; Bardi, U. The Sower's Way: Quantifying the Narrowing Net-Energy Pathways to a Global Energy Transition. *Environ. Res. Lett.* **2016**, *11* (9), 094009.
- (11) Edenhofer, O.; Hirth, L.; Knopf, B.; Pahle, M.; Schlömer, S.; Schmid, E.; Ueckerdt, F. On the Economics of Renewable Energy Sources. *Energy Econ.* **2013**, *40*, S12–S23.
- (12) Larsson, S.; Fantazzini, D.; Davidsson, S.; Kullander, S.; Höök, M. Reviewing Electricity Production Cost Assessments. *Renewable Sustainable Energy Rev.* **2014**, *30*, 170–183.
- (13) Heuberger, C. F.; Mac Dowell, N. Real-World Challenges with a Rapid Transition to 100% Renewable Power Systems. *Joule* **2018**, *2* (3), 367–370.
- (14) Bistline, J. E. Economic and Technical Challenges of Flexible Operations under Large-Scale Variable Renewable Deployment. *Energy Econ.* **2017**, *64*, 363–372.
- (15) Grams, C. M.; Beerli, R.; Pfenninger, S.; Staffell, I.; Wernli, H. Balancing Europe's Wind-Power Output through Spatial Deployment Informed by Weather Regimes. *Nat. Clim. Change* **2017**, *7* (8), 557–562.
- (16) Pfenninger, S.; Gauché, P.; Lilliestam, J.; Damerau, K.; Wagner, F.; Patt, A. Potential for Concentrating Solar Power to Provide Baseload and Dispatchable Power. *Nat. Clim. Change* **2014**, *4* (8), 689–692.
- (17) Rodríguez, R. A.; Becker, S.; Andresen, G. B.; Heide, D.; Greiner, M. Transmission Needs across a Fully Renewable European Power System. *Renewable Energy* **2014**, *63*, 467–476.
- (18) Van Den Broek, M.; Berghout, N.; Rubin, E. S. The Potential of Renewables versus Natural Gas with CO₂ Capture and Storage for Power Generation under CO₂ Constraints. *Renewable Sustainable Energy Rev.* **2015**, *49*, 1296–1322.
- (19) Rogelj, J.; Popp, A.; Calvin, K. V.; Luderer, G.; Emmerling, J.; Gernaat, D.; Fujimori, S.; Streffer, J.; Hasegawa, T.; Marangoni, G.; Krey, V.; Kriegler, E.; Riahi, K.; Van Vuuren, D. P.; Doelman, J.; Drouet, L.; Edmonds, J.; Fricko, O.; Harmsen, M.; Havlík, P.; Humpenöder, F.; Stehfest, E.; Tavoni, M. Scenarios towards Limiting Global Mean Temperature Increase below 1.5 °C. *Nat. Clim. Change* **2018**, *8* (4), 325–332.
- (20) Bui, M.; Adjiman, C. S.; Bardow, A.; Anthony, E. J.; Boston, A.; Brown, S.; Fennell, P. S.; Fuss, S.; Galindo, A.; Hackett, L. A.; Hallett, J. P.; Herzog, H. J.; Jackson, G.; Kemper, J.; Krevor, S.; Maitland, G. C.; Matuszewski, M.; Metcalfe, I. S.; Petit, C.; Puxty, G.; Reimer, J.; Reiner, D. M.; Rubin, E. S.; Scott, S. A.; Shah, N.; Smit, B.; Trusler, J. P. M.; Webley, P.; Wilcox, J.; Mac Dowell, N. Carbon Capture and Storage (CCS): The Way Forward. *Energy Environ. Sci.* **2018**, *11* (5), 1062–1176.
- (21) Bui, M.; Tait, P.; Lucquiaud, M.; Mac Dowell, N. Dynamic Operation and Modelling of Amine-Based CO₂ Capture at Pilot Scale. *Int. J. Greenhouse Gas Control* **2018**, *79* (August), 134–153.
- (22) Zhai, H.; Ou, Y.; Rubin, E. S. Opportunities for Decarbonizing Existing U.S. Coal-Fired Power Plants via CO₂ Capture, Utilization and Storage. *Environ. Sci. Technol.* **2015**, *49* (13), 7571–7579.
- (23) Flø, N. E.; Kvamsdal, H. M.; Hillestad, M. Dynamic Simulation of Post-Combustion CO₂ Capture for Flexible Operation of the Brindisi Pilot Plant. *Int. J. Greenhouse Gas Control* **2016**, *48*, 204–215.
- (24) Rua, J.; Bui, M.; Nord, L. O.; Mac Dowell, N. Does CCS Reduce Power Generation Flexibility? A Dynamic Study of Combined Cycles with Post-Combustion CO₂ Capture. *Int. J. Greenhouse Gas Control* **2020**, *95*, 102984.
- (25) Budinis, S.; Krevor, S.; Mac Dowell, N.; Brandon, N.; Hawkes, A. An Assessment of CCS Costs, Barriers and Potential. *Energy Strateg. Rev.* **2018**, *22* (January), 61–81.
- (26) Mantripragada, H. C.; Zhai, H.; Rubin, E. S. Boundary Dam or Petra Nova - Which Is a Better Model for CCS Energy Supply? *Int. J. Greenhouse Gas Control* **2019**, *82*, 59–68.
- (27) Reiner, D. M. Learning through a Portfolio of Carbon Capture and Storage Demonstration Projects. *Nat. Energy* **2016**, *1* (1), 1–7.
- (28) Kapetaki, Z.; Scowcroft, J. Overview of Carbon Capture and Storage (CCS) Demonstration Project Business Models: Risks and Enablers on the Two Sides of the Atlantic. *Energy Procedia* **2017**, *114* (November 2016), 6623–6630.
- (29) Peck, W. D.; Ayash, S. C.; Klapperich, R. J.; Gorecki, C. D. The North Dakota Integrated Carbon Storage Complex Feasibility Study. *Int. J. Greenhouse Gas Control* **2019**, *84*, 47–53.
- (30) Dai, Z.; Middleton, R.; Viswanathan, H.; Fessenden-Rahn, J.; Bauman, J.; Pawar, R.; Lee, S. Y.; McPherson, B. An Integrated Framework for Optimizing CO₂ Sequestration and Enhanced Oil Recovery. *Environ. Sci. Technol. Lett.* **2014**, *1* (1), 49–54.
- (31) ExxonMobil 2021 Energy & Carbon Summary, 2021.
- (32) Global Status of CCS 2020. Global CCS Institute 2020.
- (33) Gasser, T.; Guivarch, C.; Tachiiri, K.; Jones, C. D.; Ciais, P. Negative Emissions Physically Needed to Keep Global Warming below 2 °C. *Nat. Commun.* **2015**, *6*. DOI: 10.1038/ncomms8958.
- (34) Hilaire, J.; Minx, J. C.; Callaghan, M. W.; Edmonds, J.; Luderer, G.; Nemet, G. F.; Rogelj, J.; del Mar Zamora, M. Negative Emissions and International Climate Goals—Learning from and about Mitigation Scenarios. *Clim. Change* **2019**, *157* (2), 189–219.

- (35) Rogelj, J.; Luderer, G.; Pietzcker, R. C.; Kriegler, E.; Schaeffer, M.; Krey, V.; Riahi, K. Energy System Transformations for Limiting End-of-Century Warming to below 1.5 °C. *Nat. Clim. Change* **2015**, *5* (6), 519–527.
- (36) Beerling, D. J.; Kantzas, E. P.; Lomas, M. R.; Wade, P.; Eufrazio, R. M.; Renforth, P.; Sarkar, B.; Andrews, M. G.; James, R. H.; Pearce, C. R.; Mercure, J. F.; Pollitt, H.; Holden, P. B.; Edwards, N. R.; Khanna, M.; Koh, L.; Quegan, S.; Pidgeon, N. F.; Janssens, I. A.; Hansen, J.; Banwart, S. A. Potential for Large-Scale CO₂ Removal via Enhanced Rock Weathering with Croplands. *Nature* **2020**, *583* (7815), 242–248.
- (37) Fuss, S.; Lamb, W. F.; Callaghan, M. W.; Hilaire, J.; Creutzig, F.; Amann, T.; Beringer, T.; De Oliveira Garcia, W.; Hartmann, J.; Khanna, T.; Luderer, G.; Nemet, G. F.; Rogelj, J.; Smith, P.; Vicente, J. V.; Wilcox, J.; Del Mar Zamora Dominguez, M.; Minx, J. C. Negative Emissions - Part 2: Costs, Potentials and Side Effects. *Environ. Res. Lett.* **2018**, *13* (6), 063002.
- (38) Dowling, D. A.; Venki, R. *Greenhouse Gas Removal. Report by the UK Royal Society and Royal Academy of Engineering*, 2018.
- (39) Woolf, D.; Lehmann, J.; Lee, D. R. Optimal Bioenergy Power Generation for Climate Change Mitigation with or without Carbon Sequestration. *Nat. Commun.* **2016**, *7*, 1–11.
- (40) Smith, P. Soil Carbon Sequestration and Biochar as Negative Emission Technologies. *Glob. Chang. Biol.* **2016**, *22* (3), 1315–1324.
- (41) *Negative Emissions Technologies and Reliable Sequestration*; The National Academies Press, 2019; DOI: 10.17226/25259.
- (42) Busch, J.; Engelmann, J.; Cook-Patton, S. C.; Griscom, B. W.; Kroeger, T.; Possingham, H.; Shyamsundar, P. Potential for Low-Cost Carbon Dioxide Removal through Tropical Reforestation. *Nat. Clim. Change* **2019**, *9* (6), 463–466.
- (43) Nave, L. E.; Walters, B. F.; Hofmeister, K. L.; Perry, C. H.; Mishra, U.; Domke, G. M.; Swanson, C. W. The Role of Reforestation in Carbon Sequestration. *New For.* **2019**, *50* (1), 115–137.
- (44) Alkama, R.; Cescatti, A. Climate Change: Biophysical Climate Impacts of Recent Changes in Global Forest Cover. *Science* **2016**, *351* (6273), 600–604.
- (45) Doelman, J. C.; Stehfest, E.; van Vuuren, D. P.; Tabeau, A.; Hof, A. F.; Braakhekke, M. C.; Gernaat, D. E. H. J.; van den Berg, M.; van Zeist, W. J.; Daioglou, V.; van Meijl, H.; Lucas, P. L. Afforestation for Climate Change Mitigation: Potentials, Risks and Trade-Offs. *Glob. Chang. Biol.* **2020**, *26* (3), 1576–1591.
- (46) Muratori, M.; Bauer, N.; Rose, S. K.; Wise, M.; Daioglou, V.; Cui, Y.; Kato, E.; Gidden, M.; Streffer, J.; Fujimori, S.; Sands, R. D.; van Vuuren, D. P.; Weyant, J. EMF-33 Insights on Bioenergy with Carbon Capture and Storage (BECCS). *Clim. Change* **2020**, *163*, 1621–1637.
- (47) Fridahl, M.; Lehtveer, M. Bioenergy with Carbon Capture and Storage (BECCS): Global Potential, Investment Preferences, and Deployment Barriers. *Energy Res. Soc. Sci.* **2018**, *42* (October 2017), 155–165.
- (48) Mac Dowell, N.; Fajardy, M. Inefficient Power Generation as an Optimal Route to Negative Emissions via BECCS? *Environ. Res. Lett.* **2017**, *12* (4), 045004.
- (49) Muri, H. The Role of Large - Scale BECCS in the Pursuit of the 1.5 °C Target: An Earth System Model Perspective. *Environ. Res. Lett.* **2018**, *13* (4), 044010.
- (50) Sanz-Pérez, E. S.; Murdock, C. R.; Didas, S. A.; Jones, C. W. Direct Capture of CO₂ from Ambient Air. *Chem. Rev.* **2016**, *116* (19), 11840–11876.
- (51) Santori, G.; Charalambous, C.; Ferrari, M. C.; Brandani, S. Adsorption Artificial Tree for Atmospheric Carbon Dioxide Capture, Purification and Compression. *Energy* **2018**, *162*, 1158–1168.
- (52) Socolow, R.; Desmond, M.; Aines, R.; Blackstock, J.; Bolland, O.; Kaarsberg, T.; Lewis, N.; Mazzotti, M.; Pfeffer, A.; Sawyer, K.; Sirola, J.; Smit, B.; Wilcox, J. *Direct Air Capture of CO₂ with Chemicals Panel on Public Affairs*; American Physical Society, 2011; p 100.
- (53) Wilcox, J.; Psarras, P. C.; Liguori, S. Assessment of Reasonable Opportunities for Direct Air Capture. *Environ. Res. Lett.* **2017**, *12* (6), 065001.
- (54) Realmonte, G.; Drouet, L.; Gambhir, A.; Glynn, J.; Köberle, A. C.; Tavoni, M.; Hawkes, A. An Inter-Model Assessment of the Role of Direct Air Capture in Deep Mitigation Pathways. *Nat. Commun.* **2019**, *10* (No. 2019), 1–12.
- (55) Heck, V.; Gerten, D.; Lucht, W.; Popp, A. Biomass-Based Negative Emissions Difficult to Reconcile with Planetary Boundaries. *Nat. Clim. Change* **2018**, *8* (2), 151–155.
- (56) Smith, P.; Davis, S. J.; Creutzig, F.; Fuss, S.; Minx, J.; Gabrielle, B.; Kato, E.; Jackson, R. B.; Cowie, A.; Kriegler, E.; Van Vuuren, D. P.; Rogelj, J.; Ciais, P.; Milne, J.; Canadell, J. G.; McCollum, D.; Peters, G.; Andrew, R.; Krey, V.; Shrestha, G.; Friedlingstein, P.; Gasser, T.; Grübler, A.; Heidug, W. K.; Jonas, M.; Jones, C. D.; Kraxner, F.; Littleton, E.; Lowe, J.; Moreira, J. R.; Nakicenovic, N.; Obersteiner, M.; Patwardhan, A.; Rogner, M.; Rubin, E.; Sharifi, A.; Torvanger, A.; Yamagata, Y.; Edmonds, J.; Yongsung, C. Biophysical and Economic Limits to Negative CO₂ Emissions. *Nat. Clim. Change* **2016**, *6* (1), 42–50.
- (57) Shi, X.; Xiao, H.; Azarabadi, H.; Song, J.; Wu, X.; Chen, X.; Lackner, K. S. Sorbents for the Direct Capture of CO₂ from Ambient Air. *Angew. Chem., Int. Ed.* **2020**, *59* (18), 6984–7006.
- (58) Creutzig, F.; Breyer, C.; Hilaire, J.; Minx, J.; Peters, G. P.; Socolow, R. The Mutual Dependence of Negative Emission Technologies and Energy Systems. *Energy Environ. Sci.* **2019**, *12* (6), 1805–1817.
- (59) Babacan, O.; De Causmaecker, S.; Gambhir, A.; Fajardy, M.; Rutherford, A. W.; Fantuzzi, A.; Nelson, J. Assessing the Feasibility of Carbon Dioxide Mitigation Options in Terms of Energy Usage. *Nat. Energy* **2020**, *5*, 720.
- (60) Keith, D. W.; Holmes, G.; St. Angelo, D.; Heidel, K. A Process for Capturing CO₂ from the Atmosphere. *Joule* **2018**, *2*, 1573–1594.
- (61) House, K. Z.; Baclig, A. C.; Ranjan, M.; Van Nierop, E. A.; Wilcox, J.; Herzog, H. J. Economic and Energetic Analysis of Capturing CO₂ from Ambient Air. *Proc. Natl. Acad. Sci. U. S. A.* **2011**, *108* (51), 20428–20433.
- (62) Rubin, E. S.; Davison, J. E.; Herzog, H. J. The Cost of CO₂ Capture and Storage. *Int. J. Greenhouse Gas Control* **2015**, *40*, 378–400.
- (63) Fuhrman, J.; Mcjeon, H.; Patel, P.; Doney, S. C.; Shobe, W. M.; Clarens, A. F. Food–Energy–Water Implications of Negative Emissions Technologies in a + 1.5 °C Future. *Nat. Clim. Change* **2020**, *10*, 1–8.
- (64) Hanna, R.; Abdulla, A.; Xu, Y.; Victor, D. G. Emergency Deployment of Direct Air Capture as a Response to the Climate Crisis. *Nat. Commun.* **2021**, *12*, 1–13.
- (65) Chen, C.; Tavoni, M. Direct Air Capture of CO₂ and Climate Stabilization: A Model Based Assessment. *Clim. Change* **2013**, *118* (1), 59–72.
- (66) Marcucci, A.; Kypreos, S.; Panos, E. The Road to Achieving the Long-Term Paris Targets: Energy Transition and the Role of Direct Air Capture. *Clim. Change* **2017**, *144* (2), 181–193.
- (67) Streffer, J.; Bauer, N.; Kriegler, E.; Popp, A.; Giannousakis, A.; Edenhofer, O. Between Scylla and Charybdis: Delayed Mitigation Narrows the Passage between Large-Scale CDR and High Costs. *Environ. Res. Lett.* **2018**, *13* (4), 044015.
- (68) Fuss, S.; Reuter, W. H.; Szolgayová, J.; Obersteiner, M. Optimal Mitigation Strategies with Negative Emission Technologies and Carbon Sinks under Uncertainty. *Clim. Change* **2013**, *118* (1), 73–87.
- (69) Rao, A. B.; Rubin, E. S. Identifying Cost-Effective CO₂ Control Levels for Amine-Based CO₂ Capture Systems. *Ind. Eng. Chem. Res.* **2006**, *45* (8), 2421–2429.
- (70) IEAGHG. *CCS in Energy and Climate Scenarios*, 2019.
- (71) IEAGHG. *Towards Zero Emissions CCS in Power Plants Using Higher Capture Rates or Biomass*, 2019, No. Marc 1–128.
- (72) Brandl, P.; Bui, M.; Hallett, J. P.; Mac Dowell, N. Beyond 90% Capture: Possible, but at What Cost? *Int. J. Greenhouse Gas Control* **2021**, *105* (January), 103239.

- (73) Jiang, K.; Feron, P.; Cousins, A.; Zhai, R.; Li, K. Achieving Zero/Negative-Emissions Coal-Fired Power Plants Using Amine-Based Postcombustion CO₂ Capture Technology and Biomass Cocombustion. *Environ. Sci. Technol.* **2020**, *54* (4), 2429–2438.
- (74) Gao, T.; Selinger, J. L.; Rochelle, G. T. Demonstration of 99% CO₂ Removal from Coal Flue Gas by Amine Scrubbing. *Int. J. Greenhouse Gas Control* **2019**, *83* (February), 236–244.
- (75) Feron, P.; Cousins, A.; Jiang, K.; Zhai, R.; Shwe Hla, S.; Thiruvengatchari, R.; Burnard, C. F.; Towards Zero Emissions from Fossil Fuel Power Stations. *Int. J. Greenhouse Gas Control* **2019**, *87* (April), 188–202.
- (76) Caram, H. S.; Gupta, R.; Thomann, H.; Ni, F.; Weston, S. C.; Afeworki, M. A Simple Thermodynamic Tool for Assessing Energy Requirements for Carbon Capture Using Solid or Liquid Sorbents. *Int. J. Greenhouse Gas Control* **2020**, *97* (October 2019), 102986.
- (77) House, K. Z.; Harvey, C. F.; Aziz, M. J.; Schrag, D. P. The Energy Penalty of Post-Combustion CO₂ Capture & Storage and Its Implications for Retrofitting the U.S. Installed Base. *Energy Environ. Sci.* **2009**, *2* (2), 193–205.
- (78) Hirata, T.; Tsujiuchi, T.; Kamijo, T.; Kishimoto, S.; Inui, M.; Kawasaki, S.; Lin, Y. J.; Nakagami, Y.; Nojo, T. Near-Zero Emission Coal-Fired Power Plant Using Advanced KM CDR Process. *Int. J. Greenhouse Gas Control* **2020**, *92* (October 2018), 102847.
- (79) DOE/NETL. *Cost and Performance of PC and IGCC Plants for a Range of Carbon Dioxide Capture*; 2011; pp 1–500.
- (80) Lin, Y. J.; Madan, T.; Rochelle, G. T. Regeneration with Rich Bypass of Aqueous Piperazine and Monoethanolamine for CO₂ Capture. *Ind. Eng. Chem. Res.* **2014**, *53* (10), 4067–4074.
- (81) Abu-Zahra, M. R. M.; Niederer, J. P. M.; Feron, P. H. M.; Versteeg, G. F. CO₂ Capture from Power Plants. Part II. A Parametric Study of the Economical Performance Based on Mono-Ethanolamine. *Int. J. Greenhouse Gas Control* **2007**, *1* (2), 135–142.
- (82) Siegelman, R. L.; Milner, P. J.; Kim, E. J.; Weston, S. C.; Long, J. R. Challenges and Opportunities for Adsorption-Based CO₂ Capture from Natural Gas Combined Cycle Emissions. *Energy Environ. Sci.* **2019**, *12* (7), 2161–2173.
- (83) Siegelman, R. L.; McDonald, T. M.; Gonzalez, M. I.; Martell, J. D.; Milner, P. J.; Mason, J. A.; Berger, A. H.; Bhowan, A. S.; Long, J. R. Controlling Cooperative CO₂ Adsorption in Diamine-Appended Mg₂(dobpdc) Metal-Organic Frameworks. *J. Am. Chem. Soc.* **2017**, *139*, 10526–10538.
- (84) Furukawa, H.; Cordova, K. E.; O’Keeffe, M.; Yaghi, O. M. The Chemistry and Applications of Metal-Organic Frameworks. *Science*, **2013**, *341* (6149), 1230444.
- (85) Sumida, K.; Rogow, D. L.; Mason, J. A.; McDonald, T. M.; Bloch, E. D.; Herm, Z. R.; Bae, T. H.; Long, J. R. Carbon Dioxide Capture in Metal-Organic Frameworks. *Chem. Rev.* **2012**, *112* (2), 724–781.
- (86) McDonald, T. M.; Mason, J. A.; Kong, X.; Bloch, E. D.; Gygi, D.; Dani, A.; Crocellà, V.; Giordanino, F.; Odoh, S. O.; Drisdell, W. S.; Vlaisavljevich, B.; Dzubak, A. L.; Poloni, R.; Schnell, S. K.; Planas, N.; Lee, K.; Pascal, T.; Wan, L. F.; Prendergast, D.; Neaton, J. B.; Smit, B.; Kortright, J. B.; Gagliardi, L.; Bordiga, S.; Reimer, J. A.; Long, J. R. Cooperative Insertion of CO₂ in Diamine-Appended Metal-Organic Frameworks. *Nature* **2015**, *519* (7543), 303–308.
- (87) Kim, E. J.; Siegelman, R. L.; Jiang, H. Z. H.; Forse, A. C.; Lee, J.-H.; Martell, J. D.; Milner, P. J.; Falkowski, J. M.; Neaton, J. B.; Reimer, J. A.; Weston, S. C.; Long, J. R. Cooperative Carbon Capture and Steam Regeneration with Tetraamine-Appended Metal-Organic Frameworks. *Science* **2020**, *369* (6502), 392–396.
- (88) Leperi, K. T.; Snurr, R. Q.; You, F. Optimization of Two-Stage Pressure/Vacuum Swing Adsorption with Variable Dehydration Level for Postcombustion Carbon Capture. *Ind. Eng. Chem. Res.* **2016**, *55* (12), 3338–3350.
- (89) Nikolaidis, G. N.; Kikkinides, E. S.; Georgiadis, M. C. Model-Based Approach for the Evaluation of Materials and Processes for Post-Combustion Carbon Dioxide Capture from Flue Gas by PSA/VSA Processes. *Ind. Eng. Chem. Res.* **2016**, *55* (3), 635–646.
- (90) Siegelman, R. L.; Milner, P. J.; Forse, A. C.; Lee, J. H.; Colwell, K. A.; Neaton, J. B.; Reimer, J. A.; Weston, S. C.; Long, J. R. Water Enables Efficient CO₂ Capture from Natural Gas Flue Emissions in an Oxidation-Resistant Diamine-Appended Metal-Organic Framework. *J. Am. Chem. Soc.* **2019**, *141* (33), 13171–13186.
- (91) Azarabadi, H.; Lackner, K. S. Postcombustion Capture or Direct Air Capture in Decarbonizing US Natural Gas Power? *Environ. Sci. Technol.* **2020**, *54* (8), 5102–5111.
- (92) McQueen, N.; Psarras, P.; Pilorgé, H.; Liguori, S.; He, J.; Yuan, M.; Woodall, C. M.; Kian, K.; Pierpoint, L.; Jurewicz, J.; Lucas, J. M.; Jacobson, R.; Deich, N.; Wilcox, J. Cost Analysis of Direct Air Capture and Sequestration Coupled to Low-Carbon Thermal Energy in the United States. *Environ. Sci. Technol.* **2020**, *54* (12), 7542–7551.
- (93) Lackner, K. S.; Brennan, S.; Matter, J. M.; Park, A. H. A.; Wright, A.; Van Der Zwaan, B. The Urgency of the Development of CO₂ Capture from Ambient Air. *Proc. Natl. Acad. Sci. U. S. A.* **2012**, *109* (33), 13156–13162.
- (94) Dijkstra, J. W.; Walspurger, S.; Elzinga, G. D.; Pieterse, J. A. Z.; Boon, J.; Haije, W. G. Evaluation of Postcombustion CO₂ Capture by a Solid Sorbent with Process Modeling Using Experimental CO₂ and H₂O Adsorption Characteristics. *Ind. Eng. Chem. Res.* **2018**, *57* (4), 1245–1261.
- (95) Zhang, W.; Liu, H.; Sun, Y.; Cakstins, J.; Sun, C.; Snape, C. E. Parametric Study on the Regeneration Heat Requirement of an Amine-Based Solid Adsorbent Process for Post-Combustion Carbon Capture. *Appl. Energy* **2016**, *168*, 394–405.
- (96) Kim, K.; Yang, S.; Lee, J. B.; Eom, T. H.; Ryu, C. K.; Jo, S. H.; Park, Y. C.; Yi, C. K. Analysis of K₂CO₃/Al₂O₃ CO₂ Sorbent Tested with Coal-Fired Power Plant Flue Gas: Effect of SO_x. *Int. J. Greenhouse Gas Control* **2012**, *9*, 347–354.
- (97) Saeed, I. M.; Alaba, P.; Mazari, S. A.; Basirun, W. J.; Lee, V. S.; Sabzoi, N. Opportunities and Challenges in the Development of Monoethanolamine and Its Blends for Post-Combustion CO₂ Capture. *Int. J. Greenhouse Gas Control* **2018**, *79* (November), 212–233.
- (98) Luderer, G.; Vrontisi, Z.; Bertram, C.; Edelenbosch, O. Y.; Pietzcker, R. C.; Rogelj, J.; De Boer, H. S.; Drouet, L.; Emmerling, J.; Fricko, O.; Fujimori, S.; Havlik, P.; Iyer, G.; Keramidas, K.; Kitous, A.; Pehl, M.; Krey, V.; Riahi, K.; Saveyn, B.; Tavoni, M.; Van Vuuren, D. P.; Kriegler, E. Residual Fossil CO₂ Emissions in 1.5–2 °C Pathways. *Nat. Clim. Change* **2018**, *8* (7), 626–633.
- (99) Harper, A. B.; Powell, T.; Cox, P. M.; House, J.; Huntingford, C.; Lenton, T. M.; Sitch, S.; Burke, E.; Chadburn, S. E.; Collins, W. J.; Comyn-Platt, E.; Daioglou, V.; Doelman, J. C.; Hayman, G.; Robertson, E.; van Vuuren, D.; Wiltshire, A.; Webber, C. P.; Bastos, A.; Boysen, L.; Ciais, P.; Devaraju, N.; Jain, A. K.; Krause, A.; Poulter, B.; Shu, S. Land-Use Emissions Play a Critical Role in Land-Based Mitigation for Paris Climate Targets. *Nat. Commun.* **2018**, *9* (1). DOI: 10.1038/s41467-018-05340-z.
- (100) Plevin, R. J.; O’Hare, M.; Jones, A. D.; Torn, M. S.; Gibbs, H. K. Greenhouse Gas Emissions from Biofuels’ Indirect Land Use Change Are Uncertain but May Be Much Greater than Previously Estimated. *Environ. Sci. Technol.* **2010**, *44* (21), 8015–8021.
- (101) Roe, S.; Streck, C.; Obersteiner, M.; Frank, S.; Griscom, B.; Drouet, L.; Fricko, O.; Gusti, M.; Harris, N.; Hasegawa, T.; Hausfather, Z.; Havlik, P.; House, J.; Nabuurs, G. J.; Popp, A.; Sánchez, M. J. S.; Sanderman, J.; Smith, P.; Stehfest, E.; Lawrence, D. Contribution of the Land Sector to a 1.5 °C World. *Nat. Clim. Change* **2019**, *9* (11), 817–828.
- (102) Pehl, M.; Arvesen, A.; Humpenöder, F.; Popp, A.; Hertwich, E. G.; Luderer, G. Understanding Future Emissions from Low-Carbon Power Systems by Integration of Life-Cycle Assessment and Integrated Energy Modelling. *Nat. Energy* **2017**, *2* (12), 939–945.
- (103) Field, J. L.; Richard, T. L.; Smithwick, E. A. H.; Cai, H.; Laser, M. S.; Lebauer, D. S. Robust Paths to Net Greenhouse Gas Mitigation and Negative Emissions via Advanced Biofuels. *Proc. Natl. Acad. Sci. U. S. A.* **2020**, *117* (No. 12), 1–10.

- (104) Khanna, M.; Wang, W.; Hudiburg, T. W.; Delucia, E. H. The Social Inefficiency of Regulating Indirect Land Use Change Due to Biofuels. *Nat. Commun.* **2017**, *8* (May 2016), 1–9.
- (105) Sanchez, D. L.; Nelson, J. H.; Johnston, J.; Mileva, A.; Kammen, D. M. Biomass Enables the Transition to a Carbon-Negative Power System across Western North America. *Nat. Clim. Change* **2015**, *5* (3), 230–234.
- (106) Malins, C.; Plevin, R.; Edwards, R. How Robust Are Reductions in Modeled Estimates from GTAP-BIO of the Indirect Land Use Change Induced by Conventional Biofuels? *J. Cleaner Prod.* **2020**, *258*, 120716.
- (107) Fajardy, M.; Mac Dowell, N. Can BECCS Deliver Sustainable and Resource Efficient Negative Emissions? *Energy Environ. Sci.* **2017**, *10* (6), 1389–1426.
- (108) Cumicheo, C.; Mac Dowell, N.; Shah, N. Natural Gas and BECCS: A Comparative Analysis of Alternative Configurations for Negative Emissions Power Generation. *Int. J. Greenhouse Gas Control* **2019**, *90* (February), 102798.
- (109) Khorshidi, Z.; Florin, N. H.; Ho, M. T.; Wiley, D. E. Techno-Economic Evaluation of Co-Firing Biomass Gas with Natural Gas in Existing NGCC Plants with and without CO₂ Capture. *Int. J. Greenhouse Gas Control* **2016**, *49*, 343–363.
- (110) Koelbl, B. S.; van den Broek, M. A.; Faaij, A. P. C.; van Vuuren, D. P. Uncertainty in Carbon Capture and Storage (CCS) Deployment Projections: A Cross-Model Comparison Exercise. *Clim. Change* **2014**, *123* (3–4), 461–476.
- (111) International Institute for Applied Systems Analysis. Emission from energy (MESSAGE) <https://docs.messageix.org/projects/global/en/latest/emissions/message/index.html>.
- (112) Luderer, G.; Leimbach, M.; Bauer, N.; Kriegler, E.; Baumstark, L.; Bertram, C.; Giannousakis, A.; Hilaire, J.; Klein, D.; Levesque, A.; Mouratiadou, I.; Pehl, M.; Pietzcker, R.; Piontek, F.; Roming, N.; Schultes, A.; Schwanitz, V. J.; Streffer, J. *Description of the REMIND Model (Version 1.6)*; 2015. DOI: 10.2139/ssrn.2697070.
- (113) Krey, V.; Luderer, G.; Clarke, L.; Kriegler, E. Getting from Here to There - Energy Technology Transformation Pathways in the EMF27 Scenarios. *Clim. Change* **2014**, *123* (3–4), 369–382.
- (114) Fondazione Eni Enrico Mattei. *WITCH Documentation*; 2017.
- (115) Keppo, I.; van der Zwaan, B. The Impact of Uncertainty in Climate Targets and CO₂ Storage Availability on Long-Term Emissions Abatement. *Environ. Model. Assess.* **2012**, *17* (1–2), 177–191.
- (116) Luderer, G.; Bosetti, V.; Steckel, J.; Waisman, H. *Economics of Decarbonization - RECIPE. Appendix A: Model Description IMACLIM-R 2009*.
- (117) Muratori, M.; Khesghi, H.; Mignone, B.; McJeon, H.; Clarke, L. The Future Role of CCS in Electricity and Liquid Fuel Supply. *Energy Procedia* **2017**, *114* (November 2016), 7606–7614.
- (118) Muratori, M.; Khesghi, H.; Mignone, B.; Clarke, L.; McJeon, H.; Edmonds, J. Carbon Capture and Storage across Fuels and Sectors in Energy System Transformation Pathways. *Int. J. Greenhouse Gas Control* **2017**, *57*, 34–41.
- (119) Tong, D.; Zhang, Q.; Zheng, Y.; Caldeira, K.; Shearer, C.; Hong, C.; Qin, Y.; Davis, S. J. Committed Emissions from Existing Energy Infrastructure Jeopardize 1.5 °C Climate Target. *Nature* **2019**, *572* (7769), 373–377.
- (120) Kriegler, E.; Luderer, G.; Bauer, N.; Baumstark, L.; Fujimori, S.; Popp, A.; Rogelj, J.; Strefer, J.; Van Vuuren, D. P. Pathways Limiting Warming to 1.5 °C: A Tale of Turning around in No Time? *Philos. Trans. R. Soc., A* **2018**, *376* (2119), 20160457.
- (121) Sgouridis, S.; Carbajales-Dale, M.; Csala, D.; Chiesa, M.; Bardi, U. Comparative Net Energy Analysis of Renewable Electricity and Carbon Capture and Storage. *Nat. Energy* **2019**, *4* (6), 456–465.
- (122) Fricko, O.; Havlik, P.; Rogelj, J.; Klimont, Z.; Gusti, M.; Johnson, N.; Kolp, P.; Strubegger, M.; Valin, H.; Amann, M.; Ermolieva, T.; Forsell, N.; Herrero, M.; Heyes, C.; Kindermann, G.; Krey, V.; McCollum, D. L.; Obersteiner, M.; Pachauri, S.; Rao, S.; Schmid, E.; Schoepp, W.; Riahi, K. The Marker Quantification of the Shared Socioeconomic Pathway 2: A Middle-of-the-Road Scenario for the 21st Century. *Glob. Environ. Chang.* **2017**, *42*, 251–267.
- (123) Smith, P.; Adams, J.; Beerling, D. J.; Beringer, T.; Calvin, K. V.; Fuss, S.; Griscom, B.; Hagemann, N.; Kammann, C.; Kraxner, F.; Minx, J. C.; Popp, A.; Renforth, P.; Vicente, J. L.; Keesstra, S. Land-Management Options for Greenhouse Gas Removal and Their Impacts on Ecosystem Services and the Sustainable Development Goals. *Annu. Rev. Environ. Resour.* **2019**, *44*, 255–286.
- (124) Bach, L. T.; Gill, S. J.; Rickaby, R. E. M.; Gore, S.; Renforth, P. CO₂ Removal With Enhanced Weathering and Ocean Alkalinity Enhancement: Potential Risks and Co-Benefits for Marine Pelagic Ecosystems. *Front. Clim.* **2019**, *1* (October). DOI: 10.3389/fclim.2019.00007.
- (125) Pozo, C.; Galán-Martín, Á.; Reiner, D. M.; Mac Dowell, N.; Guillén-Gosálbez, G. Equity in Allocating Carbon Dioxide Removal Quotas. *Nat. Clim. Change* **2020**, *10* (7), 640–646.
- (126) Fuhrman, J.; McJeon, H.; Doney, S. C.; Shobe, W.; Clarens, A. F. From Zero to Hero?: Why Integrated Assessment Modeling of Negative Emissions Technologies Is Hard and How We Can Do Better. *Front. Clim.* **2019**, *1* (December). DOI: 10.3389/fclim.2019.00011.
- (127) U.S. Energy Information Administration. Emissions by plant and by region <https://www.eia.gov/electricity/data/emissions/>.
- (128) U.S. Energy Information Administration. Form EIA-860 detailed data with previous form data (EIA-860A/860B).
- (129) Zhai, H.; Rubin, E. S. A Techno-Economic Assessment of Hybrid Cooling Systems for Coal- and Natural-Gas-Fired Power Plants with and without Carbon Capture and Storage. *Environ. Sci. Technol.* **2016**, *50* (7), 4127–4134.
- (130) Kholod, N.; Evans, M.; Pilcher, R. C.; Roshchanka, V.; Ruiz, F.; Coté, M.; Collings, R. Global Methane Emissions from Coal Mining to Continue Growing Even with Declining Coal Production. *J. Cleaner Prod.* **2020**, *256*, 120489.
- (131) Schwietzke, S.; Sherwood, O. A.; Bruhwiler, L. M. P.; Miller, J. B.; Etiope, G.; Dlugokencky, E. J.; Michel, S. E.; Arling, V. A.; Vaughn, B. H.; White, J. W. C.; Tans, P. P. Upward Revision of Global Fossil Fuel Methane Emissions Based on Isotope Database. *Nature* **2016**, *538* (7623), 88–91.
- (132) Karacan, C. O.; Ruiz, F. A.; Cote, M.; Phipps, S. Coal Mine Methane: A Review of Capture and Utilization Practices with Benefits to Mining Safety and to Greenhouse Gas Reduction. *Int. J. Coal Geol.* **2011**, *86*, 121–156.
- (133) Duda, A.; Krzemień, A. Forecast of Methane Emission from Closed Underground Coal Mines Exploited by Longwall Mining – A Case Study of Anna Coal Mine. *J. Sustain. Min.* **2018**, *17* (4), 184–194.
- (134) Schwietzke, S.; Griffin, W. M.; Matthews, H. S.; Bruhwiler, L. M. P. Natural Gas Fugitive Emissions Rates Constrained by Global Atmospheric Methane and Ethane. *Environ. Sci. Technol.* **2014**, *48* (14), 7714–7722.
- (135) Zimmerle, D. J.; Williams, L. L.; Vaughn, T. L.; Quinn, C.; Subramanian, R.; Duggan, G. P.; Willson, B.; Opsomer, J. D.; Marchese, A. J.; Martinez, D. M.; Robinson, A. L. Methane Emissions from the Natural Gas Transmission and Storage System in the United States. *Environ. Sci. Technol.* **2015**, *49* (15), 9374–9383.
- (136) Roman-white, S.; Rai, S.; Littlefield, J.; Cooney, G.; Skone, T. *Life Cycle Greenhouse Gas Perspective on Exporting Liquefied Natural Gas from the United States*; National Energy Technology Laboratory, 2014; Vol. 79 (107), pp 32260–32261.
- (137) Balcombe, P.; Anderson, K.; Speirs, J.; Brandon, N.; Hawkes, A. The Natural Gas Supply Chain: The Importance of Methane and Carbon Dioxide Emissions. *ACS Sustainable Chem. Eng.* **2017**, *5* (1), 3–20.
- (138) Skone, T.; Littlefield, J.; Marriott, J.; Cooney, G.; Demetrios, L.; Jamieson, M.; Jones, C.; Mutchek, M.; Yan Shih, C.; Schivley, G.; Krynock, M.; Hamilton, B. A. *Life Cycle Analysis of Natural Gas Extraction and Power Generation*. National Energy Technology Laboratory 2014, 1–200.

(139) Alvarez, R. A.; Zavala-Araiza, D.; Lyon, D. R.; Allen, D. T.; Barkley, Z. R.; Brandt, A. R.; Davis, K. J.; Herndon, S. C.; Jacob, D. J.; Karion, A.; Kort, E. A.; Lamb, B. K.; Lauvaux, T.; Maasakkers, J. D.; Marchese, A. J.; Omara, M.; Pacala, S. W.; Peischl, J.; Robinson, A. L.; Shepson, P. B.; Sweeney, C.; Townsend-Small, A.; Wofsy, S. C.; Hamburg, S. P. Assessment of Methane Emissions from the U.S. Oil and Gas Supply Chain. *Science* **2018**, 361 (6398), 186–188.

(140) Schuiling, R. D.; Krijgsman, P. Enhanced Weathering: An Effective and Cheap Tool to Sequester CO₂. *Clim. Change* **2006**, 74 (1–3), 349–354.

(141) Pilorgé, H.; McQueen, N.; Maynard, D.; Psarras, P.; He, J.; Rufael, T.; Wilcox, J. Cost Analysis of Carbon Capture and Sequestration of Process Emissions from the U.S. Industrial Sector. *Environ. Sci. Technol.* **2020**, 54 (12), 7524–7532.

(142) Tanzer, S. E.; Blok, K.; Ramírez, A. Can Bioenergy with Carbon Capture and Storage Result in Carbon Negative Steel? *Int. J. Greenhouse Gas Control* **2020**, 100 (December 2019), 103104.

(143) Tian, S.; Jiang, J.; Zhang, Z.; Manovic, V. Inherent Potential of Steelmaking to Contribute to Decarbonisation Targets via Industrial Carbon Capture and Storage. *Nat. Commun.* **2018**, 9 (1), 1–8.

(144) Leeson, D.; Mac Dowell, N.; Shah, N.; Petit, C.; Fennell, P. S. A Techno-Economic Analysis and Systematic Review of Carbon Capture and Storage (CCS) Applied to the Iron and Steel, Cement, Oil Refining and Pulp and Paper Industries, as Well as Other High Purity Sources. *Int. J. Greenhouse Gas Control* **2017**, 61, 71–84.

(145) Davis, S. J.; Lewis, N. S.; Shaner, M.; Aggarwal, S.; Arent, D.; Azevedo, I. L.; Benson, S. M.; Bradley, T.; Brouwer, J.; Chiang, Y. M.; Clack, C. T. M.; Cohen, A.; Doig, S.; Edmonds, J.; Fennell, P.; Field, C. B.; Hannegan, B.; Hodge, B. M.; Hoffert, M. I.; Ingersoll, E.; Jaramillo, P.; Lackner, K. S.; Mach, K. J.; Mastrandrea, M.; Ogden, J.; Peterson, P. F.; Sanchez, D. L.; Sperling, D.; Stagner, J.; Trancik, J. E.; Yang, C. J.; Caldeira, K. Net-Zero Emissions Energy Systems. *Science* **2018**, 360 (6396), eaas9793.

(146) Biermann, M.; Ali, H.; Sundqvist, M.; Larsson, M.; Normann, F.; Johnsson, F. Excess Heat-Driven Carbon Capture at an Integrated Steel Mill – Considerations for Capture Cost Optimization. *Int. J. Greenhouse Gas Control* **2019**, 91, 102833.

(147) Wilson, I. A. G.; Staffell, I. Rapid Fuel Switching from Coal to Natural Gas through Effective Carbon Pricing. *Nat. Energy* **2018**, 3 (5), 365–372.