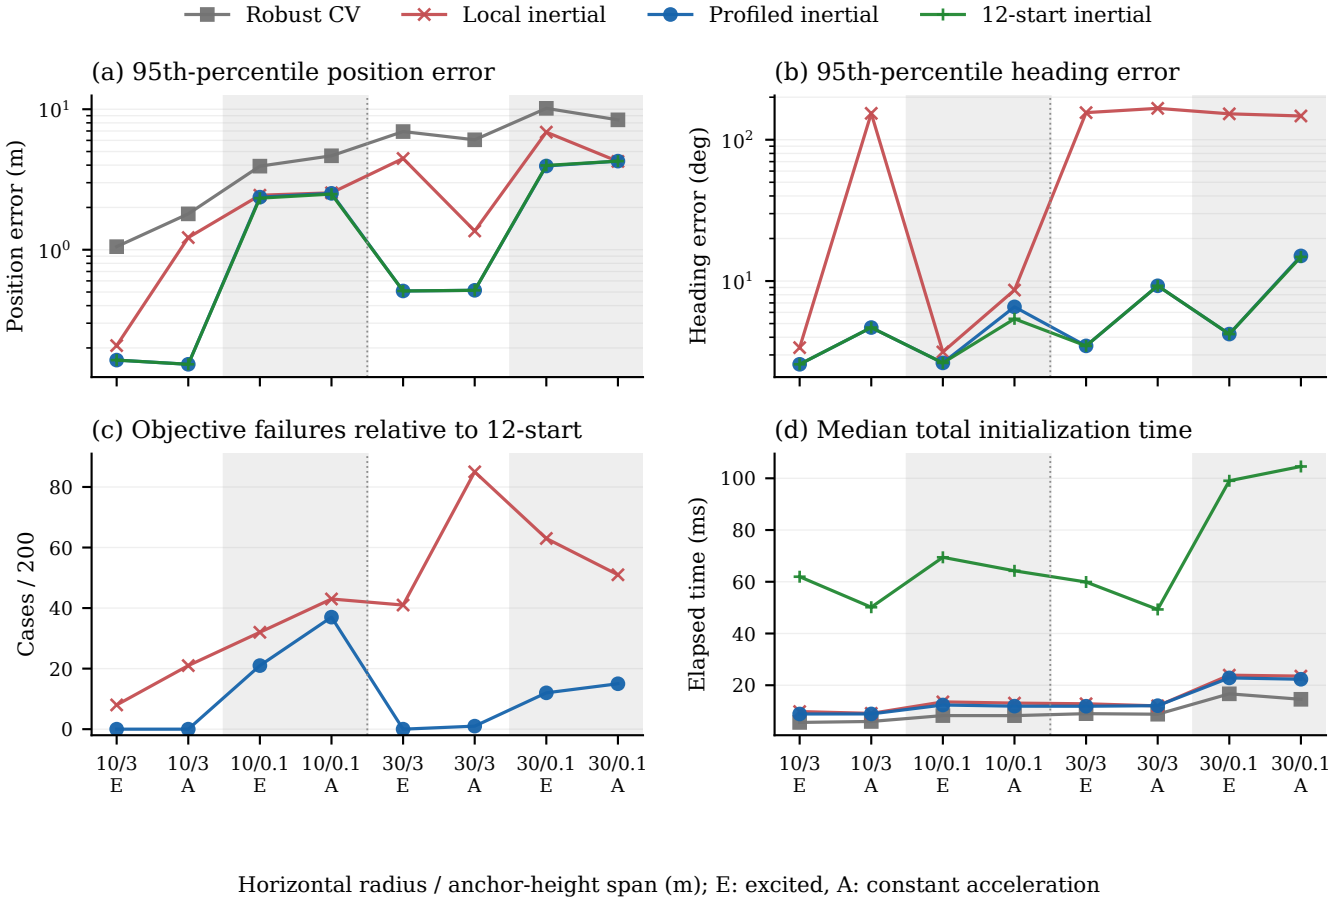
Robust CV
Local inertial
Profiled inertial
12-start inertial
(a) 95th-percentile position error
Position error (m)
10^1
10^0
(b) 95th-percentile heading error
Heading error (deg)
10^2
10^1
(c) Objective failures relative to 12-start
Cases / 200
0
20
40
60
80
(d) Median total initialization time
Elapsed time (ms)
20
40
60
80
100
10/3 E
10/3 A
10/0.1 E
10/0.1 A
30/3 E
30/3 A
30/0.1 E
30/0.1 A
Horizontal radius / anchor-height span (m); E: excited, A: constant acceleration