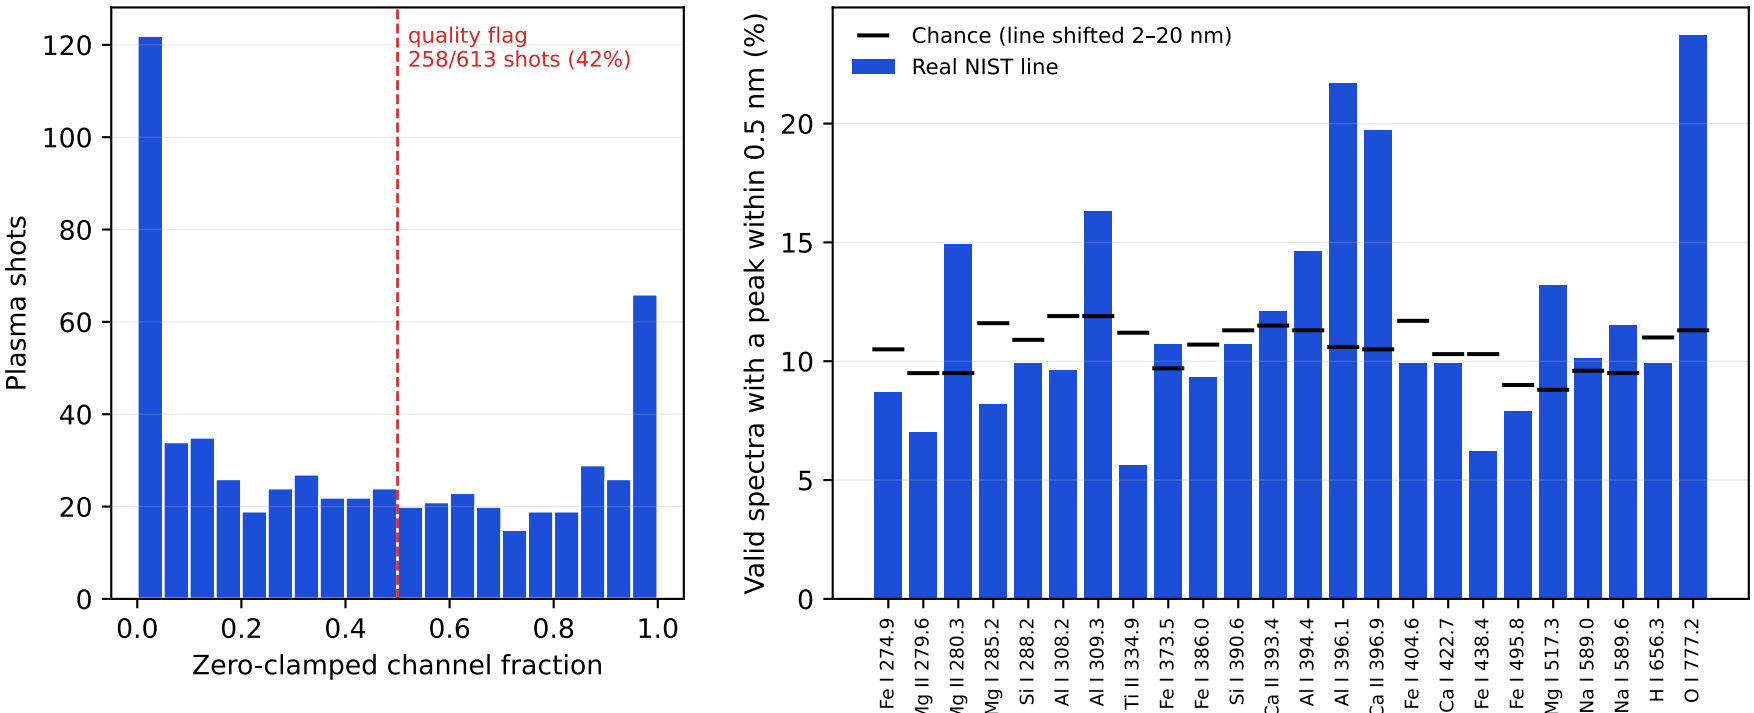
(a) Signal quality, 613 paired shots from 301 products
quality flag
258/613 shots (42%)
Plasma shots
Zero-clamped channel fraction
(b) Per-line detection rate, 355 quality-valid spectra
Chance (line shifted 2–20 nm)
Real NIST line
Valid spectra with a peak within 0.5 nm (%)
Fe I 274.9
Mg II 279.6
Mg II 280.3
Mg I 285.2
Si I 288.2
Al I 308.2
Al I 309.3
Ti II 334.9
Fe I 373.5
Fe I 386.0
Si I 390.6
Ca II 393.4
Al I 394.4
Al I 396.1
Ca II 396.9
Fe I 404.6
Ca I 422.7
Fe I 438.4
Fe I 495.8
Mg I 517.3
Na I 589.0
Na I 589.6
H I 656.3
O I 777.2