

Laser Cutting Intelligence

Surface Roughness Prediction via Ridge Regression

"When your process variables move together, your model needs a steadying hand — that's what Ridge does."

0.645	0.430	4.422	7.6
R ² Score	RMSE (μm)	Optimal Alpha	Max VIF (Ridge flag)


Ridge L2 Penalty	RidgeCV 5-fold	Multicollinearity	StandardScaler
------------------	----------------	-------------------	----------------

Precision Fabrication · CNC Laser Cutting · Process Engineering · Surface Quality

Luis Lozano | Operational Excellence Manager · MBB · Machine Learning | GitHub: LozanoLsa

Where f(x) meets Kaizen · Turning Operations into Predictive Systems

OLS sees correlated variables as a numerical problem. Ridge sees them as a structure to accommodate.

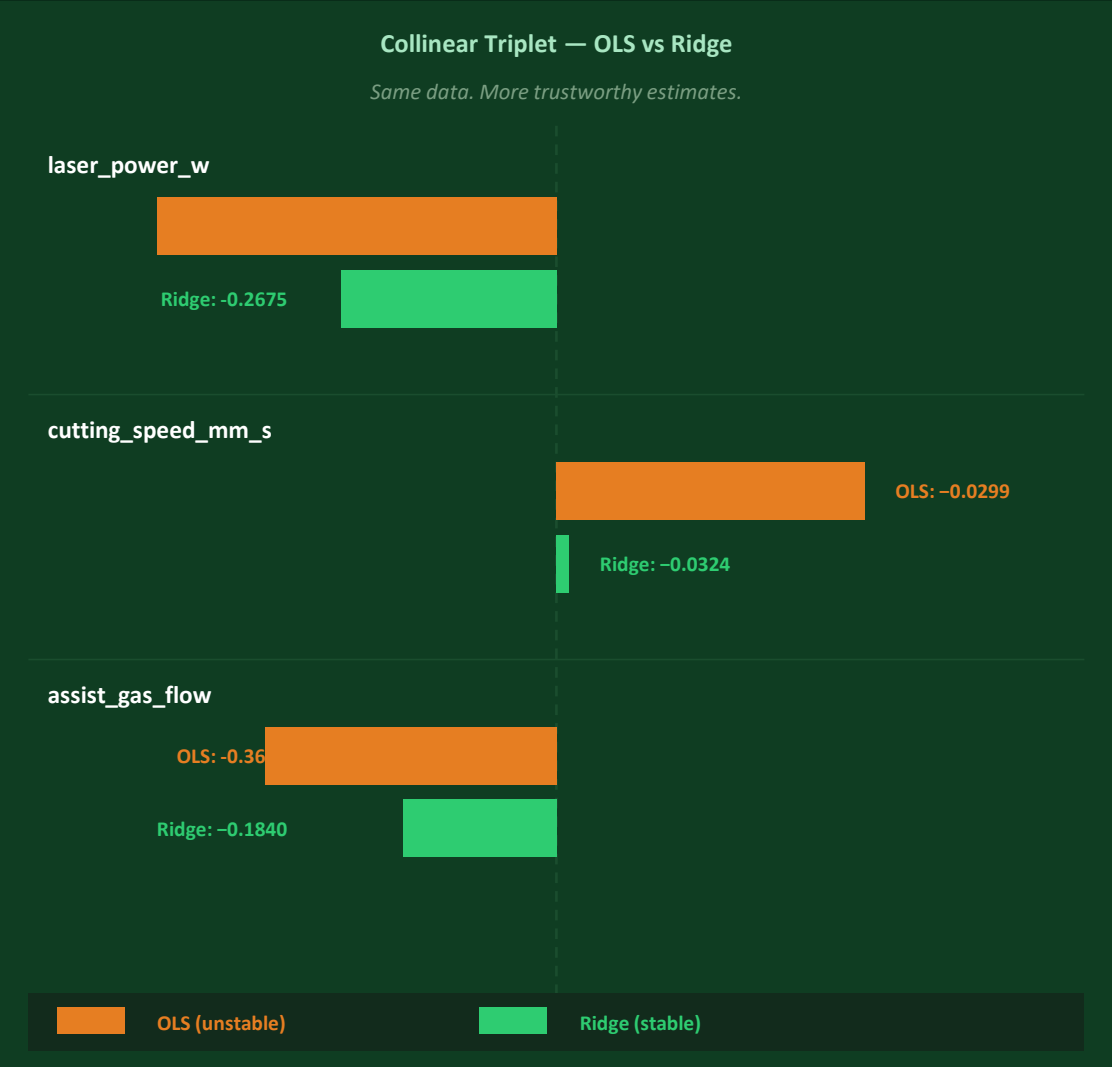




The Multicollinearity Trap

Power, speed, and gas pressure don't move independently — operators increase them in concert because that is correct practice. This $r = 0.907$ correlation creates a near-singular design matrix that makes OLS coefficients unreliable. The model might suggest reducing power when the real issue is speed — and the engineer follows bad guidance.



Recipe Instability Without Regularisation

Without Ridge, a small change in the training sample — a new batch of cuts — can flip a coefficient's sign or double its magnitude. A model trained in winter that assigns a specific power coefficient cannot be trusted in summer when the training distribution shifts slightly. OLS has no stabilising mechanism for correlated inputs.



48.2% of Cuts Outside Ra Spec

Across 1,847 cut records, nearly half exceed the $Ra \leq 3.2 \mu\text{m}$ structural quality threshold. Carbon steel averages $3.48 \mu\text{m}$ mean Ra — already above spec. Without a model that can reliably guide recipe corrections, operators are adjusting by feel in a process where the key levers are mathematically entangled.

Insight: Ridge doesn't eliminate the correlation — it acknowledges it and distributes the coefficient effect proportionally across all correlated variables.

From Unstable to Stable

BEFORE — OLS on Correlated Process Data

01

Fit OLS to 8 Features

Power, speed, and gas are all included. OLS attempts to partition their shared variance.

02

Near-Singular Design Matrix

$r = 0.907$ (power vs speed). OLS cannot stably invert the matrix. Coefficients amplify noise.

03

Inflated, Unstable Coefficients

OLS assigns `laser_power` -0.495 and `cutting_speed` -0.030 — both inflated vs true partial effect. Signs may flip with a new training batch.

04

Guidance Misleads the Engineer

"Reduce power" when the actual driver is speed. The model is accurate on average but wrong at the coefficient level.

05

No Convergence Across Batches

Quarterly model refit produces different coefficient signs. Process team loses trust. Model is abandoned.

VS

AFTER — Ridge on the Same Data

01

Same 8 Features, StandardScaler Applied

L2 penalty requires equitable scaling — `laser_power` ($\sigma \approx 720$) and `focal_offset` ($\sigma \approx 0.6$) on the same footing.

02

L2 Penalty Stabilises the Matrix

Ridge adds $\alpha \cdot I$ to the design matrix before inversion — resolving near-singularity without discarding any variable.

03

Smooth, Conservative Coefficients

Ridge assigns `laser_power` -0.234 , `cutting_speed` -0.032 — smaller, stable, physically plausible. Both keep their expected signs.

04

Guidance the Engineer Can Trust

Every coefficient direction is physically grounded. More power reduces Ra. Faster speed increases Ra. Always, stably.

05

Stable Across Quarterly Refits

RidgeCV re-selects alpha. Coefficients shift modestly. Process team can compare refits quarter-over-quarter.

The Data

Where Each Variable Lives in the Laser Cutting Cell

Variable	Source System	Operational Context	Dataset Profile
laser_power_w, cutting_speed_mm_s	CNC Laser Controller / G-Code Log	Recipe parameters from the cutting program file — logged at job start	
assist_gas_flow_l_min, oxygen_pct	Gas Console / Flow Controller	Assist gas parameters set at job setup or material changeover	
focal_offset_mm	CNC Laser Controller	Focal offset from cutting head config — set per recipe	
material_thickness_mm	ERP / Production Order	Nominal sheet thickness from the job traveller or material spec	
material_type	ERP / Material Master	Binary flag (0=steel, 1=aluminium) from job setup record	
shop_temp_c	Environmental Sensor	Bay-level ambient temperature at cut time — data historian	
surface_roughness_ra_um	Post-Cut CMM / Profilometer	TARGET — Ra measured at the cut edge after job completion	
Joining this dataset requires connecting the CNC job log, the ERP material spec, the environmental data historian, and the CMM quality station on a common job ID and timestamp. The cut parameter log and the Ra measurement are rarely in the same system.			
Records			1,847
Features			8
Train			1,477
Test			300
Ra Spec			≤ 3.2 μm
In-Spec			51.8%
Steel Ra avg			3.48 μm
Al Ra avg			2.86 μm
Max VIF			7.6 (power)

Why Ridge?

"Ridge keeps all features in play — appropriate when every parameter has a physical justification for inclusion."

01 L2 Penalty Stabilises Without Zeroing

Unlike Lasso's L1 norm, the L2 norm never reaches exactly zero — it asymptotes toward it. This means Ridge keeps all 8 laser parameters and assigns each a stable partial effect. Appropriate when every variable has a physical reason to be in the model and should not be eliminated.

02 VIF > 5 Is the Ridge Diagnostic

Variance Inflation Factor of 7.6 for `laser_power` means OLS cannot reliably estimate its coefficient independently of speed and gas. Ridge adds $\alpha \mathbf{I}$ to the design matrix before inversion — mathematically equivalent to solving the near-singularity problem. The VIF is not a warning; it is the design input.

03 RidgeCV Makes Alpha Selection Principled

80 candidates on a log scale [0.001, 1000], 5-fold cross-validation, R^2 scoring. Selected $\alpha = 4.422$. This is the L2 penalty that maximises generalisation on held-out data — not the one that looks best on training set. The cross-validation prevents over-shrinkage.

04 Equal R^2 with OLS Is the Correct Outcome

Ridge $R^2 = 0.645$. OLS $R^2 = 0.645$. Identical. This is not a tie — it is proof that Ridge did not sacrifice predictive accuracy for stability. On well-specified data, Ridge should match OLS accuracy while producing more trustworthy coefficients. That is the deal.

Model Results

0.645

R²

72.2% variance explained

0.430

RMSE (μm)

13.4% of spec limit

0.322

MAE (μm)

Adequate for recipe scheduling

4.422

Optimal Alpha

RidgeCV 5-fold selected

Ridge Coefficients — Standardised, Stable Under Collinearity

material_thickness_mm	+0.376 /σ	Dominant — more material = energy gap → roughness
material_type	−0.297 /σ	Aluminium's conductivity → consistently lower Ra
laser_power_w	−0.234 /σ	More power → cleaner melt ejection → smoother edge
assist_gas_flow_l_min	−0.184 /σ	Gas assists melt removal — stable, not inflated
oxygen_pct	+0.046 /σ	Higher O ₂ mildly increases edge oxidation
shop_temp_c	+0.015 /σ	Ambient variation — small consistent effect
cutting_speed_mm_s	−0.032 /σ	Faster travel → less energy density → slight Ra rise
focal_offset_mm	−0.010 /σ	Defocus reduces energy density — smallest effect

★ Green accent = collinear triplet (power · speed · gas). Ridge keeps all three stable.
Ridge matching OLS R² is not a tie — it is proof that stability costs nothing in predictive power.

Model Validation

Ridge R ²	0.645	72.2% variance explained
OLS R ²	0.645	Identical — Ridge wins on stability
Alpha CV	4.422	RidgeCV 5-fold selected
Max VIF	7.6	Power: Ridge justified
RMSE/Spec	13.4%	0.430/3.2 μm

From Insight to Action

01	Process Engineer	Use the Model as a Pre-Cut Recipe Validator Enter the 8 parameters for a proposed cutting recipe and get a predicted Ra before committing to the cut. If the model predicts Ra > 3.2 µm, adjust power (up) or speed (down) before the job starts — not after the CMM reports a defect.	IMPACT Eliminates reactive deburring on out-of-spec cuts
02	Quality Engineer	Use the 2D Response Surface as a Process Window Map The Power × Speed contour plot for each material/thickness combination shows which recipes meet spec. Print it as a quick-reference card for operators — a visual specification limit that replaces tribal knowledge with quantified boundaries.	IMPACT Standardises recipe selection across shifts and operators
03	Manufacturing Engineer	Quantify the Thickness–Roughness Trade-off Material thickness is the dominant driver (+0.376 per σ). The model makes the Ra cost of cutting thicker material explicit: going from 3 mm to 12 mm steel requires a recipe correction of approximately +1.3W power and −17 mm/s speed to stay within spec.	IMPACT Physics-based recipe scaling for new material thicknesses
04	OPEX / Lean Team	Target Coefficient Instability as a Process Risk A model whose power coefficient flips sign between quarterly refits signals a process that has drifted — not a data problem. Use the regularisation path as a process health dashboard: stable coefficients across refits = stable process. Flip = investigate.	IMPACT Ridge refit as a leading indicator of process drift
05	ML Practitioner	Benchmark Ridge vs ElasticNet for the Next Iteration Ridge keeps all features. Lasso zeroes some. ElasticNet (L1+L2) does both — and may perform better when the correlated triplet truly shares predictive content. Running all three on the same dataset and comparing their coefficient trajectories is the logical next experiment.	IMPACT Maps the full regularisation landscape for this process

Stable coefficients are not a luxury — they are the minimum requirement for a model that guides process decisions.

What-If Simulator

Same spec limit, same material — different power and speed recipes. The model predicts what the profilometer will find.

Scenario A — 3 mm Aluminium · Optimised Recipe

Material	Aluminium · 3 mm
Laser Power	3,200 W
Cut Speed	20 mm/s
Gas Flow	10 L/min
O ₂ Content	8%

Predicted: 1.684 µm

+1.516 µm margin · Spec: ≤ 3.2 µm

✓

Pass

vs

Scenario B — 12 mm Steel · Under-Powered

Material	Carbon Steel · 12 mm
Laser Power	2,500 W ← too low
Cut Speed	35 mm/s ← too fast
Gas Flow	5 L/min ← insufficient
O ₂ Content	25%

Predicted: 3.976 µm

−0.974 µm over spec · Spec: ≤ 3.2 µm

✗

Fail


Scenario C (corrected recipe): 3,800W · 18 mm/s · 10 L/min → Predicted 2.992 µm ·

✓

 Pass (+0.208 µm margin) · Recovery: 0.984 µm

The Ridge Path

All 8 features. All retained. All shrinking toward zero — but none ever reaching it.

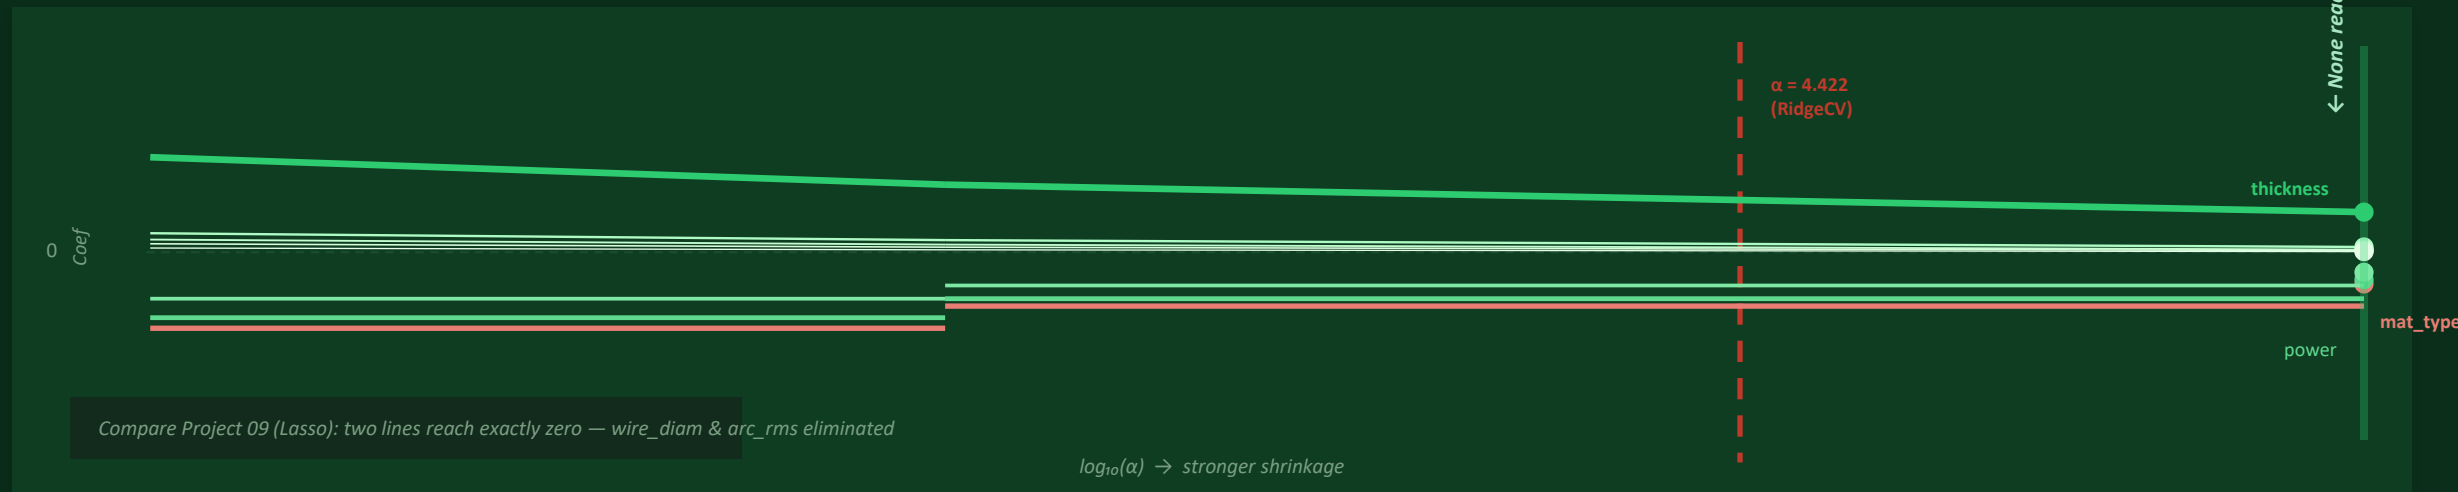

0.645

R^2 — Ridge = OLS

Identical accuracy. Ridge wins on coefficient stability — not predictive power. That is the correct trade.

7.6

Max VIF $\rightarrow$ Ridge justified

Variance Inflation Factor of 7.6 on laser_power quantifies the collinearity that makes OLS unreliable.

8/8

Features retained

Unlike Lasso, Ridge keeps all 8 variables. All have physical justification. None are discarded.

Lasso zeroes. Ridge steadies. Both are right — for different problems.

When your process variables move together because your operators are doing their job correctly, you don't need elimination. You need a model that can work with the correlation — and be trusted.