


```

gpio_set_function(0, GPIO_FUNC_UART); // TX
gpio_set_function(1, GPIO_FUNC_UART); // RX
gpio_set_function(2, GPIO_FUNC_UART); // CTS
gpio_set_function(3, GPIO_FUNC_UART); // RTS

```

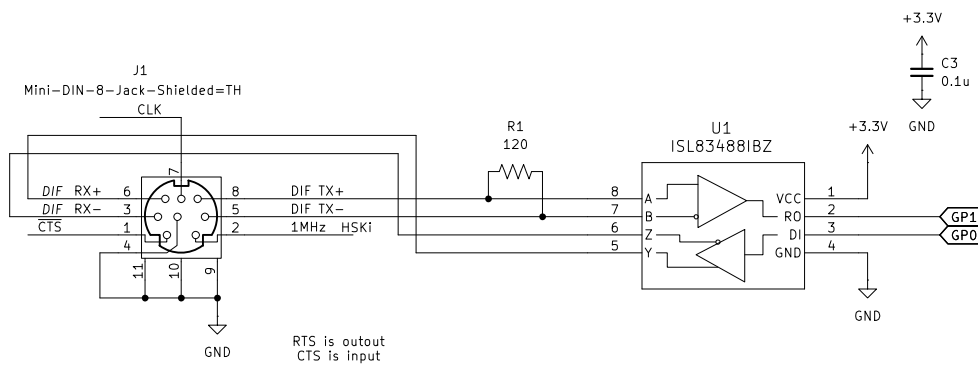

Pinout is for Apple Crossover cable.  
For stright-through connection just flip the connector horizontally.

8<->6

5<->3

2<->1

