

# 3300 XL 8mm Proximity Transducer System

## Bently Nevada\* Asset Condition Monitoring

---

### Description

The 3300 XL 8 mm Proximity Transducer System consists of:

- One 3300 XL 8 mm probe,
- One 3300 XL extension cable<sup>1</sup>, and
- One 3300 XL Proximitor\* Sensor<sup>2</sup>.

The system provides an output voltage that is directly proportional to the distance between the probe tip and the observed conductive surface and can measure both static (position) and dynamic (vibration) values. The system's primary applications are vibration and position measurements on fluid-film bearing machines, as well as Keyphasor\* reference and speed measurements<sup>3</sup>.

The 3300 XL 8 mm system delivers the most advanced performance in our eddy current proximity transducer systems. The standard 3300 XL 8 mm 5-metre system also fully complies with the American Petroleum Institute's (API) 670 Standard (4<sup>th</sup> Edition) for mechanical configuration, linear range, accuracy, and temperature stability. All 3300 XL 8 mm proximity transducer systems provide this level of performance and support complete interchangeability of probes, extension cables, and Proximitor sensors, eliminating the need to match or bench calibrate individual components

Each 3300 XL 8 mm Transducer System component is backward-compatible and interchangeable<sup>4</sup> with other non-XL 3300 series 5 mm and 8 mm transducer system components<sup>5</sup>. This compatibility includes the 3300 5 mm probe, for applications in which an 8 mm probe is too large for the available mounting space<sup>6,7</sup>.

### Proximitor Sensor

The 3300 XL Proximitor Sensor incorporates numerous improvements over previous designs. Its physical packaging allows you to use it in high-density DIN-rail installations. You can also mount the sensor in a traditional panel mount configuration, where it shares an identical 4-hole mounting "footprint" with older Proximitor Sensor designs. The mounting base for either option provides electrical isolation and eliminates the need for separate isolator plates. The 3300 XL Proximitor Sensor is highly immune to radio frequency interference, allowing you to install it in fiberglass housings without adverse effects from nearby radio frequency signals. The 3300 XL Proximitor Sensor's improved RFI/EMI immunity satisfies European CE mark approvals without requiring special shielded conduit or metallic housings, resulting in lower installation costs and complexity.

The 3300 XL's SpringLoc terminal strips require no special installation tools and facilitate faster, more robust field wiring connections by eliminating screw-type clamping mechanisms that can loosen.



## Proximity Probe and Extension Cable

The 3300 XL probe and extension cable also reflect improvements over previous designs. A patented TipLoc\* molding method provides a more robust bond between the probe tip and the probe body. The probe's cable incorporates a patented CableLoc\* design that provides 330 N (75 lbf) pull strength to more securely attach the probe cable and probe tip.

You can also order 3300 XL 8 mm probes and extension cables with an optional FluidLoc\* cable option. This option prevents oil and other liquids from leaking out of the machine through the cable's interior.

## Connectors

The 3300 XL probe, extension cable, and Proximity sensor have corrosion-resistant, gold-plated ClickLoc\* connectors. These connectors require only finger-tight torque (the connectors will "click" when tight), and the specially-engineered locking mechanism prevents the connectors from loosening. These connectors require no special tools for installation or removal.

You can order the 3300 XL 8 mm probes and extension cables with connector protectors already installed. We can also supply connector protectors separately for field installations (such as when an application must run the cable through restrictive conduit). We recommend connector protectors for all installations to provide increased environmental protection<sup>8</sup>.

## Extended Temperature Range Applications

An extended temperature range (ETR) probe and ETR extension cable are available for applications in which either the probe lead or extension cable may exceed the standard 177 °C (350 °F) temperature specification. The ETR probe has an extended temperature rating for up to 218 °C (425 °F). The ETR extension cable rating is up to 260 °C (500 °F). Both the ETR probe and cable are compatible with standard temperature probes and cables, for example, you can utilize an ETR probe with the 330130 extension cable. The ETR system uses the standard 3300 XL Proximity Sensor. Note that when you use any ETR component as part of your system, the ETR component limits the system accuracy to the accuracy of the ETR system.

## Description Notes:

- 1-metre systems do not use an extension cable.
- Proximity sensors are supplied by default from the factory calibrated to AISI 4140 steel. Calibration to other target materials is available upon request.
- Consult Bently Nevada\* Applications Note, *Considerations when using Eddy Current Proximity Probes for Overspeed Protection Applications*, when considering this transducer system for tachometer or overspeed measurements.
- 3300 XL 8 mm components are both electrically and physically interchangeable with non-XL 3300 5 mm and 8 mm components. Although the packaging of the 3300 XL Proximity Sensor differs from its predecessor, its design fits in the same 4-hole mounting pattern when used with the 4-hole mounting base, and will fit within the same mounting space specifications (when minimum permissible cable bend radius is observed).
- Mixing XL and non-XL 3300-series 5 mm and 8 mm system components limits system performance to the specifications for the non-XL 3300 5 mm and 8 mm Transducer System.
- The 3300-series 5 mm probe (refer to Specifications and Ordering Information p/n 141605-01) uses smaller physical packaging, but does not reduce the side view clearances or tip-to-tip spacing requirements as compared to an 8 mm probe. It is used when physical (not electrical) constraints preclude the use of an 8 mm probe. When your application requires narrow side view probes, use the 3300 NSv\* Proximity Transducer System (refer to Specifications and Ordering Information p/n 147385-01).
- 8 mm probes provide a thicker encapsulation of the probe coil in the molded PPS plastic probe tip. This results in a more rugged probe. The larger diameter of the probe body also provides a stronger, more robust case. We recommend that you use 8 mm probes when possible to provide optimal robustness against physical abuse.
- Each 3300 XL extension cable includes silicone tape that you can use instead of connector protectors. We do not recommend silicone tape for applications that will expose the probe-to-extension cable connection to turbine oil.

---

## Specifications

Unless otherwise noted, the following specifications are for a 3300 XL 8 mm Proximity Sensor, extension cable and 8 mm probe between +18 °C and +27 °C (+64 °F to +80 °F), with a -24 Vdc power supply, a 10 kΩ load, an AISI 4140 steel target, and a probe gapped at 1.27 mm (50 mils). Performance characteristics apply to systems that consist solely of 3300 XL 8 mm components. The system accuracy and interchangeability specifications do not apply to transducer systems that are calibrated to any target other than our AISI 4140 steel target.

---

### Electrical

#### Proximity Sensor Input

Accepts one non-contacting 3300-series 5 mm, 3300 8 mm **or** 3300 XL 8 mm Proximity Probe and Extension Cable.

#### Power

Requires -17.5 Vdc to -26 Vdc without barriers at 12 mA maximum consumption, -23 Vdc to -26 Vdc with barriers. Operation at a more positive voltage than -23.5 Vdc can result in reduced linear range.

#### Supply Sensitivity

Less than 2 mV change in output voltage per volt change in input voltage.

#### Output Resistance

50 Ω

#### Nominal Probe DC Resistance

Resistance ( $R_{\text{PROBE}}$ ) from Center Conductor to Outer Conductor

Probe Length	$R_{\text{PROBE}}$ (Ω)
0.5	$7.45 \pm 0.50$
1.0	$7.59 \pm 0.50$
1.5	$7.73 \pm 0.50$
2.0	$7.88 \pm 0.50$
3.0	$8.17 \pm 0.60$
5.0	$8.73 \pm 0.70$
9.0	$9.87 \pm 0.90$

#### Nominal Extension Cable DC Resistance

Resistance ( $R_{\text{CORE}}$ ) from Center Conductor to Center Conductor

Length of Extension Cable (m)	$R_{\text{CORE}}$ (Ω)
3.0	$0.66 \pm 0.10$
3.5	$0.77 \pm 0.12$
4.0	$0.88 \pm 0.13$
4.5	$0.99 \pm 0.15$
6.0	$1.32 \pm 0.21$
7.0	$1.54 \pm 0.23$
7.5	$1.65 \pm 0.25$
8.0	$1.76 \pm 0.26$
8.5	$1.87 \pm 0.28$

Resistance ( $R_{\text{JACKET}}$ ) from Outer Conductor to Outer Conductor

Length of Extension Cable (m)	$R_{\text{JACKET}}$ (Ω)
3.0	$0.20 \pm 0.04$
3.5	$0.23 \pm 0.05$
4.0	$0.26 \pm 0.05$
4.5	$0.30 \pm 0.06$
6.0	$0.39 \pm 0.08$
7.0	$0.46 \pm 0.09$
7.5	$0.49 \pm 0.10$
8.0	$0.53 \pm 0.11$
8.5	$0.56 \pm 0.11$

**Extension Cable  
Capacitance**

69.9 pF/m (21.3 pF/ft) typical

**Field Wiring**

0.2 to 1.5 mm<sup>2</sup> (16 to 24 AWG) .  
Recommend using 3-conductor  
shielded triad cable and tinned  
field wiring. Maximum length of  
305 metres (1,000 feet) between  
the 3300 XL Proximitor Sensor  
and the monitor. See the  
frequency response graphs in  
through Figure 13 (pages 27 and  
28) for signal rolloff at high  
frequencies when using longer  
field wiring lengths.

**Linear Range**

2 mm (80 mils). Linear range  
begins at approximately 0.25 mm  
(10 mils) from target and is from  
0.25 to 2.3 mm (10 to 90 mils)  
(approximately -1 to -17 Vdc).

**Recommended  
Gap Setting for  
Radial Vibration**

-9Vdc [approximately 1.27 mm  
(50 mils)]

**Incremental  
Scale Factor  
(ISF)**

*Standard  
5- or 1- metre  
System:*

7.87 V/mm (200 mV/mil)  $\pm$  5%  
including interchangeability error  
when measured in increments of  
0.25 mm (10 mils) over the 80 mil  
linear range from 0 °C to +45 °C  
(+32 °F to +113 °F).

*Standard  
9-metre  
System:*

7.87 V/mm (200 mV/mil)  $\pm$  6.5%  
including interchangeability error  
when measured in increments of  
0.25 mm (10 mils) over the 80 mil  
linear range from 0 °C to +45 °C  
(+32 °F to +113 °F).

*Extended  
Temperature  
Range (ETR)  
for 5- and  
9-Metre  
Systems:*

7.87 V/mm (200 mV/mil)  $\pm$  6.5%  
including interchangeability error  
when measured in increments of  
0.25 mm (10 mils) over the 80 mil  
linear range from 0 °C to +45 °C  
(+32 °F to +113 °F).

**Deviation from best fit straight line (DSL)**

*Standard  
5- or 1-metre  
System:*

Less than  $\pm 0.025$  mm ( $\pm 1$  mil) with  
components at 0 °C to +45 °C  
(+32 °F to +113 °F).

*Standard  
9-metre  
System:*

Less than  $\pm 0.038$  mm ( $\pm 1.5$  mil)  
with components at 0 °C to +45  
°C (+32 °F to +113 °F).

*Extended  
Temperature  
Range 5 and  
9-metre  
Systems:*

Less than  $\pm 0.038$  mm ( $\pm 1.5$  mil)  
with components at 0 °C to +45  
°C (+32 °F to +113 °F).

**Performance  
Over Extended  
Temperatures**

*Standard  
5- or 1-metre  
System:*

Over a probe temperature range  
of -35 °C to +120 °C (-31 °F to  
+248 °F) with the Proximitor  
sensor and extension cable  
between 0 °C to +45 °C (+32 °F to  
+113 °F), the ISF remains within  
 $\pm 10\%$  of 7.87 V/mm (200 mV/mil)  
and the DSL remains within  
 $\pm 0.076$  mm ( $\pm 3$  mils).

Over a Proximitor sensor and extension cable temperature range of  $-35^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$  ( $-31^{\circ}\text{F}$  to  $+149^{\circ}\text{F}$ ) with the probe between  $0^{\circ}\text{C}$  to  $+45^{\circ}\text{C}$  ( $+32^{\circ}\text{F}$  to  $+113^{\circ}\text{F}$ ), the ISF remains within  $\pm 10\%$  of 7.87 V/mm (200 mV/mil) and the DSL remains within  $\pm 0.076\text{ mm}$  ( $\pm 3\text{ mils}$ ).

*Standard  
9-metre  
System:*

Over a probe temperature range of  $-35^{\circ}\text{C}$  to  $+120^{\circ}\text{C}$  ( $-31^{\circ}\text{F}$  to  $+248^{\circ}\text{F}$ ) with the Proximitor sensor and extension cable between  $0^{\circ}\text{C}$  to  $+45^{\circ}\text{C}$  ( $+32^{\circ}\text{F}$  to  $+113^{\circ}\text{F}$ ), the ISF remains within  $\pm 18\%$  of 7.87 V/mm (200 mV/mil) and the DSL remains within  $\pm 0.152\text{ mm}$  ( $\pm 6\text{ mils}$ ).

Over a Proximitor sensor and extension cable temperature range of  $-35^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$  ( $-31^{\circ}\text{F}$  to  $+149^{\circ}\text{F}$ ) with the probe between  $0^{\circ}\text{C}$  to  $+45^{\circ}\text{C}$  ( $+32^{\circ}\text{F}$  to  $+113^{\circ}\text{F}$ ), the ISF remains within  $\pm 18\%$  of 7.87 V/mm (200 mV/mil) and the DSL remains within  $\pm 0.152\text{ mm}$  ( $\pm 6\text{ mils}$ ).

*Extended  
Temperature  
Range 5 and  
9-metre  
Systems:*

Over a probe and extension cable temperature range of  $-35^{\circ}\text{C}$  to  $+260^{\circ}\text{C}$  ( $-31^{\circ}\text{F}$  to  $+500^{\circ}\text{F}$ ) with the Proximitor sensor between  $0^{\circ}\text{C}$  to  $+45^{\circ}\text{C}$  ( $+32^{\circ}\text{F}$  to  $+113^{\circ}\text{F}$ ), the ISF remains within  $\pm 18\%$  of 7.87 V/mm (200 mV/mil) and the DSL remains within  $\pm 0.152\text{ mm}$  ( $\pm 6\text{ mils}$ ).

**Frequency  
Response**

(0 to 10 kHz), +0, -3 dB, with up to 305 metres (1000 feet) of field wiring.

**Minimum  
Target Size**

15.2 mm (0.6 in) diameter (flat target)

**Shaft Diameter**

*Minimum:*

50.8 mm (2 in)

*Recommended  
Minimum:*

76.2 mm (3 in)

When gapped at the center of the linear range, the interaction between two separate transducer systems (cross-talk) will be less than 50 mV on shaft diameters of at least 50 mm (2 in) or greater. You should take care to maintain minimum separation of transducer tips, generally at least 40 mm (1.6 in) for axial position measurements or 38 mm (1.5 in) for radial vibration measurements to limit cross-talk to 50 mV or less. Radial vibration or position measurements on shaft diameters smaller than 76.2 mm (3 in) will generally change the scale factor.

**Effects of 60 Hz  
Magnetic Fields  
up to 300 Gauss**

Output Voltage in Mil pp/Gauss

Gap (mil)	5- or 1-metre Proximitor Sensor	9-metre Proximitor Sensor	Probe	Ext. Cable
10	0.0119	0.0247	0.0004	0.0004
50	0.0131	0.0323	0.0014	0.0014
90	0.0133	0.0348	0.0045	0.0045

---

## Compliance and Certifications

### EMC

European Community Directives:  
EMC Directive 2004/108/EC  
Standards:  
EN61000-6-2  
EN61000-6-4

### Maritime

ABS 2009 Steel Vessels Rules  
1-1-4/7.7, 4-8-3/1.11.1, 4-9-7/13

---

## Hazardous Area Approvals

**Note:** Multiple approvals for hazardous areas certified by Canadian Standards Association (C/US) in North America and by Baseefa for Europe and IEC Ex.

**Note:** Country specific approvals may be available, consult your local Customer Care Representative for more information.

### Field Wiring Limitations:

Type Approval:	Gas Group	Capacitance (µF)	Inductance (mH)	L/R Ratio (µH/Ω)
ATEX and IEC Zone 0/1	IIC	0.078	0.99	29.2
	IIB	0.645	7.41	117.0
	IIA	2.144	15.6	234.0
CSA Div 1	A & B	0.070	1.0	29.2
	C	0.600	5.0	117.0
	D	2.09	11.0	234.0
CSA Div 2	All	0.460	100.0	N/A

### North America

3300 XL  
Proximitor  
Sensor and  
probe, ia:


Ex ia IIC T4/T5; Class I Zone 0 or Class 1; Groups A, B, C, and D, Class II, Groups E, F and G, Class III when installed with intrinsically safe zener barriers per drawing 141092 or when installed with galvanic isolators.

3300 XL  
Proximitor  
Sensor and  
probe, nA:


Ex nA IIC T4/T5 Class I Zone 2 or Class I, Division 2, Groups A, B, C, and D, when installed without barriers per drawing 140979.  
T5 @ Ta = -35 °C to +85 °C.  
T4 @ Ta = -51 °C to +100 °C.

### Europe

3300 XL  
Proximitor  
Sensor, ia:

 II 1 G EEx ia IIC T4/T5 when installed per drawing 141092.

3300 XL  
Proximitor  
Sensor, nA:

 II 3 G Ex nA II T4/T5 when installed per drawing 140979.  
T5 @ Ta = -35 °C to +85 °C  
T4 @ Ta = -51 °C to +100 °C

3300 XL  
8mm probe,  
ia:

II 1 G EEx ia IIC, Temperature Classification per Table 1 when installed per drawing 142491.

3300 XL  
8mm probe,  
nA:

II 3 G EEx nA II, Temperature Classification per Table 1 when installed per drawing 142491.

## IEC Ex

3300 XL  
Proximitors  
Sensor, ia:

Ex ia IIC T4 (-51°C ≤ Ta ≤ +100°C) /  
T5 (-35°C ≤ Ta ≤ +85°C)

Ui = -28V      Ci = 0  
Ii = 140mA      Li = 10μH  
Pi = 0.84W

3300 XL  
Proximitors  
Sensor, nA:

Ex nA II T4 (-51°C ≤ Ta ≤ +100°C) /  
T5 (-35°C ≤ Ta ≤ +85°C)

Ui = -28V

3300 XL  
8mm and  
3300 5mm  
Eddy Current  
Probes, ia:

Ex ia IIC Temperature  
Classification per Table 1.

Ui = -28V      Ci = 1.5 nF  
Ii = 140 mA      Li = 200 μH  
Pi = 0.84 W

3300 XL  
8mm and  
3300 5mm  
Eddy Current  
Probes, nA:

Ex nA II for Zone 2 Temperature  
Classification per Table 1.

**Table 1: Probe Temperature Classification**

Temperature Classification	Ambient Temperature (Probe Only)
T1	-51°C to +232°C
T2	-51°C to +177°C
T3	-51°C to +120°C
T4	-51°C to +80°C
T5	-51°C to +40°C

## Hazardous Area Conditions of Safe Use:

ATEX:

Follow the conditions of safe use included on the Declaration of Conformance sent with each product.

Canadian  
Standards  
Association  
(CSA):

Division 1 (Intrinsically safe):  
Install per Bently Nevada drawing  
141092.

Division 2 (non-Incendive): Install  
per Bently Nevada drawing  
140979.

IECEX:

Zone 0 (Intrinsically safe): The  
Proximitors Sensor must be  
installed to minimize the risk of  
impact or friction with other  
metallic surfaces.

Zone 2 (non-Incendive): The  
probe must be supplied from a  
voltage-limited source.

## Mechanical

### Probe Tip Material

Polyphenylene sulfide (PPS).

### Probe Case Material

AISI 303 or 304 stainless steel  
(SST).

### Probe Cable Specifications

Standard  
cable:

75Ω triaxial, fluoroethylene  
propylene (FEP) insulated probe  
cable in the following total probe  
lengths: 0.5, 1, 1.5, 2, 3, 5, or 9  
metres.

*Extended  
Temperature  
Range cable:*

75Ω triaxial, perfluoroalkoxy (PFA) insulated probe cable in the following total probe lengths: 0.5, 1, 1.5, 2, 5, or 9 metres.

*Armor  
(optional on  
both):*

Flexible AISI 302 or 304 SST with FEP outer jacket.

*Tensile Strength  
(Maximum  
Rated):*

330 N (75 lbf) probe case to probe lead.

270 N (60 lbf) at probe lead to extension cable connectors.

*Connector  
Material:*

Gold-plated brass or gold-plated beryllium copper.

*Probe Case  
Torque:*

Probe Type	Maximum Rated	Recommended
Standard forward-mounted probes	33.9 N•m (300 in•lbf)	11.2 N•m (100 in•lbf)
Standard forward-mount probes - first three threads	22.6 N•m (200 in•lbf)	7.5 N•m (66 in•lbf)
Reverse-mount probes	22.6 N•m (200 in•lbf)	7.5 N•m (66 in•lbf)

## Extension Cable Material

*Standard  
cable:*

75Ω triaxial, fluoroethylene propylene (FEP) insulated.

*Extended  
Temperature  
Range cable:*

75Ω triaxial, perfluoroalkoxy (PFA) insulated.

*Minimum  
Cable Bend  
Radius:*

25.4 mm (1.0 in)

**Note:** 3300 XL 8 mm components are both electrically and physically interchangeable with non-XL 3300 5 mm and 8 mm components when minimum permissible cable bend radius is observed..

*Connector  
Material:*

Gold-plated brass or gold-plated beryllium copper.

*Maximum  
Connector  
Torque:*

0.565 N•m (5 in•lbf)

*Connector-to-  
connector  
recommended  
torque:*

Connector Type	Tightening Instructions
Two 3300 XL gold "click" type connectors	Finger tight
One non-XL stainless steel connector and one 3300 XL connector	Finger tight plus 1/8 turn using pliers

## Proximator Sensor Material

A308 aluminum

*Connector  
Material:*

Gold-plated brass or gold-plated beryllium copper.

## System Length



	5 or 9 metres (including extension cable) or 1 metre (probe only).	tested prior to shipment. Contact our custom design department if you require a test of the pressure seal for your application.
<b>Total System Mass (Typical)</b>		
<i>Probe:</i>	0.7 kg (1.5 lbm)	<b>Note:</b> It is the responsibility of the customer or user to ensure that all liquids and gases are contained and safely controlled should leakage occur from a proximity probe. In addition, solutions with high or low pH values may erode the tip assembly of the probe causing media leakage into surrounding areas. Bently Nevada, Inc. will not be held responsible for any damages resulting from leaking 3300 XL 8 mm proximity probes. In addition, 3300 XL 8 mm proximity probes will not be replaced under the service plan due to probe leakage.
<i>Extension Cable:</i>	323 g (11.4 oz)	
<i>Armored Extension Cable:</i>	34 g/m (0.4 oz/ft)	
<i>Proximitior Sensor:</i>	103 g/m (1.5 oz/ft)	
	246 g (8.67 oz)	
<hr/>		
<b>Environmental Limits</b>		
<b>Probe Temperature Range</b>		
<b>Operating and Storage Temperature</b>		
<i>Standard Probe:</i>	-51 °C to +177 °C (-60 °F to +350 °F)	<i>Standard Cable:</i> -51 °C to +177 °C (-60 °F to +350 °F)
<i>Extended Temperature Range Probe:</i>	-51 °C to +218 °C (-60 °F to +425°F) for the probe tip; -51 °C to +260 °C (-60 °F to +500 °F) for the probe cable and connector.	<i>Extended Temperature Range Cable:</i> -51 °C to +260 °C (-60 °F to +500 °F)
<hr/>		
<b>Note:</b> Exposing the probe to temperatures below -34 °C (-30 °F) may cause premature failure of the pressure seal.		
<hr/>		
<b>Probe Pressure</b>		
	3300 XL 8 mm probes are designed to seal differential pressure between the probe tip and case. The probe sealing material consists of a Viton® O-ring. Probes are not pressure	
		<b>Extension Cable Temperature Range</b>
		<b>Operating and Storage Temperature</b>
		<i>Standard Cable:</i> -51 °C to +177 °C (-60 °F to +350 °F)
		<i>Extended Temperature Range Cable:</i> -51 °C to +260 °C (-60 °F to +500 °F)
		<b>Proximitior Sensor Temperature Range</b>
		<b>Operating Temperature</b> -51 °C to +100 °C (-60 °F to +212 °F)
		<b>Storage Temperature</b> -51 °C to +105 °C (-60 °F to +221 °F)
		<b>Relative Humidity</b>  Less than a 3% change in Average Scale Factor (ASF) when tested in 93% humidity in accordance with IEC standard 68-2-3 for up to 56 days.

---

## Patents

Components or procedures described in one or more of the following patents apply to this product: 5,016,343; 5,126,664; 5,351,588; and 5,685,884.

---

## Ordering Information Probes

### 3300 XL 8 mm Proximity Probes:

**330101** 3300 XL 8 mm Probe, 3/8-24 UNF thread, without armor<sup>2</sup>

**330102** 3300 XL 8 mm Probe, 3/8-24 UNF thread, with armor<sup>2</sup>

#### Part Number-AXX-BXX-CXX-DXX-EXX

**A:** Unthreaded Length Option

---

**Note:** Unthreaded length must be at least 0.8 inches less than the case length.

Order in increments of 0.1 in  
**Length configurations:**  
**Maximum unthreaded length:** 8.8 in  
**Minimum unthreaded length:** 0.0 in  
**Example: 0 4** = 0.4 in

**B:** Overall Case Length Option

Order in increments of 0.1 in  
**Threaded length configurations:**  
**Maximum case length:** 9.6 in  
**Minimum case length:** 0.8 in  
**Example: 2 4** = 2.4 in

**C:** Total Length Option

<b>0 5</b>	0.5 metre (1.6 feet)
<b>1 0</b>	1.0 metre (3.3 feet)
<b>1 5</b>	1.5 metre (4.9 feet)
<b>2 0</b>	2.0 metres (6.6 feet)
<b>3 0</b>	3.0 metres (9.8 feet)
<b>5 0</b>	5.0 metres (16.4 feet)
<b>9 0</b>	9.0 metres (29.5 feet)

---

**Notes:** 3-metre length option is only available on 330101 probes, and are designed for use with the 9-metre Proximity sensor only.

5-metre probes are designed for use with the 5-metre Proximity sensor only.

---

**D:** Connector and Cable-Type Option

<b>0 1</b>	Miniature coaxial ClickLoc connector with connector protector, standard cable
<b>0 2</b>	Miniature coaxial ClickLoc connector, standard cable

<b>1 1</b>	Miniature coaxial ClickLoc connector with connector protector, FluidLoc cable
<b>1 2</b>	Miniature coaxial ClickLoc connector, FluidLoc cable

**E:** Agency Approval Option

<b>0 0</b>	Not required
<b>0 5</b>	Multiple Approvals

---

### 3300 XL 8 mm Proximity Probes, Metric:

**330103** 3300 XL 8 mm Probe, M10 x 1 thread, without armor<sup>2</sup>

**330104** 3300 XL 8 mm Probe, M10 x 1 thread, with armor<sup>2</sup>

#### Part Number-AXX-BXX-CXX-DXX-EXX

**A:** Unthreaded Length Option

---

**Note:** Unthreaded length must be at least 20 mm less than the case length.

Order in increments of 10 mm.

**Length configuration:**  
**Maximum unthreaded length:** 230 mm

**Minimum unthreaded length:** 0 mm  
**Example: 0 6** = 60 mm

**B:** Overall Case Length Option

Order in increments of 10 mm.

**Metric thread configurations:**  
**Maximum length:** 250 mm  
**Minimum length:** 20 mm  
**Example: 0 6** = 60 mm

**C:** Total Length Option

<b>0 5</b>	0.5 metre (1.6 feet)
<b>1 0</b>	1.0 metre (3.3 feet)
<b>1 5</b>	1.5 metres (4.9 feet)
<b>2 0</b>	2.0 metres (6.6 feet)
<b>5 0</b>	5.0 metres (16.4 feet)

---

**Note:** 5-metre probes are designed for use with the 5-metre Proximity sensor only.

**9 0** 9.0 metres (29.5 feet)

**D:** Connector and Cable-Type Option

<b>0 1</b>	Miniature coaxial ClickLoc connector with connector protector, standard cable
<b>0 2</b>	Miniature coaxial ClickLoc connector, standard cable
<b>1 1</b>	Miniature coaxial ClickLoc connector with connector protector, FluidLoc cable

E: Agency Approval Option	1 2	Miniature coaxial ClickLoc connector, FluidLoc cable
	0 0	Not required
	0 5	Multiple Approvals

### 3300 XL 8 mm Reverse Mount Probes

330105-02-12-CXX-DXX-EXX, 3/8-24 UNF threads<sup>2</sup>

330106-05-30-CXX-DXX-EXX, M10 x 1 threads<sup>2</sup>

#### Option Descriptions

##### C: Total Length Option

0 5	0.5 metre (1.6 feet)
1 0	1.0 metre (3.3 feet)
1 5	1.5 metre (4.9 feet)
2 0	2.0 metres (6.6 feet)
5 0	5.0 metres (16.4 feet)

**Note:** 5-metre probes are designed for use with the 5-metre Proximitor sensor only.

D: Connector Option	9 0	9.0 metres (29.5 feet)
	0 2	Miniature ClickLoc coaxial connector
	1 2	Miniature ClickLoc coaxial connector, FluidLoc cable

**Note:** The FluidLoc cable option –12 is not necessary on the vast majority of 330105 and 330106 installations due to the presence of the probe sleeve. Consider carefully the application before ordering the FluidLoc cable option for these probes.

##### E: Agency Approval Option

0 0	Not required
0 5	Multiple Approvals

### 3300 XL 8 mm Proximity Probes, Smooth Case:

330140 3300 XL 8 mm Probe without armor<sup>1</sup>

330141 3300 XL 8 mm Probe with armor<sup>1</sup>

Part Number-AXX-BXX-CXX-DXX

#### Option Descriptions

##### A: Overall Case Length Option

Order in increments of 0.1 in  
**Length configurations:**  
**Maximum length:** 9.6 in  
**Minimum length:** 0.8 in  
**Example:** 2 4 = 2.4 in

##### B: Total Length Option

0 5	0.5 metre (1.6 feet)
1 0	1.0 metre (3.3 feet)
1 5	1.5 metres (4.9 feet)
2 0	2.0 metres (6.6 feet)
5 0	5.0 metres (16.4 feet)

**Note:** 5-metre probes are designed for use with the 5-metre Proximitor sensor only.

C: Connector and Cable-Type Option	9 0	9.0 metres (29.5 feet)
	0 1	Miniature coaxial ClickLoc connector with connector protector, standard cable
	0 2	Miniature coaxial ClickLoc connector, standard cable
	1 1	Miniature coaxial ClickLoc connector with connector protector, FluidLoc cable
	1 2	Miniature coaxial ClickLoc connector, FluidLoc cable

##### D: Agency Approval Option

0 0	Not required
0 5	Multiple Approvals

### 3300 XL 8 mm Extended Temperature Range (ETR) Proximity Probes:

330191 3300 XL 8 mm ETR Probe, 3/8-24 UNF thread, without armor

330192 3300 XL 8 mm ETR Probe, 3/8-24 UNF thread, with armor

Part Number-AXX-BXX-CXX-DXX

##### A: Unthreaded Length Option

**Note:** Unthreaded length must be at least 0.8 inches less than the case length.

Order in increments of 0.1 in  
**Length configurations:**  
**Maximum unthreaded length:** 8.8 in  
**Minimum unthreaded length:** 0.0 in  
**Example:** 1 5 = 1.5 in

##### B: Overall Case Length Option

Order in increments of 0.5 in  
**Threaded length configurations:**  
**Maximum case length:** 9.6 in  
**Minimum case length:** 0.8 in  
**Example:** 2 5 = 2.5 in

##### C: Total Length Option

0 5	0.5 metre (1.6 feet)
1 0	1.0 metre (3.3 feet)
1 5	1.5 metre (4.9 feet)
2 0	2.0 metres (6.6 feet)
5 0	5.0 metres (16.4 feet)

**Note:** 5-metre probes are designed for use with the 5-metre Proximitor sensor only.

**D:** Agency Approval Option

9 0	9.0 metres (29.5 feet)
0 0	Not required
0 5	Multiple Approvals

### 3300 XL 8 mm Extended Temperature Range (ETR) Proximity Probes, Metric:

330193 3300 XL 8 mm Probe, M10 x 1 thread, without armor

330194 3300 XL 8 mm Probe, M10 x 1 thread, with armor

**Part Number-AXX-BXX-CXX-DXX**

**A:** Unthreaded Length Option

**Note:** Unthreaded length must be at least 20 mm less than the case length.

Order in increments of 10 mm.

**Length configuration:**

**Maximum unthreaded length:** 230 mm

**Minimum unthreaded length:** 0 mm

**Example:** 0 6 = 60 mm

**B:** Overall Case Length Option

Order in increments of 10 mm.

**Metric thread configurations:**

**Maximum length:** 250 mm

**Minimum length:** 20 mm

**Example:** 0 6 = 60 mm

**C:** Total Length Option

0 5	0.5 metre (1.6 feet)
1 0	1.0 metre (3.3 feet)
1 5	1.5 metres (4.9 feet)
2 0	2.0 metres (6.6 feet)
5 0	5.0 metres (16.4 feet)

**Note:** 5-metre probes are designed for use with the 5-metre Proximitor sensor only.

**D:** Agency Approval Option

9 0	9.0 metres (29.5 feet)
0 0	Not required
0 5	Multiple Approvals

### 3300 XL 8 mm Extended Temperature Range (ETR) Reverse Mount Probes

330195-02-12-CXX-DXX, 3/8-24 UNF threads

330196-05-30-CXX-DXX, M10 x 1 threads

**C:** Total Length Option

0 5	0.5 metre (1.6 feet)
1 0	1.0 metre (3.3 feet)
1 5	1.5 metre (4.9 feet)

2 0	2.0 metres (6.6 feet)
5 0	5.0 metres (16.4 feet)

**Note:** 5-metre probes are designed for use with the 5-metre Proximitor sensor only.

**D:** Agency Approval Option

9 0	9.0 metres (29.5 feet)
0 0	Not required
0 5	Multiple Approvals

### 3300 XL 8 mm Extended Temperature Range (ETR) Proximity Probes, Smooth Case:

330197 3300 XL 8 mm Probe without armor<sup>1</sup>

330198 3300 XL 8 mm Probe with armor<sup>1</sup>

**Part Number-AXX-BXX-CXX**

**A:** Overall Case Length Option

Order in increments of 0.5 in

**Length configurations:**

**Maximum length:** 9.5 in

**Minimum length:** 1.0 in

**Example:** 3 5 = 3.5 in

**B:** Total Length Option

0 5	0.5 metre (1.6 feet)
1 0	1.0 metre (3.3 feet)
1 5	1.5 metres (4.9 feet)
2 0	2.0 metres (6.6 feet)
5 0	5.0 metres (16.4 feet)

**Note:** 5-metre probes are designed for use with the 5-metre Proximitor sensor only.

**C:** Agency Approval Option

9 0	9.0 metres (29.5 feet)
0 0	Not required
0 5	Multiple Approvals

### Aluminum probe clamp bracket<sup>1</sup>

137491-AXX

**A:** Mounting screw option

0 1 10-24 UNC-2A mounting screws

0 2 M5 x 0.8-6g mounting screws

The aluminum clamp bracket is an unthreaded mounting bracket designed for use with the smooth case probes (330140, 330141, 330197 and 330198). After gapping the probe, tighten the clamp bracket by tightening the screws. The mounting screws have pre-drilled holes for safety wire.

### Aluminum probe threaded mounting bracket

137492-AXX

**A:** Thread size

0 1	3/8-24
0 4	M10 x 1

The aluminum probe threaded mounting bracket is the standard mounting bracket for most 3300 and 3300 XL probe installations. The **-01** option includes two 10-24 UNC-2A mounting screws. The **-04** option includes two M5 x 0.8-6g mounting screws. The mounting screws have pre-drilled holes for safety wire.

---

### Phenolic threaded probe mounting bracket

**27474-AXX**

**A:** Thread size

**0 1** 3/8-24

**0 4** M10 x 1

We recommend the phenolic threaded mounting bracket if your application requires additional electric isolation from the mounting location (as in some generator and electrical motor bearing locations). The **-01** option includes two 10-24 UNC-2A mounting screws. The **-04** option includes two M5 x 0.8-6g mounting screws. The mounting screws have pre-drilled holes for safety wire.

---

### Probe Ordering Information Notes:

1. Mounting clamps must be ordered separately for 330140, 330141, 330197, and 330198.
2. For a shorter delivery time, order commonly stocked probes. The following part numbers are currently stocked probes:

330101-00-08-05-02-00, 330101-00-08-05-02-05,  
330101-00-08-10-02-00, 330101-00-08-10-02-05,  
330101-00-12-10-02-00, 330101-00-12-10-02-05,  
330101-00-16-10-02-00, 330101-00-16-10-02-05,  
330101-00-20-05-02-00, 330101-00-20-10-02-00,  
330101-00-20-10-02-05, 330101-00-30-10-02-00,  
330101-00-30-10-02-05, 330101-00-40-05-02-00,  
330101-00-40-10-02-00, 330101-00-40-10-02-05,  
330101-00-60-10-02-00, 330101-00-60-10-02-05,  
330102-00-20-10-02-00, 330103-00-02-10-02-05,  
330103-00-04-10-02-00, 330103-00-05-10-02-00,  
330104-00-06-10-02-00, 330104-01-05-50-02-00,  
330105-02-12-05-02-00, 330105-02-12-05-02-05,  
330105-02-12-10-02-00, 330105-02-12-10-02-05,  
330106-05-30-05-02-00, 330106-05-30-05-02-05,  
330106-05-30-10-02-00, 330106-05-30-10-02-05.

---

---

## Ordering Information Extension Cables

---

### 3300 XL Standard Extension Cable

**330130-AXXX-BXX-CXX**

**Note:** Make sure that the extension cable length and the probe length, when added together, equal the Proximitor Sensor total length.

**A:** Cable Length Option

<b>030</b>	3.0 metres (9.8 feet)
<b>035</b>	3.5 metres (11.5 feet)
<b>040</b>	4.0 metres (13.1 feet)
<b>045</b>	4.5 metres (14.8 feet)
<b>060</b>	6.0 metres (19.7 feet)
<b>070</b>	7.0 metres (22.9 feet)
<b>075</b>	7.5 metres (24.6 feet)
<b>080</b>	8.0 metres (26.2 feet)
<b>085</b>	8.5 metres (27.9 feet)

**B:** Connector Protector and Cable Option

<b>00</b>	Standard cable
<b>01</b>	Armored cable
<b>02</b>	Standard cable with connector protectors
<b>03</b>	Armored cable with connector protectors
<b>10</b>	FluidLoc cable
<b>11</b>	Armored FluidLoc cable
<b>12</b>	FluidLoc cable with connector protectors
<b>13</b>	Armored FluidLoc cable with connector protectors

**C:** Agency Approval Option

<b>00</b>	Not required
<b>05</b>	Multiple Approvals

---

## 3300 XL Extended Temperature Range (ETR) Extension Cable

**330190-AXXX-BXX-CXX**

**Note:** Make sure that the extension cable length and the probe length, when added together, equal the Proximitor Sensor total length.

**A:** Cable Length Option

<b>030</b>	3.0 metres (9.8 feet)
<b>035</b>	3.5 metres (11.5 feet)
<b>040</b>	4.0 metres (13.1 feet)
<b>045</b>	4.5 metres (14.8 feet)
<b>070</b>	7.0 metres (22.9 feet)
<b>075</b>	7.5 metres (24.6 feet)
<b>080</b>	8.0 metres (26.2 feet)
<b>085</b>	8.5 metres (27.9 feet)

**B:** Cable Option

<b>00</b>	Standard cable
<b>01</b>	Armored cable

**C:** Agency Approval Option

<b>00</b>	Not required
<b>05</b>	Multiple Approvals

---

# Ordering Information Proximitor Sensor

---

## 3300 XL Proximitor Sensor

330180-AXX-BXX

**A:** Total Length and Mounting Option

- 1 0** 1.0 metre (3.3 feet) system  
length, panel mount
- 1 1** 1.0 metre (3.3 feet) system  
length, DIN mount
- 1 2** 1.0 metre (3.3 feet) system  
length, no mounting hardware
- 5 0** 5.0 metre (16.4 feet) system  
length, panel mount
- 5 1** 5.0 metre (16.4 feet) system  
length, DIN mount
- 5 2** 5.0 metre (16.4 feet) system  
length, no mounting hardware
- 9 0** 9.0 metres (29.5 feet) system  
length, panel mount
- 9 1** 9.0 metres (29.5 feet) system  
length, DIN mount
- 9 2** 9.0 metres (29.5 feet) system  
length, no mounting hardware

**B:** Agency Approval Option

- 0 0** Not required
- 0 5** Multiple approvals

Country specific approvals may be available, consult your local Customer Care Representative for more information.

---

## Accessories

141078-01

**Manual.**

175751

**3300 XL Multi-Purpose Stainless Steel Housing.** 12"x12"x6". Can hold up to 8 Proximity Sensors in a DIN-mount configuration or 6 Proximity Sensors in a panel-mount configuration. (Available with ATEX Zone 0 and Zone 1 certifications.)

176467

**3300 XL Multi-Purpose Stainless Steel Housing.** 12"x8"x6". Can hold up to 4 3300XL Proximity Sensors in both DIN-mount and panel-mount configurations. (Available with ATEX Zone 0 and Zone 1 certifications.)

330181

**3300 XL Multi-Purpose Stainless Steel Housing.** 13"x9.5"x7". Can hold up to 8 Proximity sensors in a DIN-mount configuration or 6 Proximity Sensors in a panel-mount configuration. Primarily used by customers requiring hazardous area approvals for their installations. Available with ATEX Zone 0 and Zone 1 and North American Division 1 and Division 2 certifications.

02120015

**Bulk field wire.** 1.0 mm<sup>2</sup> (18 AWG), 3 conductor, twisted, shielded cable with drain wire. Specify length in feet.

138492-01

**Replacement panel-mount mounting pad.**

138493-01

**Replacement DIN-mount mounting pad.**

148722-01

**3300 XL test plug.** The 3300 XL Test Plug contains 3 small test pins attached to 3 color-coded 1-metre wires, each terminated in a banana plug. The 3-pin adapter plugs into the test pin holes on 3300 XL-style Proximity sensors. You can use this test plug to check the performance of the Proximity sensor from the test pin holes in the terminal strip without removing the field wiring.

04310310

**3300 XL Proximity Sensor panel-mount screw.** One 6-32 UNC thread forming mounting screw. Four screws are required for each Proximity sensor. (Screws supplied standard with Proximity housings [3300 XL panel-mount option]).

03200006

**Silicone self-fusing tape.** A 9.1-metre (10-yard) roll of silicone tape to protect connectors. This tape is easy to install and provides excellent electrical isolation and protection from the environment. We do not recommend using this tape inside the casing of the machine.

40113-02

**Connector Protector Kit.** Connector Protector Kit for 3300 XL 8 mm probes and extension cables, including connector protectors and installation tools.

136536-01

**Connector protector adapter.** This allows you to use connector protector installation tools manufactured prior to 1998 with 75Ω ClickLoc connectors.



40180-02

**Connector protectors.** Package contains 10 pairs of connector protectors for 3300 XL 8 mm probes and extension cables.

03839410

**75Ω triaxial male connector protector.** Male connector protectors install onto the extension cable and attach to the female connector protector on the probe, providing environmental protection of connectors.

03839420

**75Ω triaxial female connector protector.** Female connector protectors install onto the probe lead and attach to the male connector protector on the extension cable, providing environmental protection of connectors. You can also place the connector protector onto the extension cable to slide over the connection to the Proximitor sensor to protect that connection from the environment.

04301007

**3/8-24 probe lock nut with safety wire holes.** Single probe lock nut with 2 holes drilled through the nut in order to secure the lock nut in place with safety wire.

04301008

**M10 x 1 probe lock nut with safety wire holes.** Single probe lock nut with 2 holes drilled through the nut in order to secure the lock nut in place with safety wire.

330153-01

**3300 XL connector kit.** Used on 3300 XL 8 mm probes and extension cables. Contains 1 pair each of male and female ClickLoc connectors, 2 color-coded sleeves, 2 pieces of slit FEP tubing, and 1 strip of silicone tape.

330153-09

**3300 XL ETR Connector Kit.** Used on ETR 3300 XL 8mm probes and 3300 ETR XL extension cables. Contains one pair of male and female ClickLoc connectors, two color-coded sleeves, two pieces of high temperature slit FEP tubing, and one strip of silicon tape.

163356

**Connector Crimp Tool Kit.** Includes 1 set of multiconnector inserts and connector installation instructions. Compatible only with 330153 connector kits or with probes shipped in 2003 or later with ClickLoc connectors uninstalled. Supplied with carrying case.

Graphs

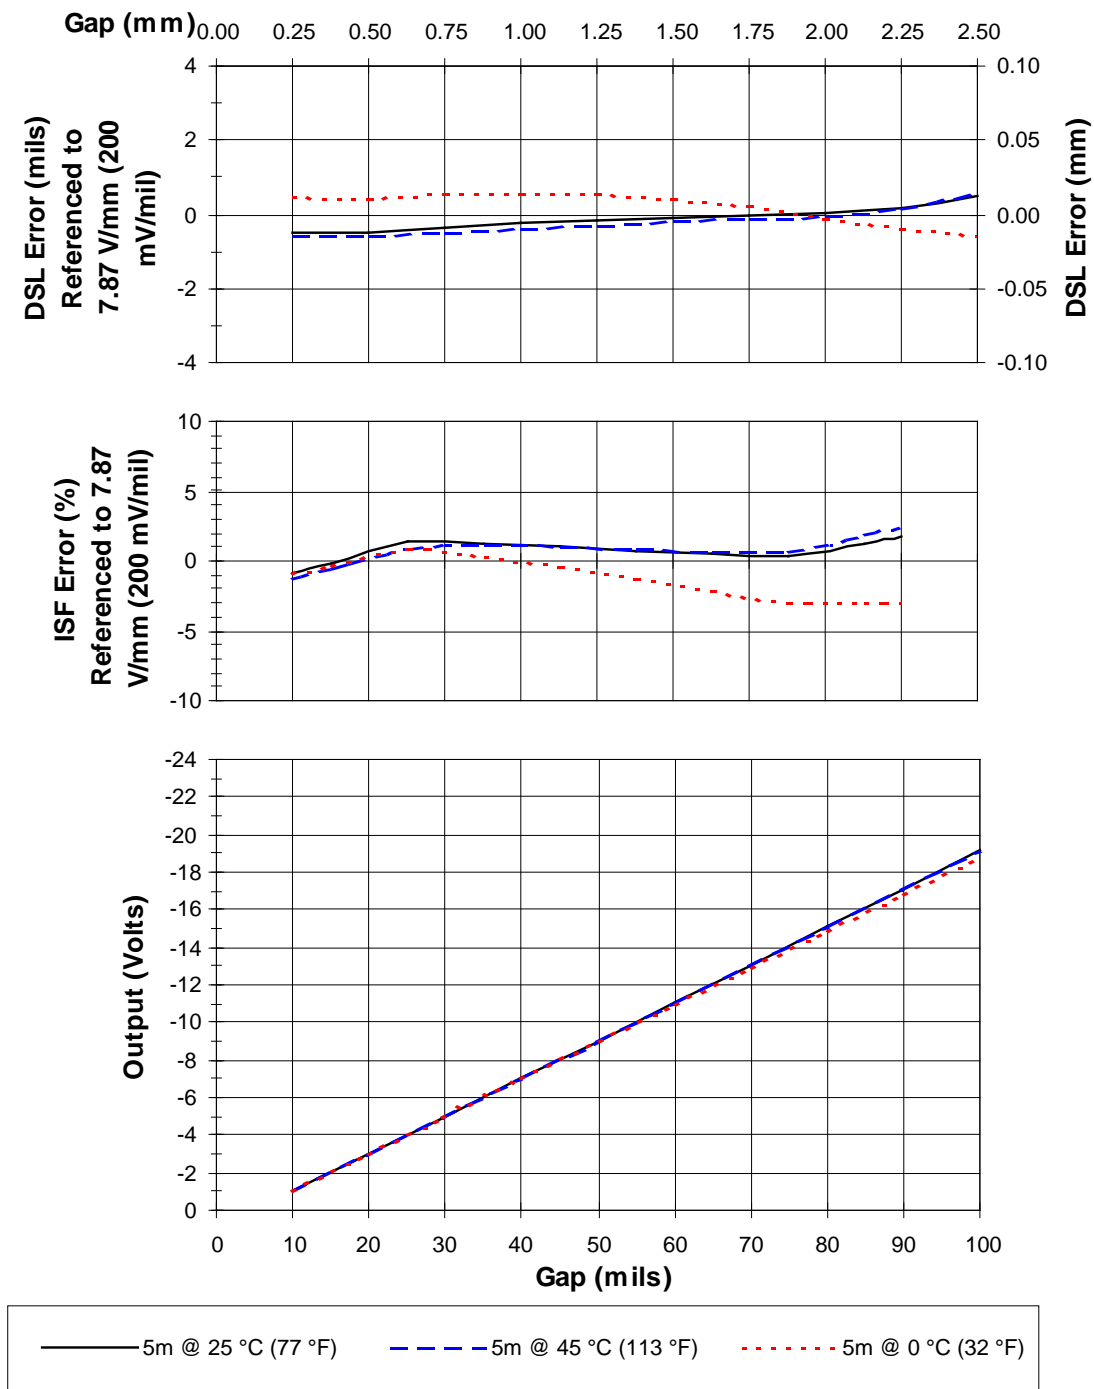


Figure 1: Typical 3300 XL 8 mm 5m or 1m System over API 670 Testing Range

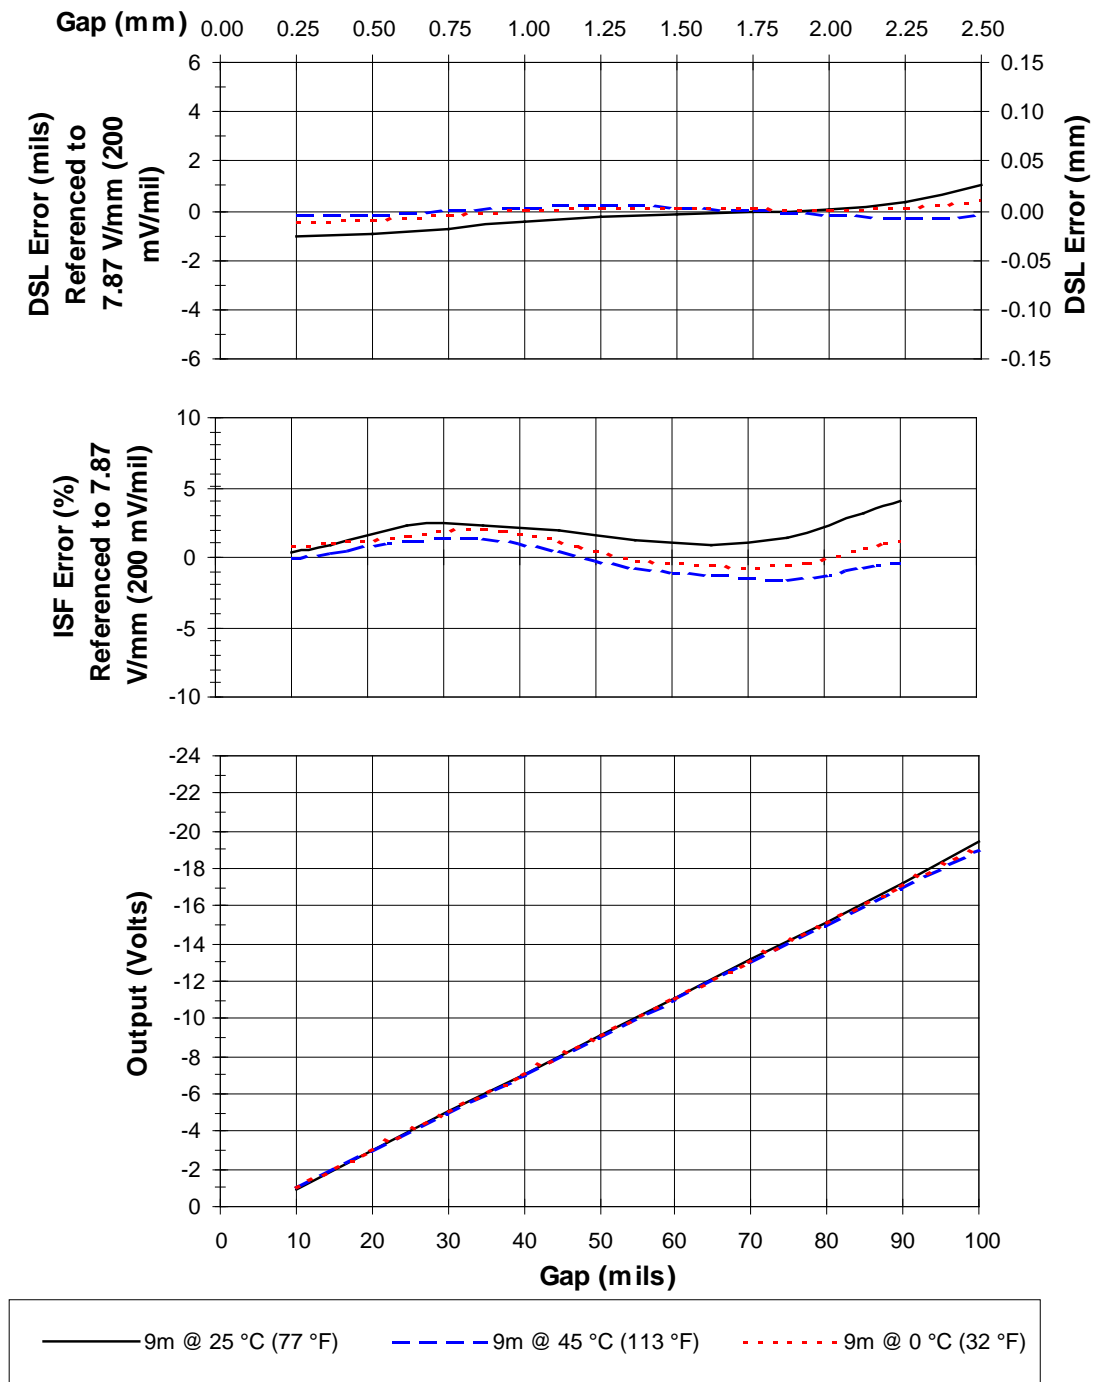


Figure 2: Typical 3300 XL 8 mm 9m System over API 670 Testing Range

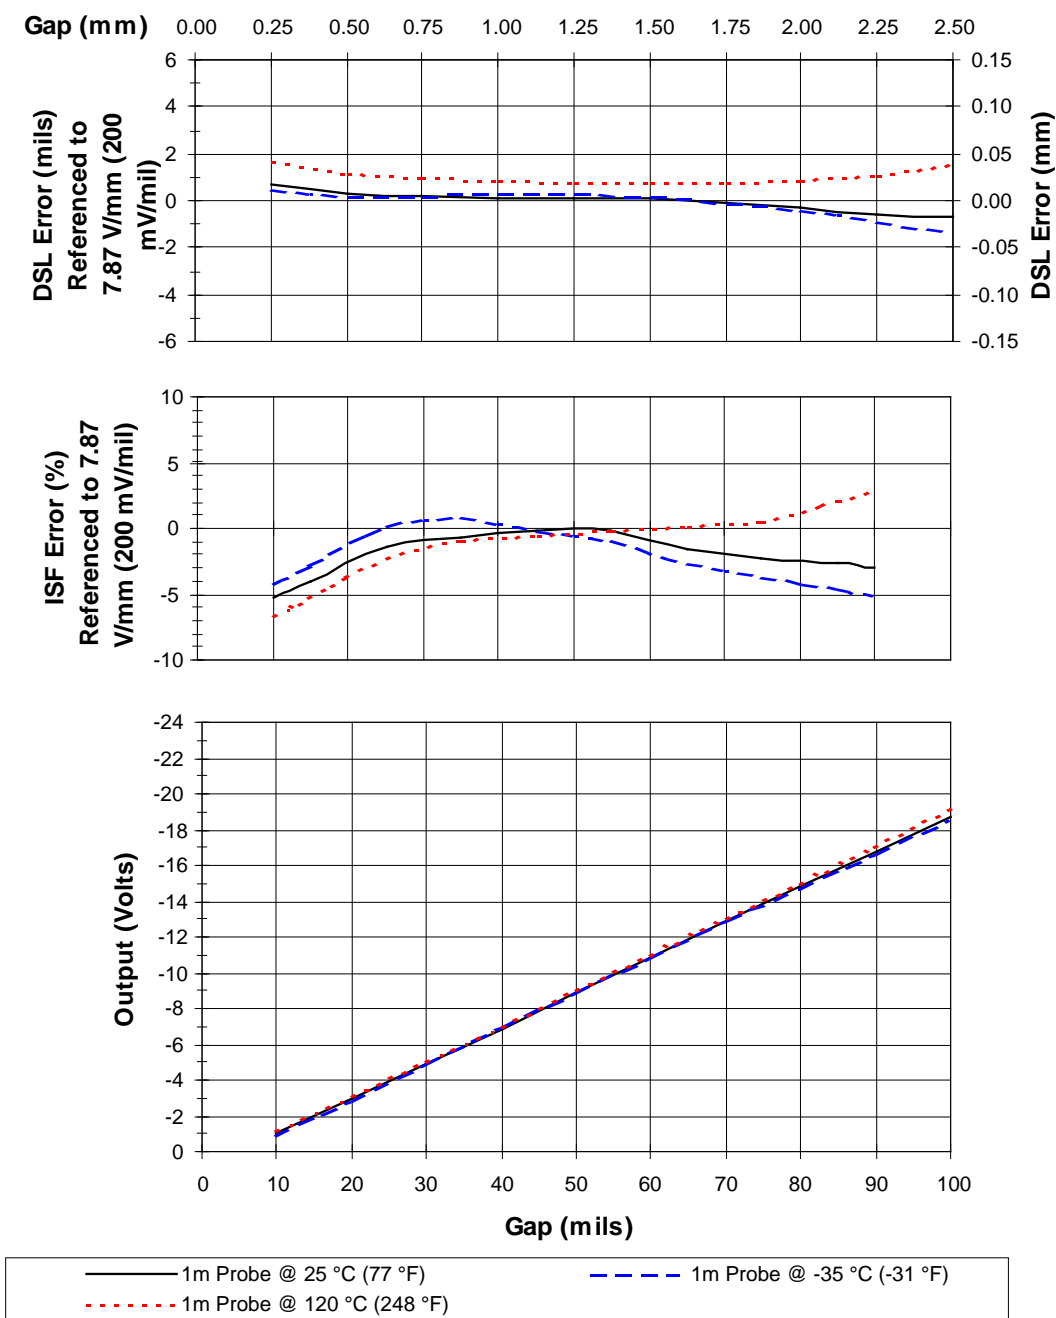


Figure 3: Typical 3300 XL 8mm Probe over API 670 Operating Range

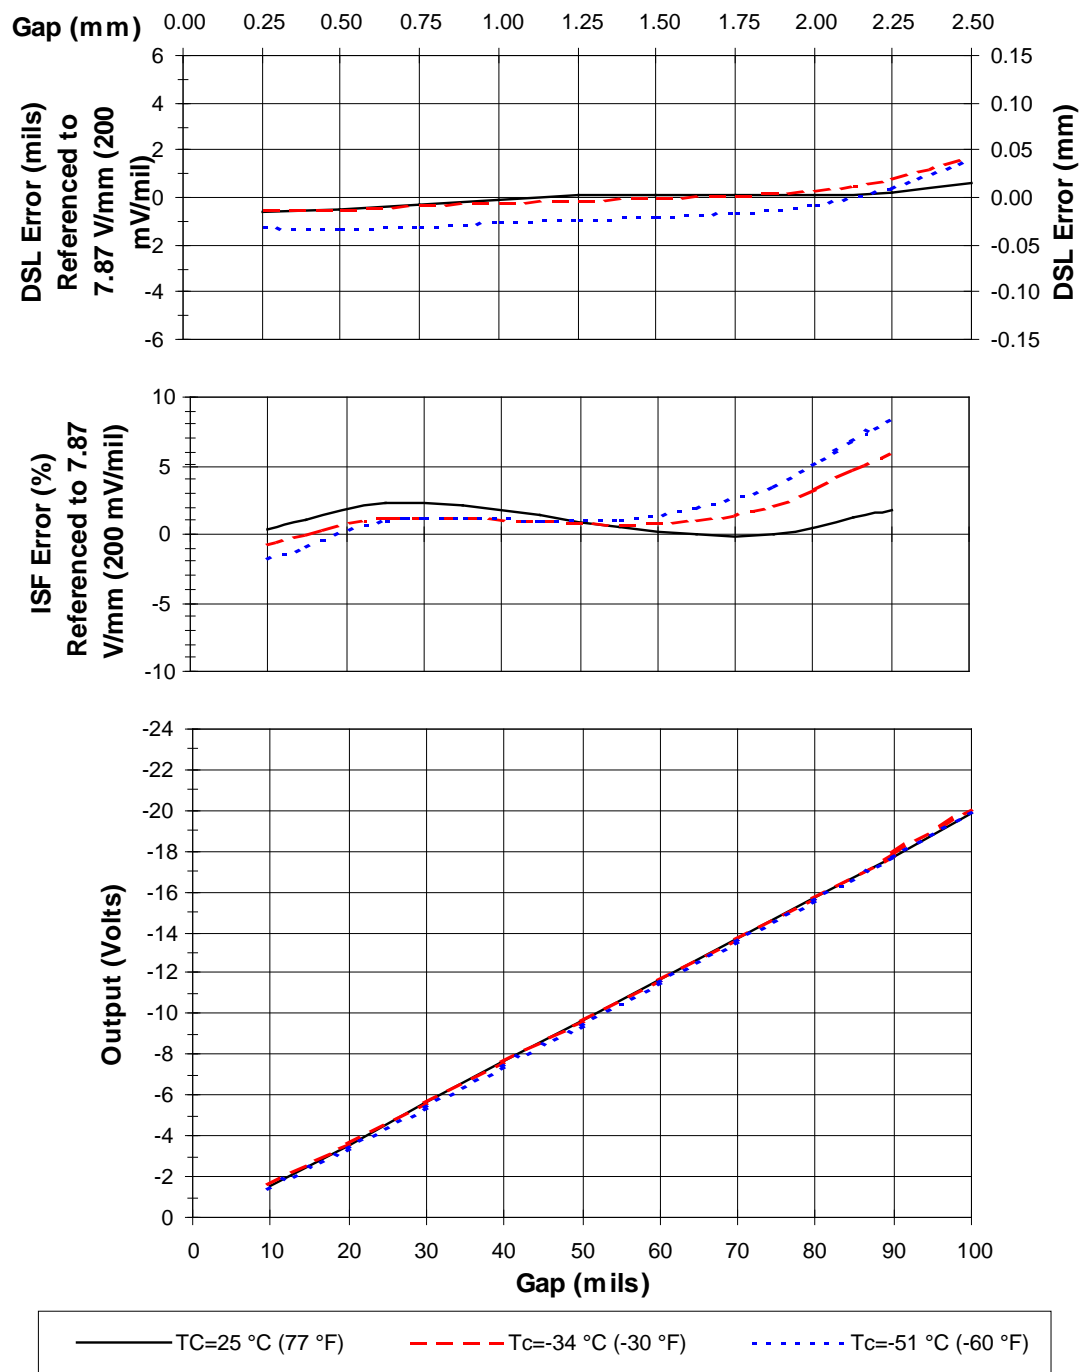


Figure 4: Typical 3300 XL 8 mm 5m Proximitor Sensor with 4m Extension Cable at  $T_c$  (Probe is at 25 °C)

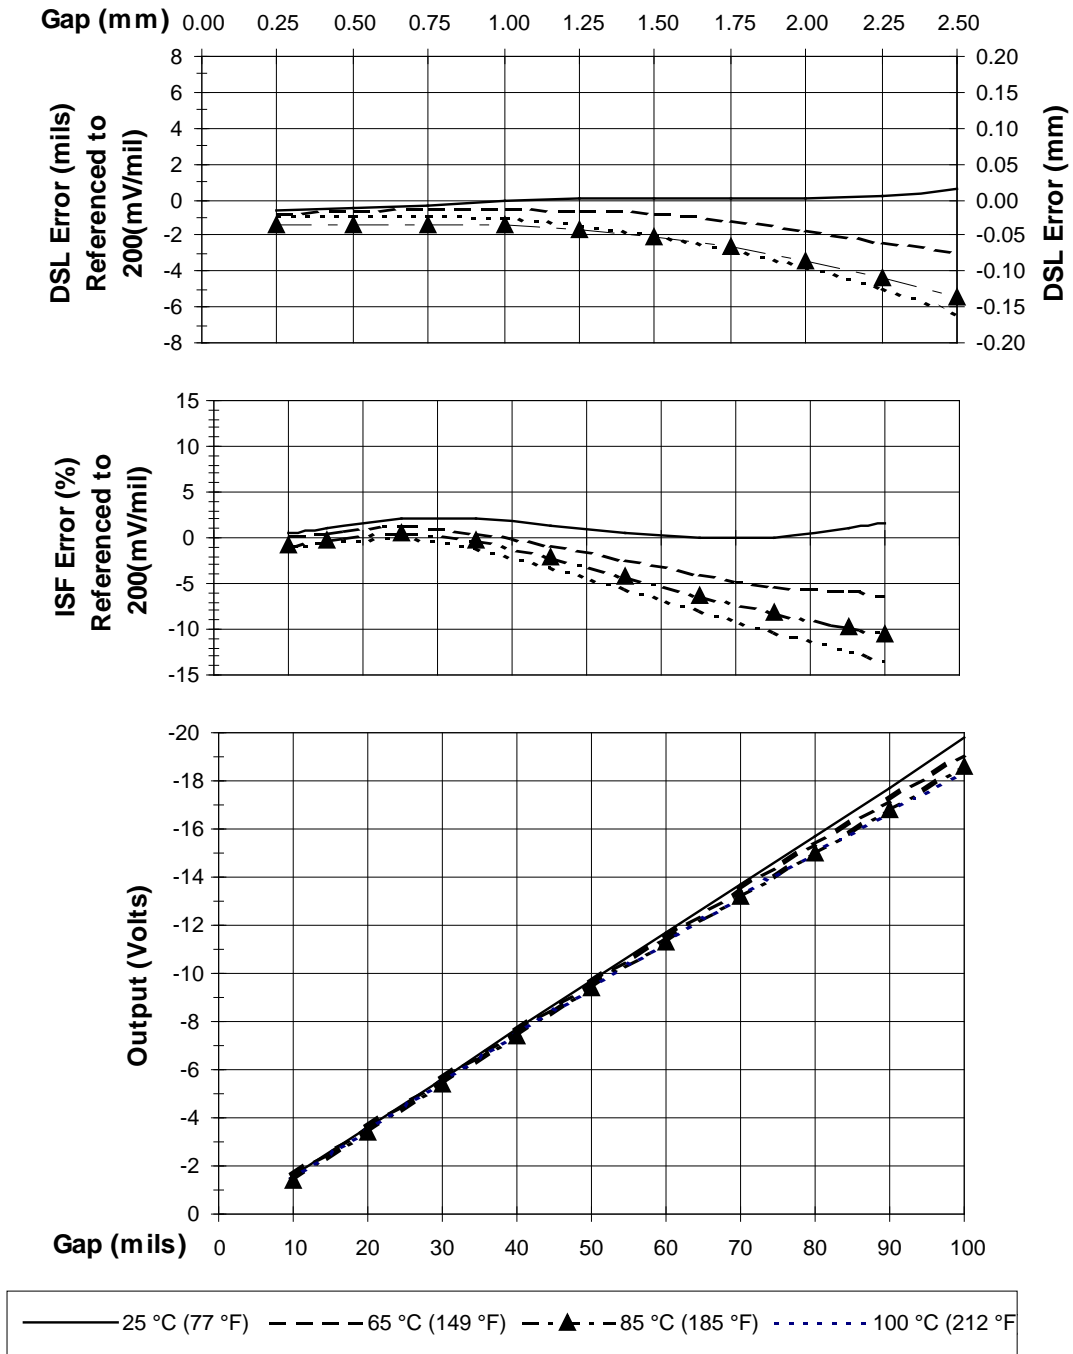


Figure 5: Typical 3300 XL 8 mm 5m Proximitior Sensor with 4m Extension Cable at T<sub>h</sub> (Probe is at 25°C)

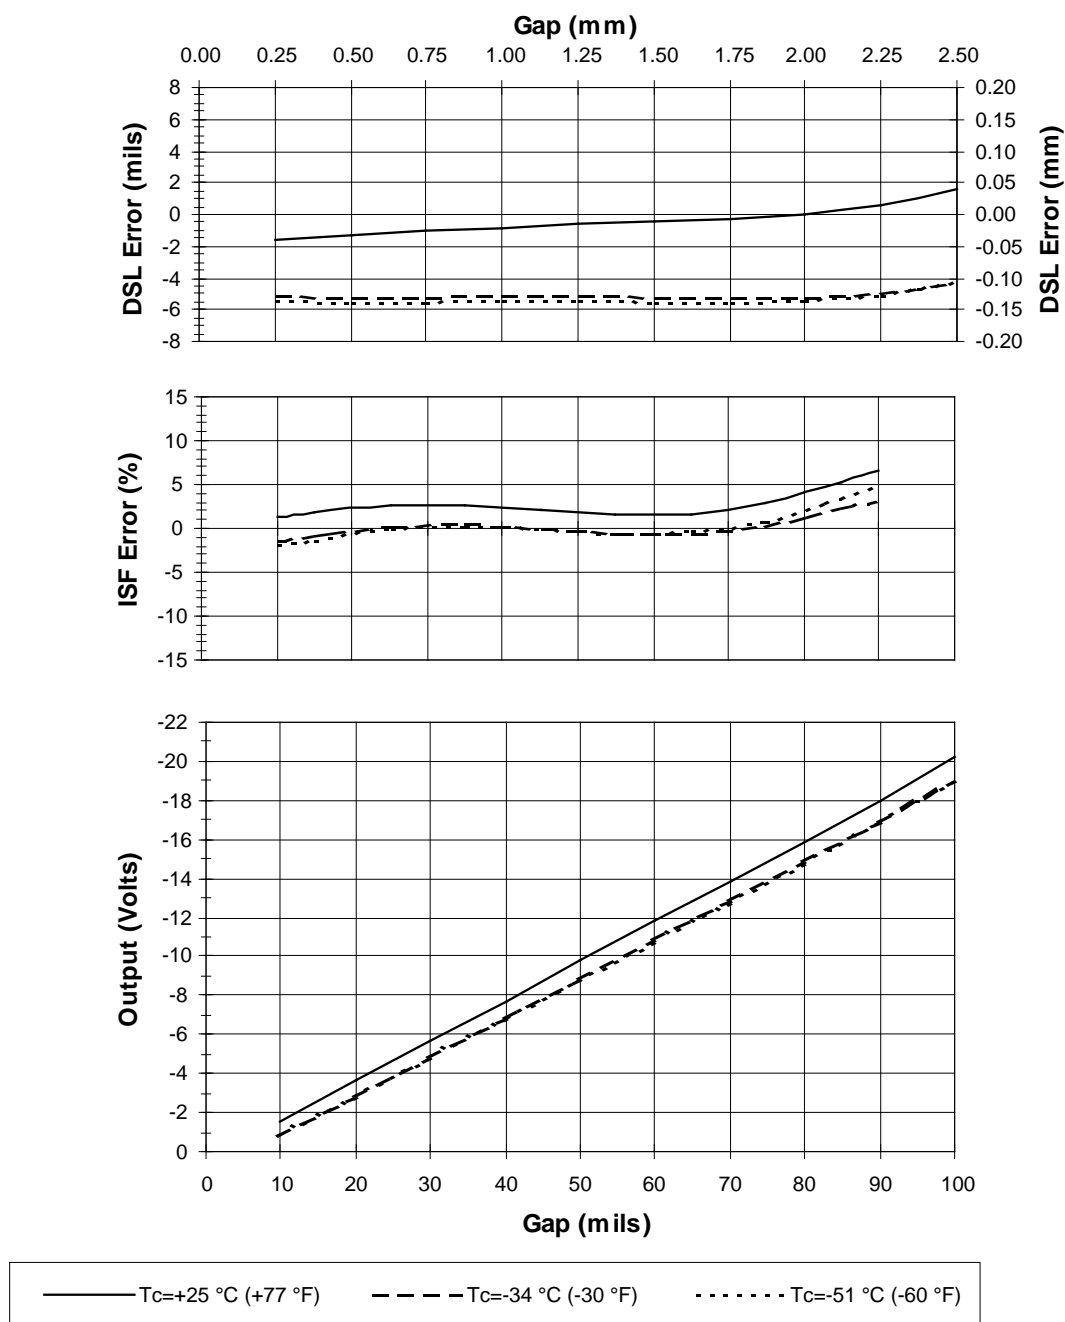


Figure 6: Typical 3300 XL 8mm 9 m Proximity Sensor with 8m of Extension Cable at  $T_c$  (Probe is at 25  $^{\circ}\text{C}$ )

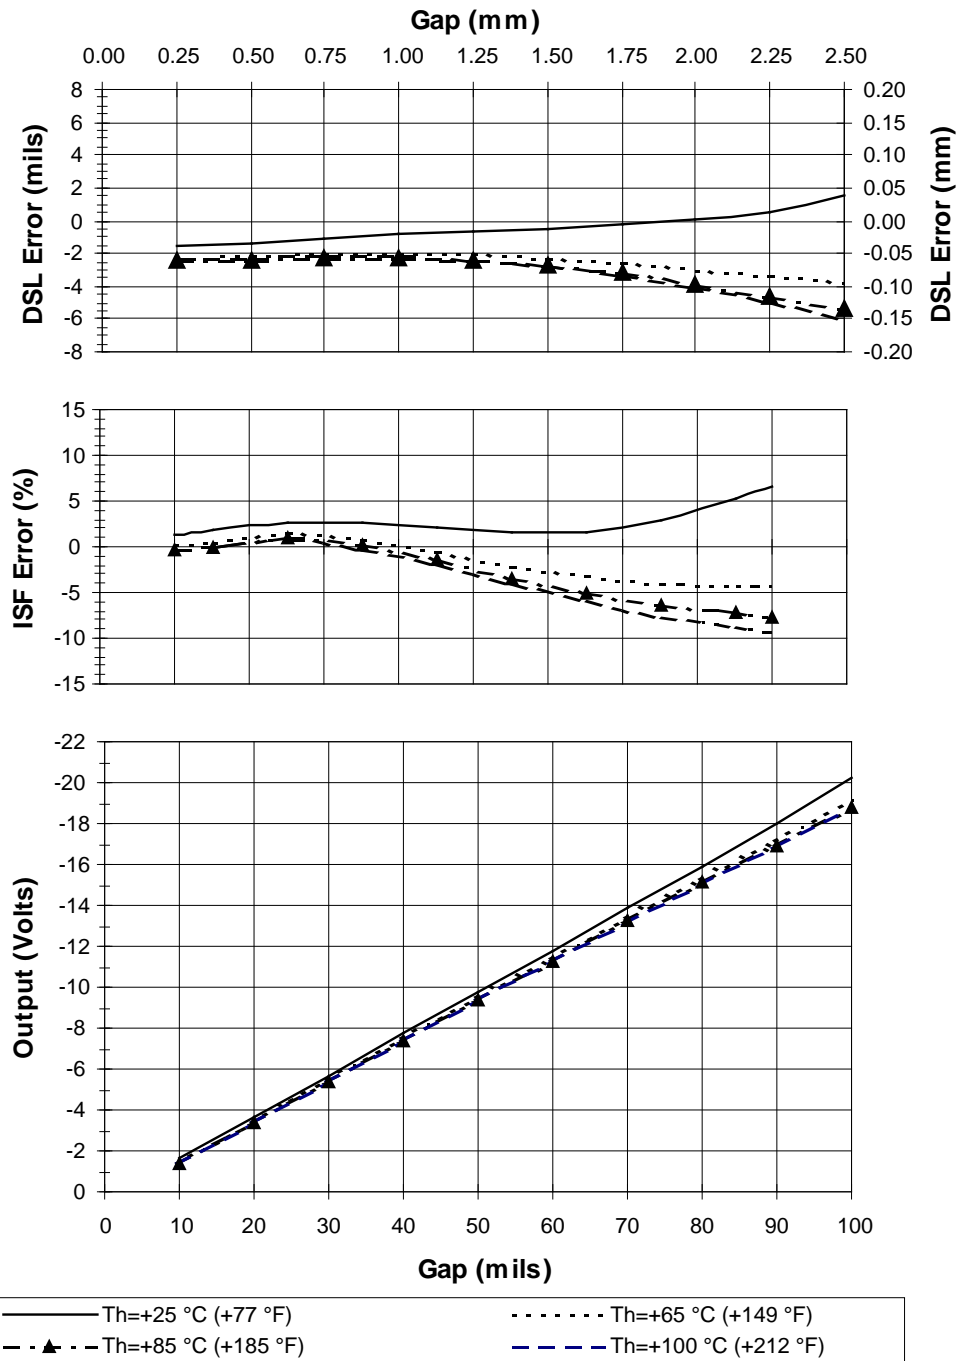


Figure 7: Typical 3300 XL 8mm 9m Proximity Sensor with 8m Extension Cable at  $T_h$  (Probe is at 25 °C)



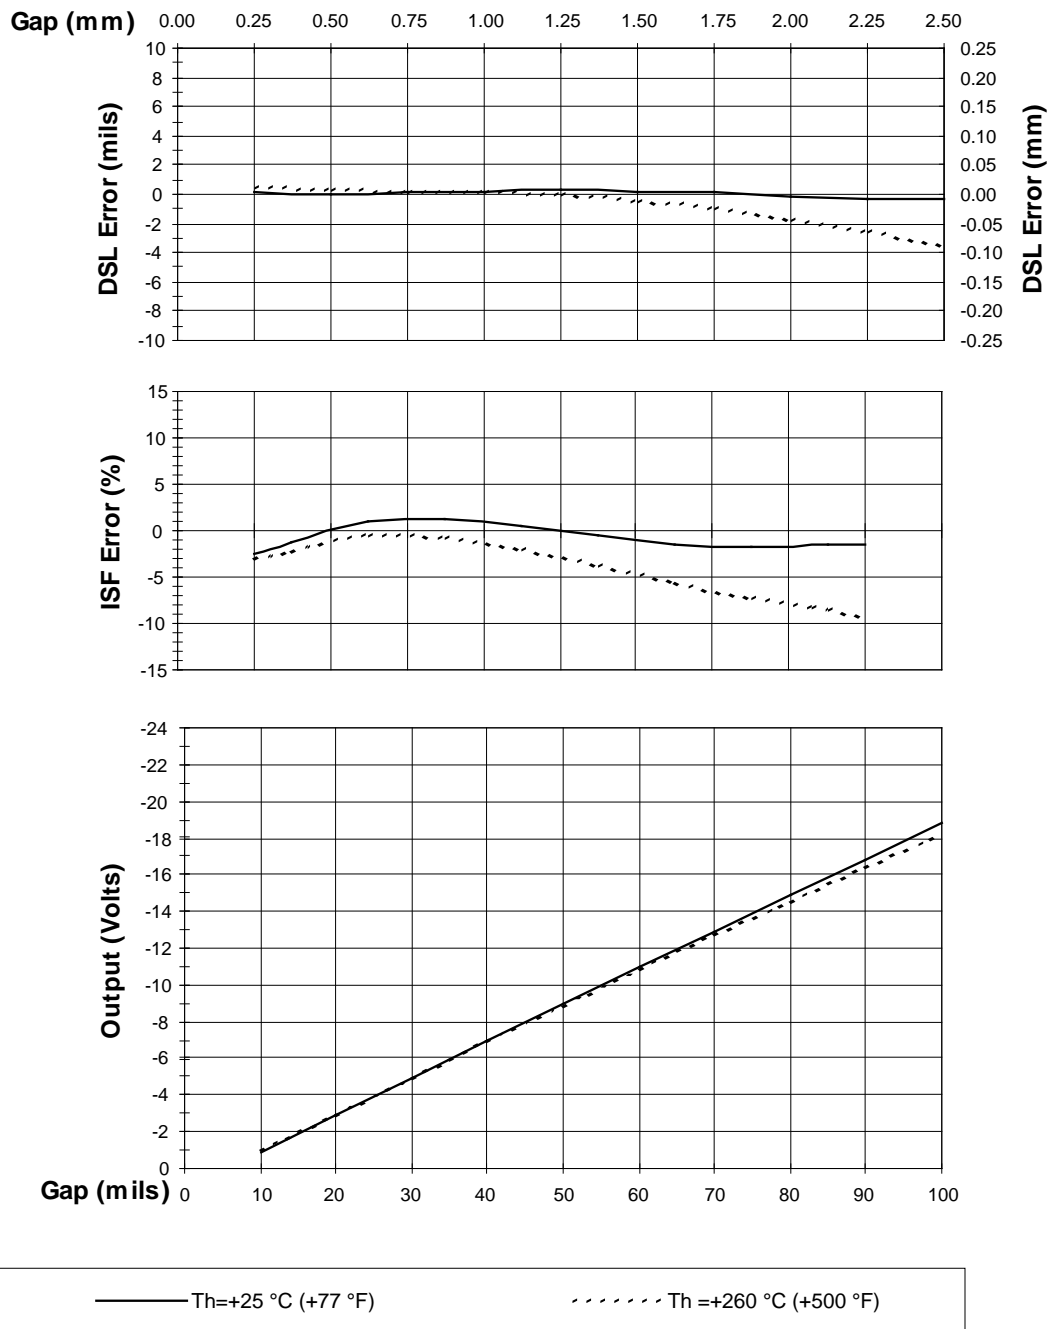


Figure 8: Typical 3300 XL Extended Temperature Range Probe and 4m Extended Temperature Range Extension Cable at  $T_h$  (Proximitor Sensor and Probe Tip with 1-foot Cable are at +25  $^{\circ}\text{C}$ )

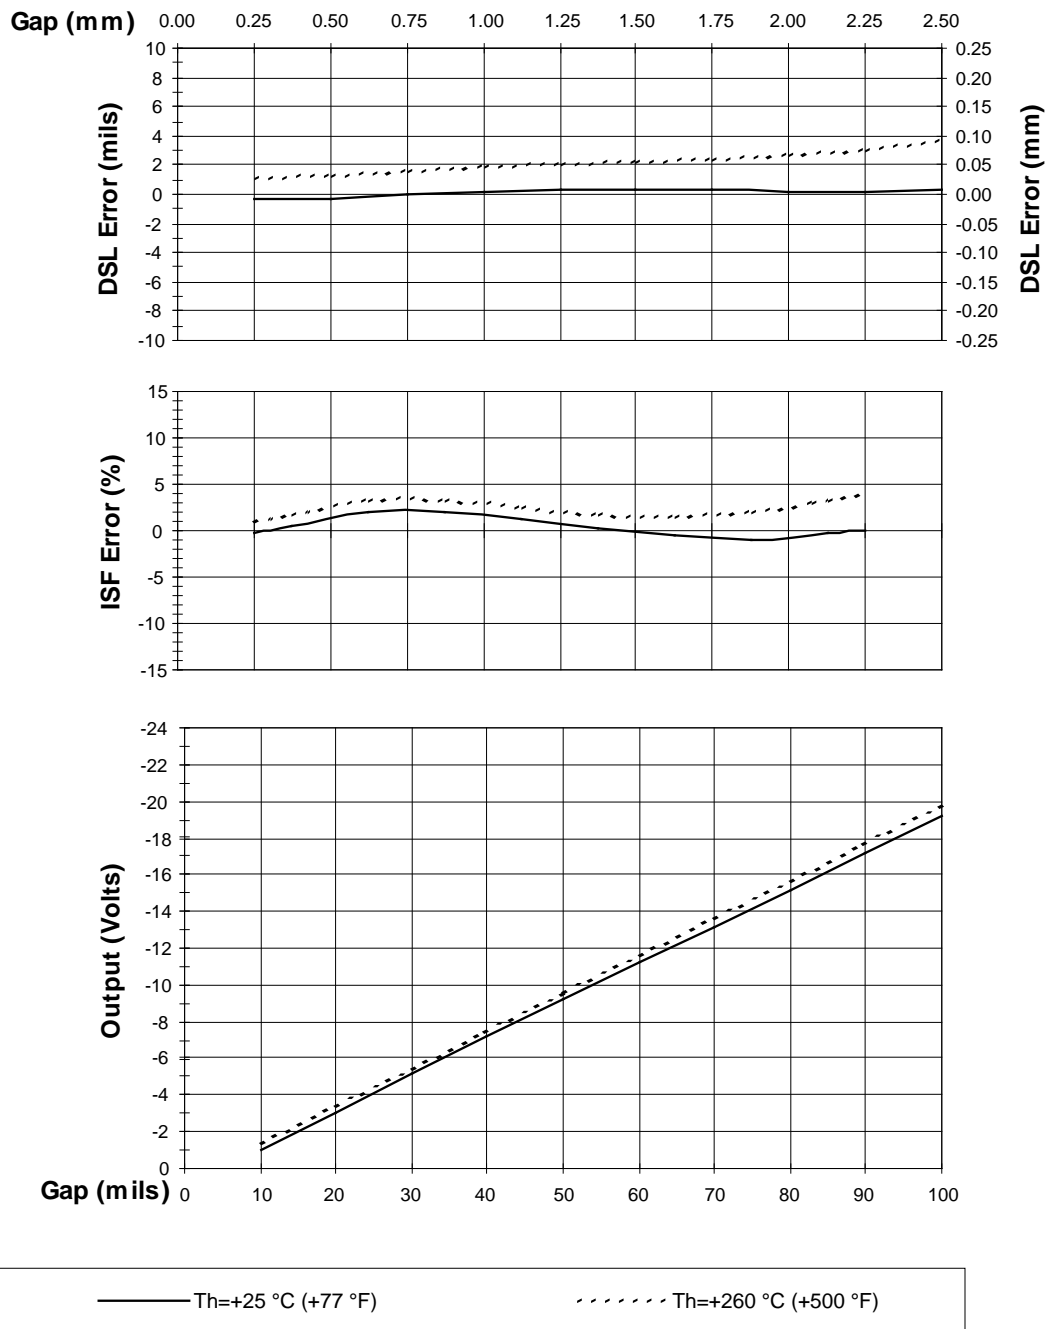


Figure 9: Typical 3300 XL Extended Temperature Range Probe and 8m Extended Temperature Range Extension Cable at  $T_h$  (Proximito Sensor and Probe Tip with 1-foot Cable are at +25  $^{\circ}\text{C}$ )

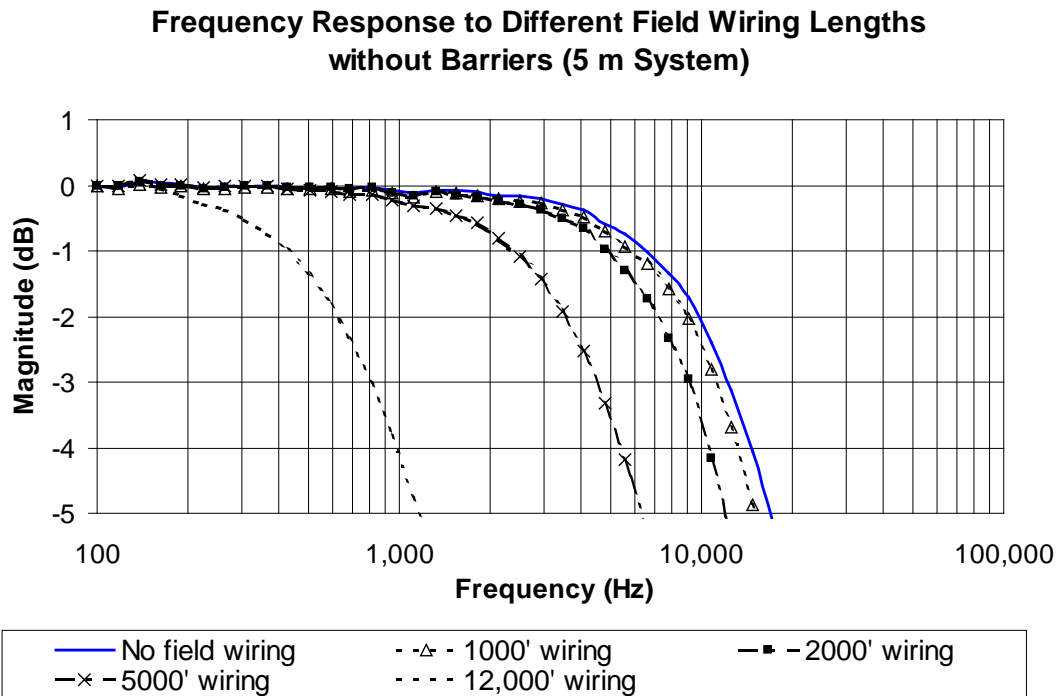


Figure 10: Frequency Response, Typical 3300 XL 8mm 5m or 1m System with Varying Lengths of Field Wiring Attached, No Barriers

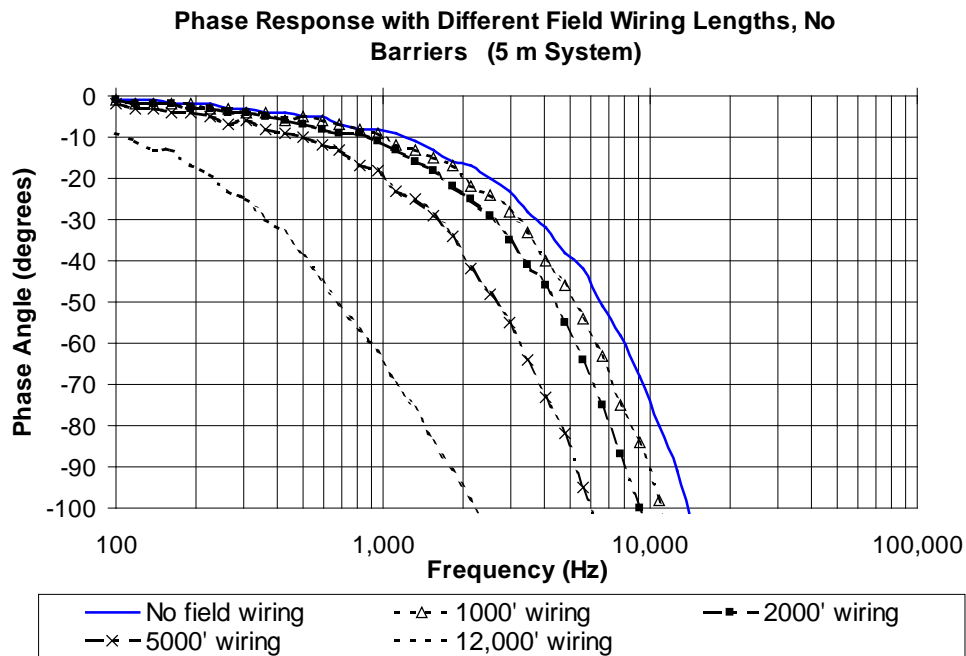


Figure 11: Phase Response, Typical 3300 XL 8mm 5m or 1m System with Varying Lengths of Field Wiring Attached, No Barriers

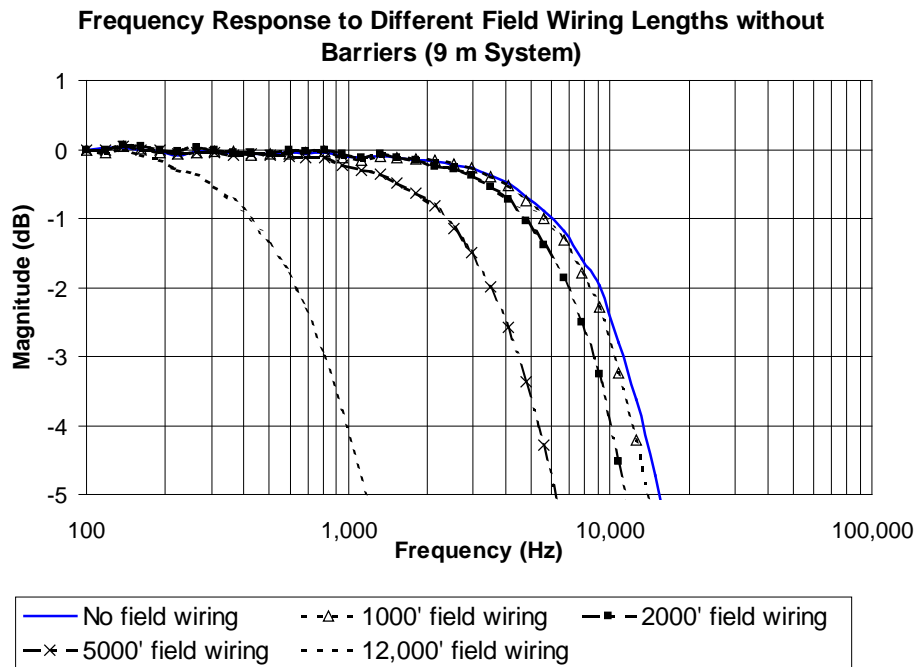


Figure 12: Frequency Response, Typical 3300 XL 8mm 9m System with Varying Lengths of Field Wiring Attached, No Barriers


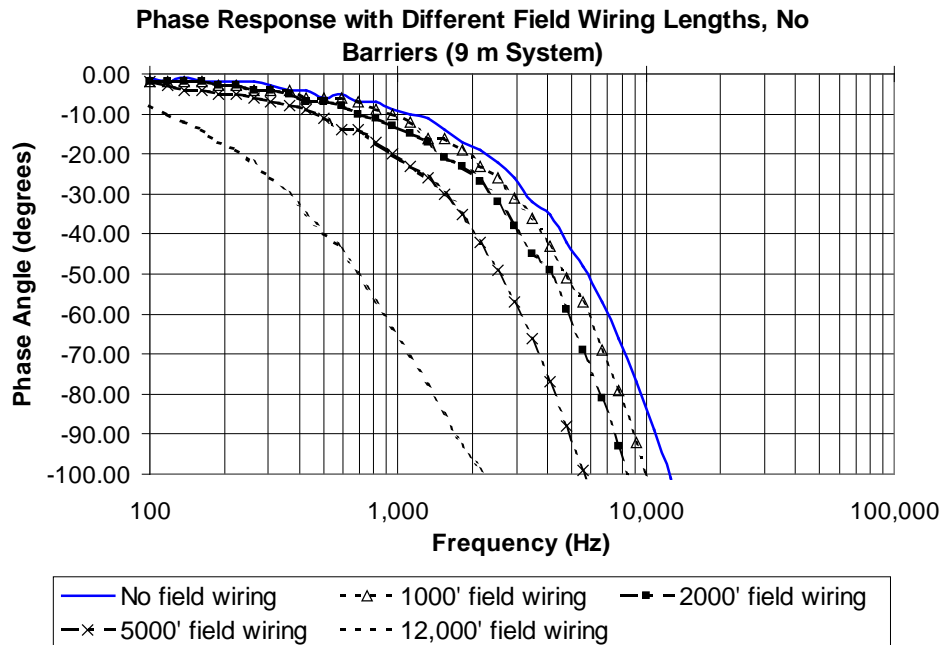


Figure 13: Phase Response, Typical 3300 XL 8mm 9m System with Varying Lengths of Field Wiring Attached, No Barriers

---

## Figures

Note: All dimensions shown in millimetres (inches) except as noted.

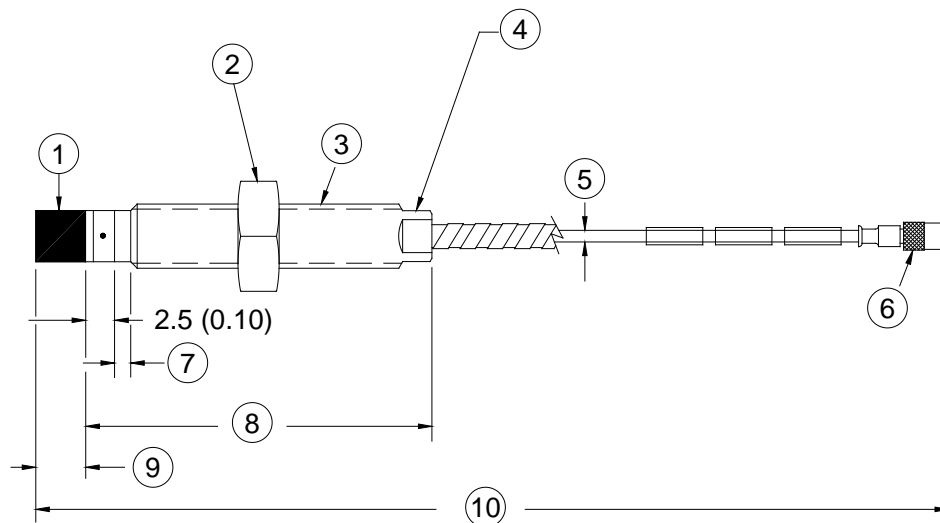

1. Probe tip, 8.0 mm (0.31 in) diameter
2. 9/16 in for 3/8-24 threads, M17 for M10 threads (see Note 2)
3. Case thread
4. 5/16 in wrench flats for 3/8-24 threads; 8mm wrench flats for M10 threads.
5. 75Ω cable, 3.68 mm (0.145 in) maximum outside diameter, 3.94 mm (0.155 in) maximum outside diameter for FluidLoc cable, 7.67 mm (0.302 in) outside diameter of armor, 9.5 mm (0.38 in) maximum diameter of armor ferrule
6. Miniature male coaxial connector, 7.24 mm (0.285 in) maximum outside diameter "D"
7. Unthreaded length "A"
8. Case length "B"
9. 6.0 mm (0.235 in) maximum
10. Total length "C", +30%, -0%<sup>3</sup>


**Figure 14: 3300 XL 8mm Proximity Probes, Standard Mount**

330101 and 330191, 3/8-24 UNF-2A, without armor <sup>7</sup>

330102 and 330192, 3/8-24 UNF-2A, with armor <sup>6</sup>

330103 and 330193, M10X1 thread, without armor <sup>7</sup>

330104 and 330194, M10X1 thread, with armor <sup>6</sup>

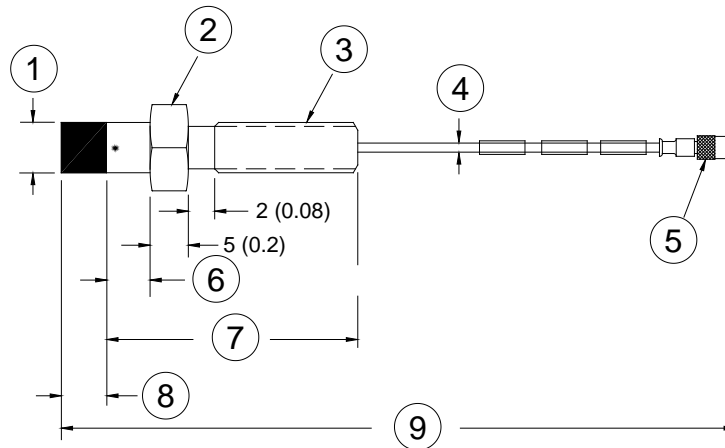


1. Probe tip, 8.0 mm (0.31 in) diameter
2. 7/16 in or M10 hexagonal
3. Case thread
4. 75Ω cable, 3.68 mm (0.145 in) outside diameter
5. Miniature male coaxial connector, 7.24 mm (0.285 in) maximum outside diameter "D"
6. Unthreaded length "A", 5.0 mm (0.20 in)
7. Case length "B", 30 mm (1.2 in)
8. 6.0 mm (0.235 in) maximum
9. Total length "C", +30%, -0%<sup>3</sup>

**Figure 15: 3300 XL 8mm Proximity Probes, Reverse Mount <sup>4, 7</sup>**

330105 and 330195, 3/8-24 UNF-2A threads

330106 and 330196, M10X1 threads

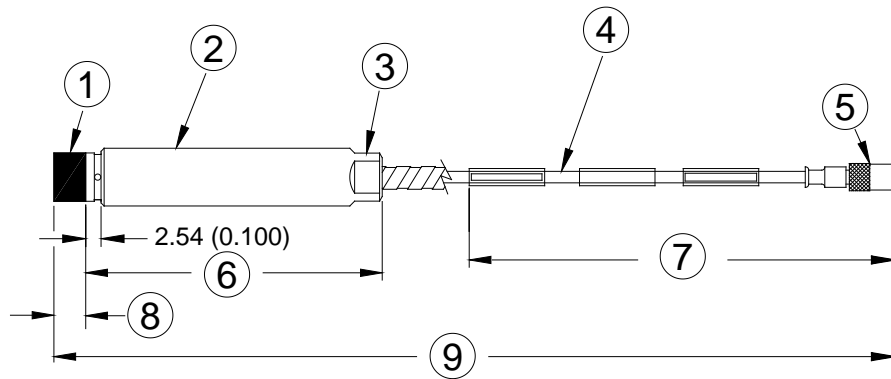


1. Probe tip, 8 mm (0.31 in) diameter
2. 9.66 mm (0.38 in) maximum diameter
3. 5/16 in wrench flats, 4 each
4. 75Ω cable, 3.68 mm (0.145 in) maximum diameter, 3.94 mm (0.155 in) maximum diameter for FluidLoc cable, 7.67 mm (0.302 in) outside diameter with armor, 10.2 mm (0.4 in) maximum diameter for armor ferrule
5. Miniature male coaxial connector, 7.24 mm (0.285 in) maximum outside diameter "D"
6. Case length "A",
7. 349.3 (13.75) max. distance
8. 6.0 mm (0.235 in) maximum
9. Total length "C", +30%, -0%<sup>3</sup>

**Figure 16: 3300 XL 8mm Proximity Probes, Smooth Case**

330140 and 330197, without armor <sup>7</sup>

330141 and 330198, with armor <sup>6</sup>

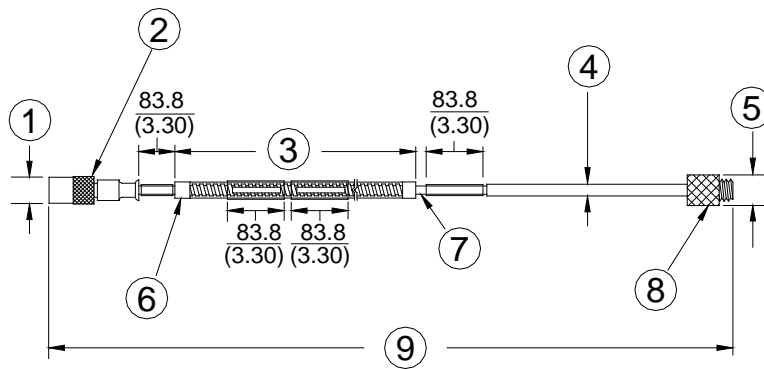


1. 7.24 mm (0.285 in) maximum diameter
2. Miniature male coaxial connector
3. FEP or PFA coated armor, armor length 300 mm (11.8 in) less than cable length (see Note 6)
4. 75Ω cable, 3.7 mm (0.15 in) maximum outside diameter, 3.94 mm (0.155 in) maximum diameter for FluidLoc cable, 7.67 mm (0.302 in) maximum outside diameter of armor, 10.2 mm (0.40 in) maximum diameter of armor ferrule
5. 7.24 mm (0.285 in) maximum diameter
6. Stainless steel ferrules, 10.2 mm (0.40 in) max diameter
7. FEP or PFA insulated triaxial cable
8. Miniature female coaxial connector
9. Cable length, +20%, -0%

**Figure 17: Extension Cable without Connector Protectors**

330130, 3300 XL Extension Cable (FEP Armor and Insulation)


330190, 3300 XL ETR Extension Cable (PFA Armor and Insulation)

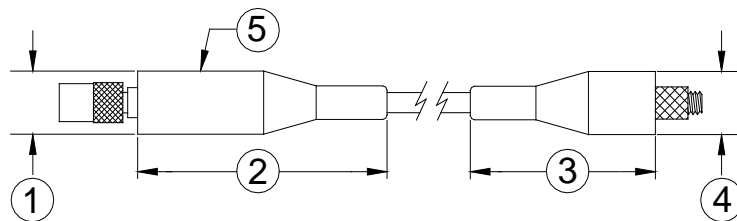

1. 12.4 mm (0.49 in) maximum diameter
2. 51.1 mm (2.01 in) maximum
3. 36.3 mm (1.43 in) maximum.
4. 12.4 mm (0.49 in) maximum diameter
5. Connector protector (fluorosilicone material)


**Figure 18: Extension Cable with Connector Protectors**



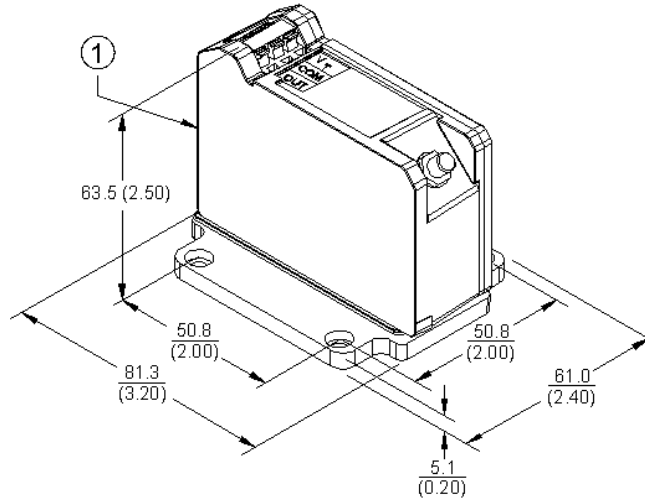


1. Mounting option "A", Options -50 or -90

**Figure 19: Panel Mount 3300 XL Proximity Sensor**

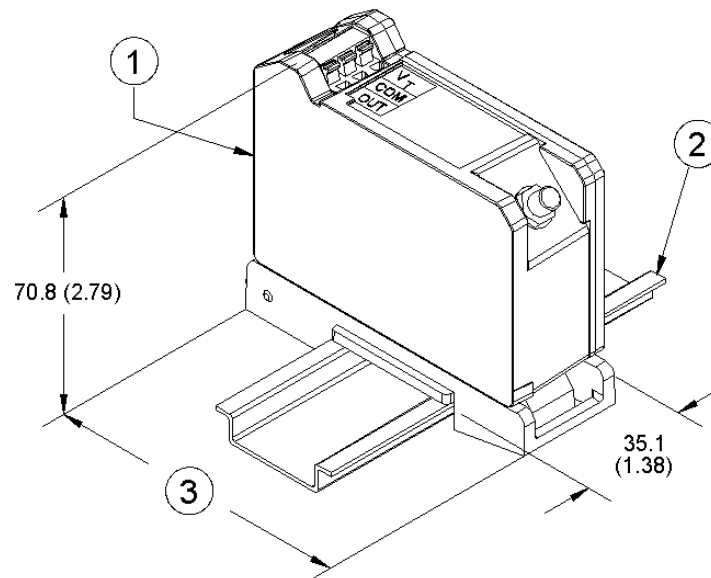

1. Mounting option "A", Options -51 or -91
2. 35mm DIN rail (not included)
3. 89.4 mm (3.52 in). Additional 3.05 mm (0.120 in) clearance required to remove DIN rail.

**Figure 20: DIN Mount 3300 XL Proximity Sensor**

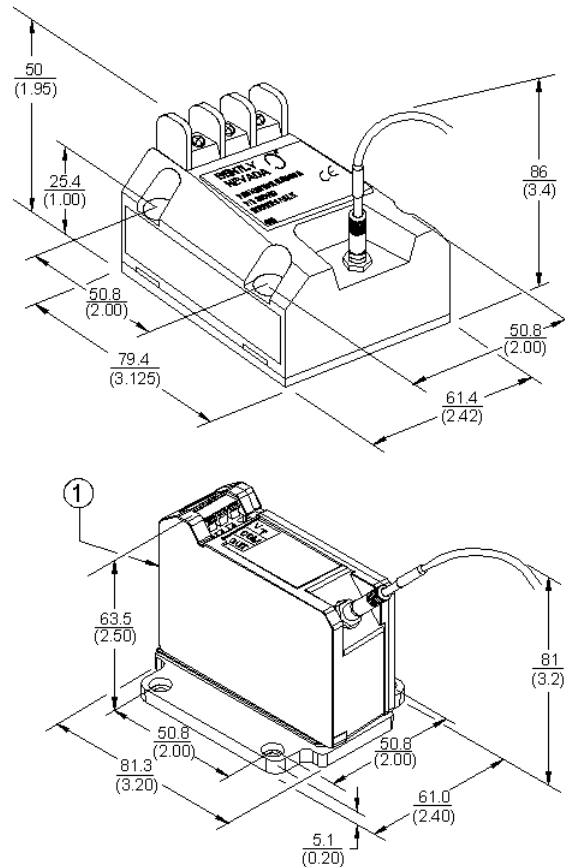

1. Mounting option "A", Options -50 or -90

**Figure 21: Physical Mounting Characteristics Showing Interchangeability of 3300 and 3300 XL Proximity Sensors when 4-hole Mounting Option Is Used<sup>8</sup>**

**Figure Notes:**

1. All dimensions on figures are in millimetres (inches) unless otherwise noted.
2. Standard mount 8 mm probes supplied with M17 or 9/16 inch lock nut.
3. Probes ordered with 5 or 9 metre integral cables have a length tolerance of +20%, -0%.
4. Reverse mount probes not available with armor or connector protector options.
5. Letters inside quotation marks on figures refer to probe ordering options.
6. Stainless steel armor is supplied with FEP outer jacket for standard probes, PFA outer jacket for ETR probes.
7. FEP jacket is standard non-armored portion of the cable for standard probes, PFA jacket on non-armored portion for ETR probes.
8. Use M3.5 or #6 screws for panel-mount Proximity Sensors (screws provided when purchasing Bently Nevada housings).

\* Denotes a trademark of Bently Nevada, Inc., a wholly owned subsidiary of General Electric Company.

Viton is a trademark of E. I. Du Pont de Nemours and Company.

© 1999-2013 Bently Nevada, Inc. All rights reserved.

Printed in USA. Uncontrolled when transmitted electronically.

1631 Bently Parkway South, Minden, Nevada USA 89423

Phone: 775.782.3611 Fax: 775.215.2873

[www.ge-mcs.com/bently](http://www.ge-mcs.com/bently)