1. 批量产品成品亮度公差为±10% ，测试条件IF=20mA/LED， V=3.0V~3.3V/LED.

2. 批量产品成品色坐标公差为±0.03.

3. 批量产品均匀性80%以上.



测试距离:500mm
Measure distance:500mm
测量角度:1°,9个点
Angle:1°,9 Points
亮度值是用BM-7色度仪测试
The Measurement instrument is:BM-7
均匀性=最小/最大亮度值*100%
Uniformity=min/max*100%

1. 图中FRAME VA为推荐TP视窗位置、大小，建议TP视窗位置、大小不要超过FRAME VA。
2. 整机机壳带泡棉产品，建议客户机壳泡棉进入LCD单边0.5MM MIN，防止漏光。
3. 整机机壳不带泡棉产品，建议客户整机TP的丝印黑油开窗或者LENS丝印黑油开窗比LCD A.A区单边大0.6MM MAX。
4. 客户需保证触摸屏下表面到玻璃上表面最少0.3MM MIN(非贴合)。

技术要求:
1) 液晶显示模式: 3,97"TFT transmissive
2)视角：ALL
2) 显示颜色：16.7M COLORS
3) 点阵：480 X 800
4)驱动芯片型号:eR61408
5)工作温度:-20° -----70°
储存温度:-30° -----80°
6)未注尺寸公差:±0.2mm
7)材料及工艺符合 ROHS

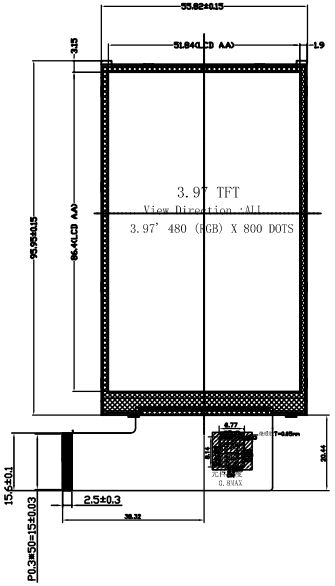

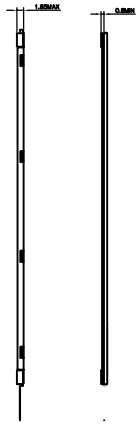

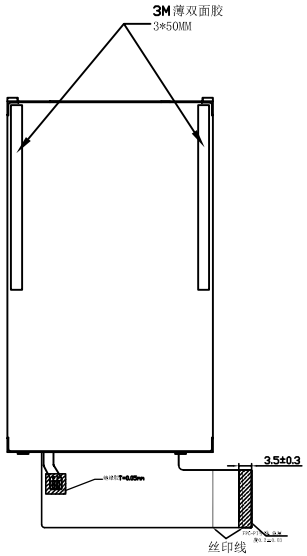

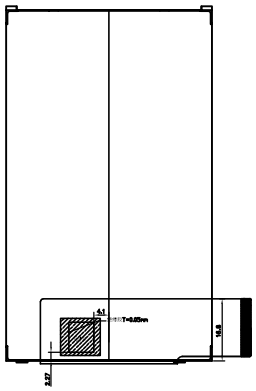



8-LED
Vf=3.2V If=160mA

1.电路图:
CIRCUIT DIAGRAM

PIN No.	Name	PIN No.	Name
1	GND	31	DB19
2	IM1	32	DB20
3	IM0	33	DB21
4	RD	34	DB22
5	RS	35	DB23
6	IM2	36	RESET
7	LEDPWN	37	CS
8	VSYNC	38	WR
9	HSYNC	39	SDI
10	PCLK	40	SDO
11	DE	41	TE
12	DB0	42	VCI
13	DB1	43	NC
14	DB2	44	IOVCC
15	DB3	45	GND
16	DB4	46	NC
17	DB5	47	NC
18	DB6	48	LEDA
19	DB7	49	LEDA
20	DB8	50	LEDK
21	DB9	51	LEDK
22	DB10		
23	DB11		
24	DB12		
25	DB13		
26	DB14		
27	DB15		
28	DB16		
29	DB17		
30	DB18		

IM1-IM0=[00] TYPE B 8BIT DB7-DB0
IM1-IM0=[01] TYPE B 16BIT DB15-DB0
IM1-IM0=[10] TYPE B 18BIT DB17-DB0
IM1-IM0=[11] TYPE B 24BIT

第二版更改
20170518

版本	更改内容	更改时间

好钜润科技

TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE:±0.2			
PART NO.:				MODULE NO.:	TK040F1532
DRAWN BY:		DATE:		PROJECTION:	
CHECKED BY:		DATE:		SCALE:N.T.S	UNIT: mm
APPROVED BY:		DATE:		SHEET: 1 OF 1	