• DRY COOLING • DRY COOLER • VERSIONE PROVVISORIA · CODICI IN VERIFICA

PROCRYON

PRODRY-S800-OSB

Serie PRO-DRY · 20 ventilatori / fans



PRODRY-S800-OSB

RESA · CAPACITY · 40→35 °C · AIR 25 °C

796 kW

POTENZA VENTILATORI · FAN POWER

38,0 kW

PORTATA ARIA · AIR FLOW

470.000 m³/h

PORTATA ACQUA · WATER FLOW

136,9 m³/h

Prestazioni nominali / Nominal performance	
Resa (acqua 40 → 35 °C, aria 25 °C) / Capacity (water 40 → 35 °C, air 25 °C)	796,0 kW
Portata acqua / Water flow	136,91 m³/h
Portata aria / Air flow	470.000 m³/h
Potenza assorbita ventilatori / Fan power input	38,0 kW
Pressione sonora / Sound pressure	68 dB(A)
Costruzione / Construction	
Ventilatori / Fans	20
Tubi / Tubes	rame / copper
Alette / Fins	alluminio preverniciato / pre-coated aluminium
Spessore / passo alette / Fin thickness / pitch	0,12 / 2,1 mm
Volume interno batteria / Coil internal volume	416,0 l
Dimensioni L × P × H / Dimensions L × D × H	7.375 × (2.500 + 2.650) × 1.650 mm

Raffreddatori di liquido ad aria: l'acqua dell'impianto viene raffreddata direttamente dall'aria esterna, senza compressori e senza refrigerante.


Air-cooled liquid coolers: the system water is cooled directly by the outdoor air, with no compressors and no refrigerant.

• DRY COOLING • DRY COOLER • VERSIONE PROVVISORIA · CODICI IN VERIFICA

PROCRYON

Dimensioni
Dimensions

PRODRY-S800-OSB · L × P × H 7.375 × (2.500 + 2.650) × 1.650 mm

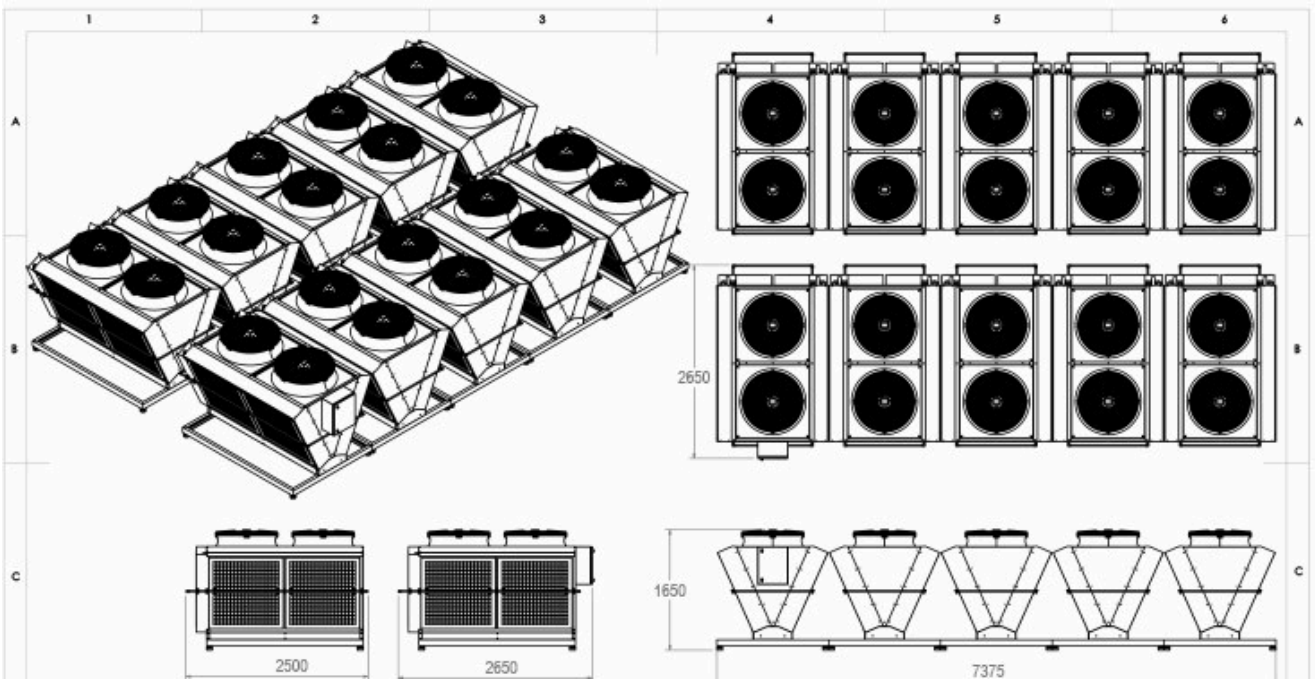

Disegno indicativo, quote in mm. Dimensioni e attacchi da confermare in fase d'ordine. / Indicative drawing, dimensions in mm. Dimensions and connections to be confirmed at order stage.

Note
Notes

- Dati nominali con acqua pura: ingresso 40 °C, uscita 35 °C, aria esterna 25 °C.
- Per condizioni diverse e per miscele con glicole la selezione è fornita su richiesta; i coefficienti di correzione sono nella pagina delle condizioni di riferimento.
- Dimensioni ricavate dai disegni quotati (tolleranza ±10 mm): da confermare in fase d'ordine.
- Dati elettrici, pesi, attacchi idraulici e perdite di carico sono forniti su richiesta.
- Procryon si riserva di modificare dati e caratteristiche senza preavviso, per il miglioramento continuo del prodotto.

- Nominal data with pure water: inlet 40 °C, outlet 35 °C, ambient air 25 °C.
- For other conditions and for glycol mixtures the selection is available on request; correction coefficients are on the reference conditions page.
- Dimensions taken from dimensional drawings (tolerance ±10 mm): to be confirmed at order stage.
- Electrical data, weights, water connections and pressure drops are available on request.
- Procryon reserves the right to change data and features without notice, as part of continuous product improvement.

Parliamoci
Let's talk

Progettazione, intervento urgente, valutazione di un impianto esistente, supporto tecnico e intervento rapido — 24/7.

System design, urgent response, assessment of an existing plant, technical support and rapid response — 24/7.

Procryon — Smart Cooling Engineering S.r.l.
Via Ugo Vaglia 10 — Gavardo (BS) — Italia
www.procryon.com



PROCRYON

Procryon — Smart Cooling Engineering S.r.l.
www.procryon.com

Continuity by design