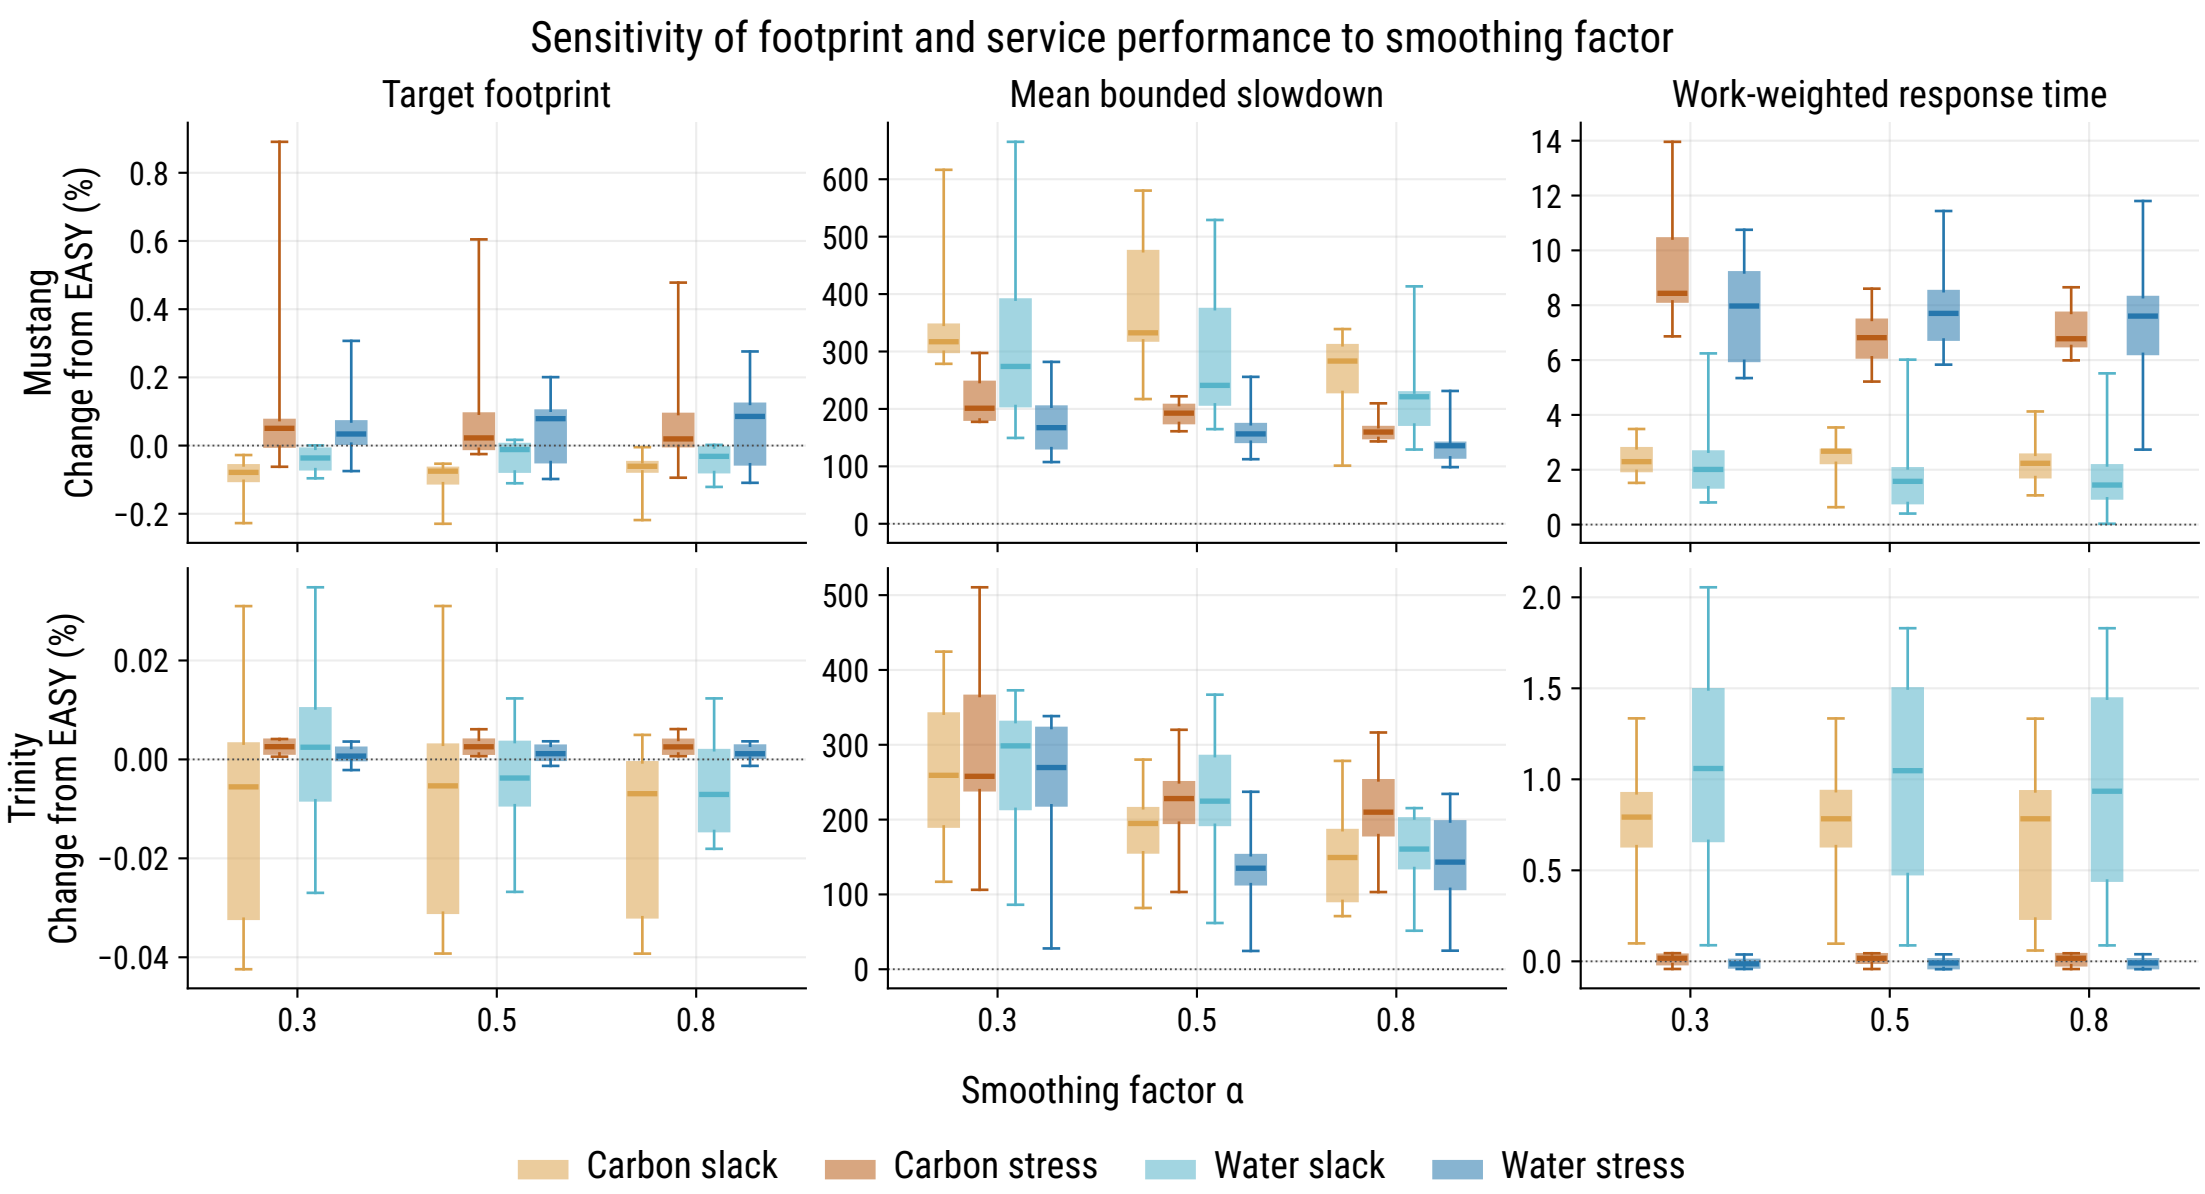
Sensitivity of footprint and service performance to smoothing factor
Target footprint
Mean bounded slowdown
Work-weighted response time
Mustang
Change from EASY (%)
Trinity
Change from EASY (%)
0.8
0.6
0.4
0.2
0.0
−0.2
600
500
400
300
200
100
0
14
12
10
8
6
4
2
0
0.02
0.00
−0.02
−0.04
500
400
300
200
100
0
2.0
1.5
1.0
0.5
0.0
0.3
0.5
0.8
Smoothing factor α
Carbon slack
Carbon stress
Water slack
Water stress