

Cond. F: LA-180			Cond. P: DPGV-48		
147-AL/34-ST1A			Apoyo 1 - Apoyo 2		
Temp.	Tens.	Fliecha	Temp.	Tens.	Fliecha
-5°C	853Kg	4.90m	-5°C	874Kg	4.30m
0°C	833Kg	4.90m	0°C	853Kg	4.43m
5°C	813Kg	5.04m	5°C	833Kg	4.55m
10°C	794Kg	5.15m	10°C	813Kg	4.66m
15°C	777Kg	5.27m	15°C	793Kg	4.77m
20°C	761Kg	5.38m	20°C	776Kg	4.87m
25°C	745Kg	5.49m	25°C	759Kg	4.98m
30°C	731Kg	5.6m	30°C	743Kg	5.08m
35°C	717Kg	5.71m	35°C	729Kg	5.18m
40°C	704Kg	5.81m	40°C	716Kg	5.29m
45°C	691Kg	5.92m	45°C	702Kg	5.38m
50°C	677Kg	6.03m	50°C	689Kg	5.48m

Cond. F: LA-180			Cond. P: DPGV-48		
147-AL/34-ST1A			Apoyo 2 - Apoyo 3		
Temp.	Tens.	Fliecha	Temp.	Tens.	Fliecha
-5°C	853Kg	4.90m	-5°C	874Kg	4.30m
0°C	833Kg	4.90m	0°C	853Kg	4.43m
5°C	813Kg	5.04m	5°C	833Kg	4.55m
10°C	794Kg	5.15m	10°C	813Kg	4.66m
15°C	777Kg	5.27m	15°C	793Kg	4.77m
20°C	761Kg	5.38m	20°C	776Kg	4.87m
25°C	745Kg	5.49m	25°C	759Kg	4.98m
30°C	731Kg	5.6m	30°C	743Kg	5.08m
35°C	717Kg	5.71m	35°C	729Kg	5.18m
40°C	704Kg	5.81m	40°C	716Kg	5.29m
45°C	691Kg	5.92m	45°C	702Kg	5.38m
50°C	677Kg	6.03m	50°C	689Kg	5.48m


Cond. F: LA-180			Cond. P: DPGV-48		
147-AL/34-ST1A			Apoyo 3 - Apoyo 4		
Temp.	Tens.	Fliecha	Temp.	Tens.	Fliecha
-5°C	853Kg	7.1m	-5°C	874Kg	6.59m
0°C	832Kg	7.28m	0°C	852Kg	6.56m
5°C	813Kg	7.45m	5°C	833Kg	6.70m
10°C	794Kg	7.63m	10°C	813Kg	6.89m
15°C	777Kg	7.79m	15°C	793Kg	7.05m
20°C	761Kg	7.96m	20°C	776Kg	7.21m
25°C	745Kg	8.12m	25°C	759Kg	7.36m
30°C	730Kg	8.29m	30°C	743Kg	7.52m
35°C	717Kg	8.45m	35°C	729Kg	7.67m
40°C	704Kg	8.61m	40°C	716Kg	7.82m
45°C	690Kg	8.76m	45°C	703Kg	7.96m
50°C	676Kg	8.92m	50°C	689Kg	8.11m

Cond. F: LA-180			Cond. P: DPGV-48		
147-AL/34-ST1A			Apoyo 4 - Apoyo 5		
Temp.	Tens.	Fliecha	Temp.	Tens.	Fliecha
-5°C	937Kg	2.69m	-5°C	957Kg	2.43m
0°C	913Kg	2.79m	0°C	939Kg	2.53m
5°C	870Kg	2.89m	5°C	894Kg	2.63m
10°C	841Kg	3m	10°C	859Kg	2.73m
15°C	814Kg	3.1m	15°C	823Kg	2.83m
20°C	788Kg	3.2m	20°C	797Kg	2.93m
25°C	763Kg	3.29m	25°C	772Kg	3.03m
30°C	743Kg	3.39m	30°C	749Kg	3.1m
35°C	723Kg	3.49m	35°C	728Kg	3.19m
40°C	704Kg	3.58m	40°C	709Kg	3.28m
45°C	686Kg	3.67m	45°C	690Kg	3.37m
50°C	673Kg	3.94m	50°C	679Kg	3.45m

Cond. F: LA-180			Cond. P: DPGV-48		
147-AL/34-ST1A			Apoyo 5 - Apoyo 6		
Temp.	Tens.	Fliecha	Temp.	Tens.	Fliecha
-5°C	937Kg	4.37m	-5°C	957Kg	3.95m
0°C	913Kg	4.53m	0°C	939Kg	4.11m
5°C	870Kg	4.7m	5°C	894Kg	4.27m
10°C	841Kg	4.87m	10°C	859Kg	4.43m
15°C	814Kg	5.03m	15°C	823Kg	4.59m
20°C	788Kg	5.19m	20°C	797Kg	4.74m
25°C	763Kg	5.35m	25°C	772Kg	4.89m
30°C	743Kg	5.51m	30°C	749Kg	5.04m
35°C	723Kg	5.66m	35°C	728Kg	5.19m
40°C	704Kg	5.82m	40°C	709Kg	5.33m
45°C	686Kg	5.97m	45°C	690Kg	5.47m
50°C	673Kg	6.4m	50°C	679Kg	5.61m

Cond. F: LA-180			Cond. P: DPGV-48		
147-AL/34-ST1A			Apoyo 6 - Apoyo 7		
Temp.	Tens.	Fliecha	Temp.	Tens.	Fliecha
-5°C	937Kg	1.09m	-5°C	957Kg	3.95m
0°C	913Kg	1.25m	0°C	939Kg	4.11m
5°C	870Kg	1.41m	5°C	894Kg	4.27m
10°C	841Kg	1.57m	10°C	859Kg	4.43m
15°C	814Kg	1.73m	15°C	823Kg	4.59m
20°C	788Kg	1.89m	20°C	797Kg	4.74m
25°C	763Kg	2.05m	25°C	772Kg	4.89m
30°C	743Kg	2.21m	30°C	749Kg	5.04m
35°C	723Kg	2.36m	35°C	728Kg	5.19m
40°C	704Kg	2.52m	40°C	709Kg	5.33m
45°C	686Kg	2.67m	45°C	690Kg	5.47m
50°C	673Kg	2.83m	50°C	679Kg	5.61m

Cond. F: LA-180			Cond. P: DPGV-48			Cond. F: LA-180			Cond. P: DPGV-48		
147-AL/34-ST1A			Apoyo 7 - Apoyo 8			Apoyo 8 - Apoyo 9			Apoyo 9 - Apoyo 10		
Temp.	Tens.	Fliecha	Temp.	Tens.	Fliecha	Temp.	Tens.	Fliecha	Temp.	Tens.	Fliecha
-5°C	937Kg	1.25m	-5°C	957Kg	0.95m	-5°C	937Kg	1.18m	-5°C	937Kg	1.25m
0°C	913Kg	1.09m	0°C	919Kg	0.99m	0°C	870Kg	1.25m	0°C	894Kg	1.25m
5°C	870Kg	1.25m	5°C	884Kg	1.25m	5°C	846Kg	1.25m	5°C	861Kg	1.25m
10°C	841Kg	1.27m	10°C	859Kg	1.27m	10°C	823Kg	1.29m	10°C	835Kg	1.29m
15°C	814Kg	1.29m	15°C	833Kg	1.31m	15°C	798Kg	1.33m	15°C	808Kg	1.33m
20°C	788Kg	1.25m	20°C	797Kg	1.34m	20°C	777Kg	1.37m	20°C	788Kg	1.37m
25°C	763Kg	1.29m	25°C	772Kg	1.38m	25°C	757Kg	1.4m	25°C	767Kg	1.4m
30°C	743Kg	1.33m	30°C	749Kg	1.42m	30°C	738Kg	1.44m	30°C	747Kg	1.44m
35°C	723Kg	1.37m	35°C	728Kg	1.47m	35°C	728Kg	1.47m	35°C	728Kg	1.47m
40°C	704Kg	1.4m	40°C	709Kg	1.51m	40°C	704Kg	1.51m	40°C	704Kg	1.51m
45°C	686Kg	1.44m	45°C	690Kg	1.54m	45°C	686Kg	1.54m	45°C	686Kg	1.54m
50°C	673Kg	1.54m	50°C	679Kg	1.64m	50°C	673Kg	1.64m	50°C	673Kg	1.64m

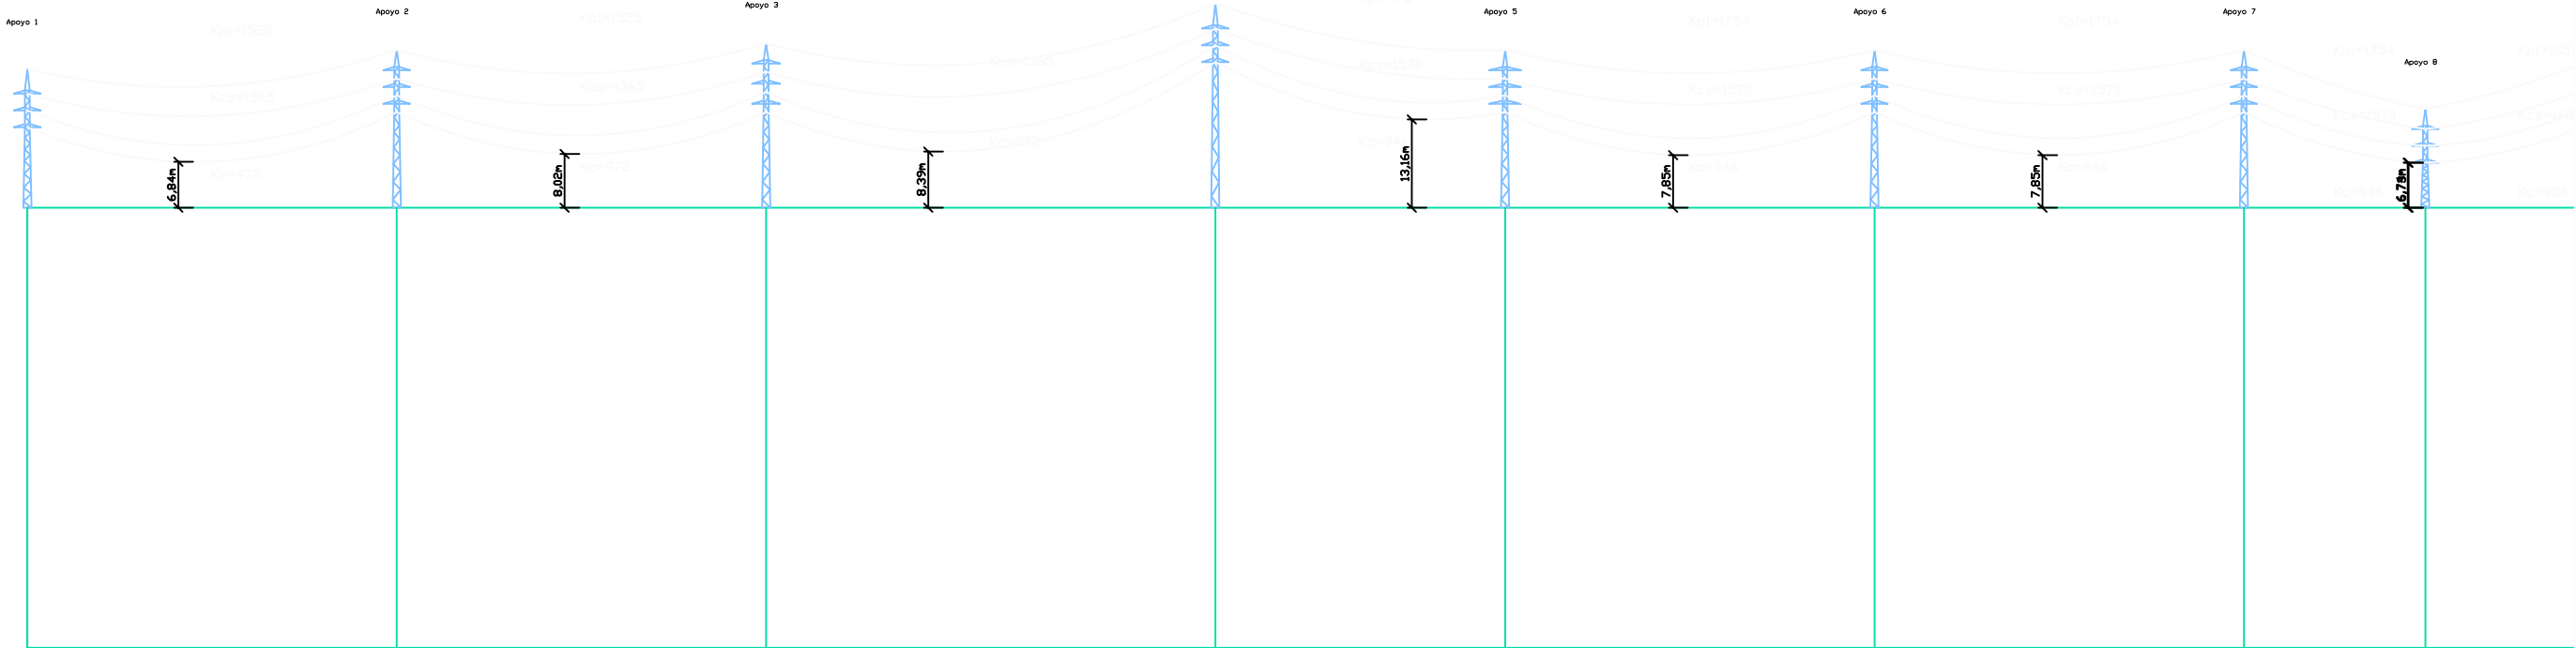

P.C.: 1034.48 m

Nº Apoyos / Longitud Vanos (m)	1	220.00	2	220.00	3	267.45	4	172.55	5	220.00	6	220.00	7	108.00	8	112.00
Cota Terreno (m)	1100.00		1100.00		1100.00		1100.00		1100.00		1100.00		1100.00		1100.00	
Distancia Parcial (m)	0.00		220.00		220.00		267.45		172.55		220.00		220.00		108.00	
Distancia Origen (m)	0.00		220.00		440.00		707.45		880.00		1100.00		1320.00		1428.00	
Función de Apoyo	FL		AL_SU		AL_SU		AN_AM (188,7g)		AL_SU		AL_SU		AL_SU		AL_AM	
Serie Apoyo	AGR-18000-12		HAR-5000-18		HAR-5000-18		HAR-9000-24		HAR-5000-18		HAR-5000-18		HAR-5000-18		HAR-5000-9	
Armado (m)	b=2,5/a=2/c=2/h=3,7		b=2,5/a=2/c=2/h=3		b=3/a=2,1/c=2,1/h=3		b=2,5/a=2/c=2/h=3,7		b=2,5/a=2,4/c=2,4/h=3		b=2,5/a=2/c=2/h=3		b=2,5/a=2/c=2/h=3		b=2,5/a=2/c=2/h=3	
Altura Dtl Cruceta Inferior (m)	12		15,49 (Normal/K=12)		15,49 (Normal/K=12)		21,72 (Normal/K=12)		15,49 (Normal/K=12)		15,49 (Normal/K=12)		15,49 (Normal/K=12)		6,73 (Normal/K=12)	
Tipo de cimentación	Tetraploque (Cuadrada con curva)		Monobloque		Monobloque		Monobloque		Monobloque		Monobloque		Monobloque		Monobloque	
Datos Cimentación (m)	a=1,53/h=0,3/h=3,35/h=1,2		a=1,78/h=2,38		a=1,78/h=2,38		a=2,43/h=2,75		a=1,78/h=2,38		a=1,78/h=2,38		a=1,78/h=2,38		a=1,46/h=2,12	



Cond. Pst: DFGW-48				Cond. F: LA-180 147-AL/34-STIA			
Apoyeo 7 - Apoyo 8				Apoyo 8 - Apoyo 9			
Temp.	Tens.	Flecho	Temp.	Tens.	Flecho	Temp.	Flecho
-5°C	95.7kg	0.95m	-5°C	90.2kg	1.18m		
0°C	91.9kg	0.95m	0°C	87.6kg	1.28m		
5°C	88.4kg	1.03m	5°C	84.6kg	1.25m		
10°C	85.2kg	1.07m	10°C	82.1kg	1.29m		
15°C	82.3kg	1.11m	15°C	79.8kg	1.33m		
20°C	79.7kg	1.14m	20°C	77.7kg	1.37m		
25°C	77.2kg	1.18m	25°C	75.7kg	1.4m		
30°C	74.9kg	1.22m	30°C	73.8kg	1.44m		
35°C	72.8kg	1.25m	35°C	72.0kg	1.47m		
40°C	70.9kg	1.29m	40°C	70.4kg	1.51m		
45°C	69.0kg	1.32m	45°C	68.8kg	1.54m		
50°C	6.73kg	1.35m	50°C	6.66kg	1.54m		

Cond. P1: DPGW-48		
Apoyo 9 - Apoyo 10		
Temp.	Tens.	Flecha
-5°C	921Kg	4,1n
0°C	890Kg	4,24n
5°C	861Kg	4,38n
10°C	835Kg	4,52n
15°C	810Kg	4,66n
20°C	788Kg	4,8n
25°C	767Kg	4,93n
30°C	747Kg	5,06n
35°C	728Kg	5,19n
40°C	711Kg	5,31n
45°C	693Kg	5,44n
50°C	680Kg	5,56n

Temp.	Tens.	Flecha
-5°C	921Kg	4,1n
0°C	890Kg	4,24n
5°C	861Kg	4,38n
10°C	835Kg	4,52n
15°C	810Kg	4,66n
20°C	788Kg	4,8n
25°C	767Kg	4,93n
30°C	747Kg	5,06n
35°C	728Kg	5,19n
40°C	711Kg	5,31n
45°C	695Kg	5,44n
50°C	680Kg	5,56n


Cond. P1: DPGV-48		
Apoyo 11 - Apoyo 12		
Temp.	Tens.	Flecha
-5°C	921Kg	4,1n
0°C	890Kg	4,25n
5°C	861Kg	4,39n
10°C	835Kg	4,53n
15°C	810Kg	4,66n
20°C	788Kg	4,8n
25°C	767Kg	4,93n
30°C	747Kg	5,06n
35°C	728Kg	5,19n
40°C	711Kg	5,32n
45°C	695Kg	5,44n
50°C	680Kg	5,56n

PGV-48	
Apoyo 13	
ms.	Flecha
Kg	4,1n
Kg	4,25m
Kg	4,39m
Kg	4,53m
Kg	4,66m
Kg	4,8n
Kg	4,93n
Kg	5,06n
Kg	5,19n
Kg	5,32n
Kg	5,44n
Kg	5,56n

Temp.	Tens.	Flecha
-5°C	921Kg	4,1m
0°C	890Kg	4,25m
5°C	861Kg	4,39m
10°C	835Kg	4,53m
15°C	810Kg	4,66m
20°C	788Kg	4,8m
25°C	767Kg	4,93m
30°C	747Kg	5,06m
35°C	728Kg	5,19m
40°C	711Kg	5,32m
45°C	695Kg	5,44m
50°C	680Kg	5,56m

Cond. P1: DPGW-48		
Apoyo 14 - Apoyo 15		
Temp.	Tens.	Flecha
-5°C	921Kg	3,54m
0°C	890Kg	3,67m
5°C	861Kg	3,79m
10°C	835Kg	3,91m
15°C	810Kg	4,03m
20°C	788Kg	4,14m
25°C	767Kg	4,26m
30°C	747Kg	4,37m
35°C	728Kg	4,48m
40°C	711Kg	4,59m
45°C	695Kg	4,7m
50°C	680Kg	4,8m

Col
Apr
Tem
-5°
0°C
5°C
10°
15°
20°
25°
30°
35°
40°
45°
50°

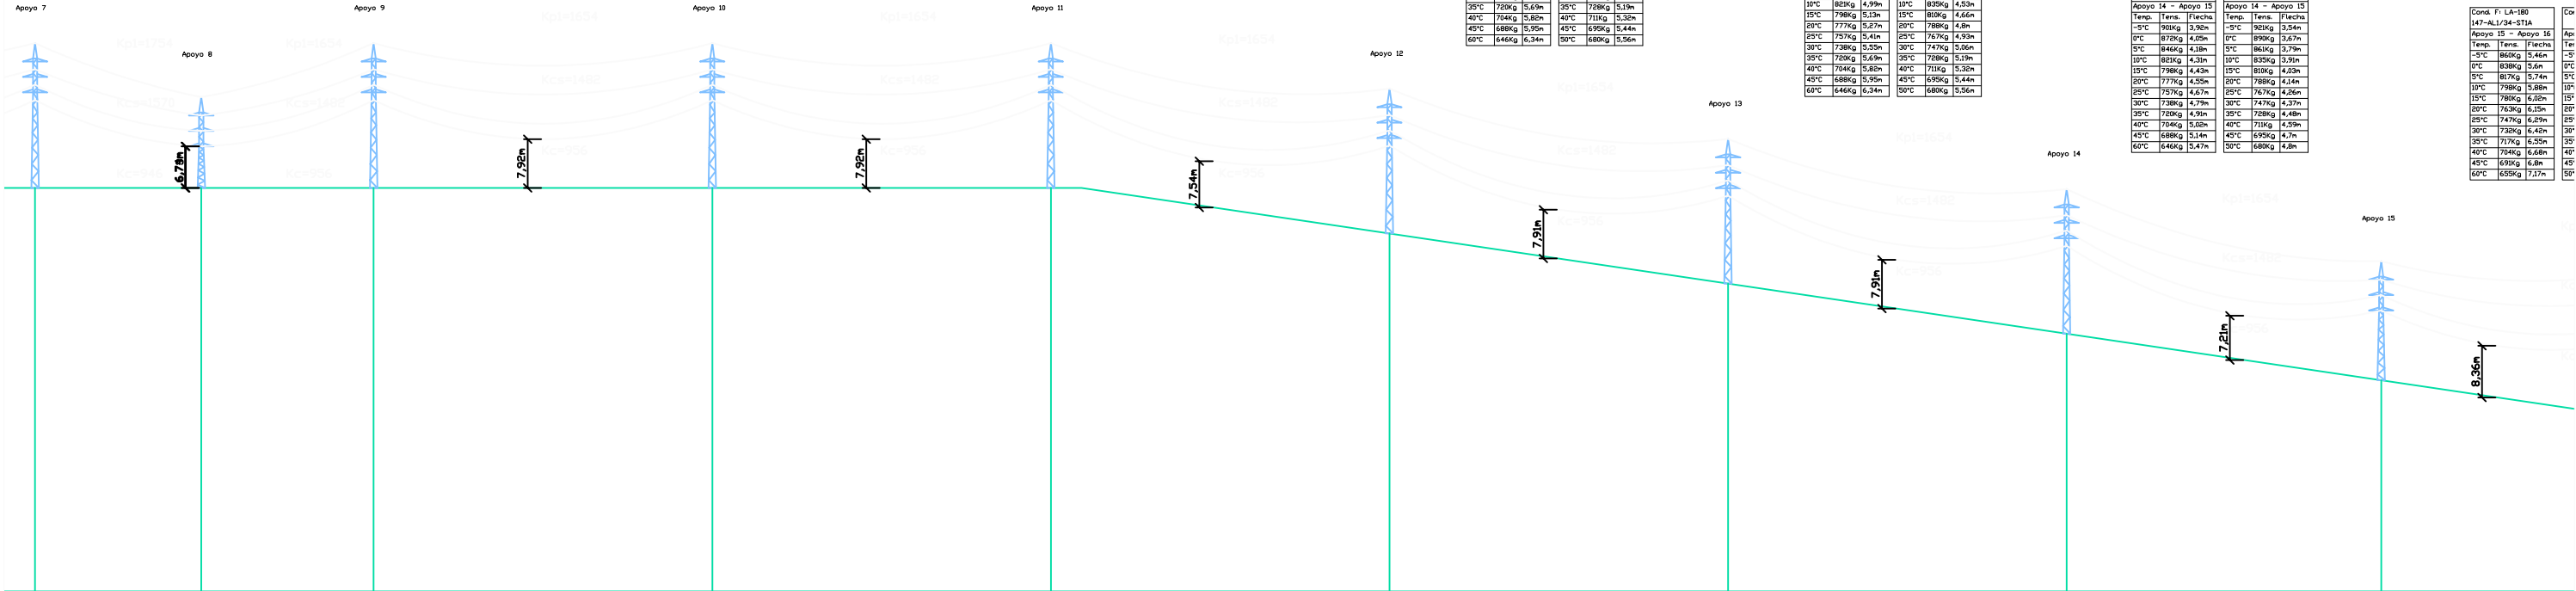
[illegible]

The diagram illustrates a sequence of 10 numbered boxes (22-31) arranged horizontally. Each box is connected to the next by a curved line. Below each numbered box, there is another box, connected by a vertical line. The boxes are labeled as follows:

- Box 22: [Empty]
- Box 23: [Empty]
- Box 24: [Empty]
- Box 25: [Empty]
- Box 26: [Empty]
- Box 27: [Empty]
- Box 28: [Empty]
- Box 29: [Empty]
- Box 30: [Empty]
- Box 31: [Empty]

Below each numbered box, there is another box, connected by a vertical line. The boxes are labeled as follows:

- Box 22: [Empty]
- Box 23: [Empty]
- Box 24: [Empty]
- Box 25: [Empty]
- Box 26: [Empty]
- Box 27: [Empty]
- Box 28: [Empty]
- Box 29: [Empty]
- Box 30: [Empty]
- Box 31: [Empty]

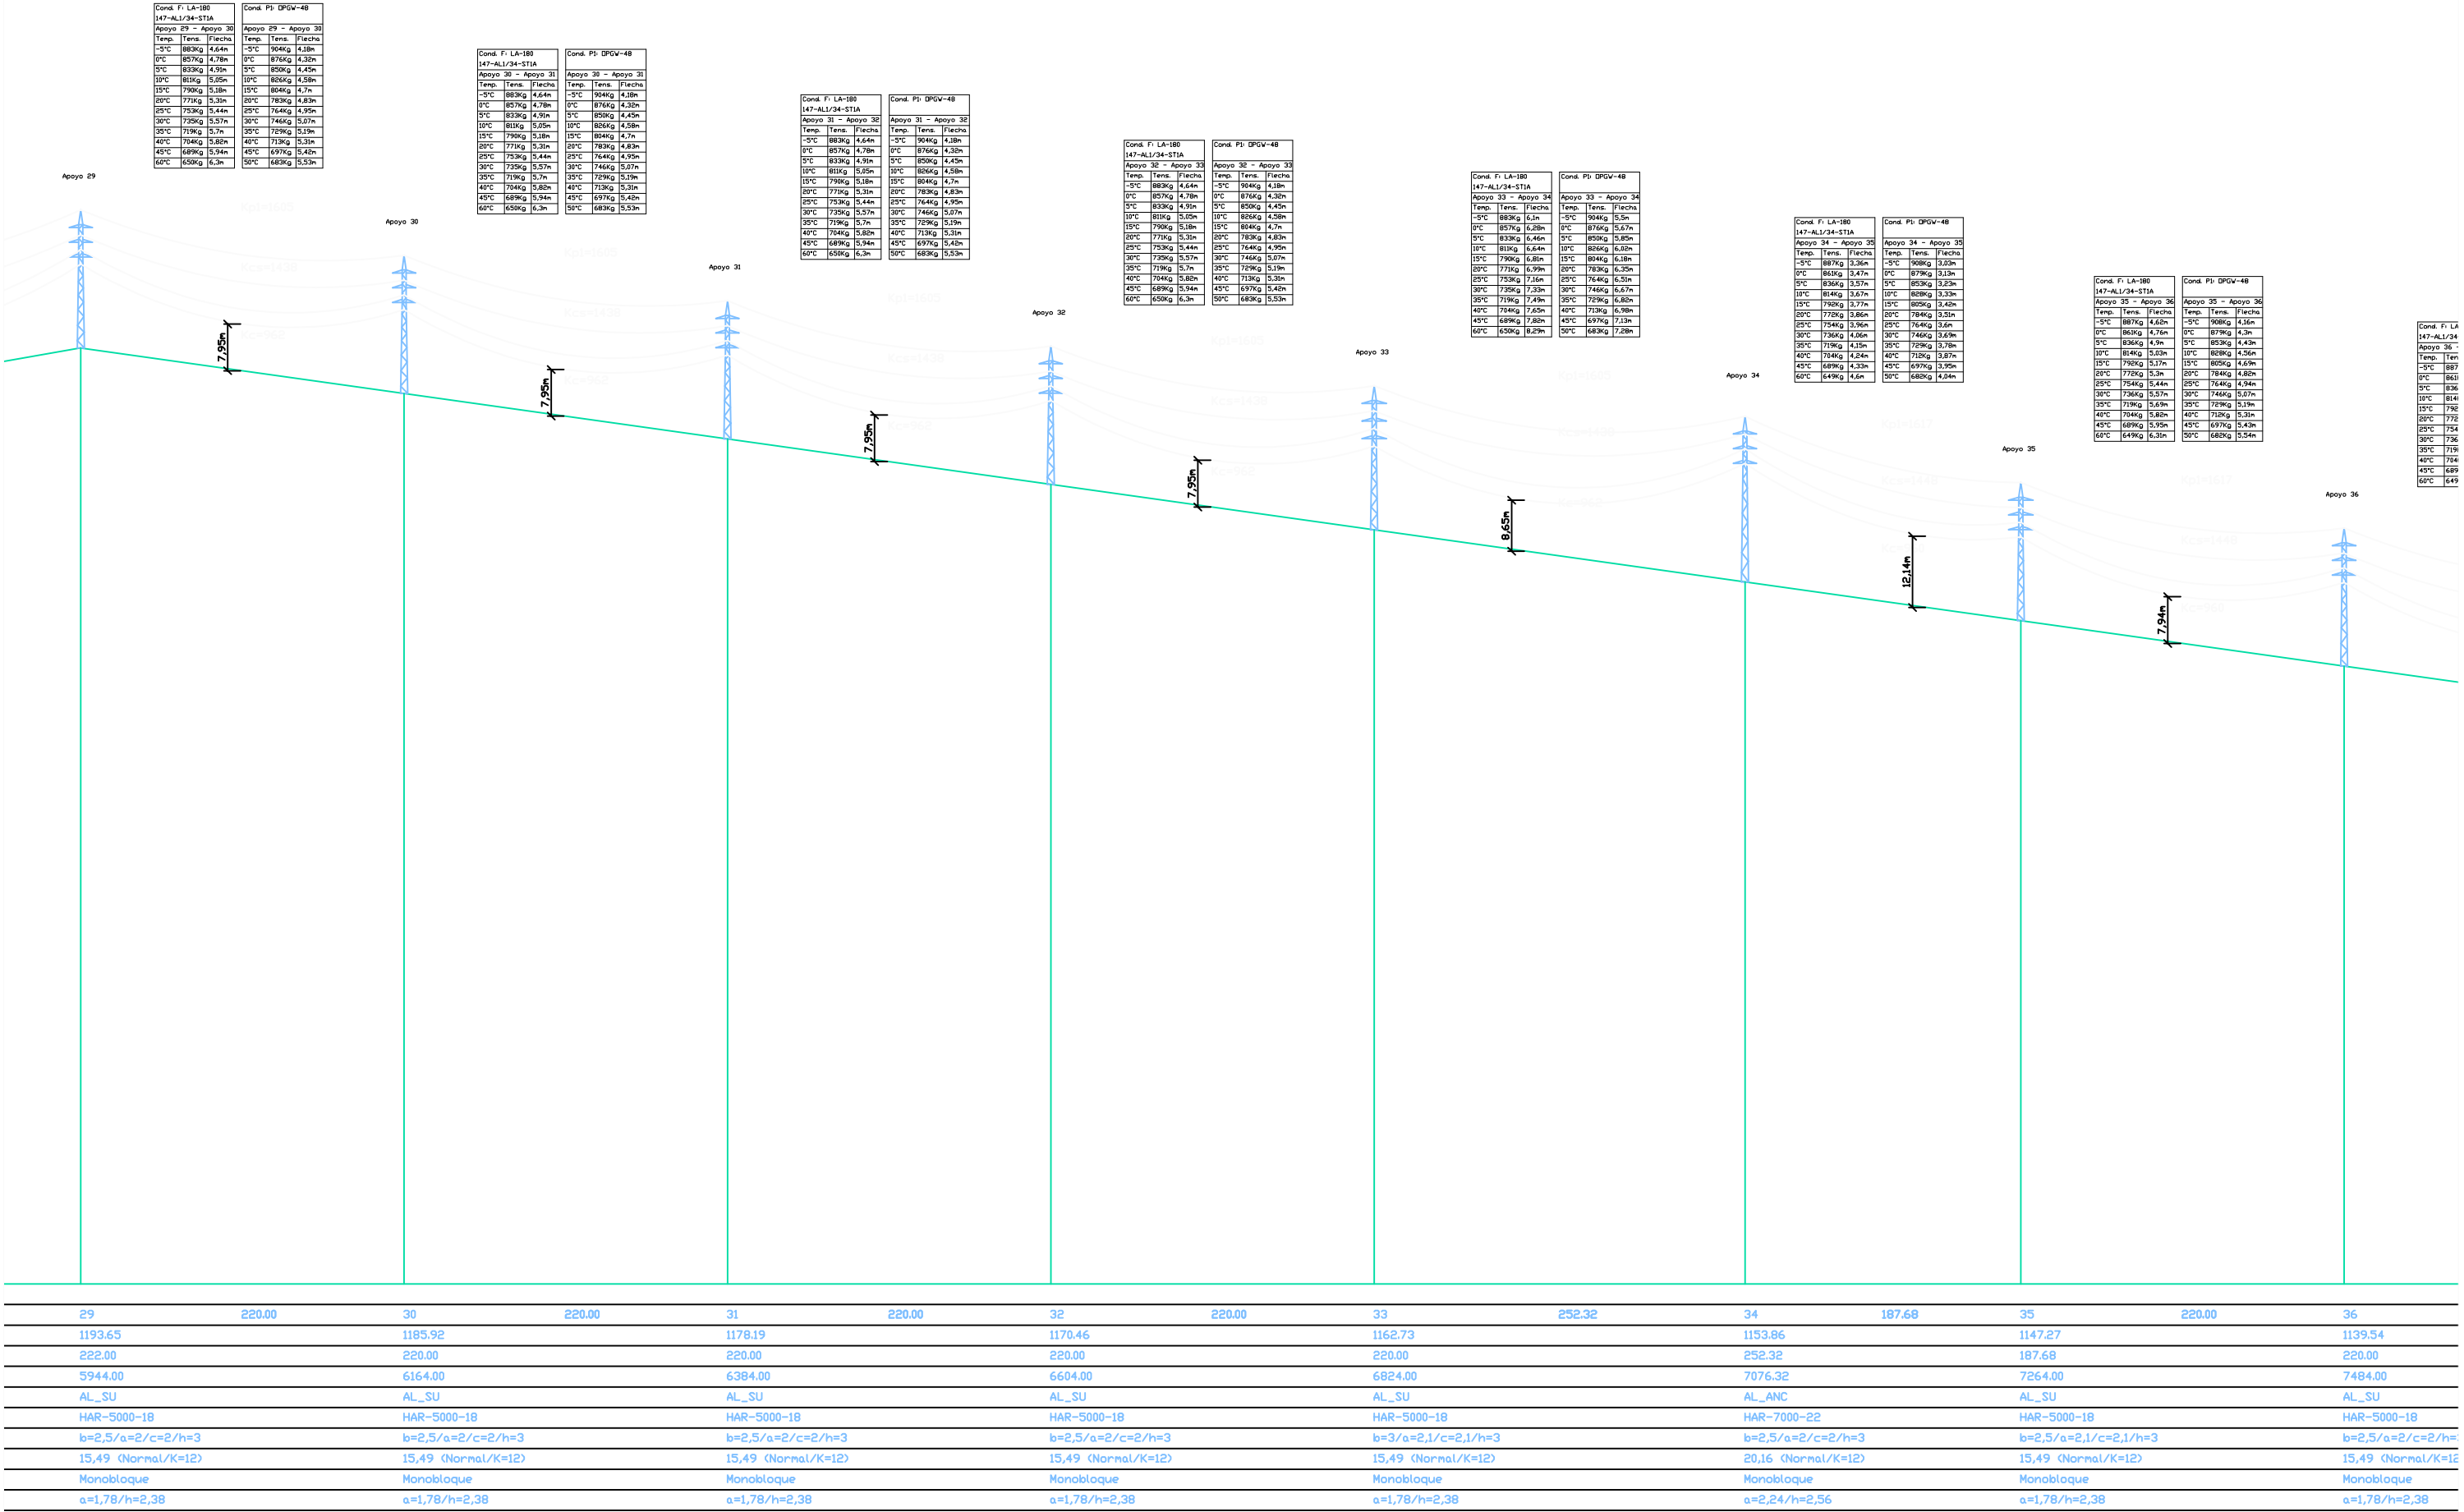

Cond. F. LA-180				Cond. Pt. DP6W-48			
147-AL/34-STIA				147-AL/34-STIA			
Apyro 37 - Apyro 38				Apyro 37 - Apyro 38			
Temp.	Tens.	Flecha		Temp.	Tens.	Flecha	
-5°C	867kg	4,62m		-5°C	908kg	4,16m	
0°C	861kg	4,76m		0°C	879kg	4,3m	
5°C	836kg	4,9m		5°C	853kg	4,43m	
10°C	814kg	5,03m		10°C	828kg	4,56m	
15°C	792kg	5,17m		15°C	805kg	4,69m	
20°C	772kg	5,3m		20°C	784kg	4,82m	
25°C	754kg	5,44m		25°C	764kg	4,94m	
30°C	736kg	5,57m		30°C	746kg	5,07m	
35°C	719kg	5,69m		35°C	729kg	5,19m	
40°C	704kg	5,82m		40°C	712kg	5,31m	
45°C	689kg	5,95m		45°C	697kg	5,43m	
50°C	674kg	6,09m		50°C	682kg	5,54m	

Cond. F: LA-180				Cond. P: DPW+48			
147-AL/34-STIA							
Apoyo 38		Apoyo 39		Apoyo 38		Apoyo 39	
Temp.	Tens.	Flecha		Temp.	Tens.	Flecha	
-5°C	867kg	4,62m		-5°C	908kg	4,16m	
0°C	881kg	4,76m		0°C	879kg	4,3m	
5°C	836kg	4,9m		5°C	853kg	4,43m	
10°C	814kg	5,03m		10°C	828kg	4,56m	
15°C	792kg	5,17m		15°C	805kg	4,69m	
20°C	772kg	5,3m		20°C	784kg	4,82m	
25°C	754kg	5,44m		25°C	764kg	4,94m	
30°C	736kg	5,57m		30°C	746kg	5,07m	
35°C	719kg	5,69m		35°C	729kg	5,19m	
40°C	704kg	5,82m		40°C	710kg	5,31m	
45°C	689kg	5,95m		45°C	697kg	5,43m	
50°C	674kg	6,13m		50°C	682kg	5,54m	


Cond. F. LA-180				Cond. Fp. DPGV-48			
147-141/34-ST1A							
Apoyno 39		Apoyno 40		Apoyno 39		Apoyno 40	
Temp.	Tens.	Flecha		Temp.	Tens.	Flecha	
-5°C	887kg	4,62m		-5°C	908kg	4,16m	
0°C	861kg	4,76m		0°C	879kg	4,26m	
5°C	836kg	4,64m		5°C	853kg	4,43m	
10°C	814kg	5,03m		10°C	828kg	4,56m	
15°C	792kg	5,17m		15°C	805kg	4,69m	
20°C	772kg	5,3m		20°C	784kg	4,82m	
25°C	754kg	5,44m		25°C	764kg	4,94m	
30°C	736kg	5,57m		30°C	746kg	5,07m	
35°C	719kg	5,69m		35°C	729kg	5,19m	
40°C	704kg	5,82m		40°C	712kg	5,31m	
45°C	689kg	5,95m		45°C	697kg	5,43m	
50°C	674kg	6,31m		50°C	682kg	5,54m	

Cond. F: LA-180			Cond. P1: DP6V-48		
147-141/34-STIA					
Apyoyo 40		Apyoyi 41	Apyoyo 40		Apyoyi 41
Temp.	Tens.	Flecha	Temp.	Tens.	Flecha
-5°C	887kg	4.62m	-5°C	908kg	4.16m
0°C	846kg	4.76m	0°C	879kg	4.3m
5°C	836kg	4.9m	5°C	853kg	4.43m
10°C	814kg	5.03m	10°C	828kg	4.56m
15°C	796kg	5.17m	15°C	805kg	4.69m
20°C	772kg	5.3m	20°C	784kg	4.82m
25°C	754kg	5.44m	25°C	764kg	4.94m
30°C	736kg	5.57m	30°C	746kg	5.07m
35°C	719kg	5.69m	35°C	729kg	5.19m
40°C	704kg	5.82m	40°C	712kg	5.31m
45°C	689kg	5.95m	45°C	697kg	5.43m
50°C	674kg	6.09m	50°C	682kg	5.54m

Cond. F: LA-180				Cond. Pt: DP6V-48			
[47-AL/34-STIA]							
Apyro 41		Apyro 42		Apyro 41		Apyro 42	
Temp.	Tens.	Fliecha		Temp.	Tens.	Fliecha	
-5°C	867K	4,62n		-5°C	908K	4,16n	
0°C	861K	4,76n		0°C	879K	4,3n	
5°C	836K	4,39n		5°C	853K	4,43n	
10°C	814K	5,03n		10°C	828K	4,56n	
15°C	798K	5,17n		15°C	805K	4,69n	
20°C	778K	5,3n		20°C	784K	4,82n	
25°C	754K	5,44n		25°C	764K	4,94n	
30°C	736K	5,57n		30°C	746K	5,07n	
35°C	719K	5,69n		35°C	729K	5,19n	
40°C	704K	5,82n		40°C	718K	5,31n	
45°C	689K	5,95n		45°C	697K	5,43n	
50°C	649K	6,31n		50°C	680K	5,54n	

Const. F: LA-180				Const. P1: DPGW-48			
147-AL/34-JTA							
Apoxy 42		Apoxy 43		Apoxy 42		Apoxy 43	
Temp.	Tens.	Flex.		Temp.	Tens.	Flex.	
-5°C	8876g	4.62g		-5°C	9089g	4.16g	
0°C	8639g	4.76g		0°C	8779g	4.3g	
5°C	8369g	4.9g		5°C	8535g	4.43g	
10°C	8149g	5.03g		10°C	8288g	4.56g	
15°C	7929g	5.17g		15°C	8059g	4.68g	
20°C	7729g	5.3g		20°C	7844g	4.82g	
25°C	7549g	5.44g		25°C	7648g	4.94g	
30°C	7369g	5.57g		30°C	7462g	5.07g	
35°C	7199g	5.69g		35°C	7279g	5.19g	
40°C	7049g	5.82g		40°C	7129g	5.31g	
45°C	6899g	5.95g		45°C	6979g	5.43g	
50°C	6749g	6.09g		50°C	6829g	5.54g	

Temp.	Tens.
-5°C	887Kg
0°C	861Kg
5°C	836Kg
10°C	814Kg
15°C	792Kg
20°C	772Kg
25°C	754Kg
30°C	736Kg
35°C	719Kg
40°C	704Kg
45°C	689Kg
50°C	649Kg

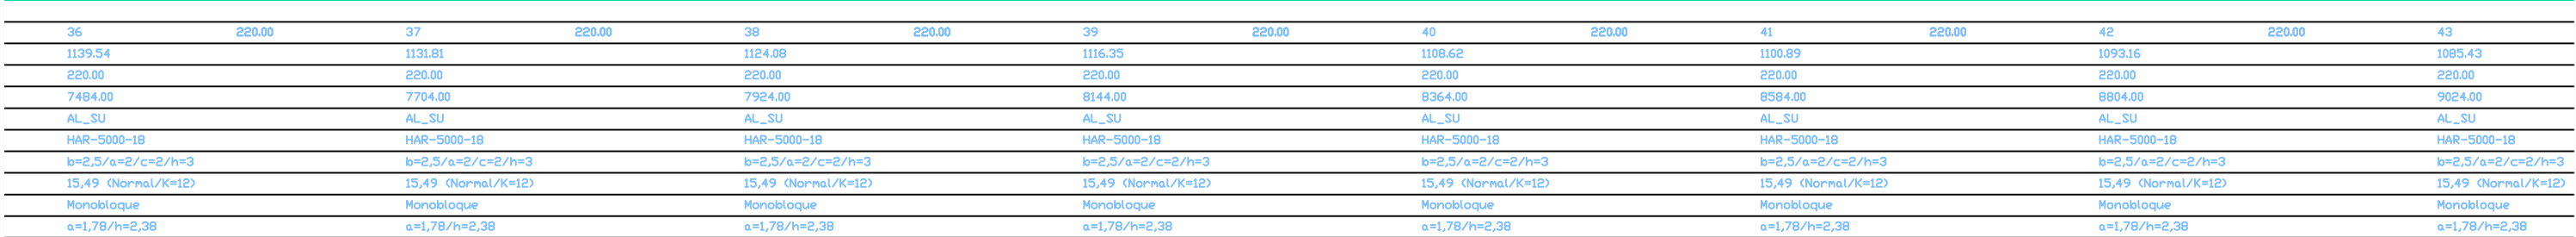

Cond. F: LA-180	Cond. P: DPGV-48
147-AL1/34-ST1A	Apoyo 40 - Apoyo 41
Temp. Tens. Flecha	Temp. Tens. Flecha
-5°C 887Kg 4,62m	-5°C 908Kg 4,16m
0°C 863Kg 4,76m	0°C 879Kg 4,3m
5°C 836Kg 4,9m	5°C 852Kg 4,43m
10°C 814Kg 5,03m	10°C 828Kg 4,56m
15°C 792Kg 5,17m	15°C 805Kg 4,69m
20°C 772Kg 5,3m	20°C 784Kg 4,82m
25°C 754Kg 5,44m	25°C 764Kg 4,94m
30°C 736Kg 5,57m	30°C 746Kg 5,07m
35°C 719Kg 5,69m	35°C 729Kg 5,19m
40°C 704Kg 5,82m	40°C 712Kg 5,31m
45°C 689Kg 5,95m	45°C 697Kg 5,43m
50°C 674Kg 6,07m	50°C 682Kg 5,54m

Cond. F: LA-180	Cond. P: DPGV-48
147-AL1/34-ST1A	Apoyo 41 - Apoyo 42
Temp. Tens. Flecha	Temp. Tens. Flecha
-5°C 887Kg 4,62m	-5°C 908Kg 4,16m
0°C 863Kg 4,76m	0°C 879Kg 4,3m
5°C 836Kg 4,9m	5°C 852Kg 4,43m
10°C 814Kg 5,03m	10°C 828Kg 4,56m
15°C 792Kg 5,17m	15°C 805Kg 4,69m
20°C 772Kg 5,3m	20°C 784Kg 4,82m
25°C 754Kg 5,44m	25°C 764Kg 4,94m
30°C 736Kg 5,57m	30°C 746Kg 5,07m
35°C 719Kg 5,69m	35°C 729Kg 5,19m
40°C 704Kg 5,82m	40°C 712Kg 5,31m
45°C 689Kg 5,95m	45°C 697Kg 5,43m
50°C 674Kg 6,07m	50°C 682Kg 5,54m


Cond. F: LA-180	Cond. P: DPGV-48
147-AL1/34-ST1A	Apoyo 42 - Apoyo 43
Temp. Tens. Flecha	Temp. Tens. Flecha
-5°C 887Kg 4,62m	-5°C 908Kg 4,16m
0°C 863Kg 4,76m	0°C 879Kg 4,3m
5°C 836Kg 4,9m	5°C 852Kg 4,43m
10°C 814Kg 5,03m	10°C 828Kg 4,56m
15°C 792Kg 5,17m	15°C 805Kg 4,69m
20°C 772Kg 5,3m	20°C 784Kg 4,82m
25°C 754Kg 5,44m	25°C 764Kg 4,94m
30°C 736Kg 5,57m	30°C 746Kg 5,07m
35°C 719Kg 5,69m	35°C 729Kg 5,19m
40°C 704Kg 5,82m	40°C 712Kg 5,31m
45°C 689Kg 5,95m	45°C 697Kg 5,43m
50°C 674Kg 6,07m	50°C 682Kg 5,54m

Cond. F: LA-180	Cond. P: DPGV-48
147-AL1/34-ST1A	Apoyo 43 - Apoyo 44
Temp. Tens. Flecha	Temp. Tens. Flecha
-5°C 887Kg 4,62m	-5°C 908Kg 4,16m
0°C 863Kg 4,76m	0°C 879Kg 4,3m
5°C 836Kg 4,9m	5°C 852Kg 4,43m
10°C 814Kg 5,03m	10°C 828Kg 4,56m
15°C 792Kg 5,17m	15°C 805Kg 4,69m
20°C 772Kg 5,3m	20°C 784Kg 4,82m
25°C 754Kg 5,44m	25°C 764Kg 4,94m
30°C 736Kg 5,57m	30°C 746Kg 5,07m
35°C 719Kg 5,69m	35°C 729Kg 5,19m
40°C 704Kg 5,82m	40°C 712Kg 5,31m
45°C 689Kg 5,95m	45°C 697Kg 5,43m
50°C 674Kg 6,07m	50°C 682Kg 5,54m

Cond. F: LA-180	Cond. P: DPGV-48
147-AL1/34-ST1A	Apoyo 44 - Apoyo 45
Temp. Tens. Flecha	Temp. Tens. Flecha
-5°C 887Kg 4,62m	-5°C 908Kg 4,16m
0°C 863Kg 4,76m	0°C 879Kg 4,3m
5°C 836Kg 4,9m	5°C 852Kg 4,43m
10°C 814Kg 5,03m	10°C 828Kg 4,56m
15°C 792Kg 5,17m	15°C 805Kg 4,69m
20°C 772Kg 5,3m	20°C 784Kg 4,82m
25°C 754Kg 5,44m	25°C 764Kg 4,94m
30°C 736Kg 5,57m	30°C 746Kg 5,07m
35°C 719Kg 5,69m	35°C 729Kg 5,19m
40°C 704Kg 5,82m	40°C 712Kg 5,31m
45°C 689Kg 5,95m	45°C 697Kg 5,43m
50°C 674Kg 6,07m	50°C 682Kg 5,54m

Cond. F: LA-180	Cond. P: DPGV-48
147-AL1/34-ST1A	Apoyo 45 - Apoyo 46
Temp. Tens. Flecha	Temp. Tens. Flecha
-5°C 887Kg 4,62m	-5°C 908Kg 4,16m
0°C 863Kg 4,76m	0°C 879Kg 4,3m
5°C 836Kg 4,9m	5°C 852Kg 4,43m
10°C 814Kg 5,03m	10°C 828Kg 4,56m
15°C 792Kg 5,17m	15°C 805Kg 4,69m
20°C 772Kg 5,3m	20°C 784Kg 4,82m
25°C 754Kg 5,44m	25°C 764Kg 4,94m
30°C 736Kg 5,57m	30°C 746Kg 5,07m
35°C 719Kg 5,69m	35°C 729Kg 5,19m
40°C 704Kg 5,82m	40°C 712Kg 5,31m
45°C 689Kg 5,95m	45°C 697Kg 5,43m
50°C 674Kg 6,07m	50°C 682Kg 5,54m

Cond. F: LA-180	Cond. P: DPGV-48
147-AL1/34-ST1A	Apoyo 46 - Apoyo 47
Temp. Tens. Flecha	Temp. Tens. Flecha
-5°C 887Kg 4,62m	-5°C 908Kg 4,16m
0°C 863Kg 4,76m	0°C 879Kg 4,3m
5°C 836Kg 4,9m	5°C 852Kg 4,43m
10°C 814Kg 5,03m	10°C 828Kg 4,56m
15°C 792Kg 5,17m	15°C 805Kg 4,69m
20°C 772Kg 5,3m	20°C 784Kg 4,82m
25°C 754Kg 5,44m	25°C 764Kg 4,94m
30°C 736Kg 5,57m	30°C 746Kg 5,07m
35°C 719Kg 5,69m	35°C 729Kg 5,19m
40°C 704Kg 5,82m	40°C 712Kg 5,31m
45°C 689Kg 5,95m	45°C 697Kg 5,43m
50°C 674Kg 6,07m	50°C 682Kg 5,54m

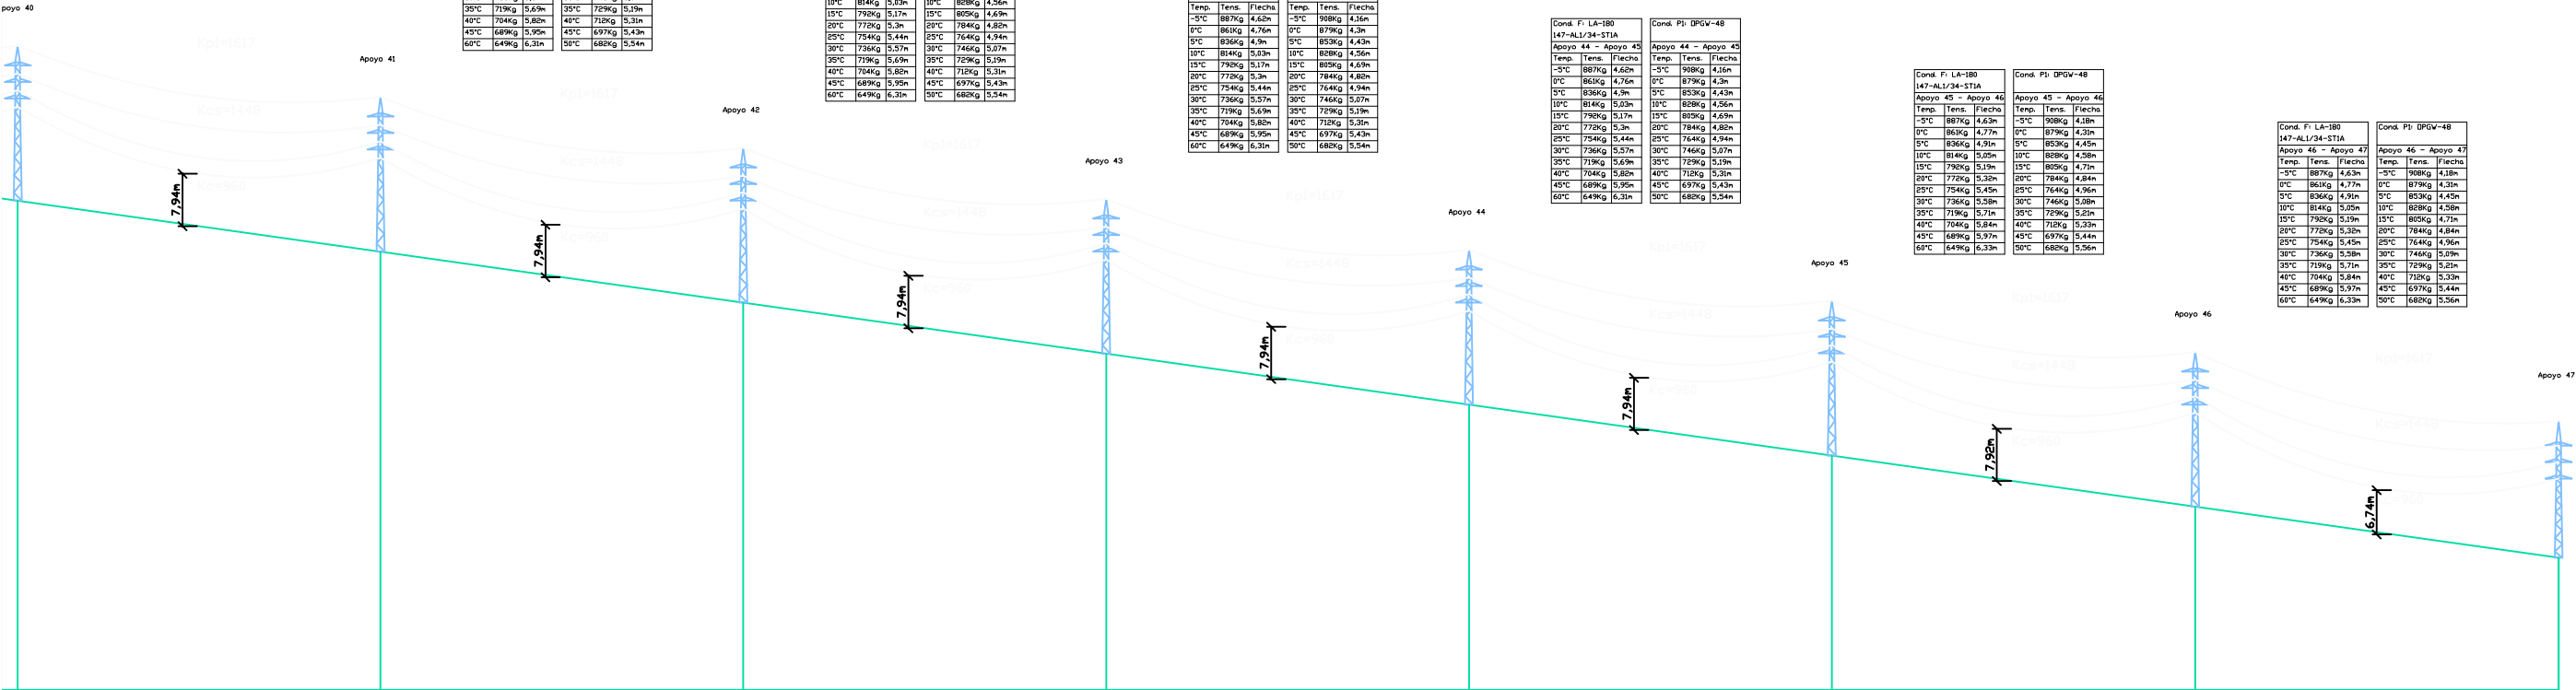

40	220.00	41	220.00	42	220.00	43	220.00	44	220.00	45	220.36	46	220.36	47
1108.62		1100.89		1093.16		1085.43		1077.70		1069.97		1062.22		1054.48
220.00		220.00		220.00		220.00		220.00		220.00		220.36		220.36
8364.00		8584.00		8804.00		9024.00		9244.00		9464.00		9684.36		9904.73
AL_SU		AL_SU		AL_SU		AL_SU		AL_SU		AL_SU		AL_SU		FL
HAR-5000-18		HAR-5000-18		HAR-5000-18		HAR-5000-18		HAR-5000-18		HAR-5000-18		HAR-5000-18		AGR-18000-12
b=2,5/a=2/c=2/h=3		b=2,5/a=2/c=2/h=3		b=2,5/a=2/c=2/h=3		b=2,5/a=2/c=2/h=3		b=2,5/a=2/c=2/h=3		b=2,5/a=2/c=2/h=3		b=2,5/a=2/c=2/h=3		b=2,5/a=2/c=2/h=3,7
15,49 (Normal/K=12)		15,49 (Normal/K=12)		15,49 (Normal/K=12)		15,49 (Normal/K=12)		15,49 (Normal/K=12)		15,49 (Normal/K=12)		15,49 (Normal/K=12)		12
Monobloque		Monobloque		Monobloque		Monobloque		Monobloque		Monobloque		Monobloque		Tetrabloque (Cusadas con curva)
a=1,78/h=2,38		a=1,78/h=2,38		a=1,78/h=2,38		a=1,78/h=2,38		a=1,78/h=2,38		a=1,78/h=2,38		a=1,78/h=2,38		a=1,55/h=0,3/h=3,35/b=1,2



