

Exercício 8


Grupo:

Lucas Rocha Oliveira

Luiz Felipe Melo Oliveira

Luiz Guilherme Oliveira Pires

Otávio Gomes Calazans

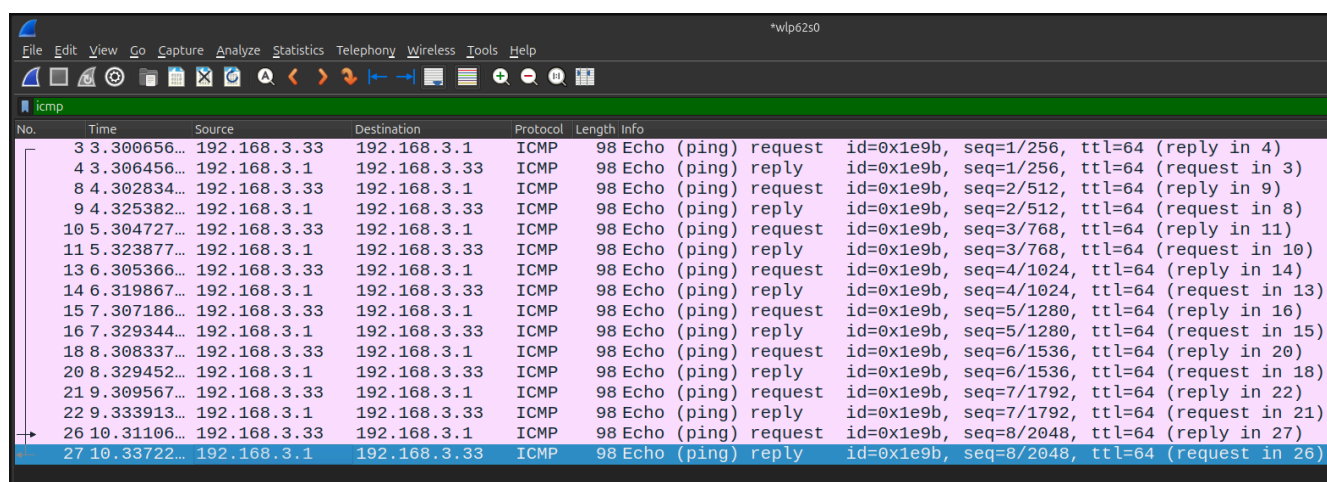

The image shows a Wireshark packet capture of ICMP Echo (ping) traffic. The interface includes a menu bar (File, Edit, View, Go, Capture, Analyze, Statistics, Telephony, Wireless, Tools, Help), a toolbar, and a packet list pane. The packet list pane shows 27 packets, all of which are ICMP Echo (ping) requests or replies. The source and destination IP addresses are 192.168.3.33 and 192.168.3.1. The protocol is ICMP, and the length is 98 bytes. The info column shows the sequence number and TTL for each packet.

No.	Time	Source	Destination	Protocol	Length	Info
3	3.300656...	192.168.3.33	192.168.3.1	ICMP	98	Echo (ping) request id=0x1e9b, seq=1/256, ttl=64 (reply in 4)
4	3.306456...	192.168.3.1	192.168.3.33	ICMP	98	Echo (ping) reply id=0x1e9b, seq=1/256, ttl=64 (request in 3)
8	4.302834...	192.168.3.33	192.168.3.1	ICMP	98	Echo (ping) request id=0x1e9b, seq=2/512, ttl=64 (reply in 9)
9	4.325382...	192.168.3.1	192.168.3.33	ICMP	98	Echo (ping) reply id=0x1e9b, seq=2/512, ttl=64 (request in 8)
10	5.304727...	192.168.3.33	192.168.3.1	ICMP	98	Echo (ping) request id=0x1e9b, seq=3/768, ttl=64 (reply in 11)
11	5.323877...	192.168.3.1	192.168.3.33	ICMP	98	Echo (ping) reply id=0x1e9b, seq=3/768, ttl=64 (request in 10)
13	6.305366...	192.168.3.33	192.168.3.1	ICMP	98	Echo (ping) request id=0x1e9b, seq=4/1024, ttl=64 (reply in 14)
14	6.319867...	192.168.3.1	192.168.3.33	ICMP	98	Echo (ping) reply id=0x1e9b, seq=4/1024, ttl=64 (request in 13)
15	7.307186...	192.168.3.33	192.168.3.1	ICMP	98	Echo (ping) request id=0x1e9b, seq=5/1280, ttl=64 (reply in 16)
16	7.329344...	192.168.3.1	192.168.3.33	ICMP	98	Echo (ping) reply id=0x1e9b, seq=5/1280, ttl=64 (request in 15)
18	8.308337...	192.168.3.33	192.168.3.1	ICMP	98	Echo (ping) request id=0x1e9b, seq=6/1536, ttl=64 (reply in 20)
20	8.329452...	192.168.3.1	192.168.3.33	ICMP	98	Echo (ping) reply id=0x1e9b, seq=6/1536, ttl=64 (request in 18)
21	9.309567...	192.168.3.33	192.168.3.1	ICMP	98	Echo (ping) request id=0x1e9b, seq=7/1792, ttl=64 (reply in 22)
22	9.333913...	192.168.3.1	192.168.3.33	ICMP	98	Echo (ping) reply id=0x1e9b, seq=7/1792, ttl=64 (request in 21)
26	10.31106...	192.168.3.33	192.168.3.1	ICMP	98	Echo (ping) request id=0x1e9b, seq=8/2048, ttl=64 (reply in 27)
27	10.33722...	192.168.3.1	192.168.3.33	ICMP	98	Echo (ping) reply id=0x1e9b, seq=8/2048, ttl=64 (request in 26)

A captura monitora a troca de pacotes ICMP entre o notebook (192.168.3.33) e o gateway da rede (192.168.3.1) para verificar a conectividade local. O Wireshark registra de forma alternada os pacotes de solicitação (Echo request), enviados pela máquina, e os pacotes de resposta (Echo reply), devolvidos pelo roteador logo em seguida. Para manter a organização do fluxo, o protocolo utiliza o parâmetro id=0x1e9b para vincular todas as mensagens ao mesmo processo do terminal e o contador seq para numerar cada tentativa de envio em ordem cronológica. Como o destino está na mesma sub-rede, o valor de ttl=64 permanece intacto, servindo como indicador técnico de que a comunicação interna foi direta, rápida e livre de falhas de roteamento.