

circontrol

↑001



CirPark

SOLUTIONS FOR
EFFICIENT PARKING

Product Catalogue 2023

CirPark Platform

4

CirPark Software

Cosmos

iPark

10

Guidance System

Counting System

Find Your Car

LEDPark

32

Regulated LED lighting

Energy Efficiency

EVPark

38

EV Chargers

DLM

Park & Charge

PMS Integrations

CPMS Integrations



CirPark Platform

The CirPark Platform is a comprehensive solution that effectively manages various systems from a single centralized location, offering a range of features to parking operators. With its Scada software and third-party integration capabilities, it provides a multi-platform and mobile-oriented software infrastructure.

CirPark enables vehicle counting, parking guidance systems, and a convenient "find your car" feature from iPark. It also incorporates regulated LED lighting and energy-efficient solutions from LEDPark, along with EV chargers, Park&Charge options, and integrations with Parking Management Systems and Charge Point Management Systems from EVPark. This unique platform significantly enhances parking mobility, illumination, and security while providing comprehensive e-mobility solutions.

iPark

Intelligent Parking Guidance System including Single Space Detection and/or Area & Level Counting, Find your Car solution and Outdoor Guidance.



Guidance System



Counting System



Find Your Car



Video Surveillance

LEDPark

Efficient and low consumption Led Lighting System including Lighting Regulation and Energy Monitoring System (EMS) for Parkings.



Led Park



Energy Efficiency

EVPark

Electric Vehicle Charging System for Indoor and Outdoor Parkings.



Electric vehicle
chargers



OCPP



DLM



Park&Charge



Parking
Management
System
integration



Charge
Point
Operator
integration



CirPark Platform

The CirPark Platform is a comprehensive solution that centrally manages various systems, benefiting parking operators. With Scada software and third-party integration, it offers a mobile-oriented infrastructure. CirPark includes vehicle counting, parking guidance, and "find your car" features. It integrates LEDPark's LED lighting and energy-efficient solutions, as well as EVPark's EV chargers and integrations with Parking and Charge Point Management Systems. This platform enhances parking mobility, illumination, security, and e-mobility solutions.

LOCAL PLATFORM



**CirPark Scada
Software**



XML API

Application Protocol Interface
open for integrators.

CLOUD PLATFORM



COSMOS
Cloud based Platform



COSMOS API

API for integrators/operators



CirPark Software

CirPark Dynamic Software offers a real-time management of all Efficient Parking products which are iPark (counting, indoor/outdoor guidance and vehicle localization), LEDPark (regulated lighting control and energy efficiency) and EVPark (control of electric vehicle charging equipments).



CirPark Scada Software

CirPark Scada Software allows real-time management of all Cirpark products:

iPark: counting, indoor/outdoor guidance and vehicle location.

LEDPark: regulated lighting control and energy efficiency.

EVPark: control of electric vehicle charging equipments.

It allows controlling the occupation, introducing a map of the installation, and creating visualization screens of the occupancy, crossing zones, statistics, reports and logic of operation and alarms.

Multiclient and cross-platform software. Connection via multiplatform web browser or through Windows O.S. program. Integration via XML API. Mail server and RSS. Monitoring of IP cameras. Integration and monitoring of third party system using API. License for unlimited number of parking spaces.





COSMOS

Use the cosmos API to create, customize, and deploy your own mobile app.




COSMOS

Cosmos is a cloud-based platform that collects data to monitor and report on a range of Electric Vehicle charging points.

Cloud API

API for integrators / operators

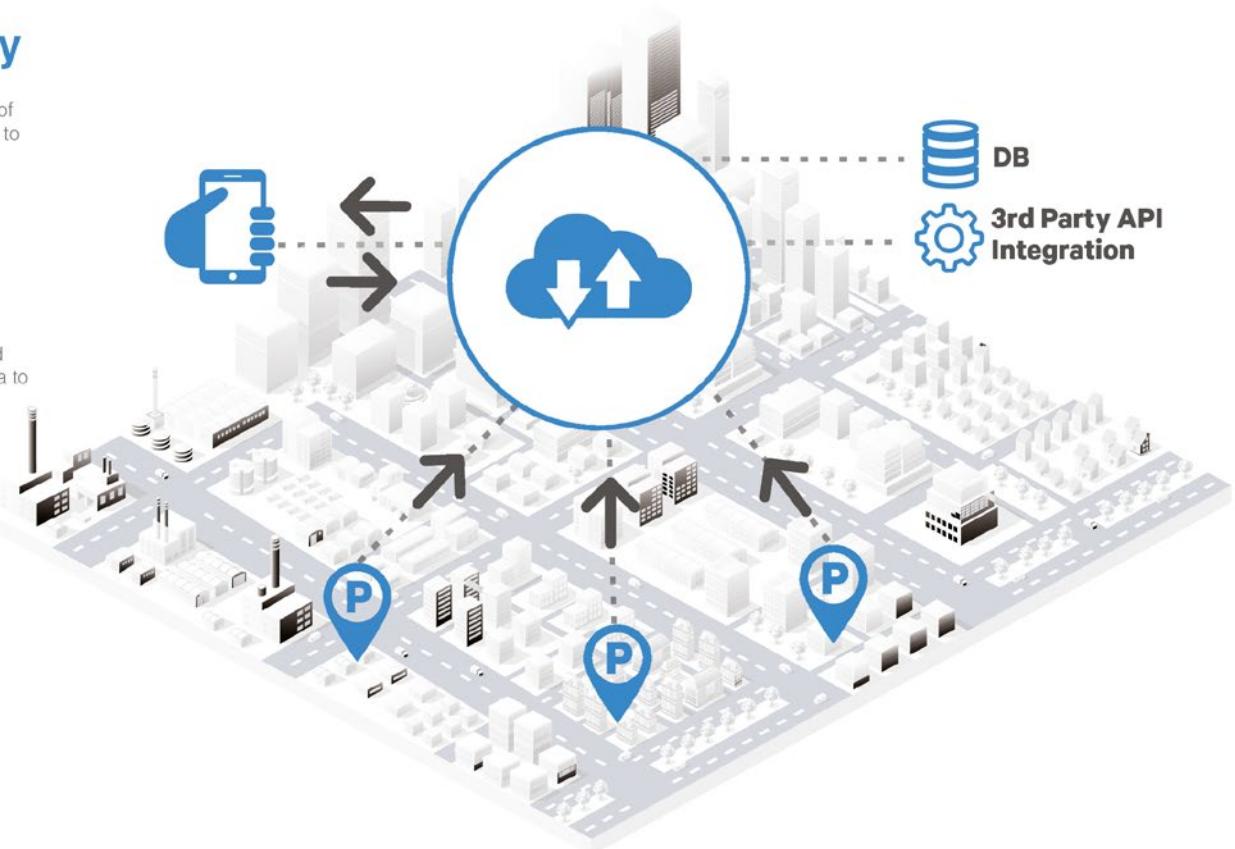

With CirCloud Platform you can access and manage data received from all car parks that use Circontrol technology.



iPark

iPark is one of the most impressive and long-lasting systems on the market for Guidance, Find Your Car and Counting Systems. Integrated within the CirPark Platform, it becomes a powerful management tool that optimises the traffic in car parks and provides user satisfaction, giving them the information they need, when they need it. Operators, on the other hand, have an excellent tool to gain the loyalty of their customers, optimise traffic and occupancy, and reduce maintenance and operation.



Guidance System

Indoor/Outdoor Dynamic Guidance system that manages the user information in order to optimise the occupancy and traffic of the parking facilities. Ultimate technology sensors and panels, plug&play and long-lasting. Worldwide product range oriented.



Counting System

Level & Area counting system with full range of detectors and panel display information for Indoor & Outdoor parking facilities.



Find Your Car

Powerful system able to provide car-finding solutions based on License Plate Recognition within lanes or in each parking space, offering users the location and route to their own car via the user application.

Guidance system

Optimises traffic in car parks and provides user satisfaction by giving them the information they need

Owner Benefits

- Customer Loyalty and Car Park reputation.
- Efficient Traffic and Occupancy management.
- Operational and Maintenance Reduction costs.
- Full remote control system with auto-pilot operability.
- Completely customizable Reports, RealTime Screens and HeatMaps.
- Manage Guidance, Illumination & EVChargers from one site.

Customer Benefits

- Less time spent on locating free parking spaces.
- Less stress and increased ease of parking.
- Easy Location of Handicapped, EVCharge & Reserved places.

Sensors



Displays



Control

Converter
INDOOR/ OUTDOOR



Server
INDOOR/ OUTDOOR



Accessories

License
INDOOR/ OUTDOOR



Wiring
INDOOR



Fixing Elements
INDOOR



iPark / Guidance System / Sensors

Front End Sensors

TRILOGY
460315T




Ultrasonic Sensor RGB LED indicator and LED lighting system for the detection and indication of the occupation status and for a courtesy lighting of the parking space. High brightness RGB LED indicator Power: 24/48 Vdc. Consumption: 5 W. Communications: RS-485. It has connector for Power+Data. Extended Temperature Range -20 to 60°C. Remote Configurable Firmware. Sensing distance and brightness intensity adjustable by software. Recommended installation height between 2 and 2.75 meters. IP54 Protection.

BILOGY
460313T



Ultrasonic Sensor and RGB LED indicator for the detection and indication of the occupancy status of the parking space. High brightness RGB LED indicator Power: 24/48 Vdc. Consumption: 1.5 W. Communications: RS-485. It has connector for Power+data. Extended Temperature Range -20 to 60°C. Remote Configurable Firmware. Sensing distance and brightness intensity adjustable by software. Recommended installation height between 2 and 2.75 meters. IP54 Protection.

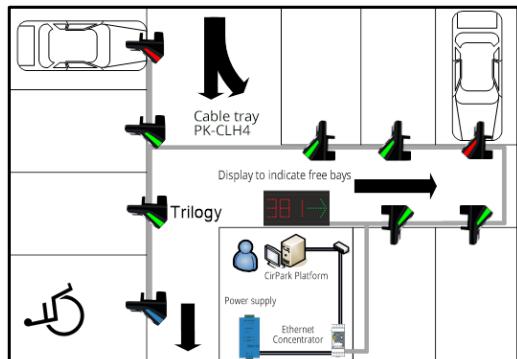

Centre of Bay Sensor+Indicator

SP3-RG
460128




Ultrasonic sensor and Indicator light on the same equipment, for the detection and indication of occupancy status of the parking space. Power+data Connector and external light connector. Power supply: 24 Vdc. Consumption: 1.2 W. Communications: RS-485. Extended Temperature Range -10 to 50°C. Remote Configurable Firmware. Recommended installation height between 2 and 3 meters. Detection distance adjustable by software. It has Red-Green LED indicator.

SP3-RB
460129



Ultrasonic sensor and Indicator light on the same equipment, for the detection and indication of occupancy status of the parking space. Power+data Connector and external light connector. Power supply: 24 Vdc. Consumption: 1.2 W. Communications: RS-485. Extended Temperature Range -10 to 50°C. Remote Configurable Firmware. Recommended installation height between 2 and 3 meters. Detection distance adjustable by software. It has Red-Blue indicator.

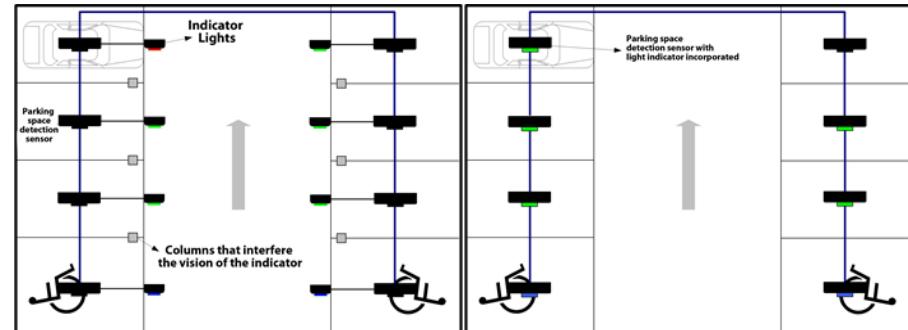

Camera based sensor

KSENSOR
460810



Camera-based sensor with a built-in indicator that arises from the need to integrate in a sensor device the image recognition technology thanks to the use of its two integrated cameras. Power Supply: DC 48V PoE Consumption: 5W Communications: Ethernet (RJ45) Extended Temperature Range -20 °C to +60 °C Remote configurable Firmware. Recommended Installation height between 2.2 and 2.5 meters. IP50 Protection.

KSENSOR C1
460810C1





Camera-based sensor with a built-in indicator that arises from the need to integrate in a sensor device the image recognition technology thanks to the use of it one integrated camera. Power Supply: DC 48V PoE Consumption: 5W Communications: Ethernet (RJ45) Extended Temperature Range -20 °C to +60 °C Remote configurable Firmware. Recommended Installation height between 2.2 and 2.5 meters. IP50 Protection.

OSCam
460833



Outdoor camera to detect vehicles in parking areas individually. Power Supply: DC 12V PoE Consumption: 8.5W Communications: Ethernet (RJ45) Extended Temperature Range -30 °C to +60 °C Remote configurable. Recommended Installation height: 20 meters. IP67 Protection.

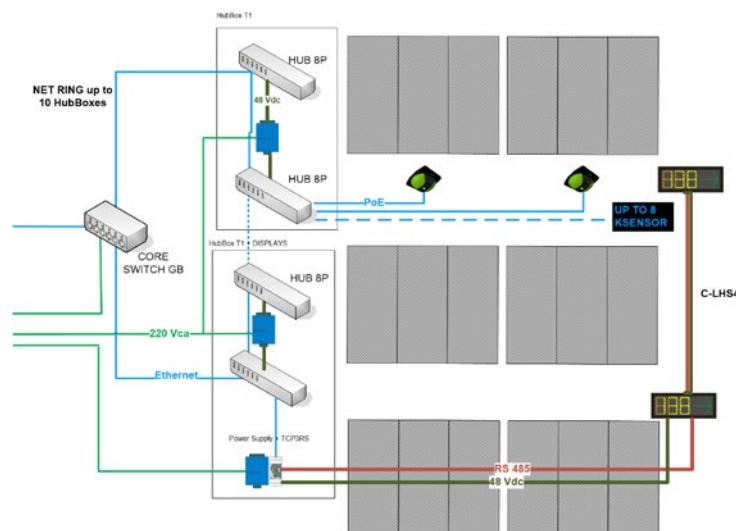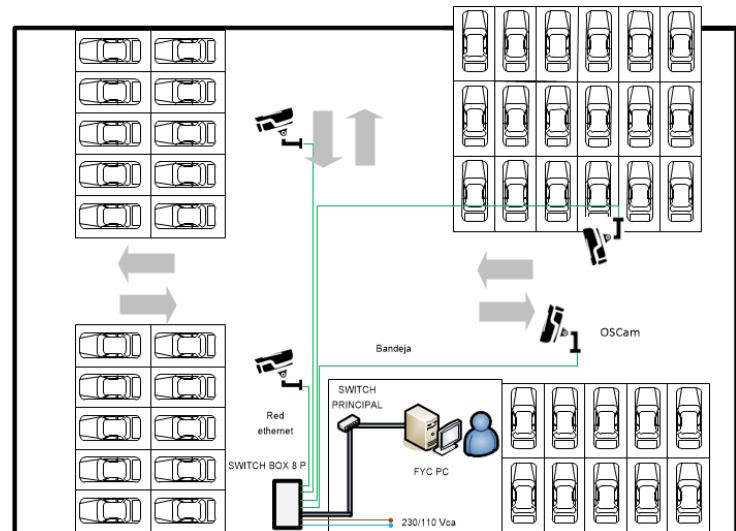

iPark / Guidance System/ Displays

VMS Indoor/Outdoor Displays

VMS-125-8M
460828



Indoor/Outdoor display in configuration [‘P’ symbol + 4 digits + Cross/Arrow]. RGB LED Matrix. Customizable Symbol by software. Text of 8 characters or scroll up to 15. Power: 24/48 Vdc. Consumption 22W. Communication: RS-485. Brightness intensity adjustable by software. Digit height 128 mm. Dimensions: 128 x 512 x 76 mm.

VMS-200-4M
460829



Indoor/Outdoor display in configuration [‘P’ symbol + 2 digits + Cross/Arrow]. RGB LED Matrix. Customizable Symbol by software. Text of 4 characters or scroll up to 15. Power: 24/48 Vdc. Consumption 35W (Max.) Communication: RS-485. Brightness intensity adjustable by software. Digit height 192 mm. Dimensions: 384 x 78 x 192 mm.

RGB Indoor Display

DX3-RGB
460666



Indoor display in mode: [3 digits + Cross/Arrow]. RGB LEDs with 120° angle. 8 predefined digit colors. Digit height 125 mm. Right / Left and Up / Down controllable arrow. Arrow: Green/Red and Cross: Red. Indication of free places and address. Display “FULL” or “000 Arrow/Cross”. Power supply: 48-24 Vdc. Maximum consumption: 18 W. Communications: RS-485. Dimensions: 404 x 165,23 x 39 mm. Stock on demand.

RGB Outdoor Display

DX3-RGB-O
460666-O



Outdoor display with [3 digits + Cross/Arrow]. RGB LEDs with 120° angle. 8 predefined digit colors. Digit height 125 mm. Right / Left and Up / Down controllable arrow. Arrow: Green/Red and Cross: Red. Indication of free places and address. Display “FULL” or “000 Arrow/Cross”. Power supply: 110-220 Vac +/- 15%. Maximum consumption: 18 W. Communications: RS-485. Dimensions: 404 x 165,23 x 39 mm. IP54. Stock available.

iPark / Guidance System / Outdoor Displays

Panel Parking

Display SPACES / FULL

460808-EN/ES/FR/
CAT



Display LED outdoor Text available in 4 languages: English (SPACES/FULL), French (LIBRE/COMPLET), Spanish (LIBRE/COMPLETO) and Catalan (LLIURE/COMPLET). LED 5mm. Colours: green/red. Digit height: 82mm. Input power: 230 V 50Hz.

Dimensions: 750 x 250 x 100mm

English 460808-EN
Spanish 460808-ES
French 460808-FR
Catalan 460808-CAT

Panel Parking 'P' with
SPACES / FULL display
460807-EN/ES/FR/
CAT



Panel Parking 'P' with OPEN/CLOSED display.

Structured made off 2 mm aluminium plate. Folded and welded, painted in textured black epoxy. Backlight by LED. Dimensions: 1200mm x 940mm x 130mm. Available in 4 languages: English (SPACES/FULL), French (LIBRE/COMPLET), Spanish (LIBRE/COMPLETO) and Catalan (LLIURE/COMPLET). 6mm front antivandal polycarbonate with translucent vinyl labelling. Window with display visualization and solar protection film.


English 460807-EN
Spanish 460807-ES
French 460807-FR
Catalan 460807-CAT

Panel Parking

460187

Panel with information about the capacity of the car park, per floor or overall. 2-3-4 digit displays.

Panel with information about the capacity of the car park, per floor or overall. 2-3-4 digit displays. Advanced, Basic and Outdoor Displays. Communication: RS-485. Digit colour: RGB or Red. Brightness intensity adjustable by software.

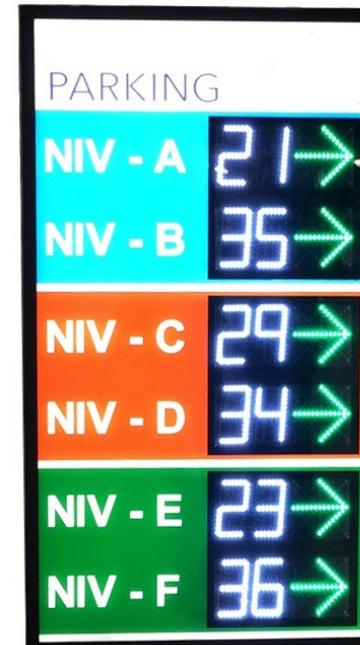

iPark / Guidance System / Control

Gateways & Controllers

TCP3RS

460803

Industrial RS-485 to TCP-IP Ethernet communication converter.
RS-232/RS-485 opto-isolated port. Input power: 230 V AC.
Consumption: 2 VA. DIN rail.



Software Licenses

CirPark Scada
610105

Car park management Scada software.
Full version.

CirPark Scada
Software 1000 Bays
610105-1K

Car park management Scada software.
Limited to 1000 parking spaces.

CirPark Scada
Software LT
610111

Car park management Scada software.
Limited to parkings with no Single Bay Sensor Guidance.

OSCamLicense
460832

License for OSCam outdoor camera.
One license for each parking space.

OSBayLicense
460832

License for outdoor parking spaces detected by an OSCam.
One license for each parking space.



Server with built-in license



Computer Equipment for CirPark systems. Standard PC. Intel Core i3 10th gen. 8GB RAM memory. 256 GB Solid-State Drive. O.S windows Win10 Pro. Customized work desktop, users, protections and language.

PK-CPU+Soft CirPark EN
610206-ENPK-CPU+Soft CirPark ES
610206-ESPK-CPU+Soft CirPark 1K EN
610206-1K-ENPK-CPU+Soft CirPark 1K ES
610206-1K-ESPK-CPU+Soft CirPark LT EN
610206-LT-ENPK-CPU+Soft CirPark LT ES
610206-LT-ES

Accessories

PK-TFT

460204



TFT 22" Wide Screen with high resolution

PK-SWITCH 8P

460205G

PK-SWITCH 16P

460206G



Gigabit Switch 8 ports 10/100/1000 Mbps

Gigabit Switch 16 ports 10/100/1000 Mbps

FYC-HUB8POE

460703



Ethernet Signal Concentrator for a maximum group of 48 parking spaces with 8 Ksensors. Includes an industrial PoE switch for the group of Ksensors.

PSC-240-24

200520



Switched power supply. Input power: 230 V AC. Output voltage: 24 V DC. Power: 240 W. DIN rail.

PSC-240-48

200526





Switched power supply. Input power: 230 V AC. Output voltage: 48 V DC. Power: 240 W. DIN rail.

PSC-480-48

460224



Switched power supply. Input power: 230 V AC. Output voltage: 48 V DC. Power: 480 W. DIN rail.

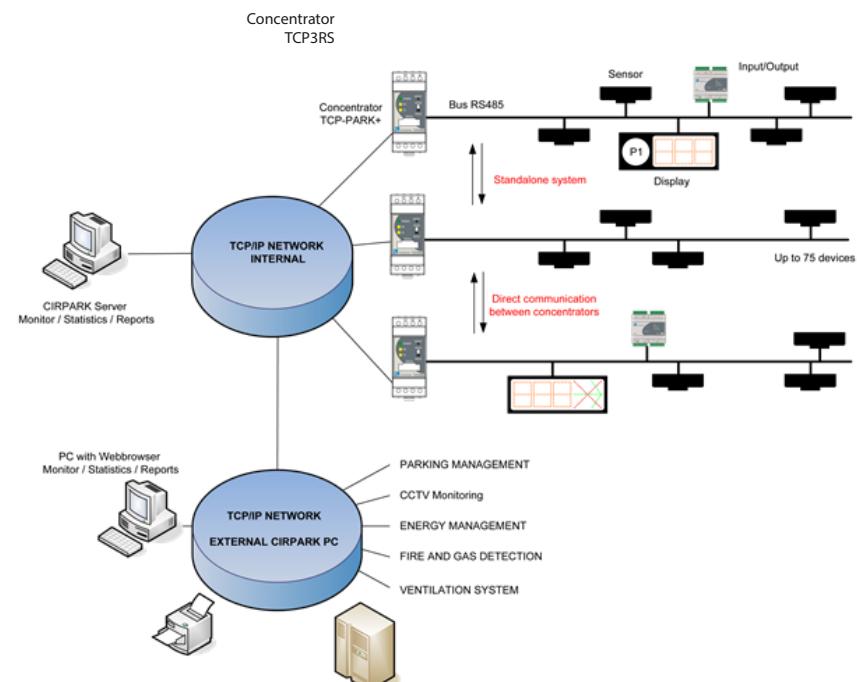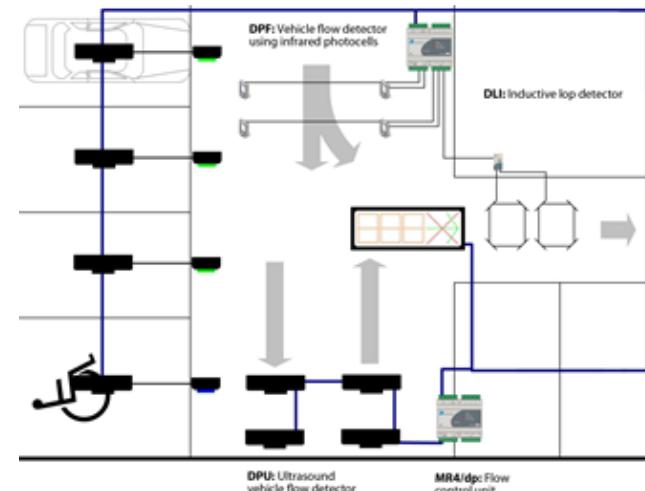

iPark / Guidance System / Accesories

Guidance Accesories

PK-CLIP-1K
460161

Sturdy clip for securing the SP series sensors and indicator lights.
For clamping in metal tray or pk-socket accessory. 1000 pcs bag



Fixings



PK-SOCKET -
KSENSOR
460285

Polycarbonate socket for Ksensor and Ksensor C1 pipe installations. 25-mm tube for ethernet cable.

PK-SOCKET BI
BIOLOGY/TRILOGY
460287



Polycarbonate socket for Biology and Trilogy pipe installations. 25-mm tube for connecting sensors.

PK-SOCKET
460159

Polycarbonate socket for SP3 and DPU pipe installations, 25-mm tube for connecting sensors and 20-mm tube for connecting the light indicator sensor.

PK-TPPx
460173



Black plastic accessory for mounting the space indicator PPx.

PK-CP245
460170



Blind aluminium tray, 48 mm wide and 2.45 m long.

PK-CP80T
460686



Galvanised-steel accessory to cover the tray. External clip subsection. Openings to introduce the equipment cables inside the tray. 80cm long.

Wiring

PK-CP050

460171



Blind aluminium tray, 48 mm wide and 0.5 m long.

PK-CP50T

460691



Galvanised-steel tray cover. External clip subjection. Openings to introduce the equipment cables inside the tray. 50cm long. Used for the Front End sensors bilogy or trilogy.

PK-PUC

460176



Galvanised-steel accessory for attaching the channel to the ceiling.

PK-G

460687



Galvanised-steel accessory in a G shape for attaching the channel to the ceiling. Holds the tray for the outside making the installation faster an easier.

PK-E

460175



Galvanised-steel accessory for joining trays.

PK-C

460174



Galvanised-steel accessory at a 90° angle.

PK-TSS

460172



T-shaped galvanised-steel accessory to install the SP sensor series.

PK-ESS

460179



Galvanised-steel accessory to install the SP sensor series. Used at the end of a tray line.

C-LHS4

460115



3-m halogen-free hose-cable, to connect sensors of SP series, Bilogy or Trilogy. 2 x 1.5 mm² power cable + 2 x 0.34 mm² twisted and shielded cable for the RS-485 bus.

*Other lengths available upon request

C-SS4-T

460152



3-m halogen-free hose-cable, to connect sensors of SP series, Bilogy or Trilogy. 2 x 1.5 mm² power cable + 2 x 0.34 mm² twisted and shielded cable for the RS-485 bus. Specially designed for installation inside a tube.

*Other lengths available upon request

C-LHP3

460116



3-m halogen-free hose-cable, for the connection between SP sensor series and its own indicator. 3 x 0.75 mm².

*Other lengths available upon request

C-LH4

460117



100-m halogen-free hose-cable extending the row of devices. 2 x 1.5 mm² power cable + 2 x 0.34 mm² twisted and shielded cable for the RS-485 bus.

C-DD40-P

460293



40cm halogen-free hose-cable, to connect displays internally inside Panel parking. 2 x 1.5 mm² power cable + 2 x 0.34 mm² twisted and shielded cable for the RS-485 bus.

**Cable Cat.5e/6
(305mts)**

230003



305-m UTP communication cable, category 5. Unshielded cable, four twisted pairs WG26.



Counting system

Level & Area counting system with full range of detectors and information panels for Indoor & Outdoor parking facilities.

This system offers 3 different types of detection to control the access into different areas with reduced equipment and high levels of accuracy.

It includes Autonomous Control Units to automatize the counting and control of any area. This is possible with embedded CirPark Scada that makes this system smart.

Detectors



Inductive Loop Detectors
INDOOR/OUTDOOR



Photocell crossing-zone
Detectors
INDOOR/OUTDOOR



Ultrasonic crossing-zone
Detectors
INDOOR/OUTDOOR

Displays



VMS Range
INDOOR



RGB Range
INDOOR / OUTDOOR



High Luminosity Range
OUTDOOR



Panel Parking
OUTDOOR

Control

Control Unit for crossing-zone detectors
INDOOR/ OUTDOOR





Server
INDOOR/ OUTDOOR



Converter
INDOOR/ OUTDOOR



License
INDOOR/ OUTDOOR

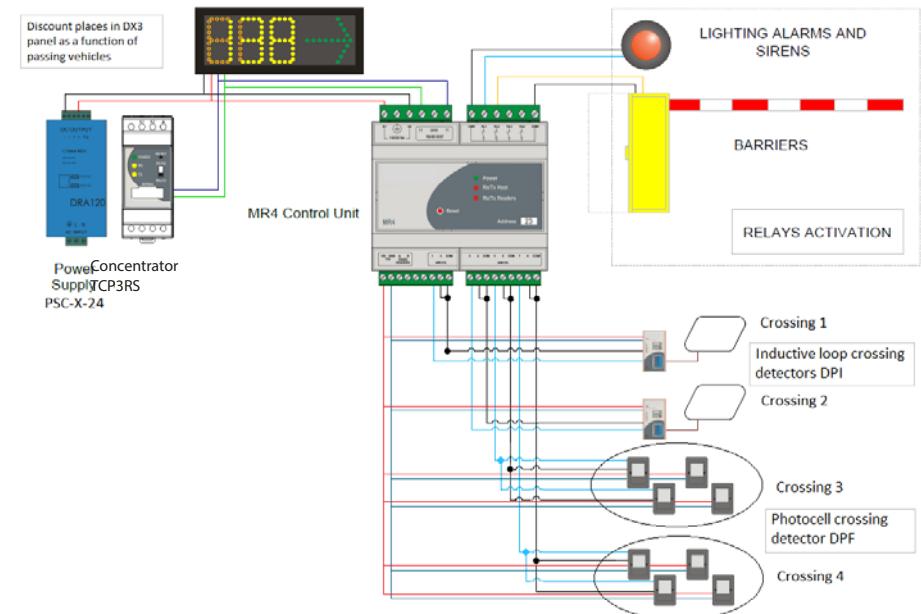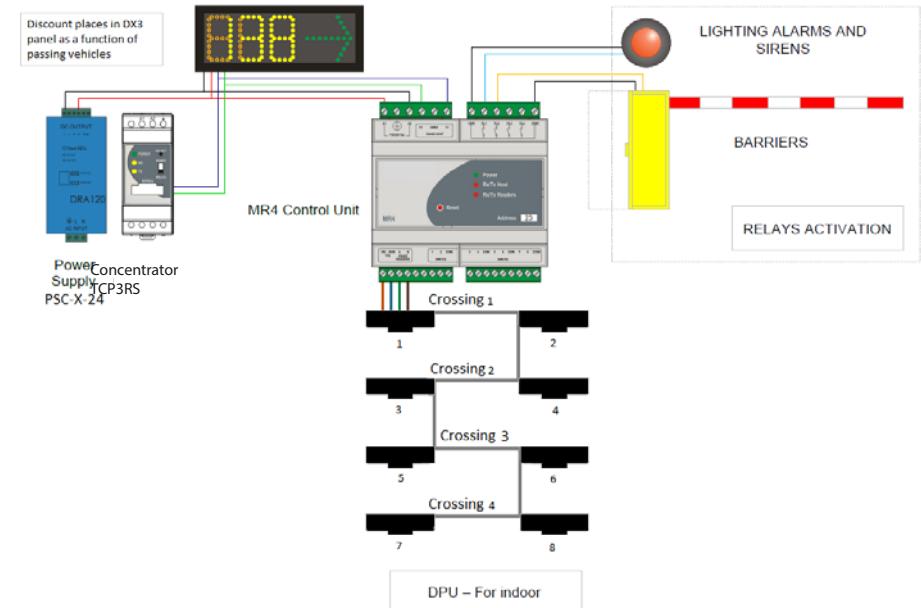



iPark / Counting System

Detectors

MR4/dp-48
460804



Vehicle counting equipment. Control unit for inductive loop, photocell or DPU pass detectors. Power supply: 24/48 Vdc. Consumption: 1 W + (Number of zones x 1,6 W). Communications via RS-485. 8 digital inputs for control of up to 4 pass-zones. Additional RS-485 input for control of up to 4 DPU. Incorporates 4 relay outputs for automation, depending on the occupation. Storage memory for the 4 pass-zone counters. Auxiliar output: 24 Vdc

DPF
460114



Vehicle flow detector using infrared photocells. Set of two modules with two photocells each (transmitter-receiver). Input power: 24 V DC. Activation by digital input in MR4/dp.
Powered directly from MR4/dp-48.

DPU
460133



Ultrasound vehicle flow detector. Set of two ultrasound sensors. 24 V DC input power. Consumption: 2 x 0.8 W. Communication: RS-485 with MR4/dp. Socket for installation in tube included.
Powered directly from MR4/dp-48.

DLI-24
460219



Inductive loop detector. Input power: 24 V DC. Consumption: 1.5 VA. Control with one inductive loop. Activates a relay when detecting a metal mass on the loop. Possibility of adjusting the sensitivity. Adjustable pulse type, during or after detection.
Powered directly from MR4/dp-48.

DLI-PARK-24
460220



Inductive loop detector. Input power: 24 VDC. Consumption: 1.5 VA. Control of two inductive loops. Activates a relay when detecting a metal mass on the loop. Possibility of adjusting the sensitivity. Adjustable pulse type, during or after detection. Powered directly from MR4/dp-48.

Panel Parking

Panel Parking
460187



Panel with information about the capacity of the car park, per floor or overall. 2-3-4 digit displays. Consumption: 2.5 - 4 W per panel. Communication: RS-485. Digit colour: amber - red. Brightness intensity adjustable by software.


- 24/48 Vdc if TCP3RS is located outside
- 220 Vac if TCP3RS is located inside

Control & Software

TCP3RS
460803



Industrial RS-485 to TCP-IP Ethernet communication converter. RS-232/RS-485 opto-isolated port. Input power: 230 V AC. Consumption: 2 VA. DIN rail.

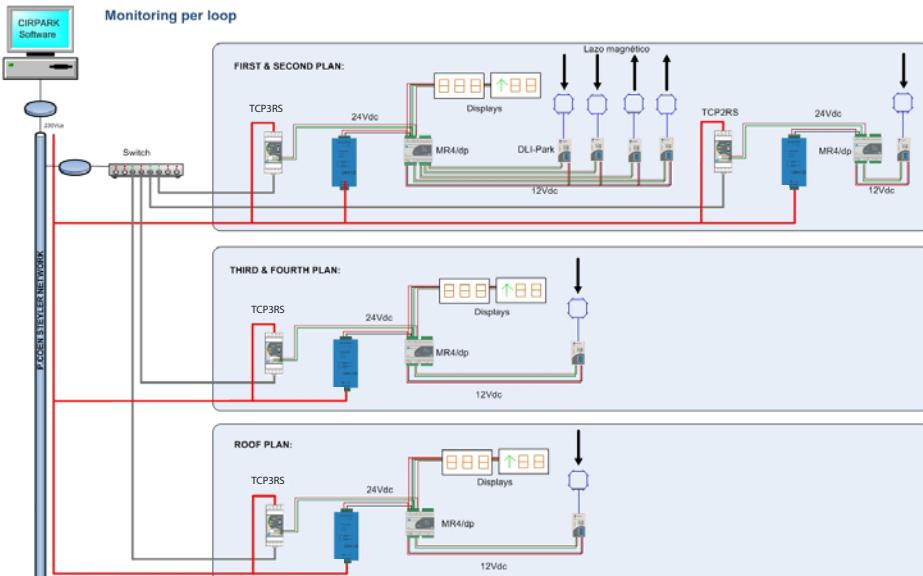



Find Your Car

Powerful system able to provide car-finding solutions based on QR Code or License Plate Recognition within lanes or in each parking space, offering users the location and route to their own car via the user application.

Features

[License Plate Recognition](#) by lane or within defined zones in small parkings to facilitate user's car location.

[Car Recognition](#) within each special parking space, such as EV charging spaces or reserved VIP bays.

[Combining Find Your Car with CirPark Guidance System](#) provides a car location service with great reliability.

Cameras

Ksensor
INDOOR



Lane Cameras
INDOOR/OUTDOOR



Terminal

Kiosk User Interface
INDOOR



Control

Switch POE
INDOOR




Main Gigabit Ethernet Switch
INDOOR




Server
INDOOR



License
INDOOR

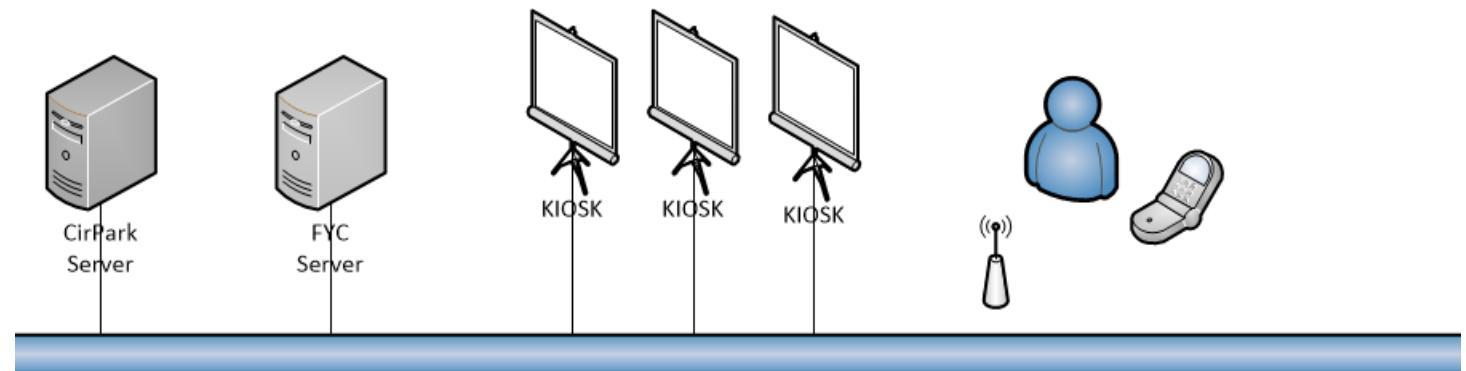

Legend		
Símbolo	Total	Descripción
	2	Ethernet
	1	User
	5	Server
	3	Kiosk
	3	Switch
	1	Access Point
	1	Mobile

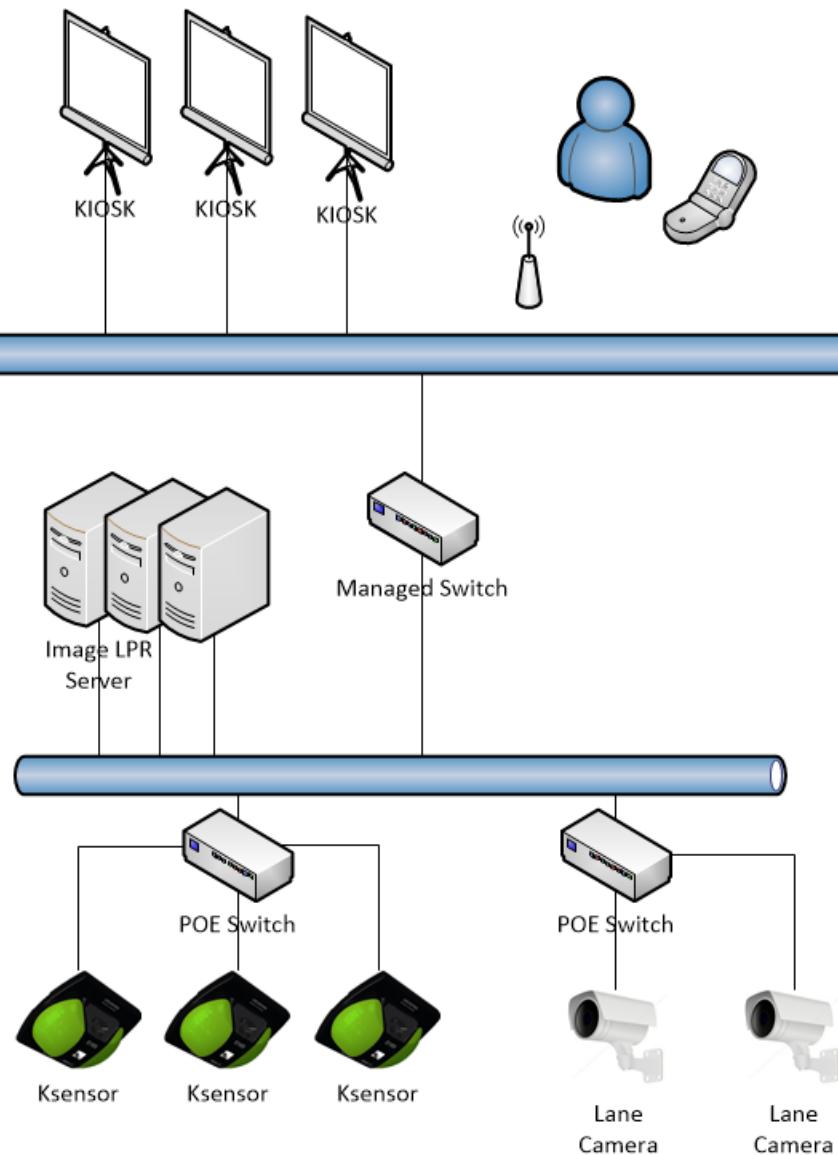



iPark / Find Your Car

Camera based sensors

Ksensor
460810



Camera-based sensor with a built-in indicator that arises from the need to integrate in a sensor device the image recognition technology thanks to the use of its two integrated cameras. Power Supply: DC 48V PoE Consumption: 5W Communications: Ethernet (RJ45) Extended Temperature Range -20 °C to +60 °C Remote configurable Firmware. Recommended Installation height between 2.2 and 2.5 meters. IP50 Protection

Ksensor C1
460810C1



Camera-based sensor with a built-in indicator that arises from the need to integrate in a sensor device the image recognition technology thanks to the use of it one integrated camera. Power Supply: DC 48V PoE Consumption: 5W Communications: Ethernet (RJ45) Extended Temperature Range -20 °C to +60 °C Remote configurable Firmware. Recommended Installation height between 2.2 and 2.5 meters. IP50 Protection

FYC-LANE CAM V
460710V



Bullet Camera with autozoom 2.8-12mm and vandalproof for LPR by zone. 3MP resolution (H.264/H.265). IR cut filter with 60m range. External POE included. HD lens 1/2,9" SONY sensor CMOS low ilumination. It works with FYC-FREEFLOW-1Z license.

Terminal

FYCKIOSK
460722



FYC Kiosk, User Interface for Find Your Car system made with galvanic iron. 22" panoramic touch screen. 220Vca/100W power and Ethernet output.

Control

FYCHUB8POE
460703




Gigabit PoE Switch with 8 PoE fast ethernet and 2 combo gigabit ports.
Network redundancy, IP routing, QoS, VLAN support and PoE alarm.
48Vdc Power supply with 48-55Vdc input range.
-10 to 65°C Operating Temp Range.

FYC-SWITCH_GIGABIT_24P
46020



Industrial Managed Gigabit Switch with 24 Gigabit Ethernet ports.

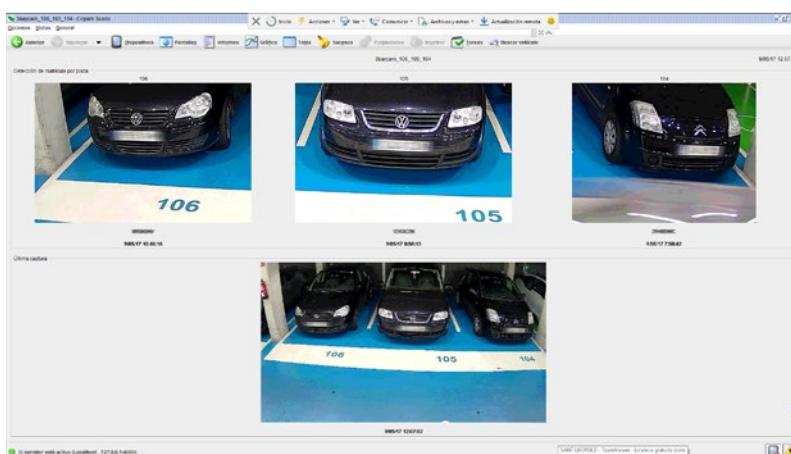

Software

FYC-SERVER-DELUXE
460790-1

High Featured Server for FYC image processing. Includes License Plate Recognition Program in FreeFlow mode. 16 cores equipment with i7 CPU or higher, 16GB RAM memory, 1TB HD and Windows 10 Pro.

FYC-SOFTWARE
460750

FYC-LICENSE-LPR 1000bays
460750-1
FYC-LICENSE-LPR 2000bays
460750-2

Software CirPark Scada
610105

Find Your Car Software that includes License Plate Recognition per zone and per parking space, interface management of the user kiosk and integration with CirPark. License Plate Recognition License valid for 1000/2000 bays.

Car park management Scada software. Real-time management of the iPark family (counting, indoor/outdoor guidance and vehicle localization), ledPark (regulated lighting control and energy efficiency) and evPark (control of electric vehicle recharging equipment). It allows the control of the occupation, to introduce the map of the installation, and create screens of visualization of the occupancy, crossing zones, statistics, reports, logic of operation and alarms. Software mult-client and cross-platform. Connection via multiplatform web browser or through Windows O.S. program. Integration via XML API. Mail server and RSS. Monitoring of IP cameras. Integration and monitoring of CO. License for unlimited number of parking spaces.



LEDPark

Regulated LED Light system with LED technology, integrated with parking guidance and managed accordingly with real-time occupancy and pedestrian movements. Consumption reduction via Energy Efficiency management. Installation and Maintenance cost reduction thanks to its low power consumption and long-lasting equipment.

Consumption reduction via Energy Efficiency management



LED Park

Regulated LED Light equipment with low power consumption. Integrated into CirPark Platform for a full automatic and unattended control.



Energy Efficiency

Consumption and Energy control with integrated management into CirPark Platform for eco-friendly LEED certification.

Owner Benefits

Real parking data obtained by Oficial Laboratory

FLUORESCENT LIGHT



⚡ 34.144 kWh



LED TUBE



⚡ 17.035 kWh



-50%

LEDPARK



⚡ 9.021 kWh
⚡ 5.234 kWh



-85%

Less than 3 years of Return on Investment, giving high levels of illumination and reducing energy and maintenance costs.



Lighting Modules

BL-Park-S
460651



LED module, regulated, of the LED-park system. Maximum Consumption: 4W. Anchor bracket in iPark tray and built-in cooling plate. Connection via cable with connector.

DL-PARK-2
460653



Power Driver for LED Lighting Control. Management Capacity 3 BL-PARK-S, with an output power of 3W per BL-PARK-S. 3 cable Input connection from Power supply 48Vdc and regulation from CL-PARK-2..

TCP3RS
460803



Industrial RS-485 to TCP-IP Ethernet communication converter. RS-232/RS-485 opto-isolated port. Input power: 230 V AC. Consumption: 2 VA. DIN rail.

Lighting Control

CL-PARK-2
460802



Header controller of the LEDPark. Power control over voltage regulation 0-10V. RS485 output for control from CIRPARK Software. One module per power supply and for control of up to 30 DL-PARK series drivers.

PK-ENERGY KIT
460188



Car park energy management kit. Can be used to manage and control the energy consumption of the car park. Kit made up of one CVM-MINI grid analyser + one three-phase measurement transformer. For new electrical cabinets installation.

PSC-480-48
460603



Switched power supply. Input power: 230 V AC. Output voltage: 48 V DC. Power: 480 W. DIN rail.




KITPK-SALED
460614

Super Long Life UPS module Ni-MH (nickel-metal hydride). Includes PSC-57 constant current source and switching relay. Rated output voltage: 43.2V. Constant current load. Capacity for 400W charging load, equivalent to 1 hour of uninterrupted illumination with the LEDPark system. Extended Temperature Range. It allows communication with SCADA Software for battery status awareness.



PK-CP245
460170

Blind aluminium tray, 48 mm wide and 2.45 m long.

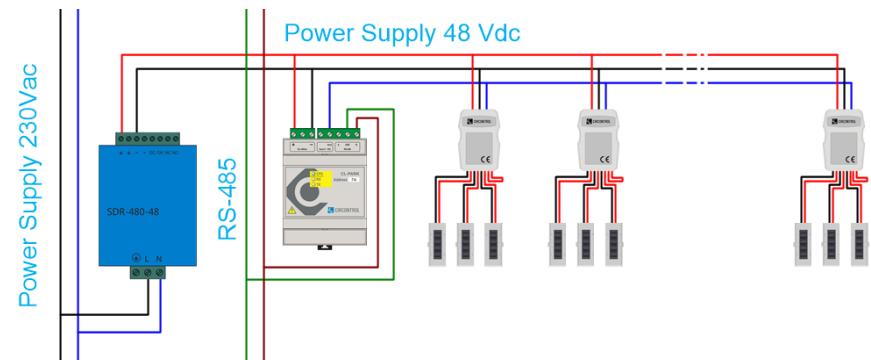



Lighting Accesories

PK-TSS
460172

T-shaped galvanised-steel accessory to install the SP sensor series.



PK-T
460609

T-shaped galvanised-steel accessory without holes, to install the biogy or triology in the LEDPark system.



PK-E
460175

Galvanised-steel accessory for joining trays.



Lighting Wiring

CB-PARK



Wiring unit for connecting DL-PARK-2 to each BL-PARK-S 2 x 0.50 mm², including halogen-free connectors and wiring.

CB-PARK-60
460605

60 cm wiring unit.

CB-PARK-80
460605A

80 cm wiring unit.

CB-PARK-150
460606

150 cm wiring unit.

CB-PARK-210
460613A

210 cm wiring unit.

CB-PARK-500
460613A

500 cm wiring unit.

CB-PARK-750
460615

750 cm wiring unit.

C-BL
460607




100-m Halogen-free power and control-signal wiring for the DL-PARK systems instalLED: 2 x 6 mm² + 1 x 0.34 mm²
To be used from electrical cabinet until first driver.

CLH4
460117



100-m halogen-free hose-cable extending the row of devices. 2 x 1.5 mm² power cable + 2 x 0.34 mm² twisted and shielded cable for the RS-485 bus. To be used between drivers.

Electric diagram LEDPark System with the kit PK SAI LED

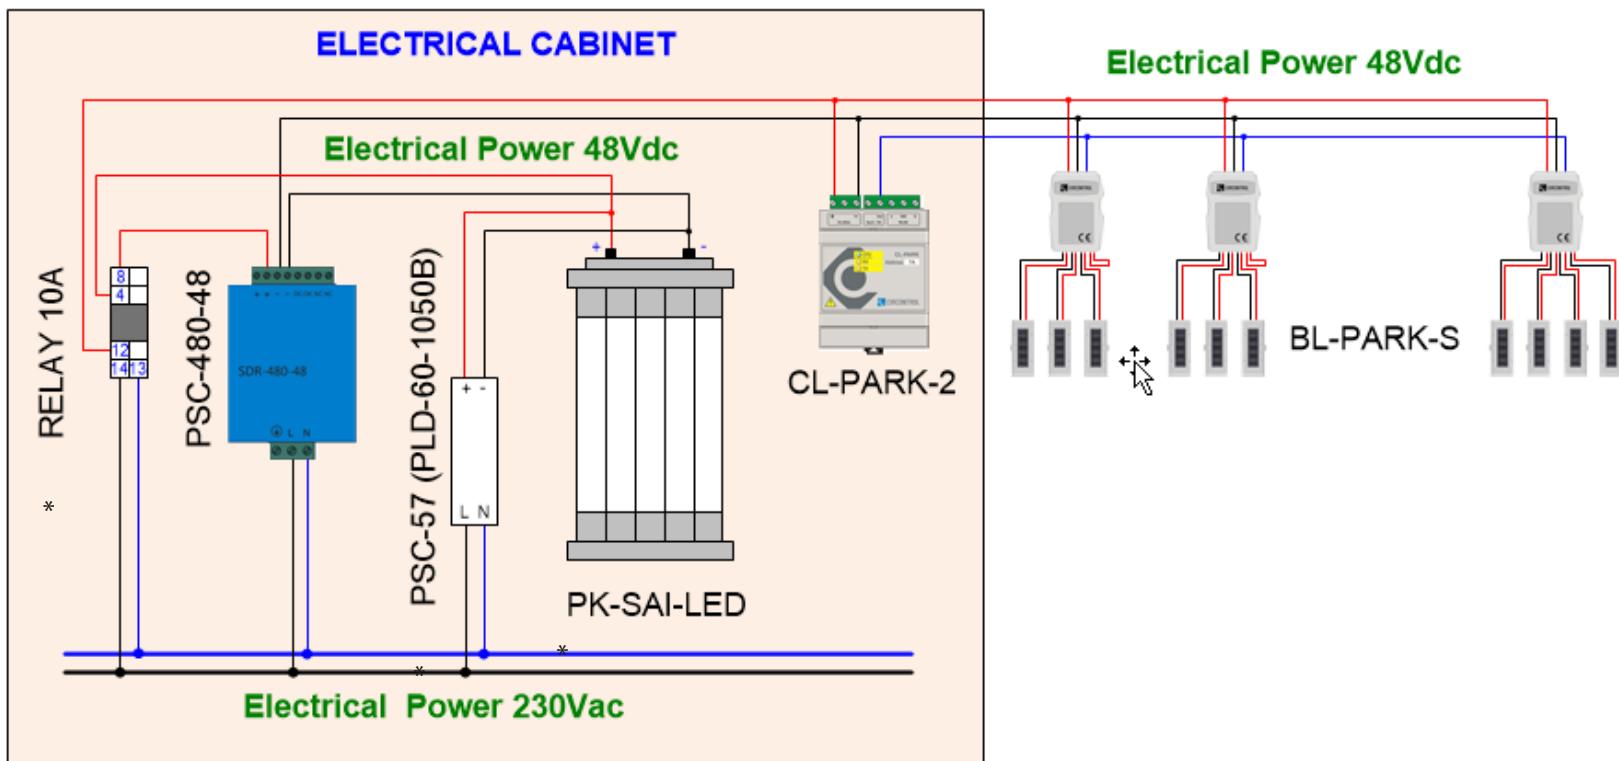



EVPark

EVPark is Circontrol's solution for Electric Vehicle (EV) charging in indoor and outdoor parking facilities.

Charging in indoor and outdoor parking facilities



Electrical vehicle chargers

EVPark offers a wide range of EV chargers; wall/ground mount, slow/quick charging, and single/double socket.

For indoor/outdoor facilities.



OCPP

To ensure a friendly operation of the chargers by the users and a profitable business model for the parking operator, EVPark solutions use OCPP (Open Charge Point Protocol), widely extended in the Electro-Mobility business.



DLM

The Dynamic Load Management (DLM) system can be integrated with CirPark Platform, offering the most complete solution currently available on the market. DLM system ensures that only the available power of the installation is used, thus maximising its efficiency and avoiding the high cost of its power upgrading.



Charge Point integrated with PMS

A complete procedural solution provided to Parking Management Systems manufacturers to integrate EV Charge Points into their own payment system.



Park&Charge

Ticketless payment system allows the user to charge an electric vehicle without the need to print any ticket. The reading and recognition of the license plate using the FYC system will be enough to allow charging the vehicle automatically.



EV Charge Stations Indoor

Interface protocol: OCPP 1.2 1.5. Enclosure rating: IP54/IK10. Operating Temperature: -5 to +45°C. Display: Multi-language. RFID Reader: ISO/IEC14443 A/B, MIFARE classic/DESFire EV1, NFC 16,56 MHz, ISO 18092/ECMA-340

WallBox Evolve Smart S / T
WVS0006411 (S)
WVS0006413 (T)



WallBox Smart
WBM-SMART-TRI
490089



WallBox Smart WB2MSMARTTRI
WVS00064B3




Indoor EV Charger with:

- Double Type2 socket
- Single phase (S) / Three phase (T)
- 32A max load in 2 x 7,2 kW output format (S)
- 32A max load in 2 x 22 kW output format (T)
- Mode 3 Charging

DLM (Dynamic Load Management)


► WITHOUT DYNAMIC LOAD MANAGEMENT

Main Supply Overload

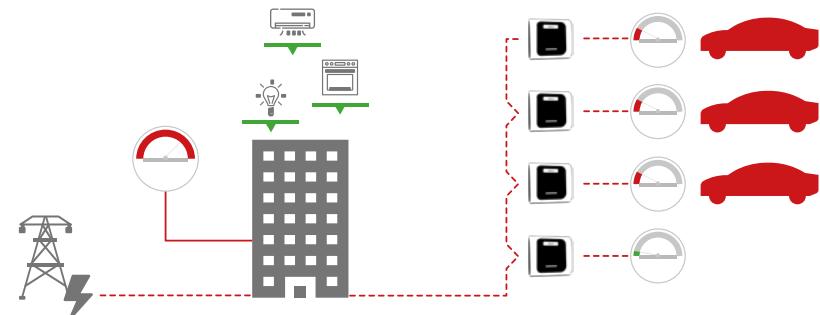

► WITH DYNAMIC LOAD MANAGEMENT

Main Supply protected

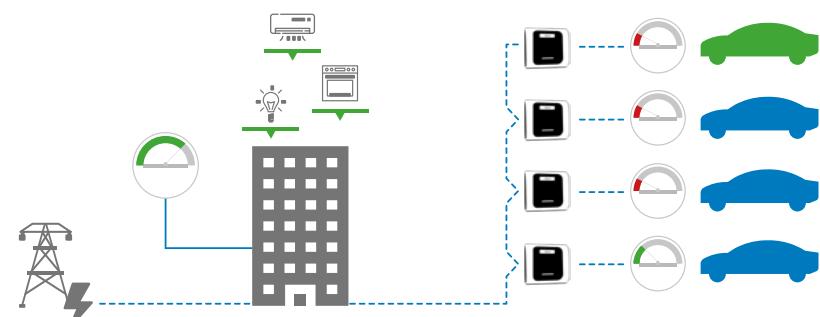

EV Charge Stations Outdoor

Interface protocol: OCPP 1.2, 1.5. Enclosure rating: IP54/ IK10. Enclosure material: Aluminium & ABS. Enclosure door lock. Operating temperature: -5 to + 45 °C. Dimensions: 450mmx290mmx1550mm. RFID Reader: ISO/IEC14443A/B, MIFARE classic/DESFire EV1, NFC 16,56MHz, ISO 18092/ECMA-340

Post eVolve smart T
PVS0006411

Outdoor Charge Point for Electrical Vehicles with:

- Three phase connection.
- 2 x (32A Type2) socket.

Post eVolve smart S
PVS0006413


Outdoor Charge Point for Electrical Vehicles with:

- Single phase connection.
- 2 x (32A Type2) socket.

Post eVolve smart TM4
PVS00064B3




OCPP Integration

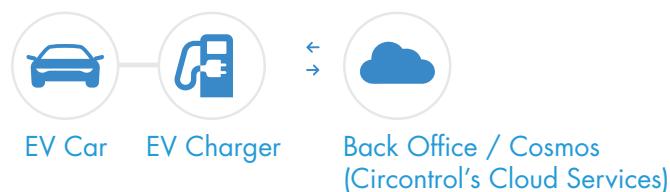


Charge Point Integration

Rotation Users

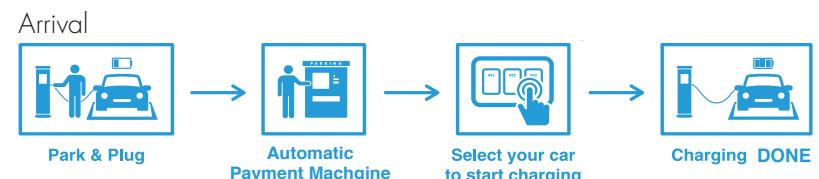


Departure




Subscribed Users

Arrival

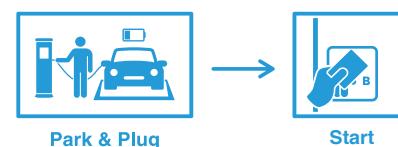

Departure

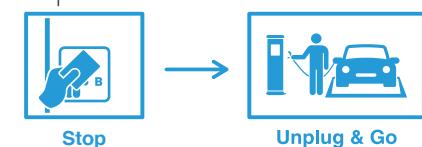

“ Solutions for Efficient Parking



Circontrol has a network of distributors and representative agents all over the world. For further information please contact:

Headquarter Address:
C/ Innovació, 3 Industrial Park Can Mitjans
08232 Viladecavalls (Barcelona), Spain

Phone: (+34) 937 362 940
Fax: (+34) 937 362 941
Mail: circontrol@circontrol.com
V2.3