
IT10 2 - No Protection - Benchmarking Algorithm - Descending


Topology

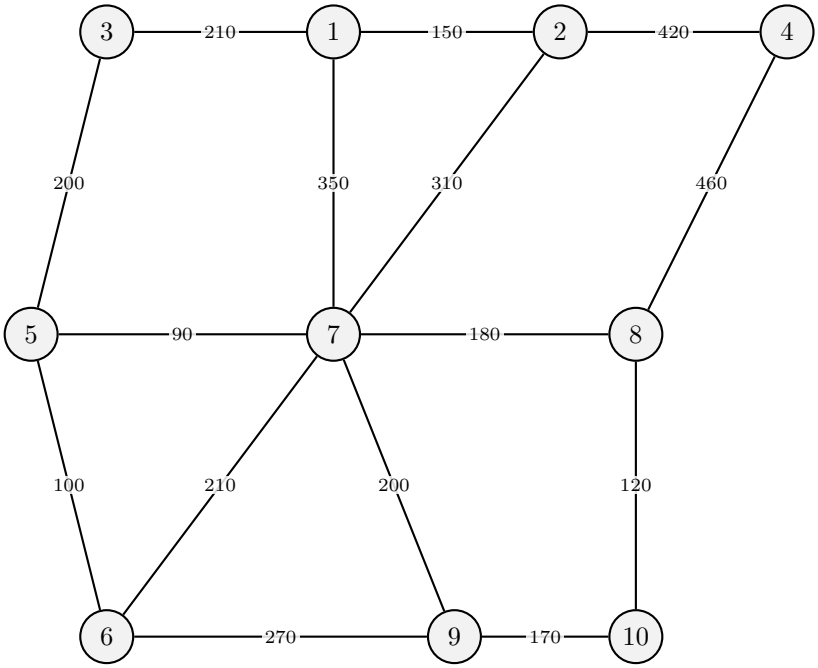


Performance Parameters

Highest link load	238 Gb/s
Highest used FSU	270 / 320
Total used FSUs	258
Transponder cost	129.0
SC-DP-QPSK transponders	86
SC-DP-16QAM transponders	0
DP-16QAM transponders	0


Link Load Map

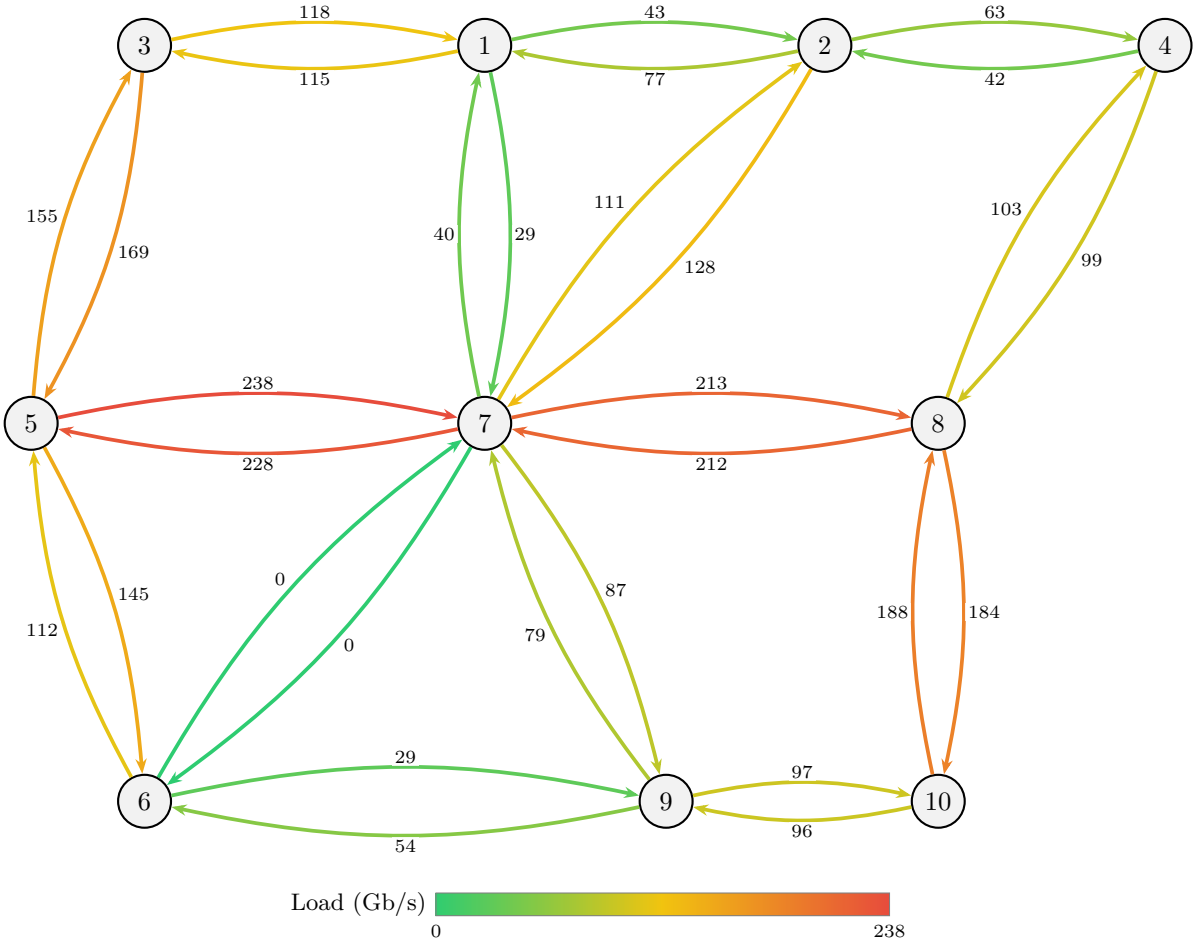


Link Load Distribution

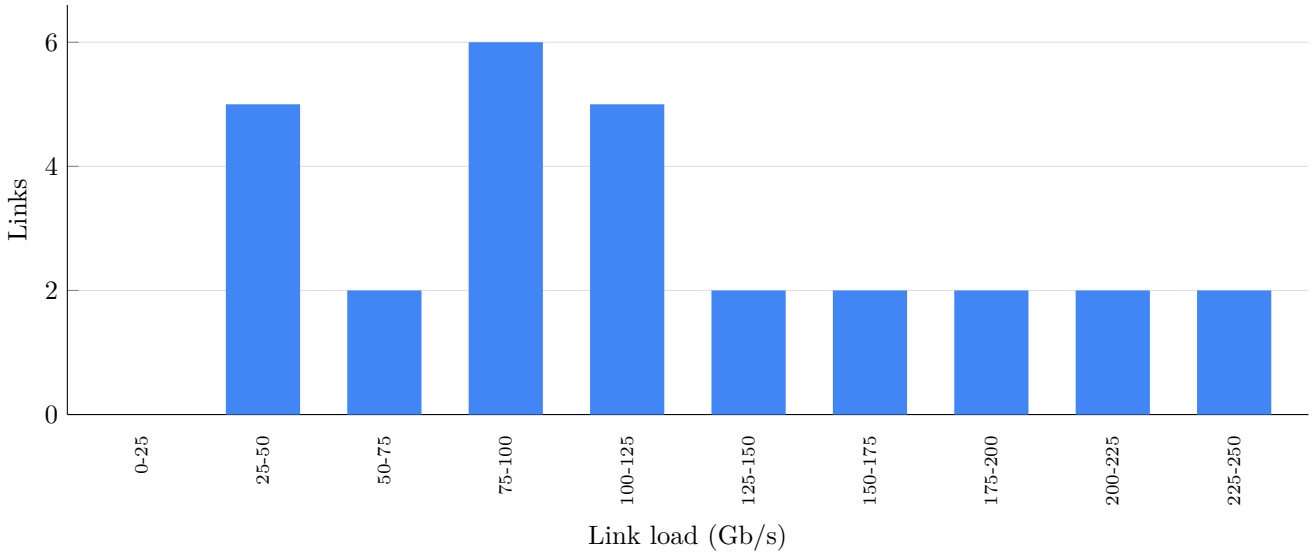


Spectrum Occupancy

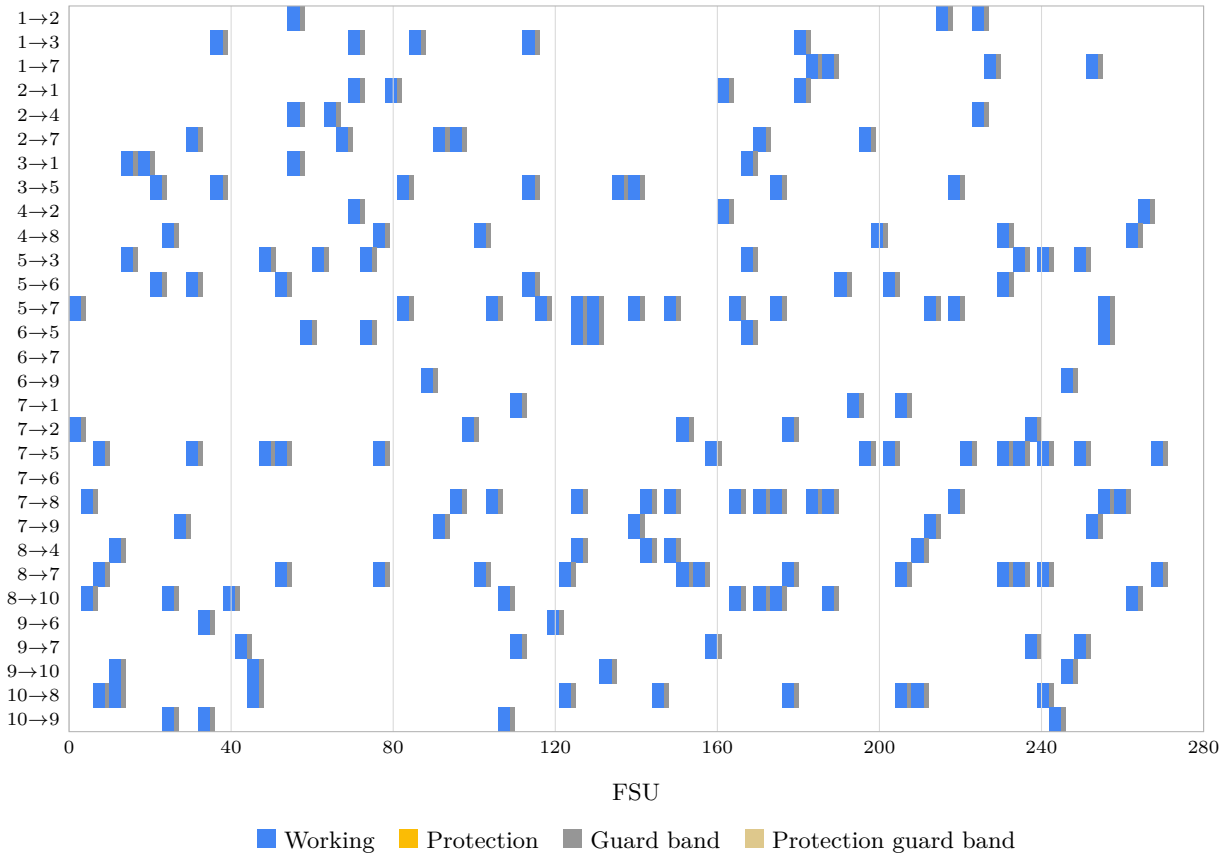


Path Length Distribution

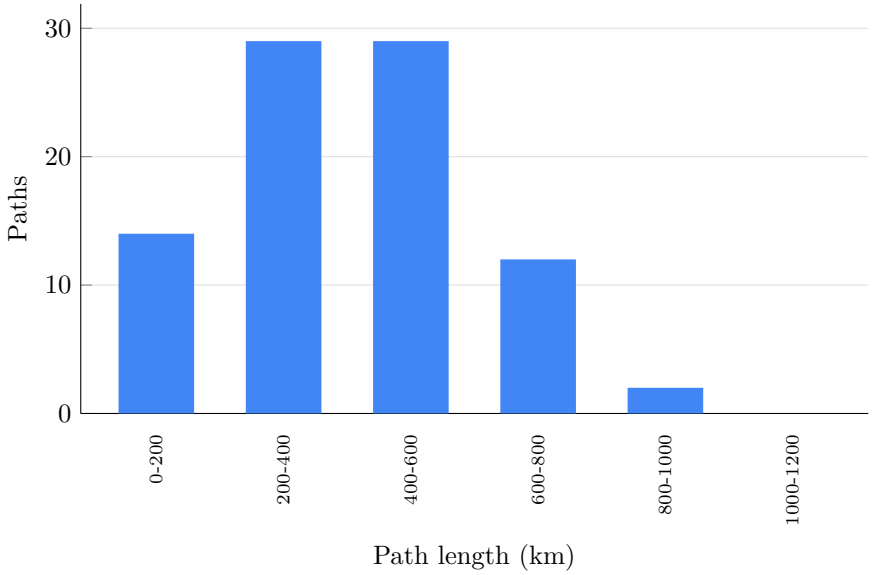

Utilization Entropy

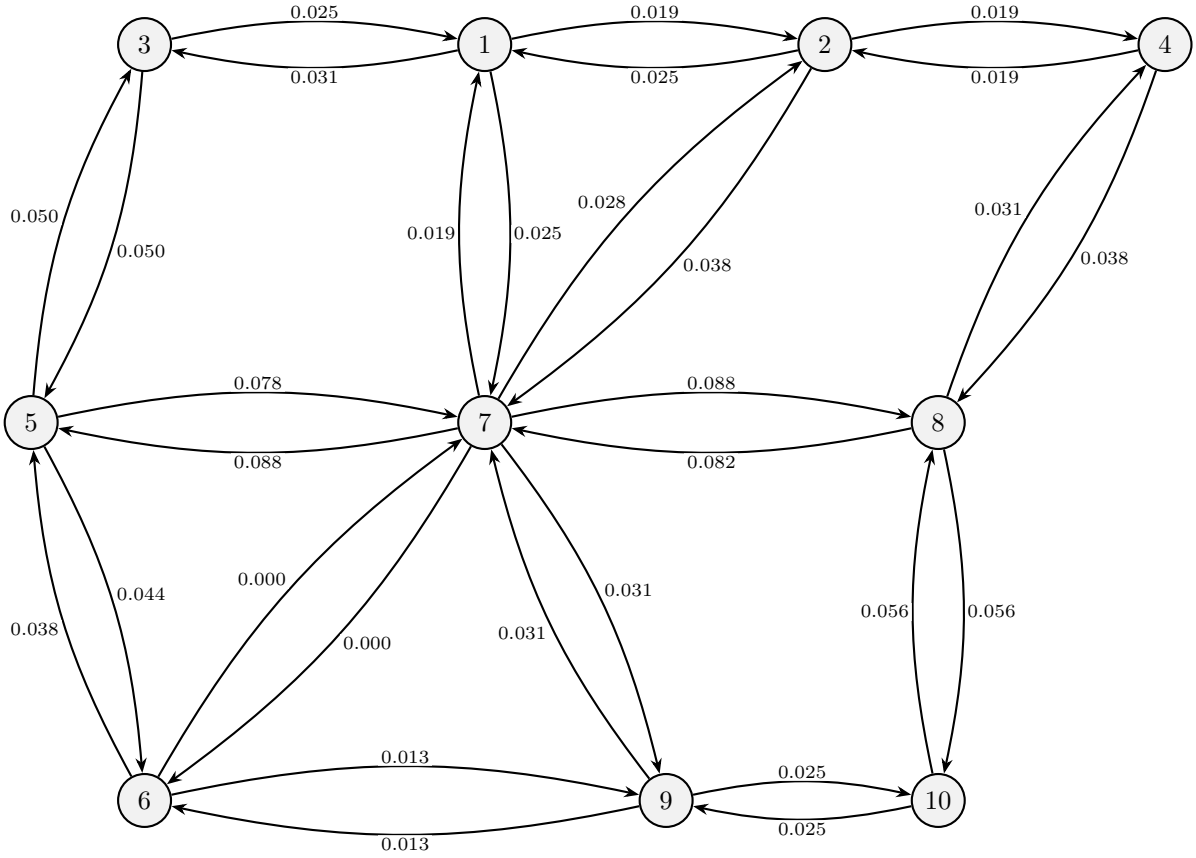

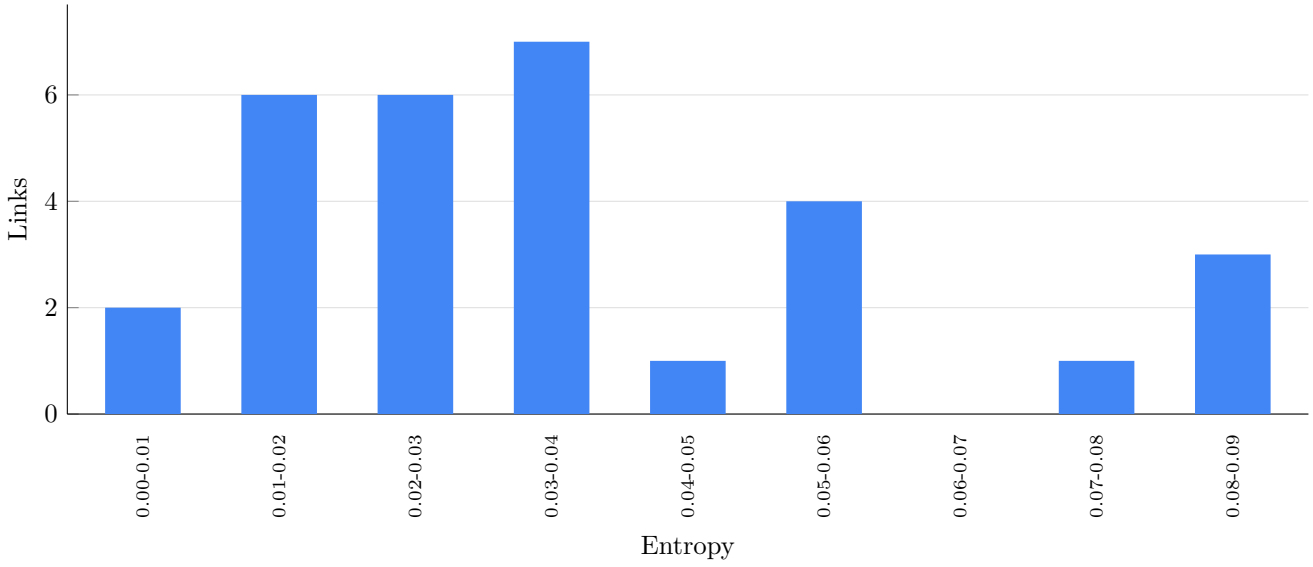

Shannon Entropy

