
IT10 2 - Dedicated Protection - Custom Algorithm - Ascending


Topology

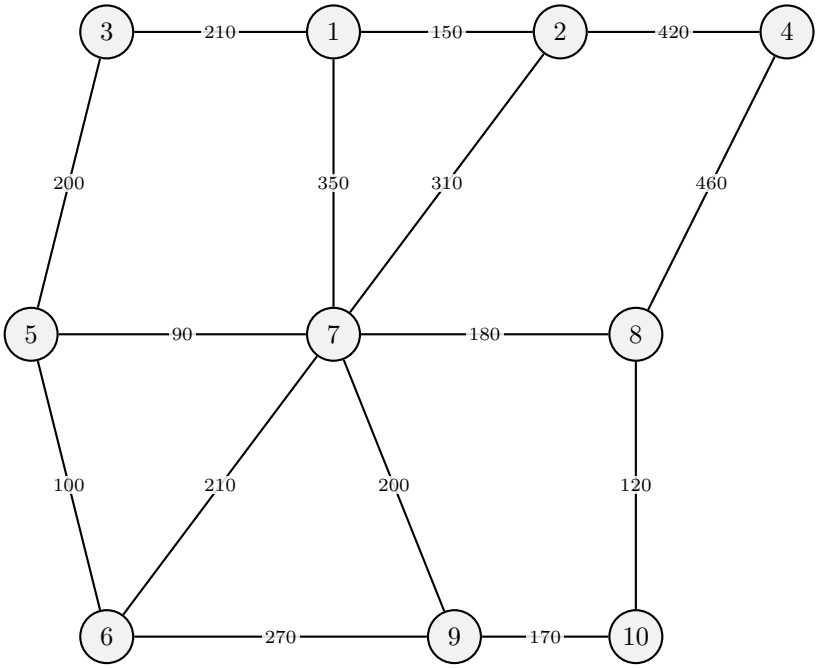


Performance Parameters

Highest link load	344 Gb/s
Highest used FSU	320 / 320
Total used FSUs	513
Transponder cost	256.5
SC-DP-QPSK transponders	171
SC-DP-16QAM transponders	0
DP-16QAM transponders	0


Link Load Map

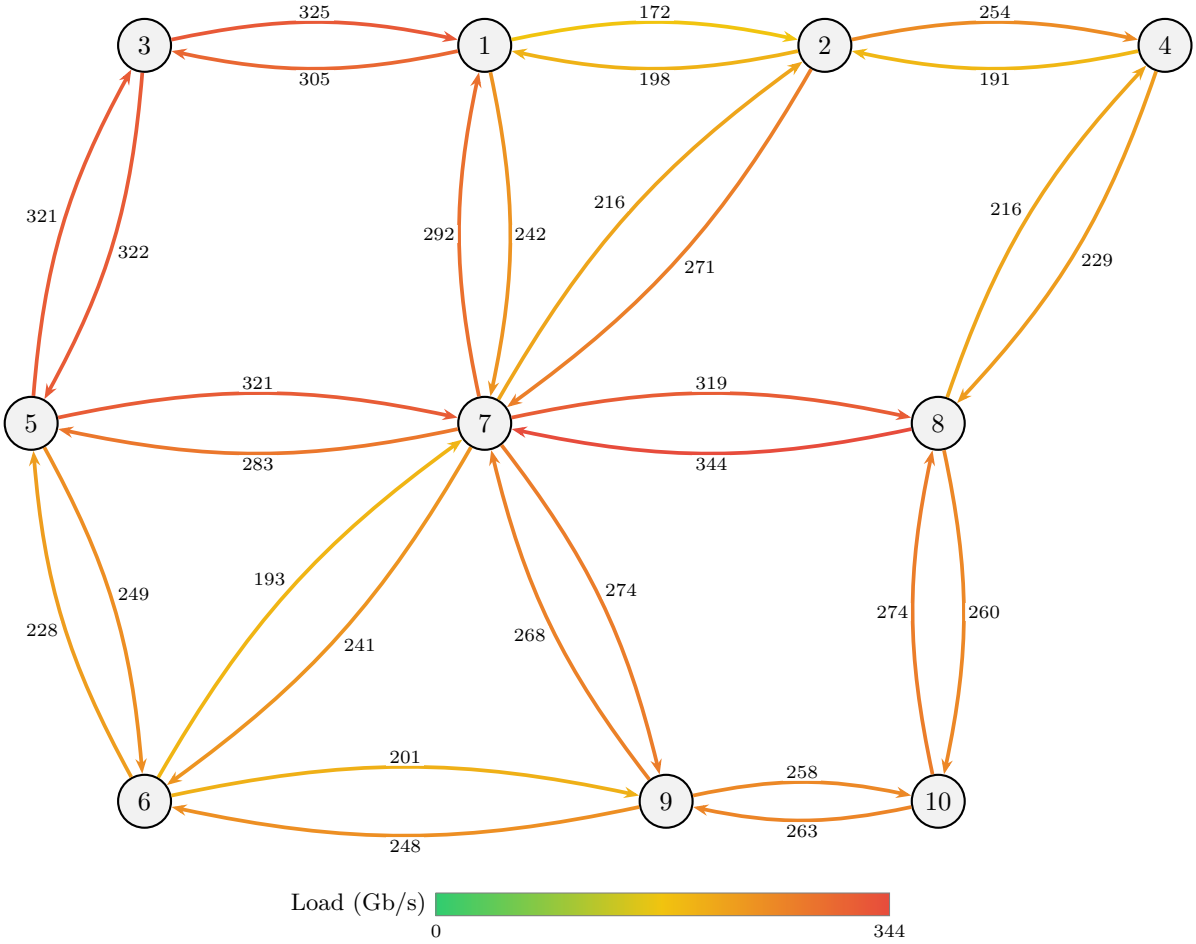


Link Load Distribution

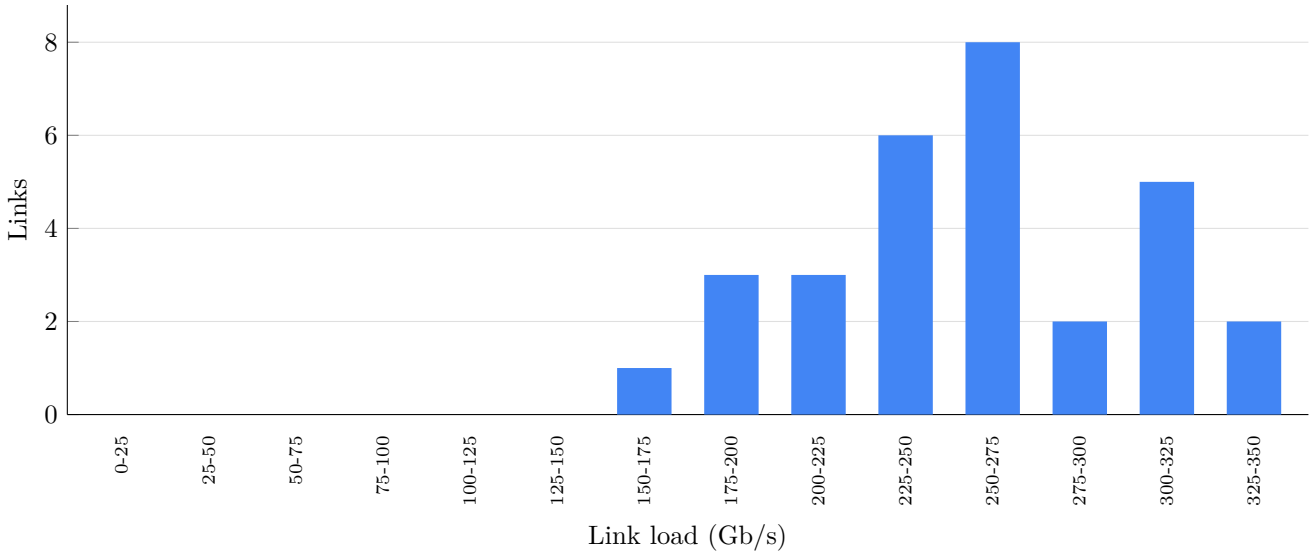


Spectrum Occupancy

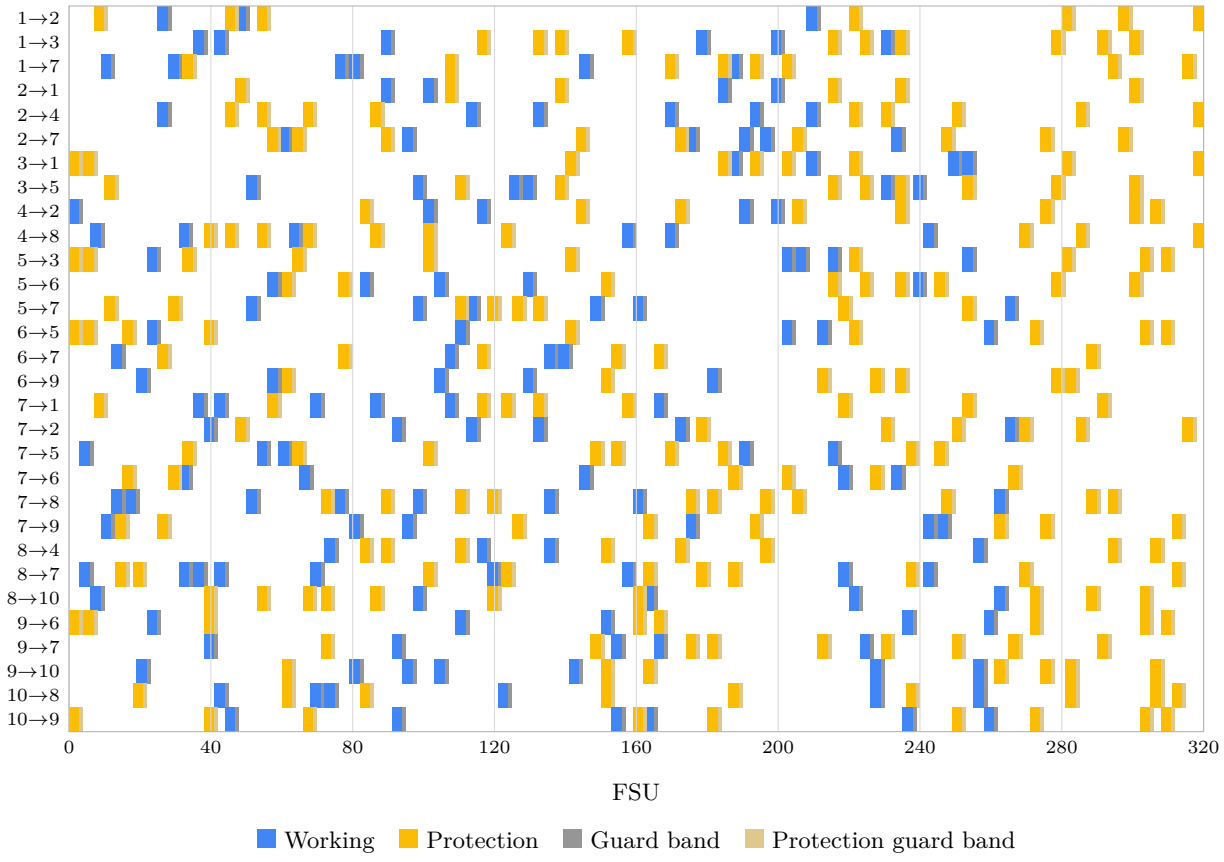


Path Length Distribution

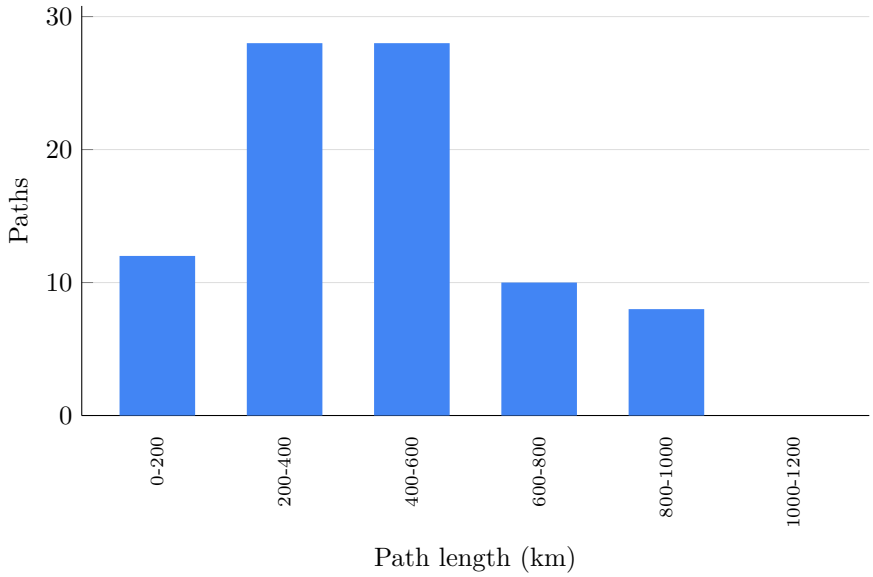


Protection Path Length Distribution

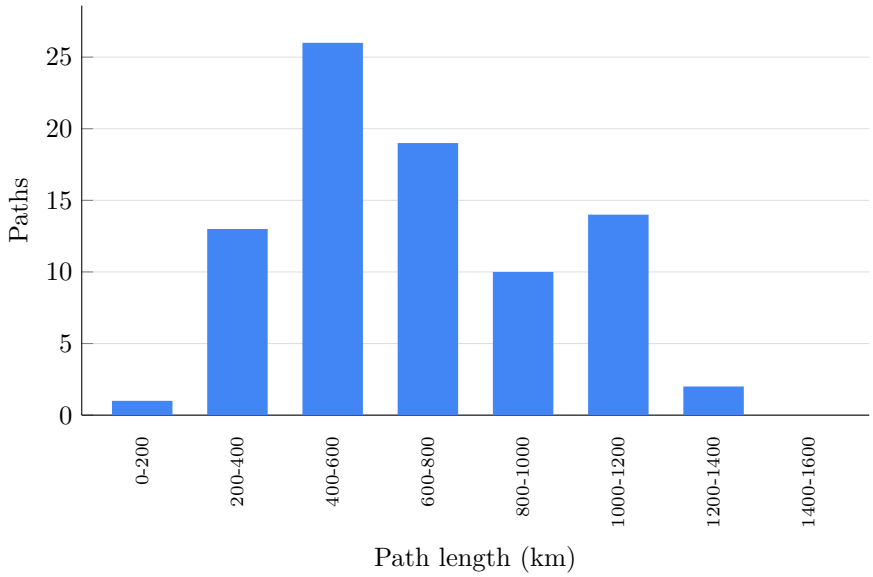

Utilization Entropy

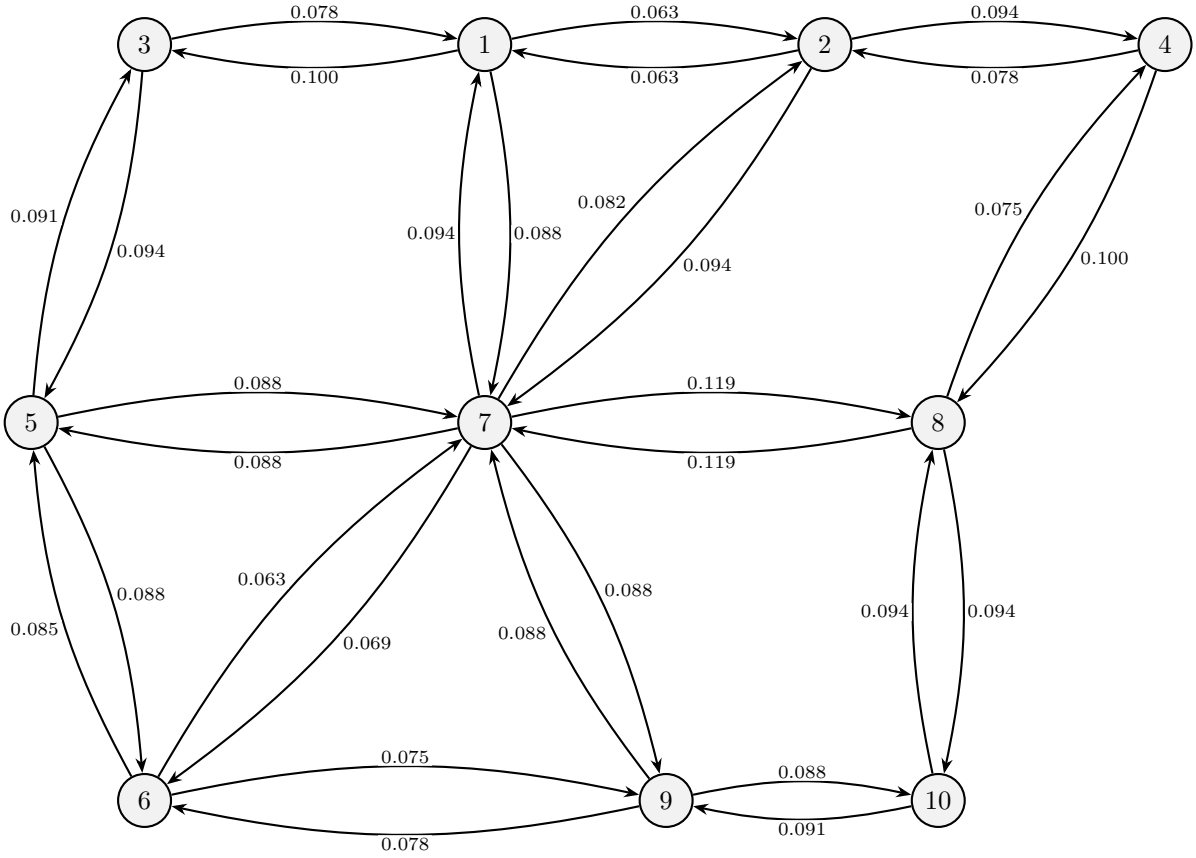

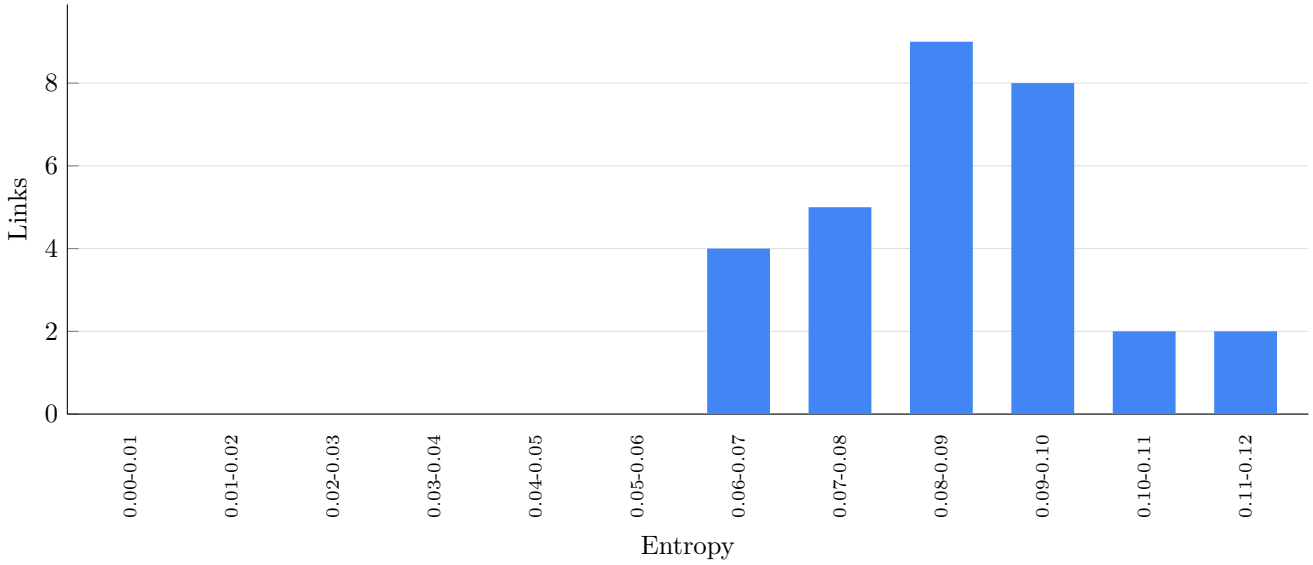

Shannon Entropy

