
IT10 3 - No Protection - Benchmarking Algorithm - Ascending


Topology

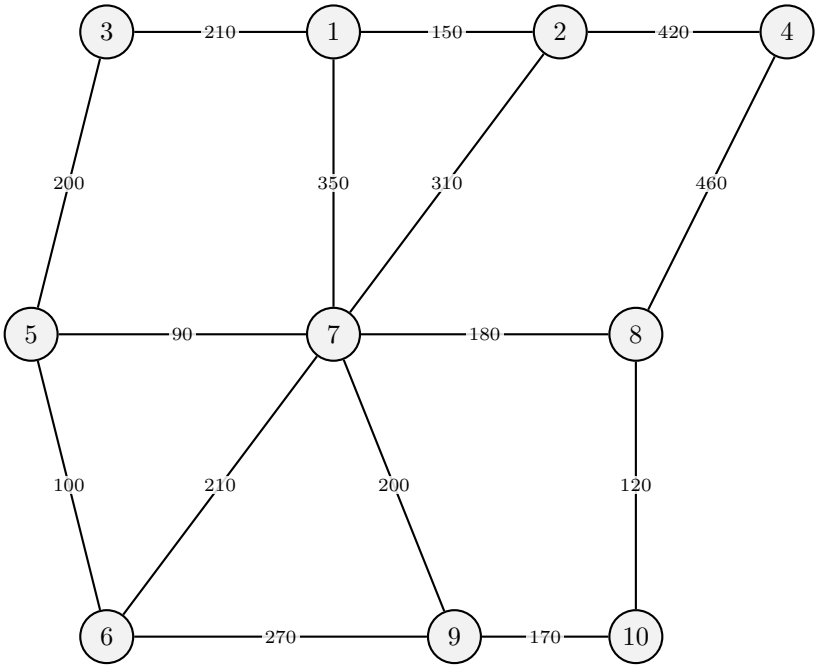


Performance Parameters

Highest link load	537 Gb/s
Highest used FSU	285 / 320
Total used FSUs	267
Transponder cost	133.5
SC-DP-QPSK transponders	89
SC-DP-16QAM transponders	0
DP-16QAM transponders	0


Link Load Map

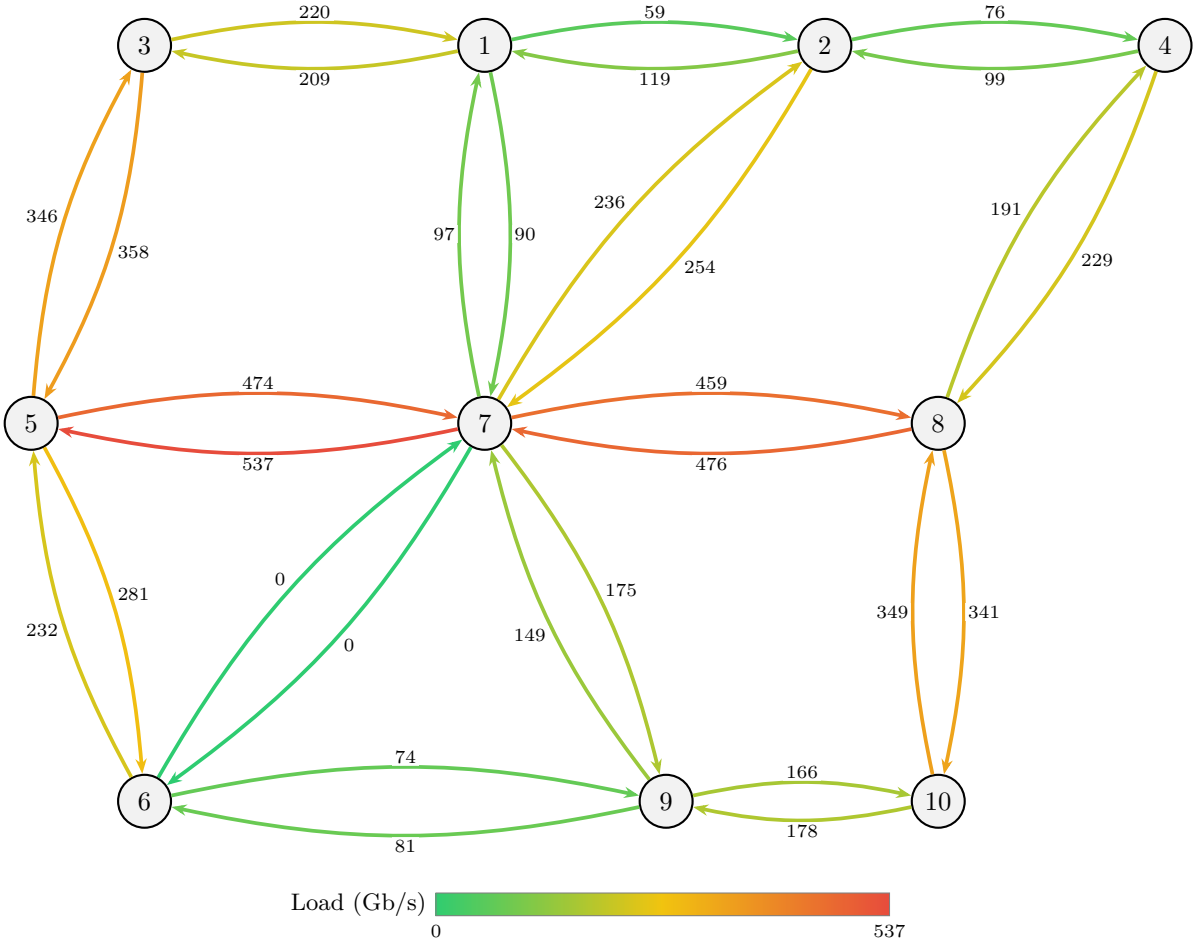


Link Load Distribution

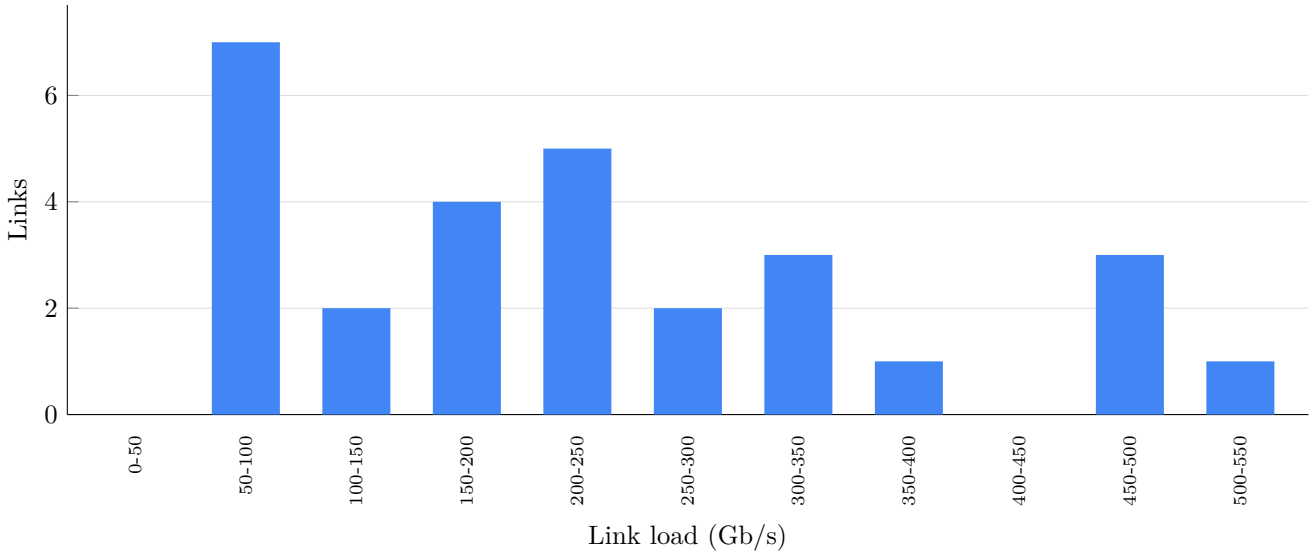


Spectrum Occupancy

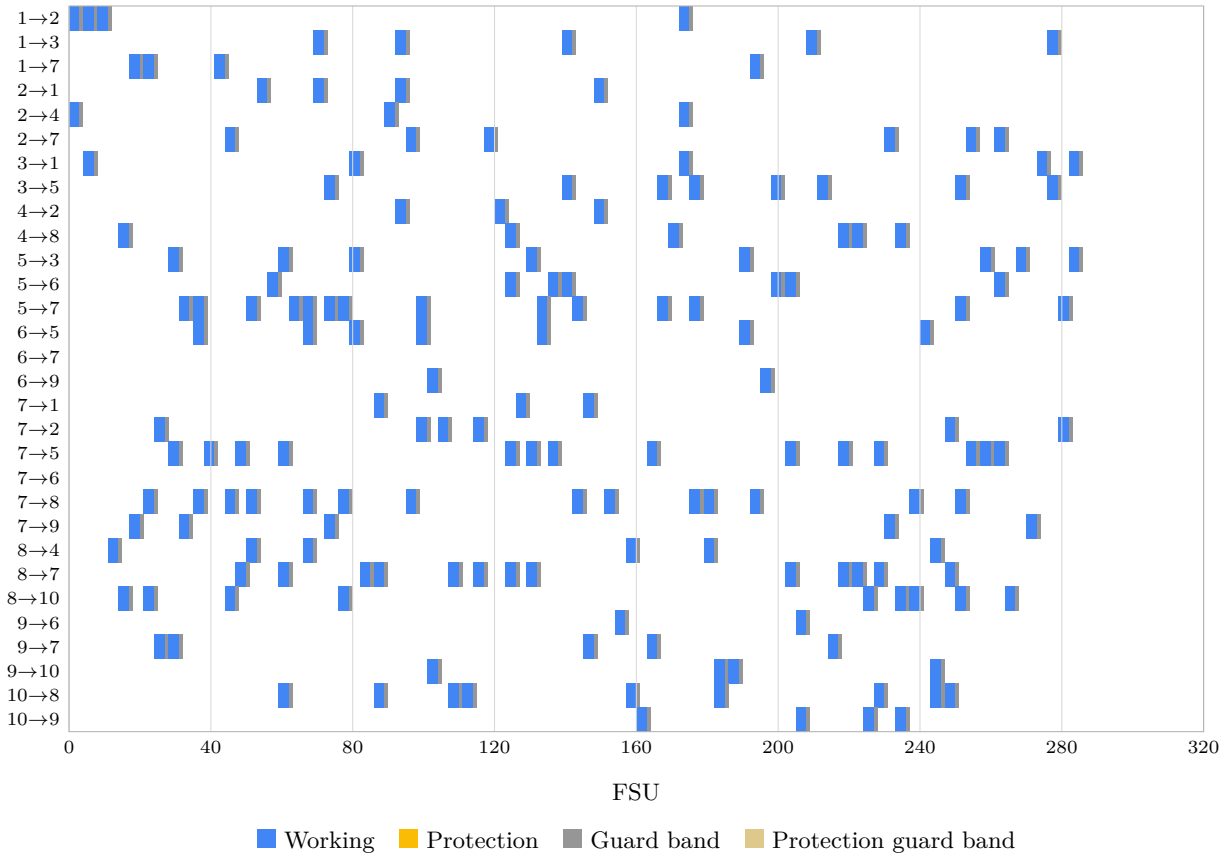


Path Length Distribution

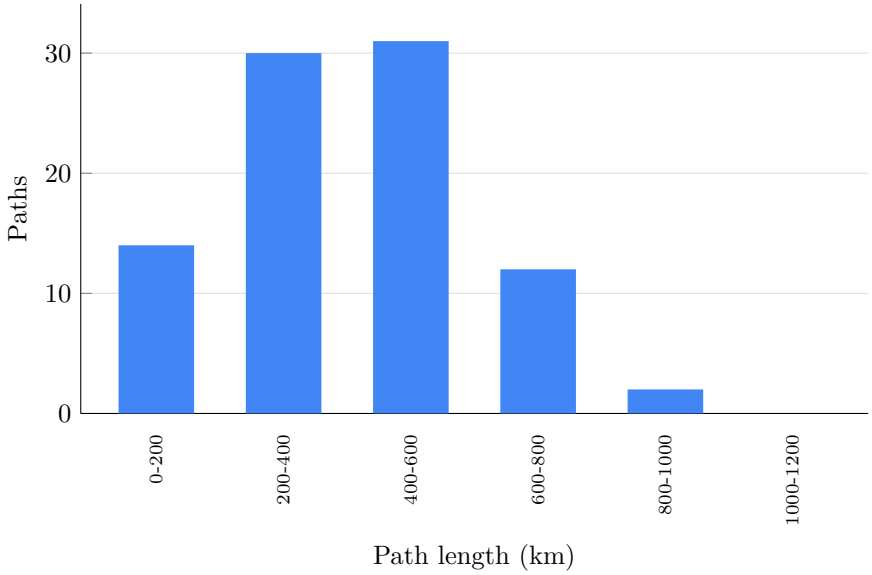

Utilization Entropy

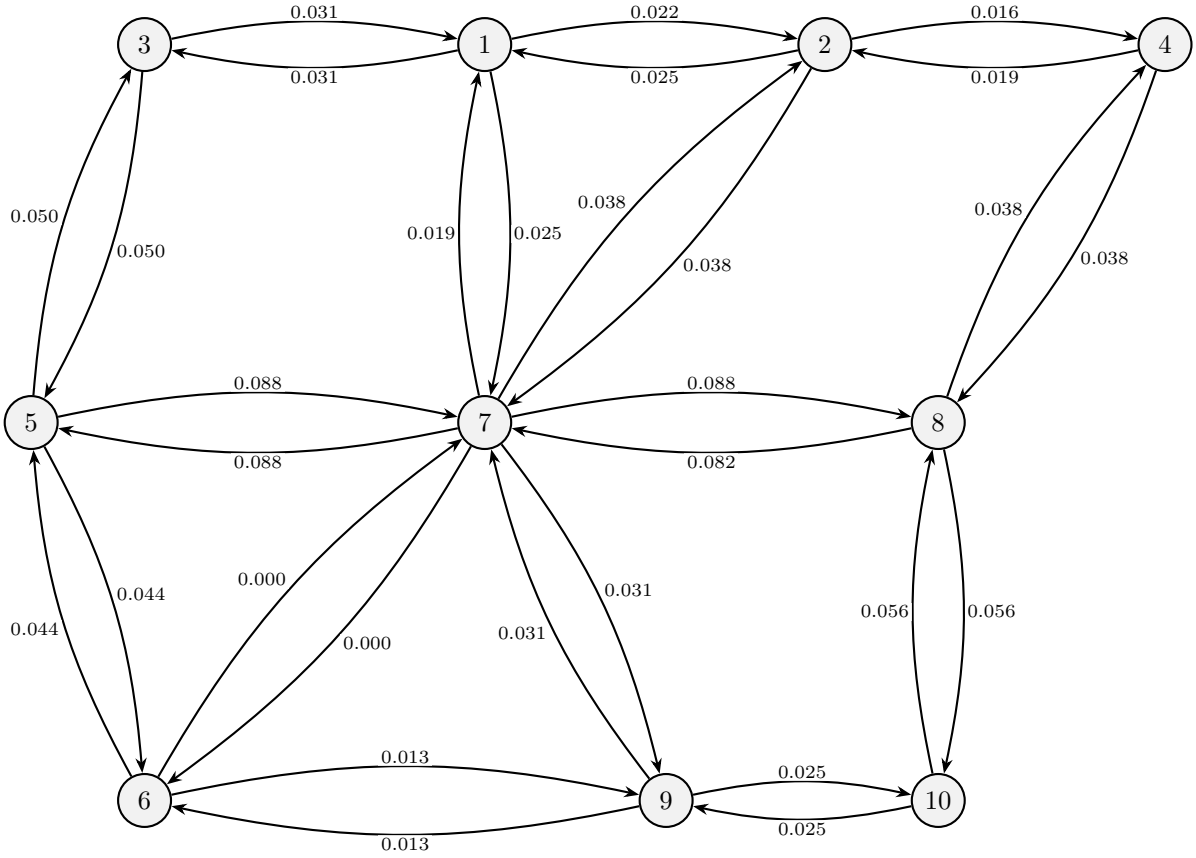

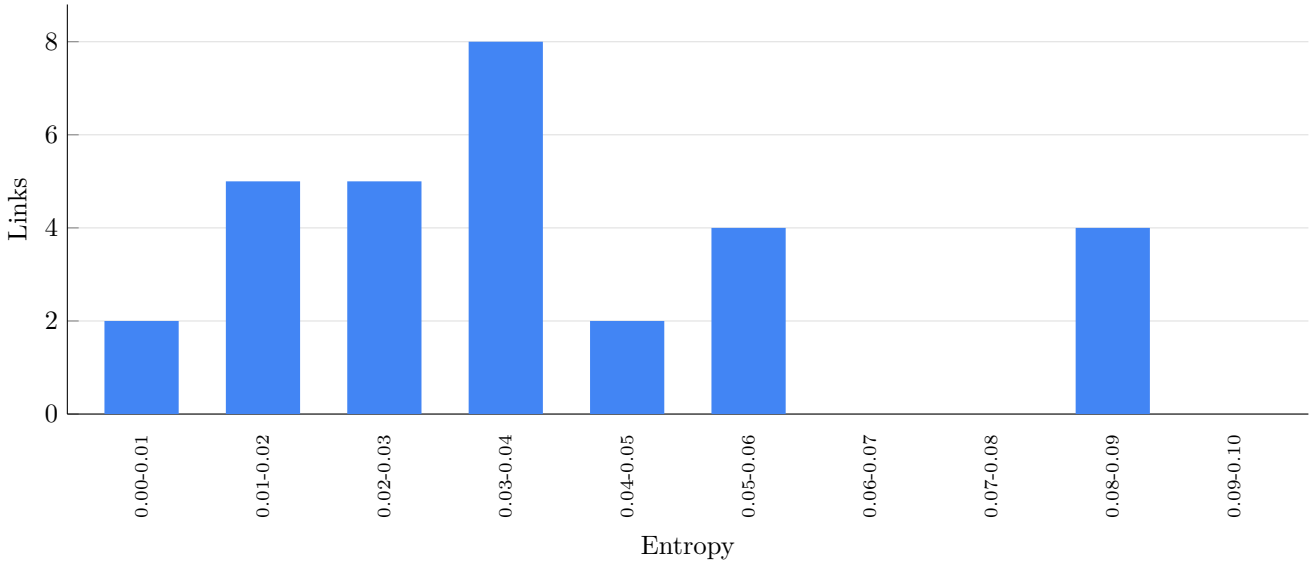

Shannon Entropy

