
IT10 3 - Dedicated Protection - Custom Algorithm - Ascending


Topology

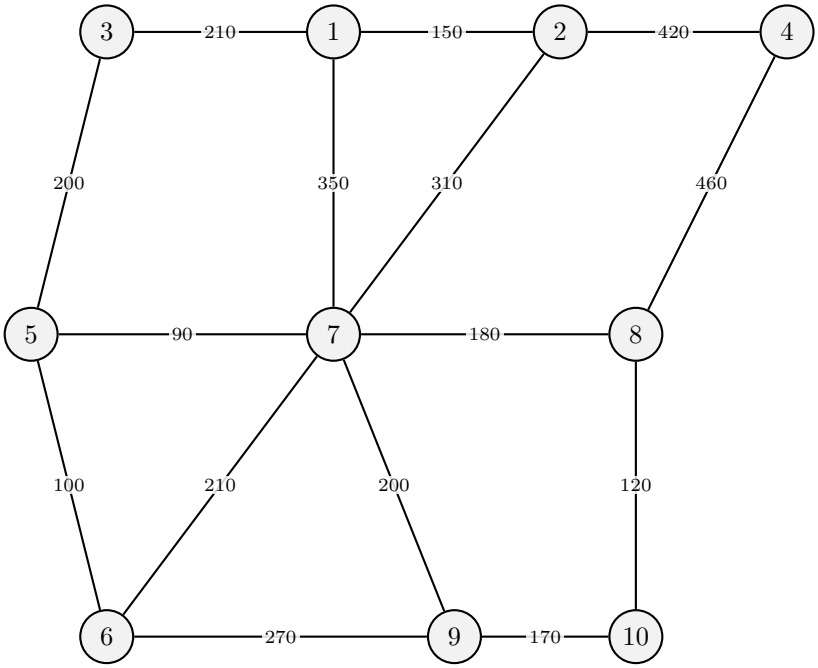


Performance Parameters

Highest link load	801 Gb/s
Highest used FSU	320 / 320
Total used FSUs	534
Transponder cost	267.0
SC-DP-QPSK transponders	178
SC-DP-16QAM transponders	0
DP-16QAM transponders	0


Link Load Map

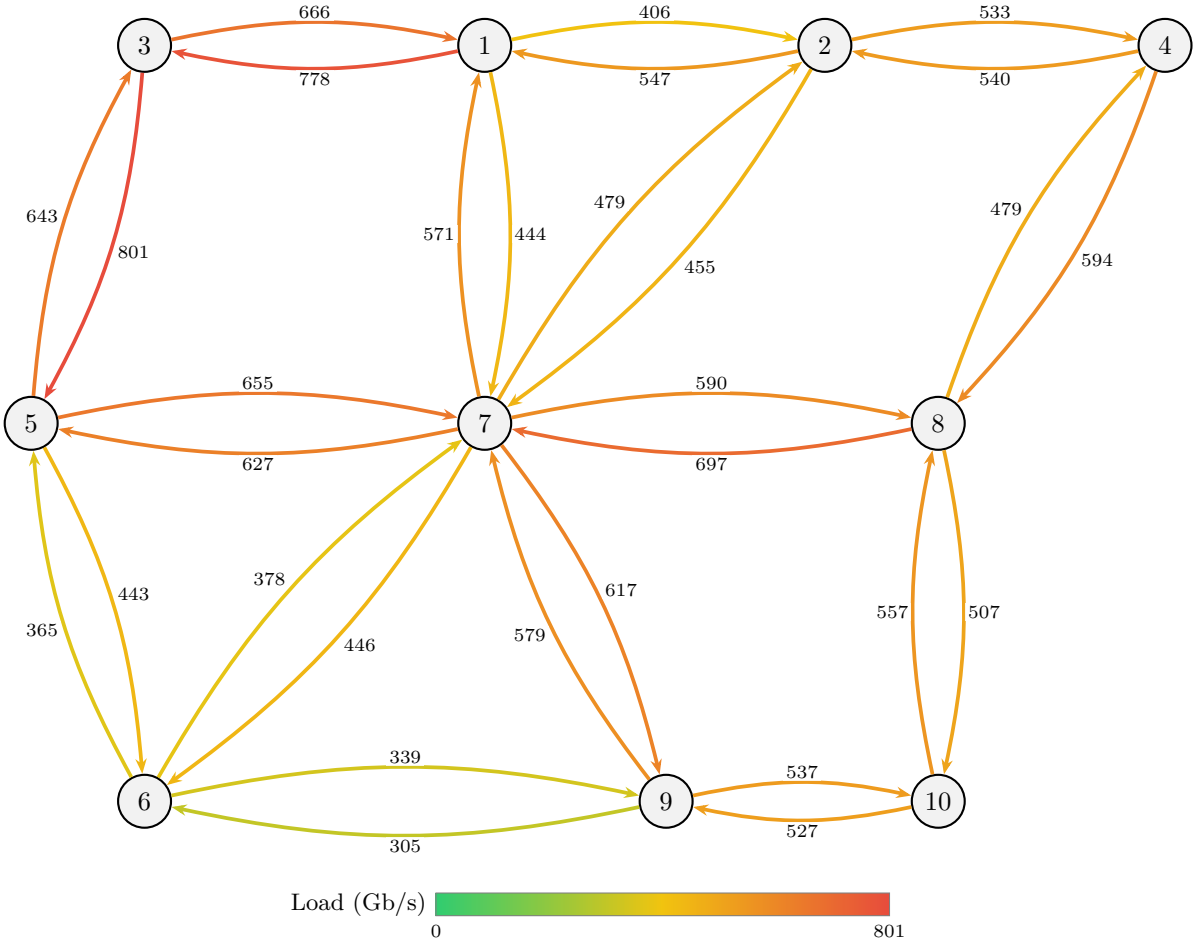


Link Load Distribution

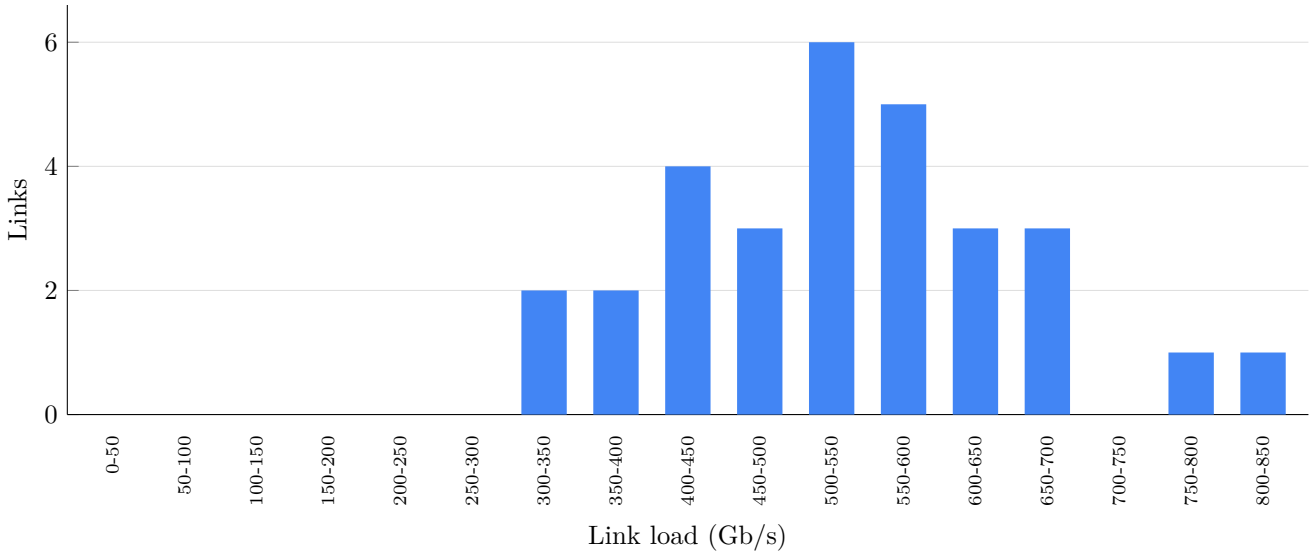


Spectrum Occupancy

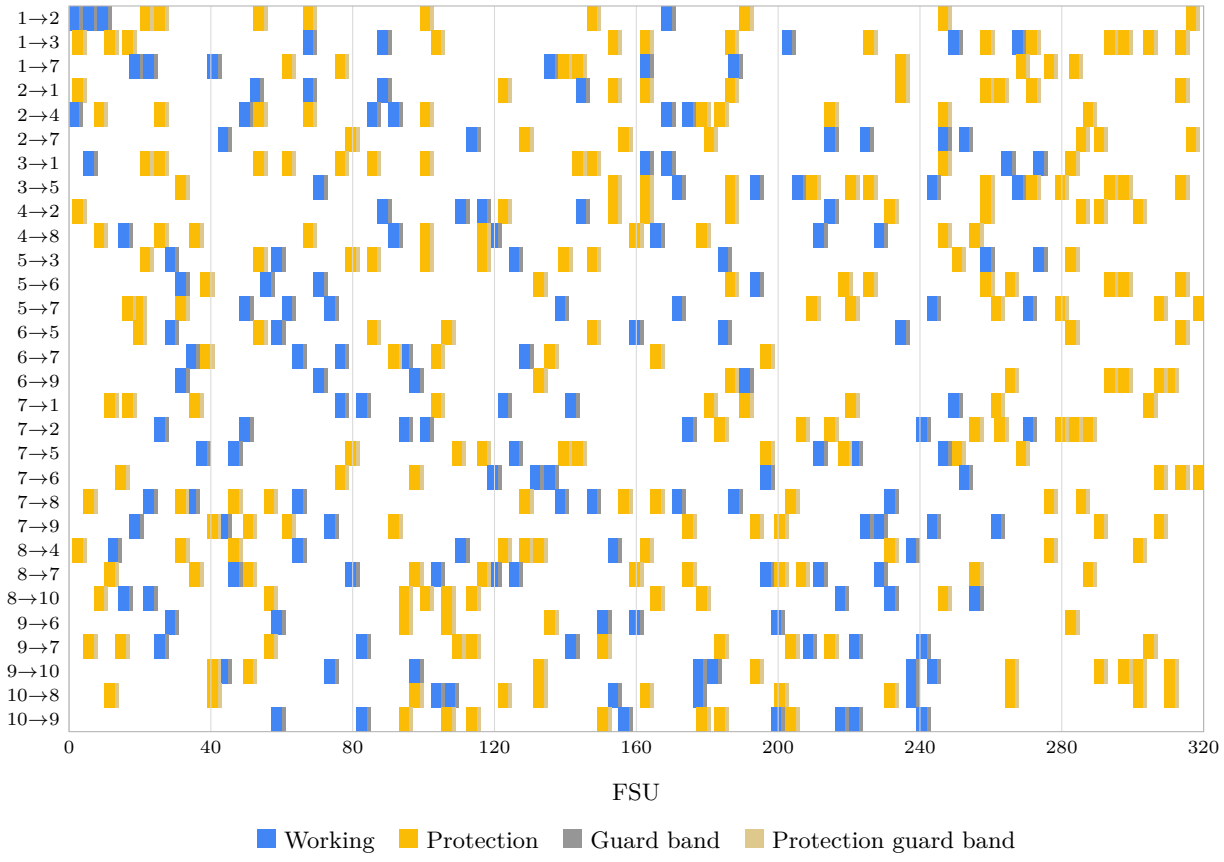


Path Length Distribution

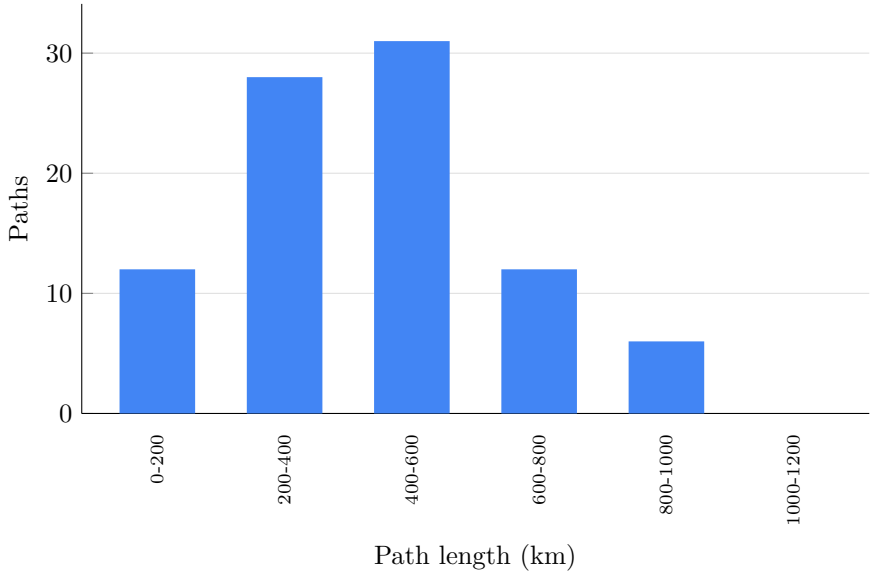


Protection Path Length Distribution

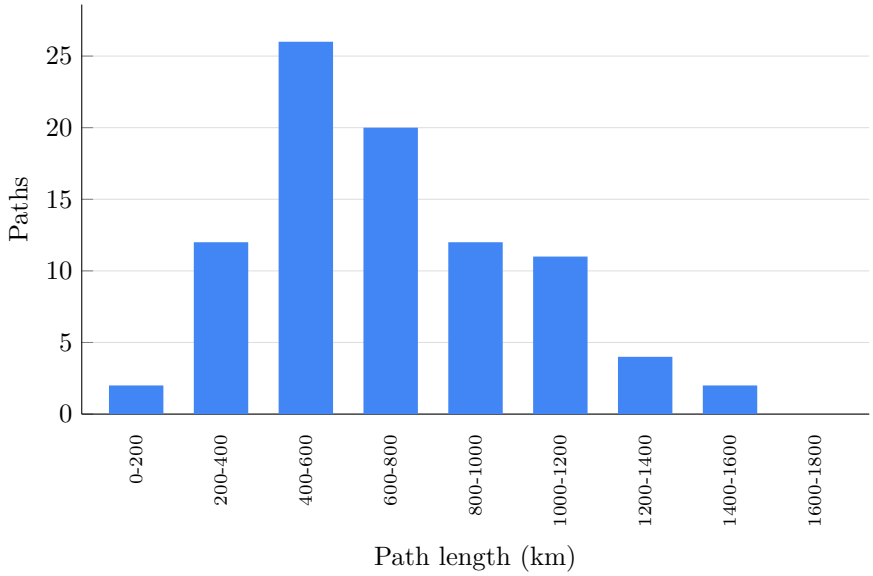

Utilization Entropy

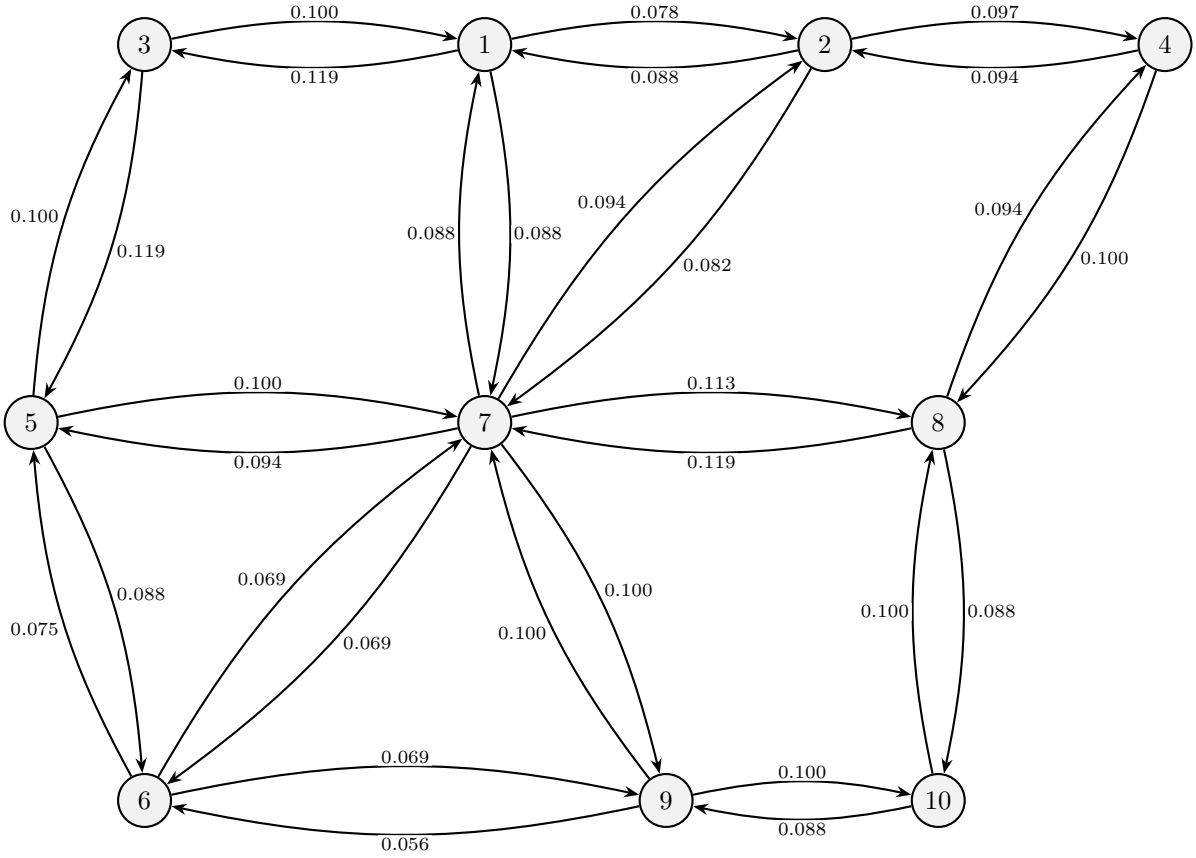

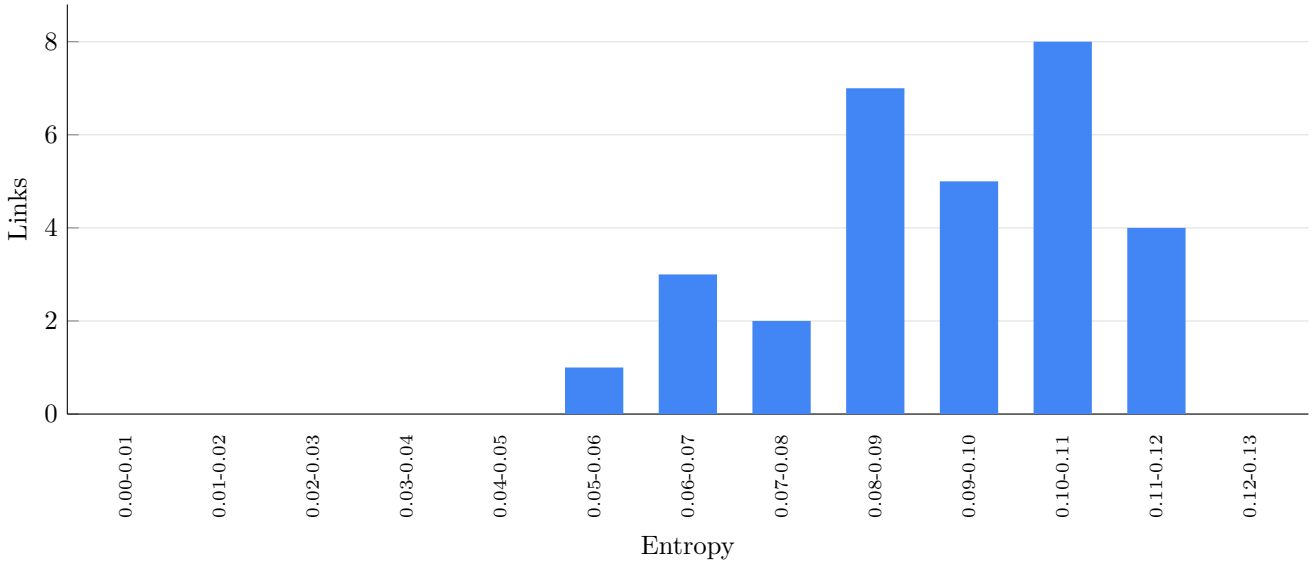

Shannon Entropy

