
IT10 4 - Dedicated Protection - Custom Algorithm - Ascending


Topology

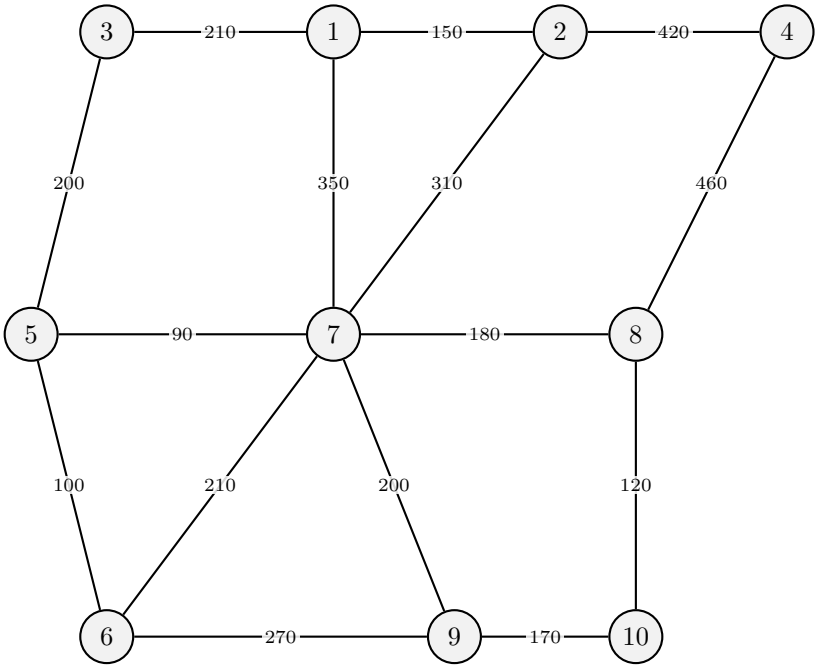


Performance Parameters

Highest link load	1210 Gb/s
Highest used FSU	320 / 320
Total used FSUs	534
Transponder cost	269.0
SC-DP-QPSK transponders	174
SC-DP-16QAM transponders	4
DP-16QAM transponders	0


Link Load Map

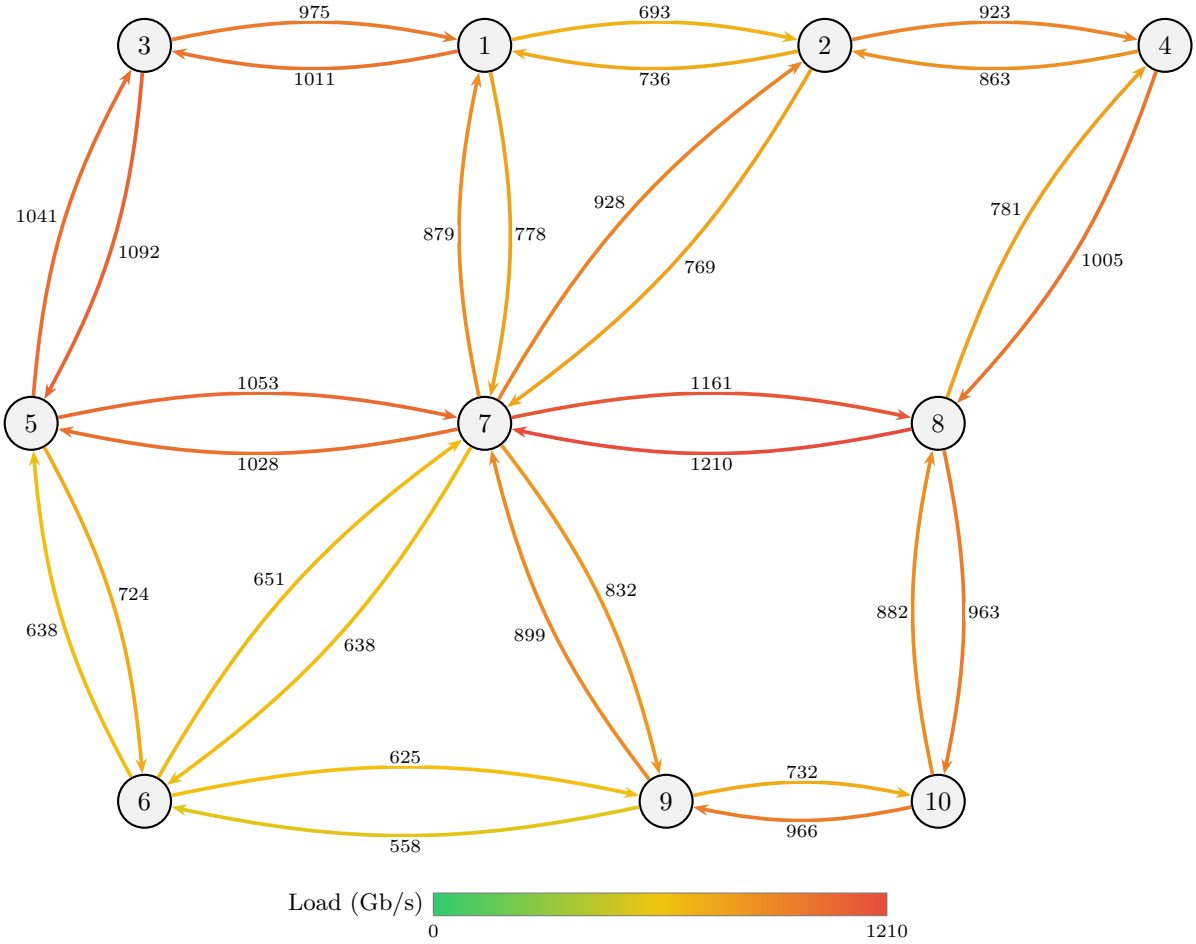


Link Load Distribution

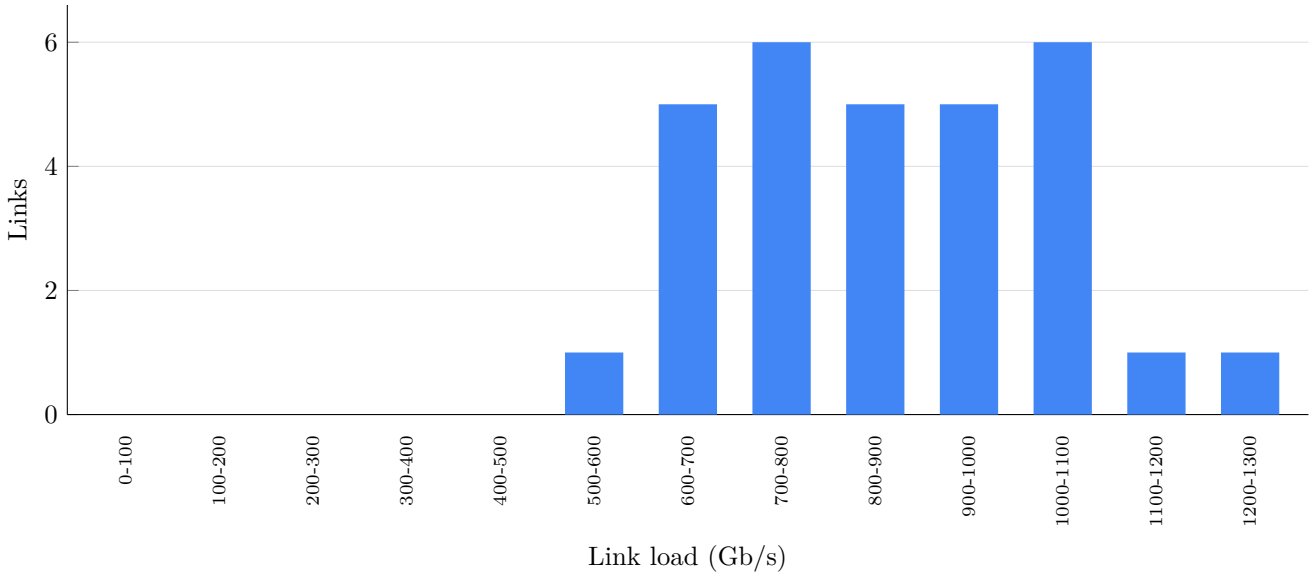


Spectrum Occupancy

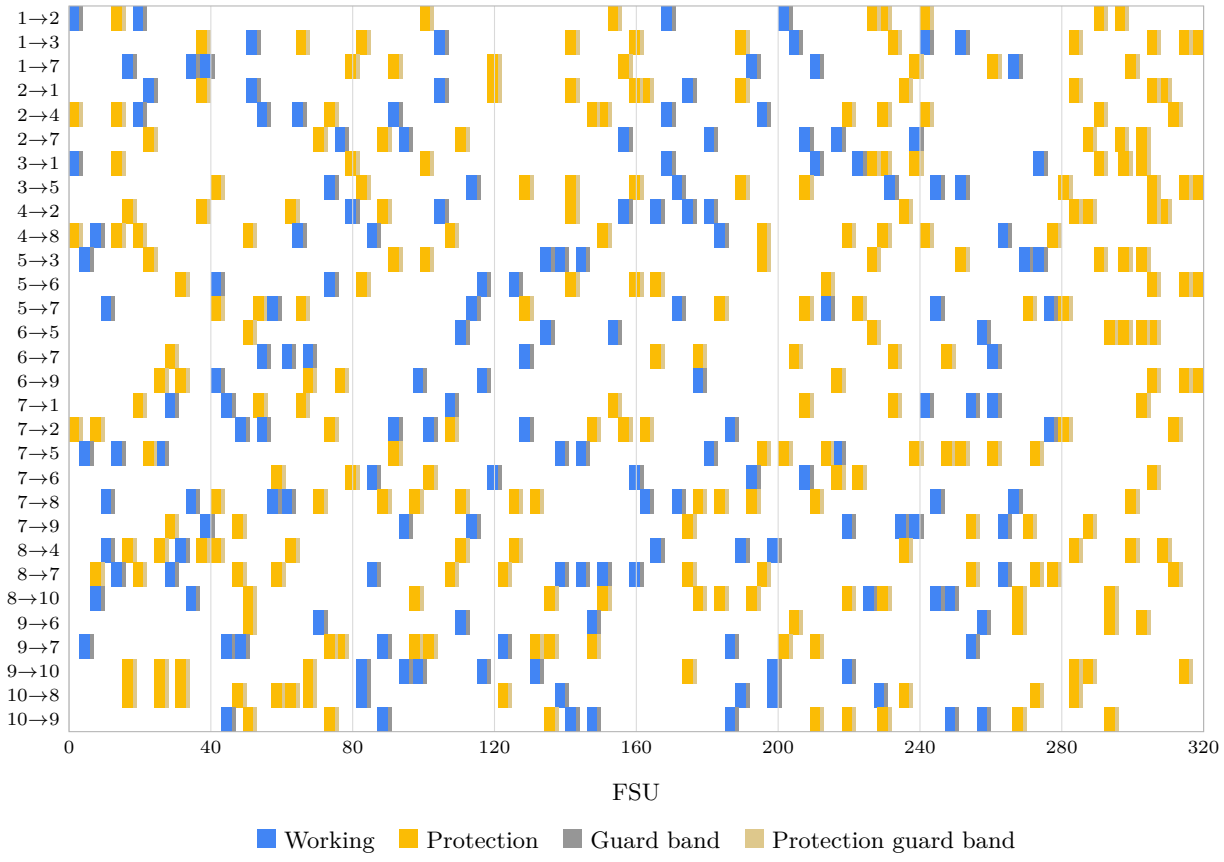


Path Length Distribution

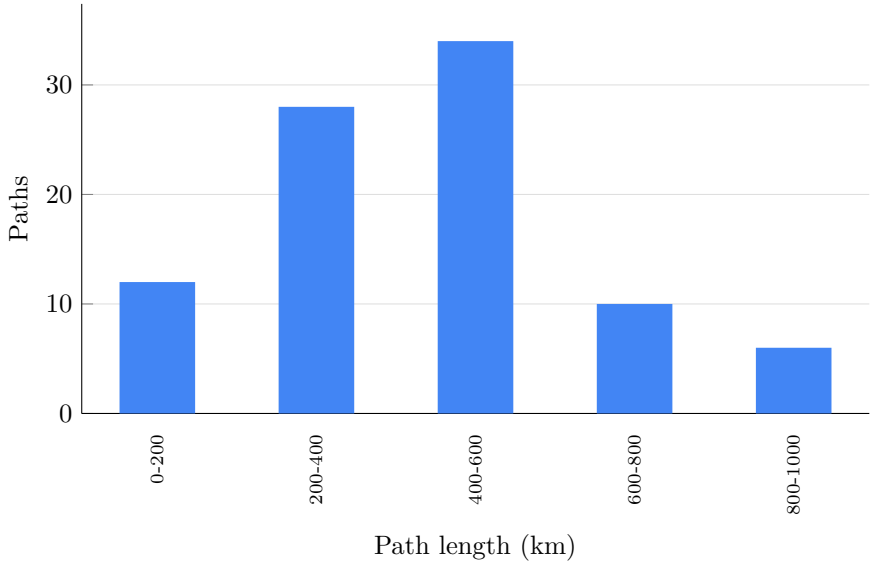


Protection Path Length Distribution

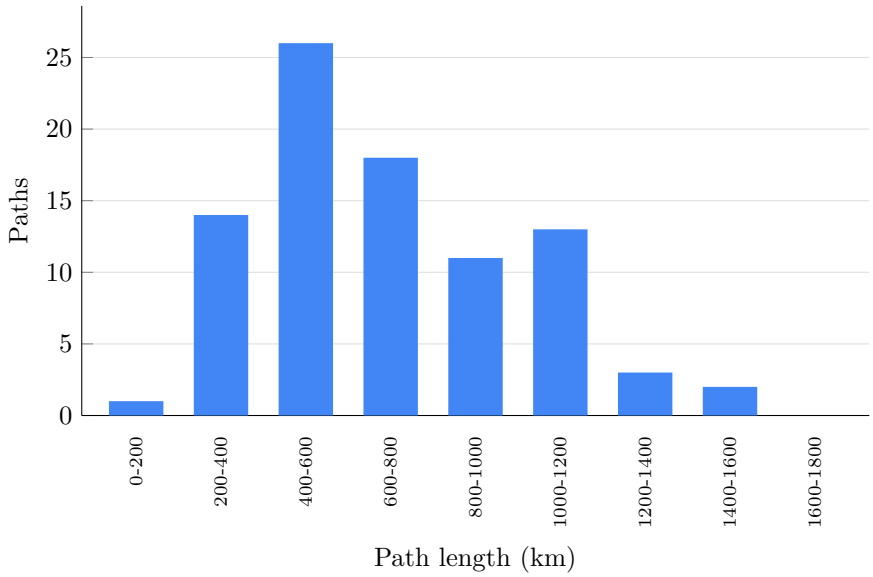

Utilization Entropy

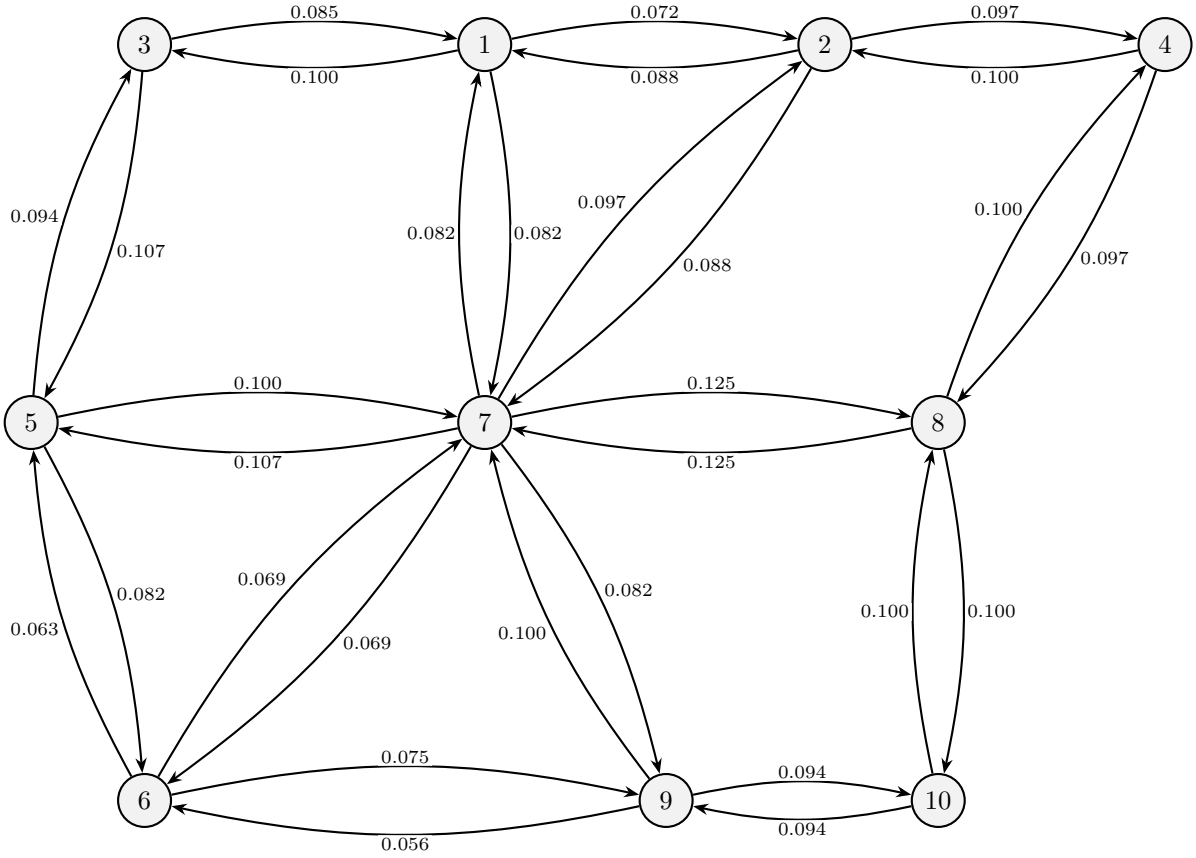

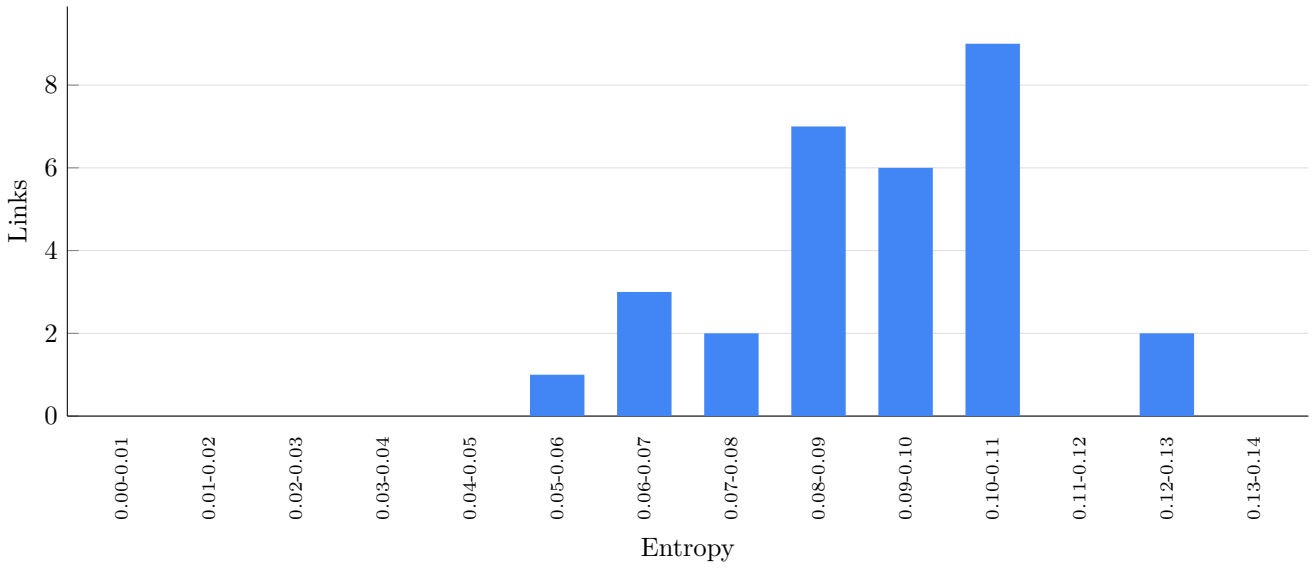

Shannon Entropy

