
IT10 4 - Shared Protection - Custom Algorithm - Ascending


Topology

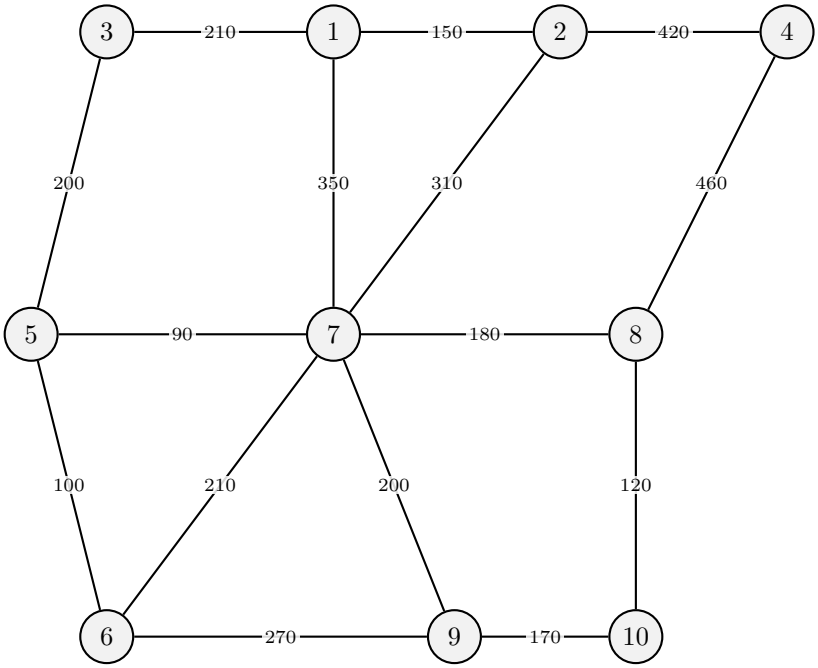


Performance Parameters

Highest link load	480 Gb/s
Highest used FSU	278 / 320
Total used FSUs	270
Transponder cost	136.0
SC-DP-QPSK transponders	88
SC-DP-16QAM transponders	2
DP-16QAM transponders	0


Link Load Map

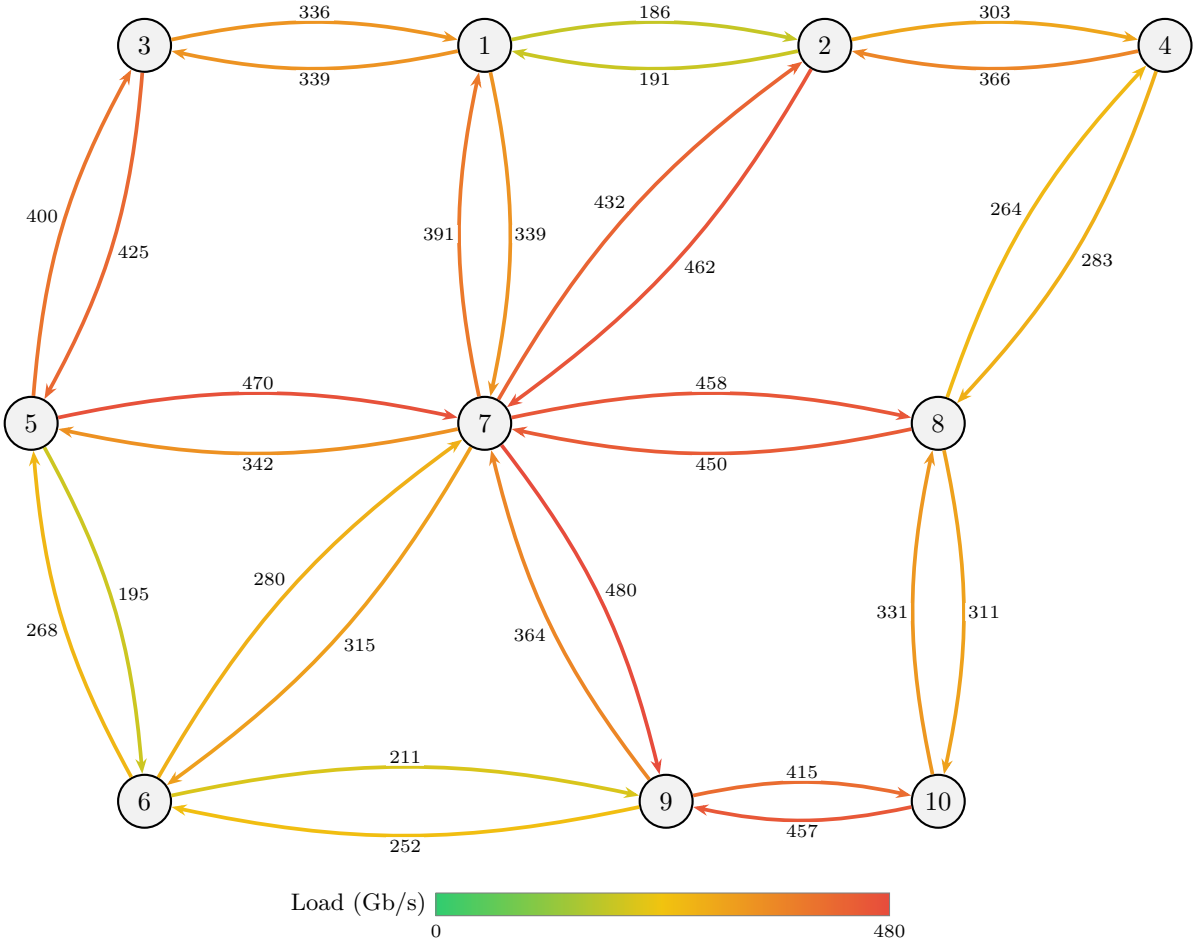


Link Load Distribution

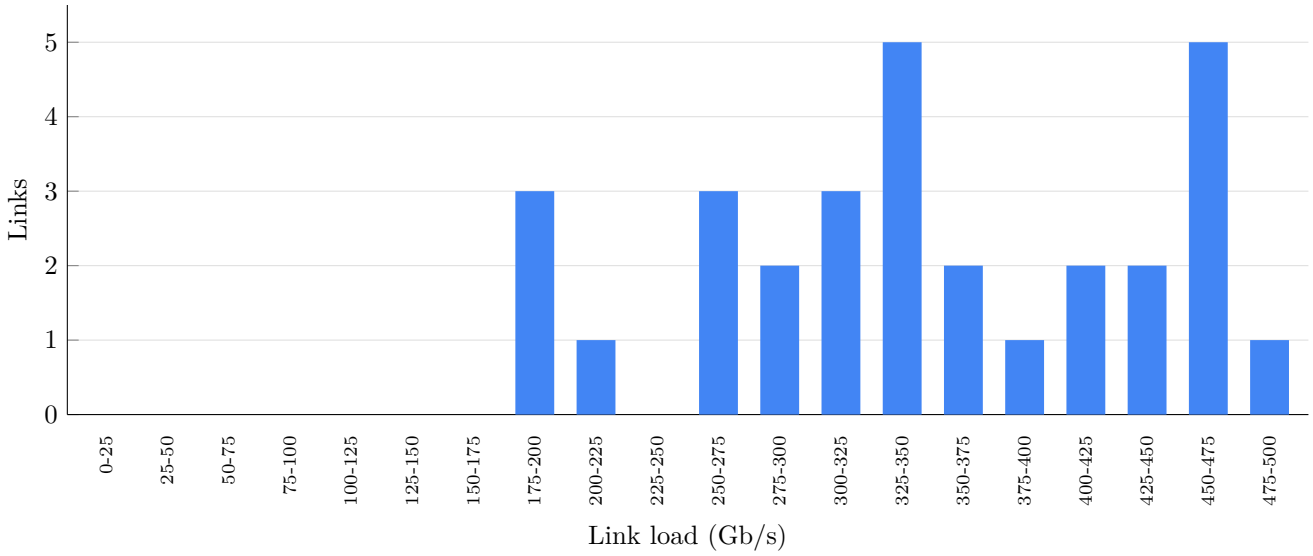


Spectrum Occupancy

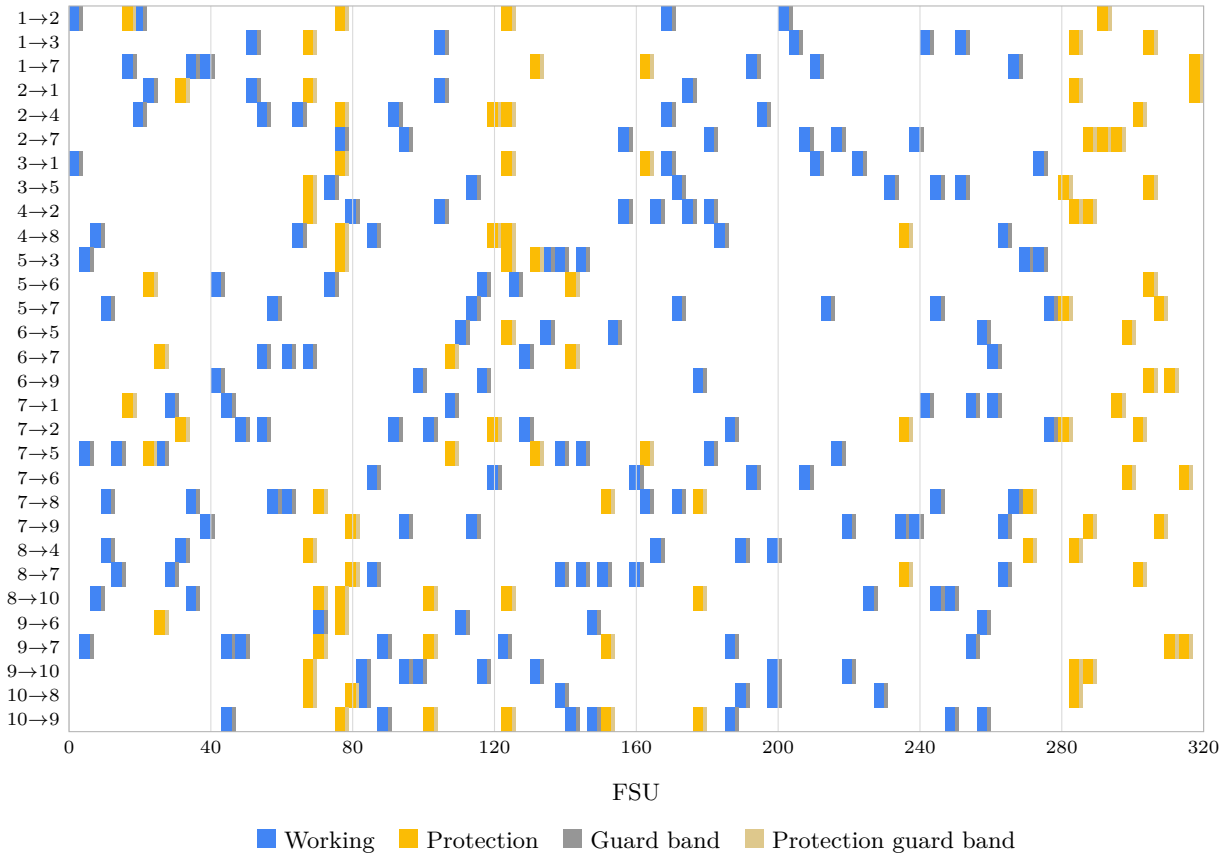


Path Length Distribution

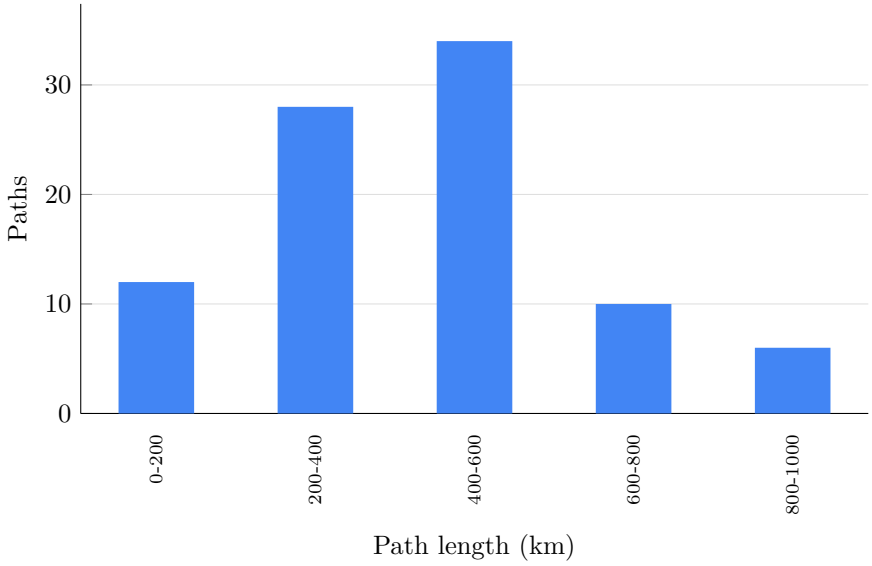

Utilization Entropy

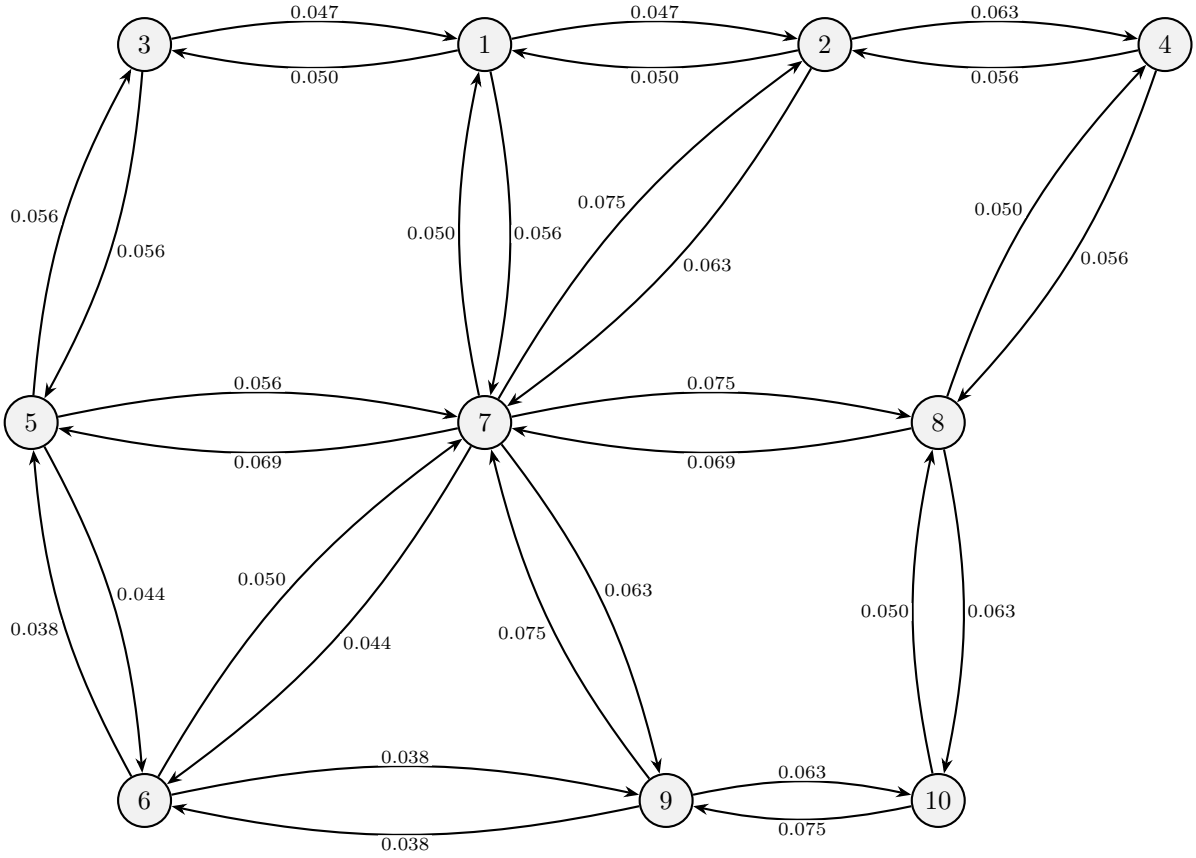

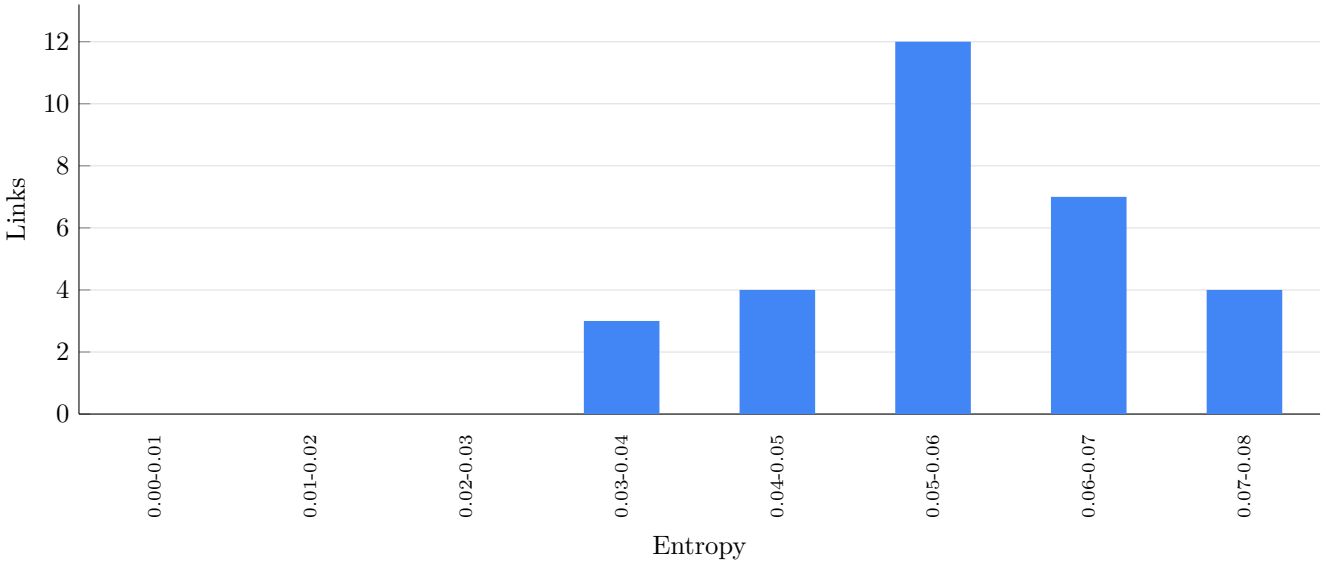

Shannon Entropy

