
IT10 5 - No Protection - Benchmarking Algorithm - Ascending


Topology

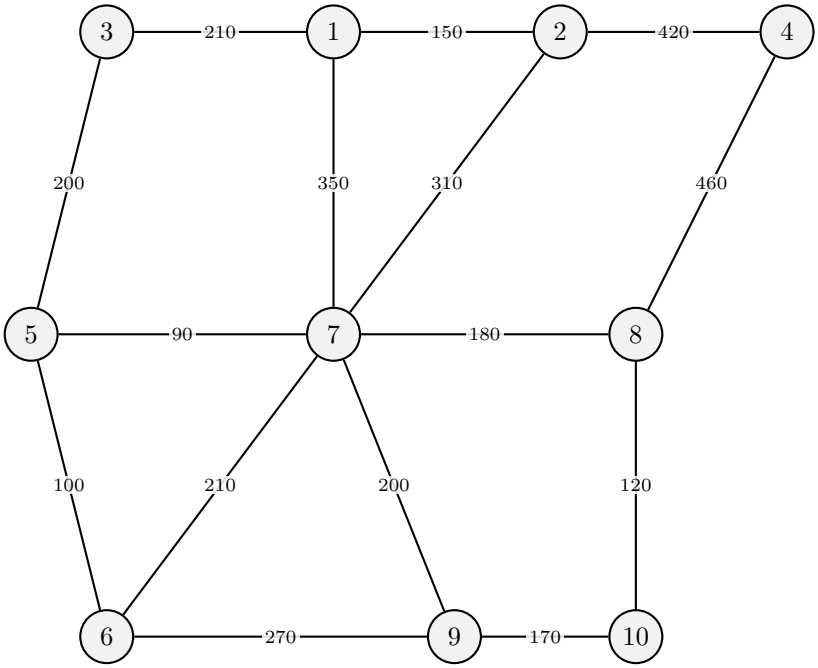


Performance Parameters

Highest link load	1252 Gb/s
Highest used FSU	297 / 320
Total used FSUs	306
Transponder cost	155.5
SC-DP-QPSK transponders	65
SC-DP-16QAM transponders	29
DP-16QAM transponders	0


Link Load Map

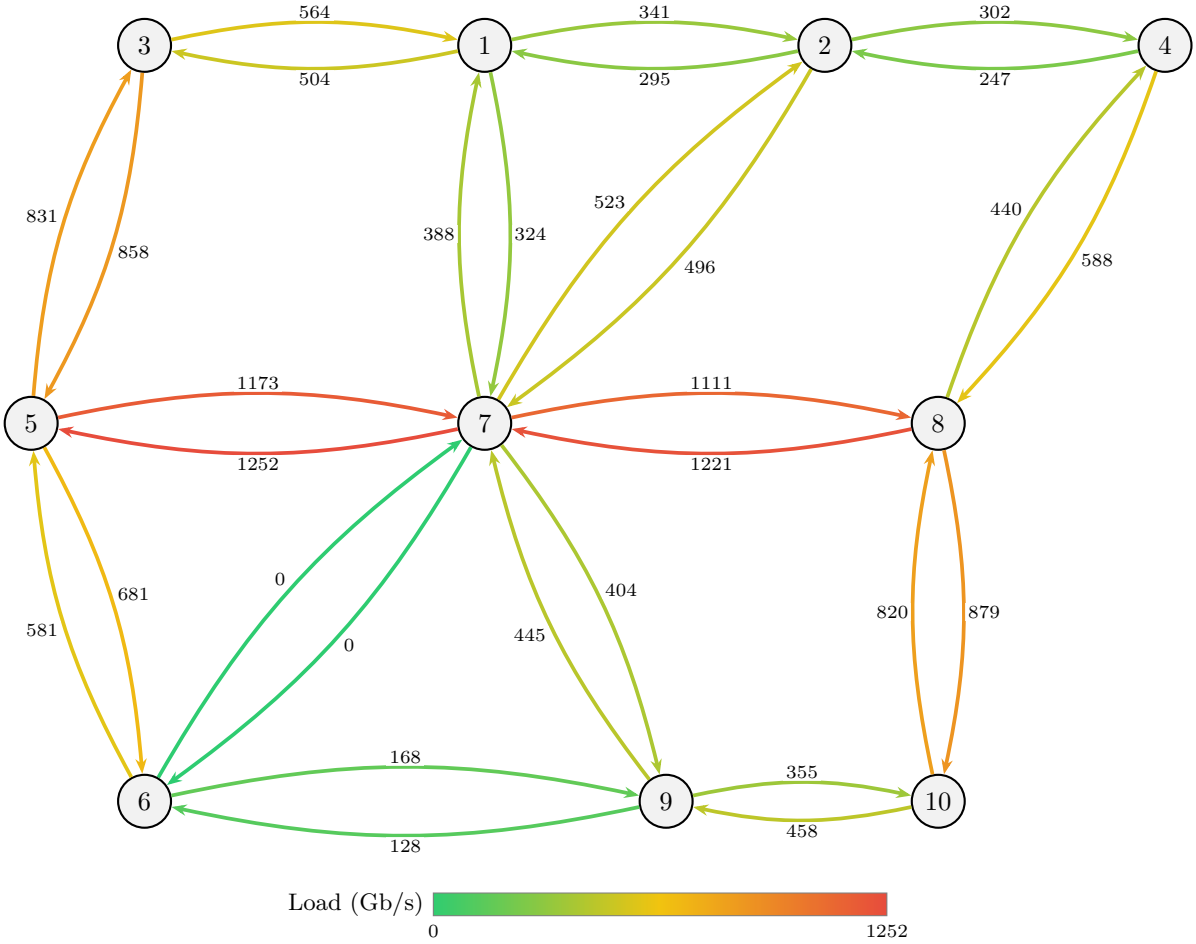


Link Load Distribution

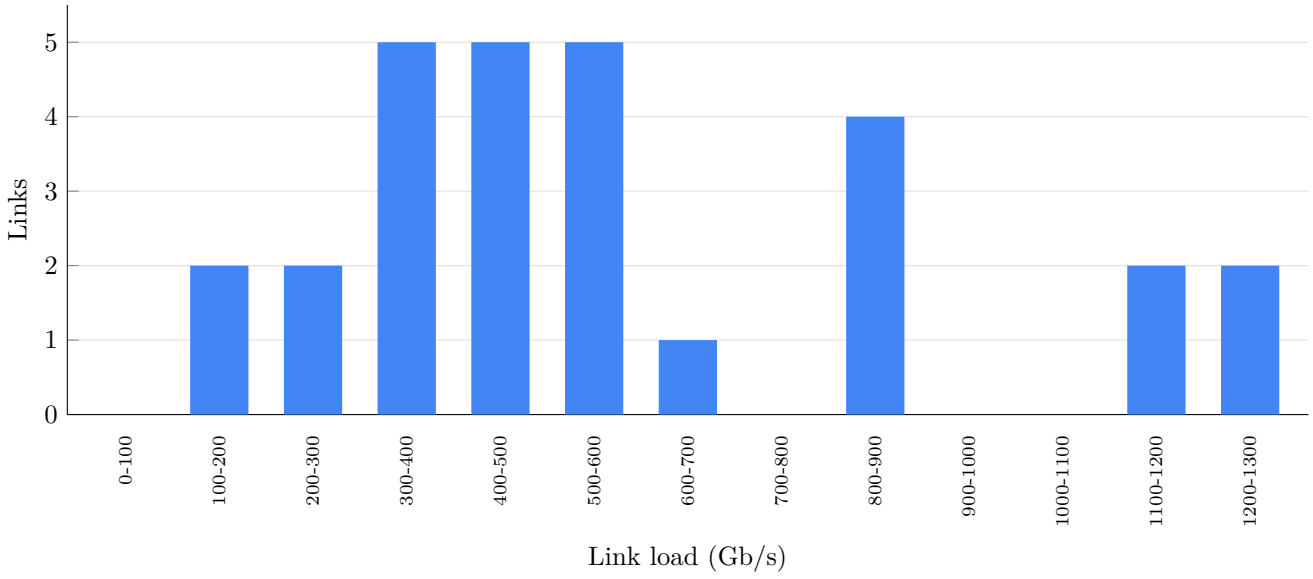


Spectrum Occupancy

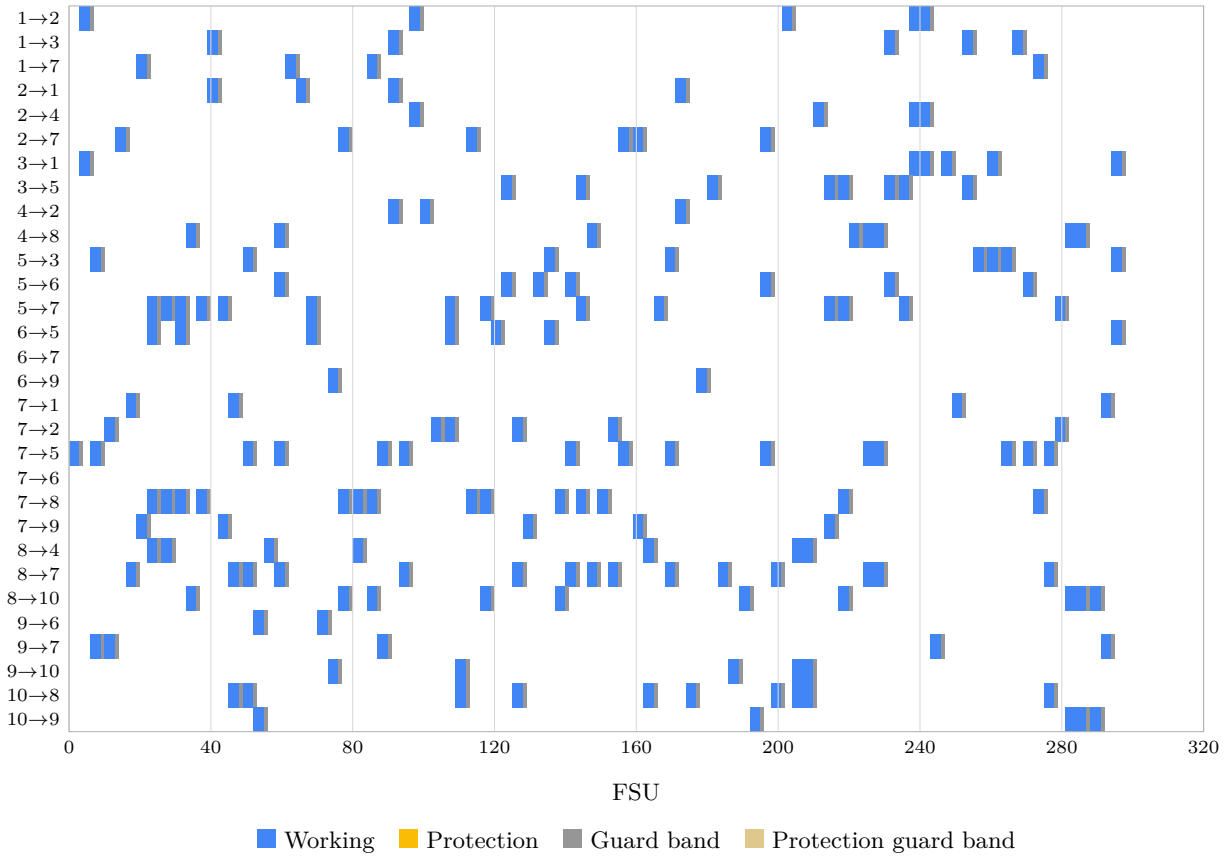


Path Length Distribution

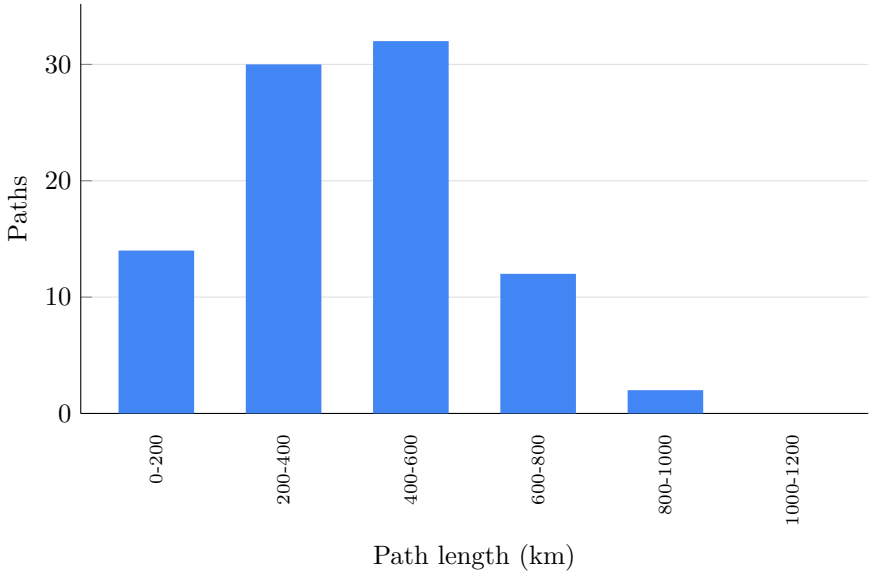

Utilization Entropy

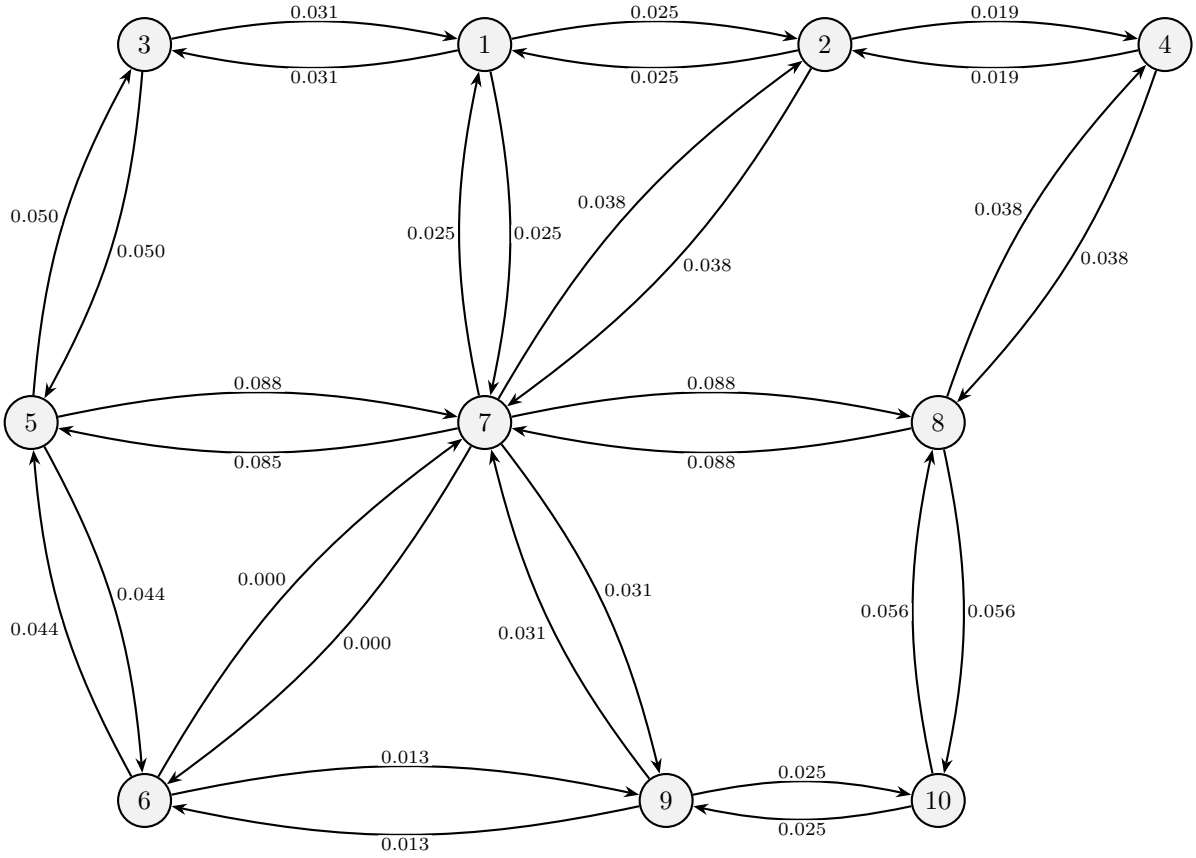

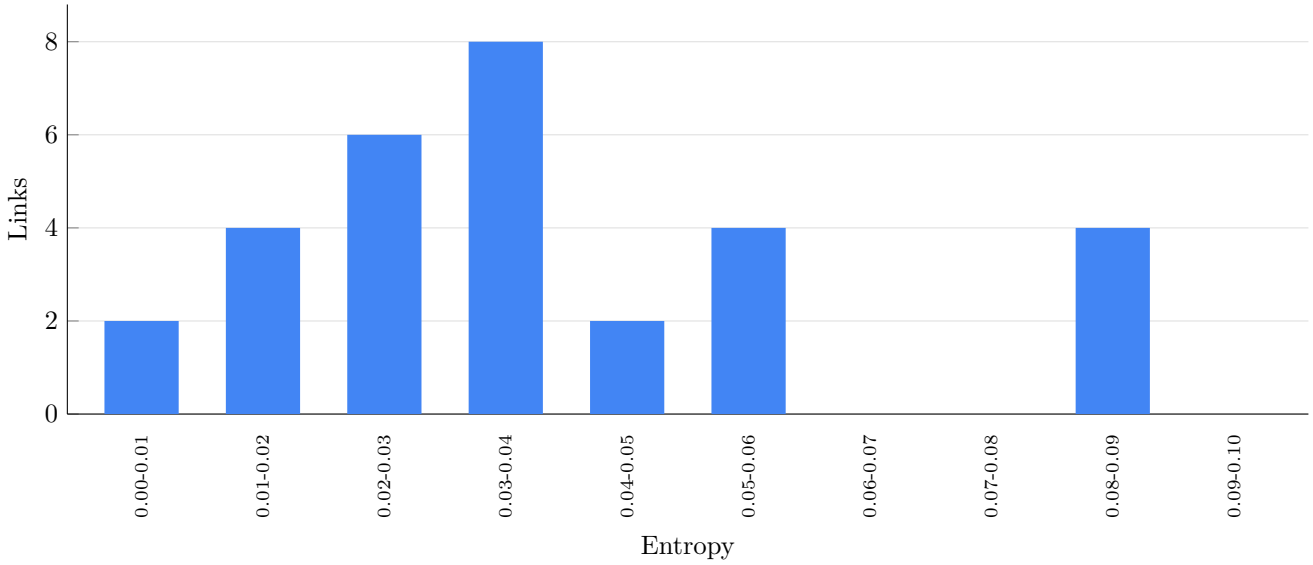

Shannon Entropy

