
IT10 5 - Shared Protection - Custom Algorithm - Descending


Topology

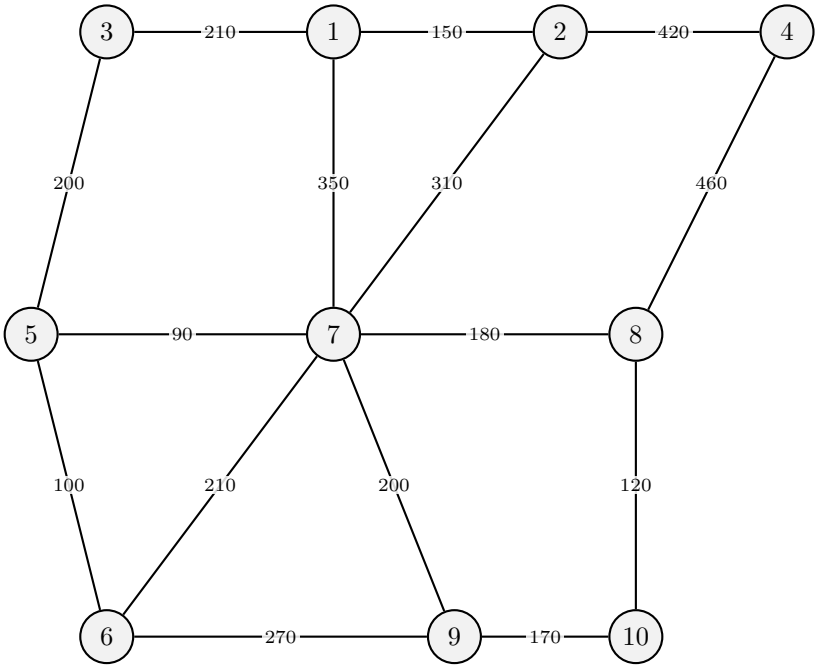


Performance Parameters

Highest link load	692 Gb/s
Highest used FSU	293 / 320
Total used FSUs	315
Transponder cost	156.5
SC-DP-QPSK transponders	67
SC-DP-16QAM transponders	28
DP-16QAM transponders	0


Link Load Map

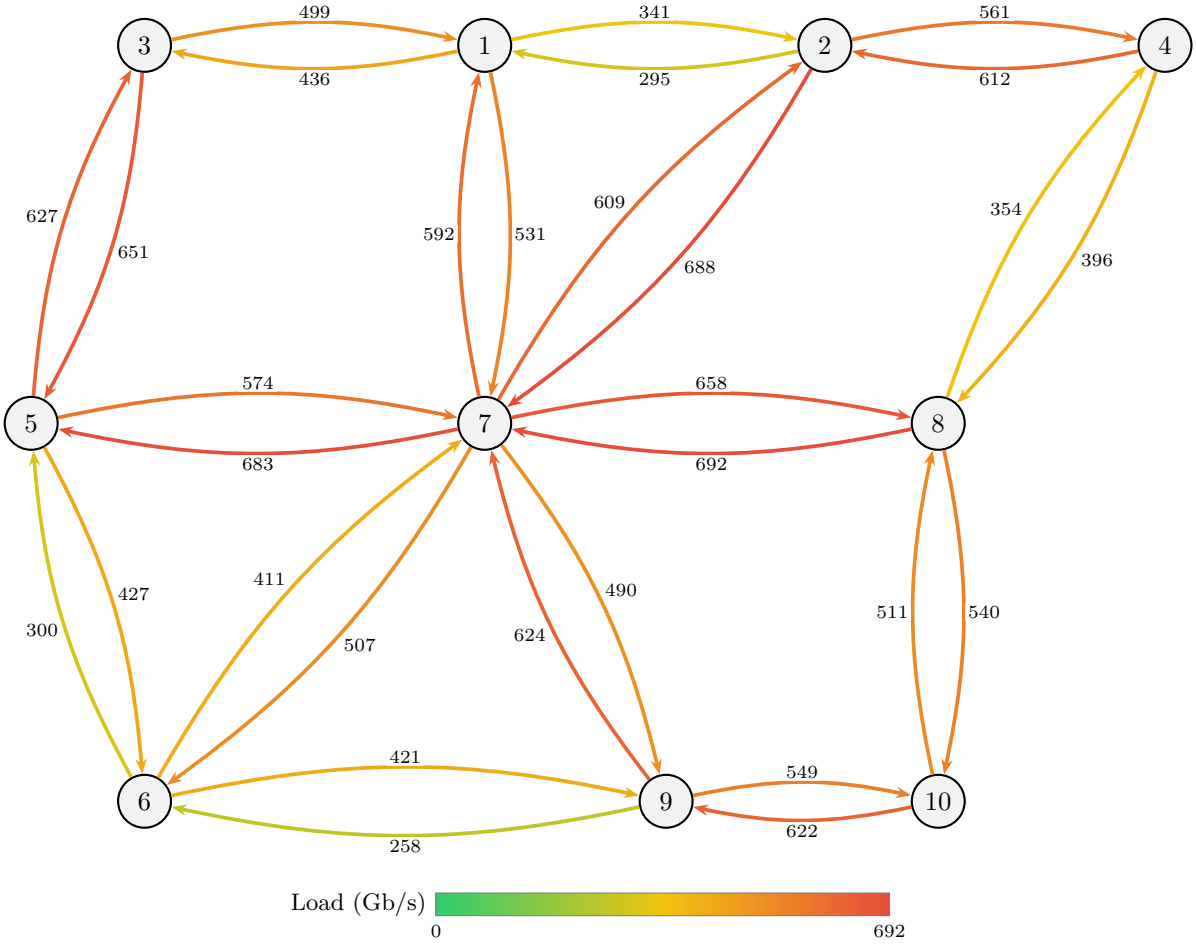


Link Load Distribution

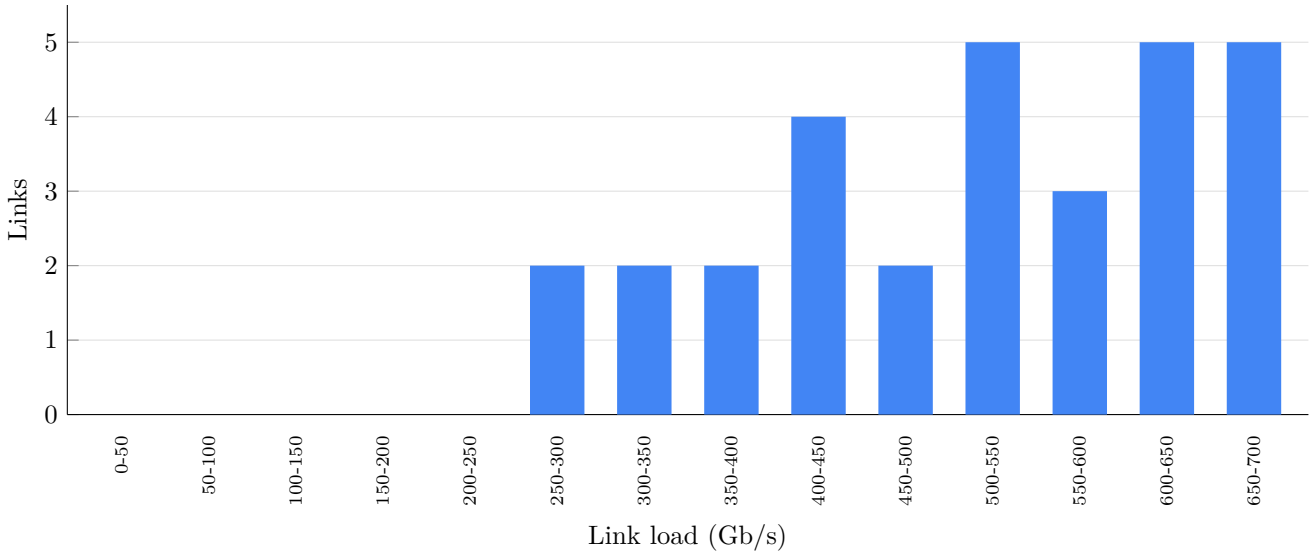


Spectrum Occupancy

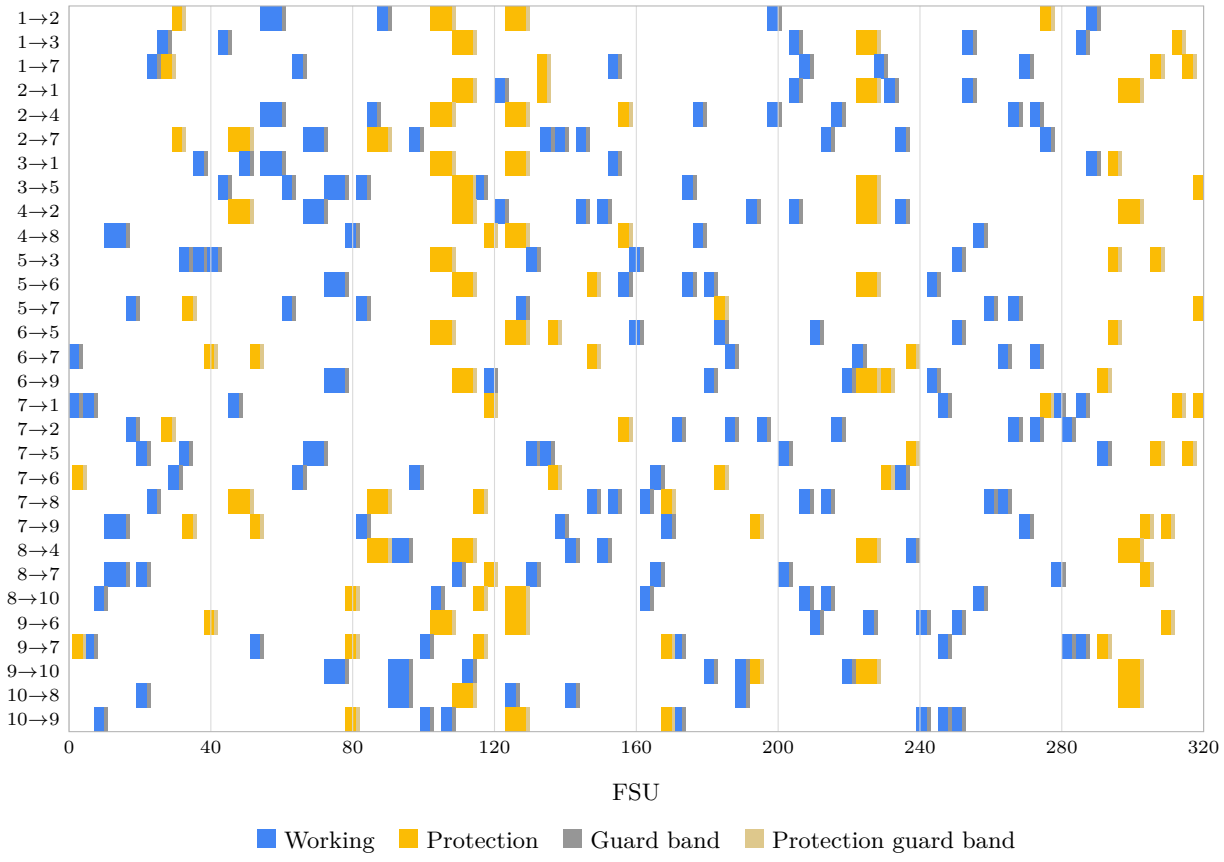


Path Length Distribution

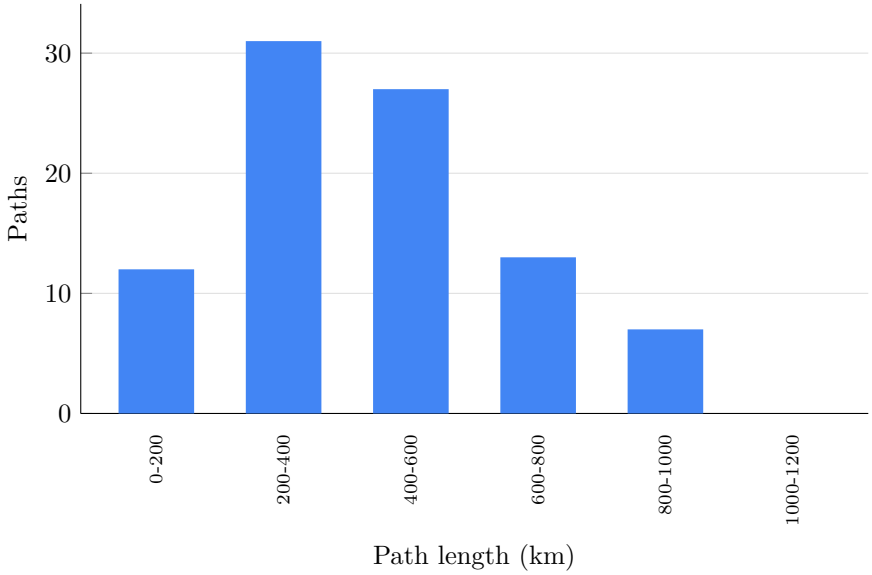

Utilization Entropy

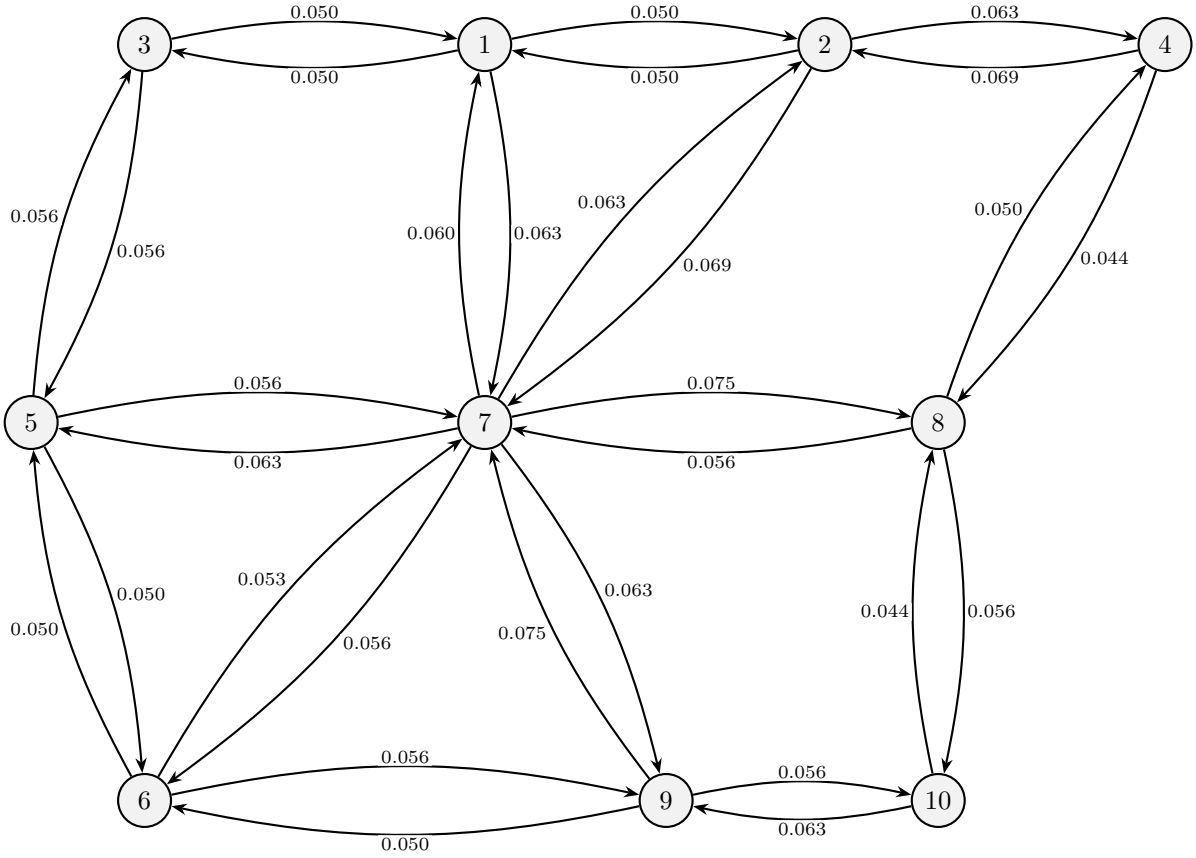

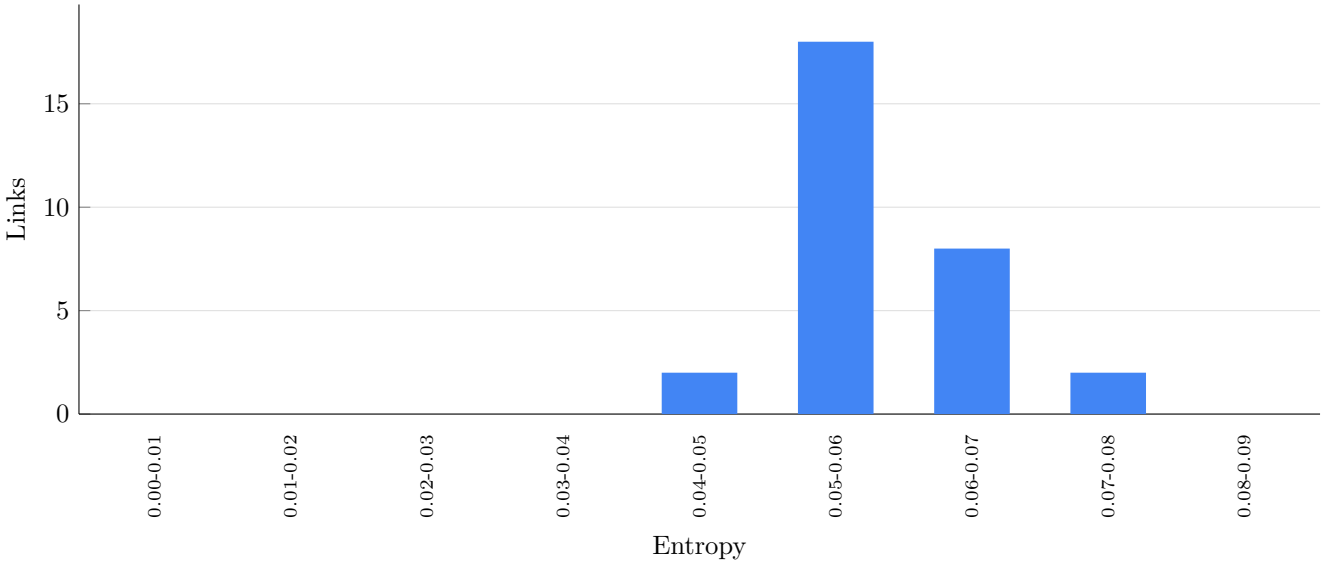

Shannon Entropy

