





Digital I/O



Digital I/O




USB power GPIO

Default output high : USB power on



BID0	BID1
1	0
2	0
3	1
4	1

Intel Rsmrst recommend
2.9V -> 0.8V
(Non 2.1V -> 0.8V)

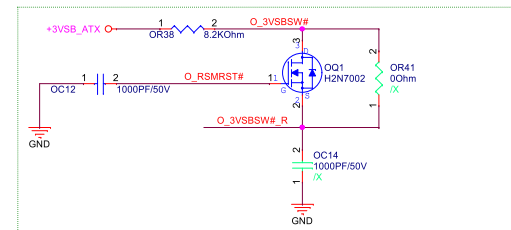

ASUS		Title : SO-1(F81866-D)	
ASUSTek COMPUTER INC.		Engineer: <OrgAddr>	
Size	Project Name	Rev	
Custom	IMBM-HS1C	1.00	
Date: Tuesday, October 31, 2017	Sheet	54	of 78

