


```
H:QS sample
L:ES sample
```




.....
This signal has an internal pull-up.

```



BOOT_BIOS_STRAP
H:LPC
L:SPI

```



This signal has an internal pull-up.


0 = Disable No Reboot mode. (Default)
1 = Enable No Reboot mode
(PCH will disable the TCO
Timer system reboot feature).
This function is useful
when running ITP/XDP.

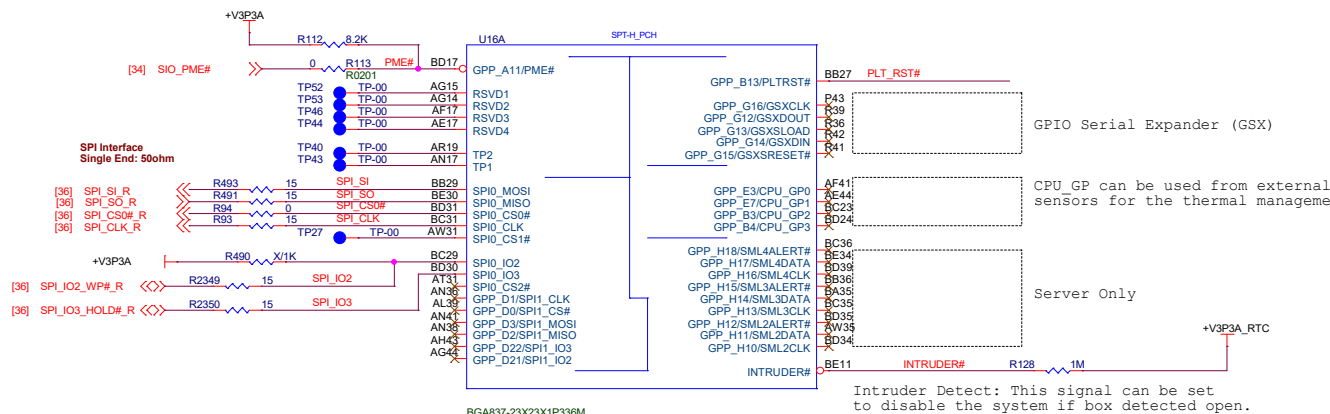


BOOT_BIOS_STRAP	AT29	00000000
-----------------	------	----------

If the GPIO functionality is also not used, the signals can be left as no-connect.

If the GPIO functionality is also not used, the signals can be left as no-connect.

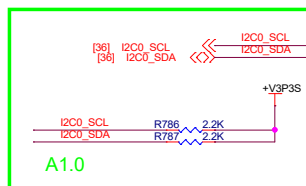


I2C interfaces are not used, the signals can be used as GPIOs instead. If the GPIO functionality is also not used, the signals can be left as no-connect.

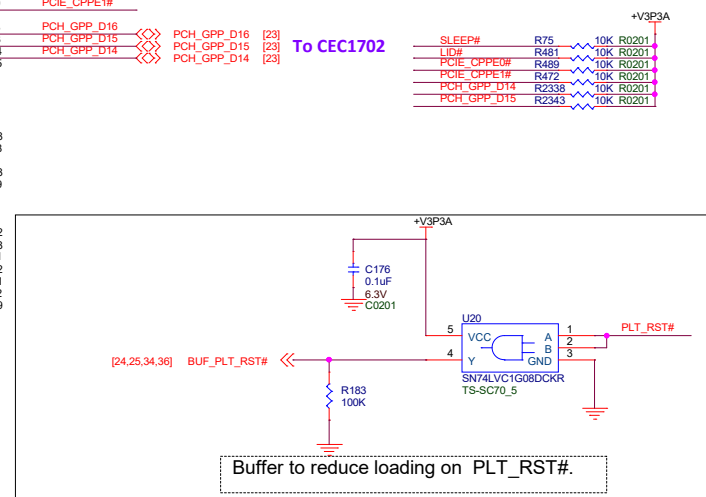


A4EON®
An ASUS® Company

Title		
PCH 1-SPI/SMLINK/UART/I2C		
Size A	Document Number EPD-AAENTI/EEPDAEAENTIA01	Rev: A0.1_0_0
Date: <i>Friday, January 03, 2020</i>		Sheet: 14 of 48


DIO

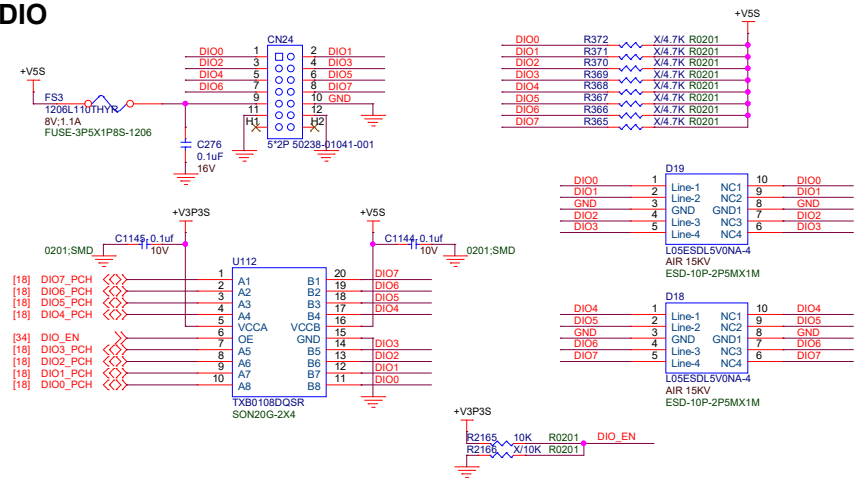



Temperature Monitor

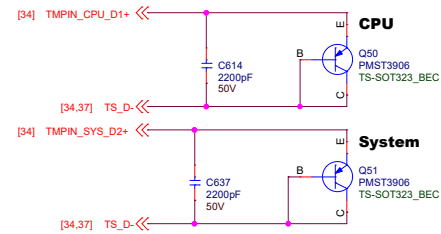

Voltage Monitor

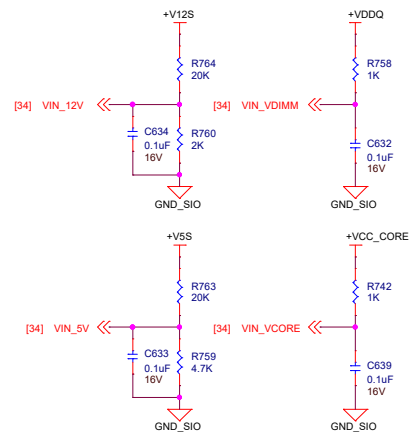

CPU FAN

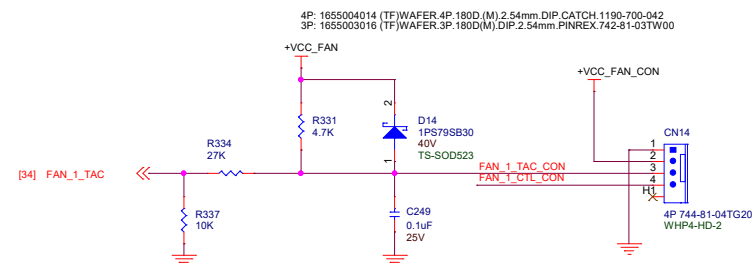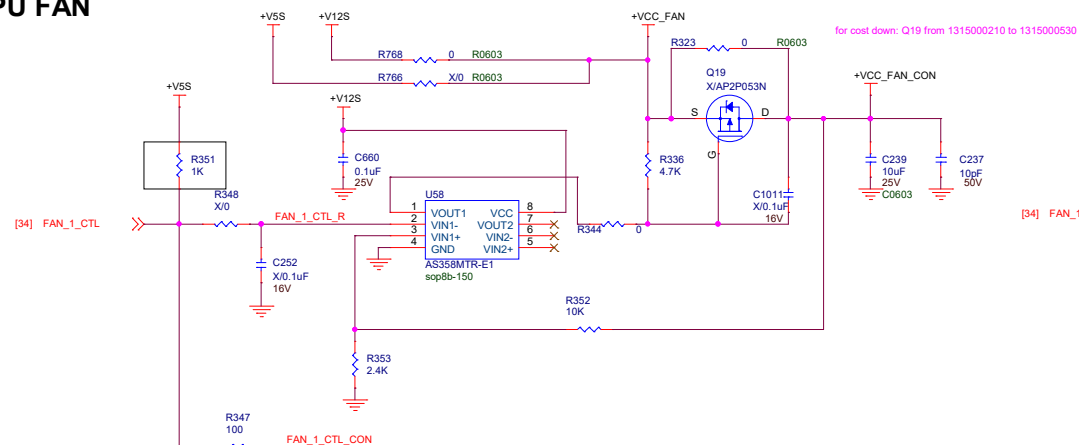

System FAN

