


CPU FAN




C664 耐壓需改 25 V

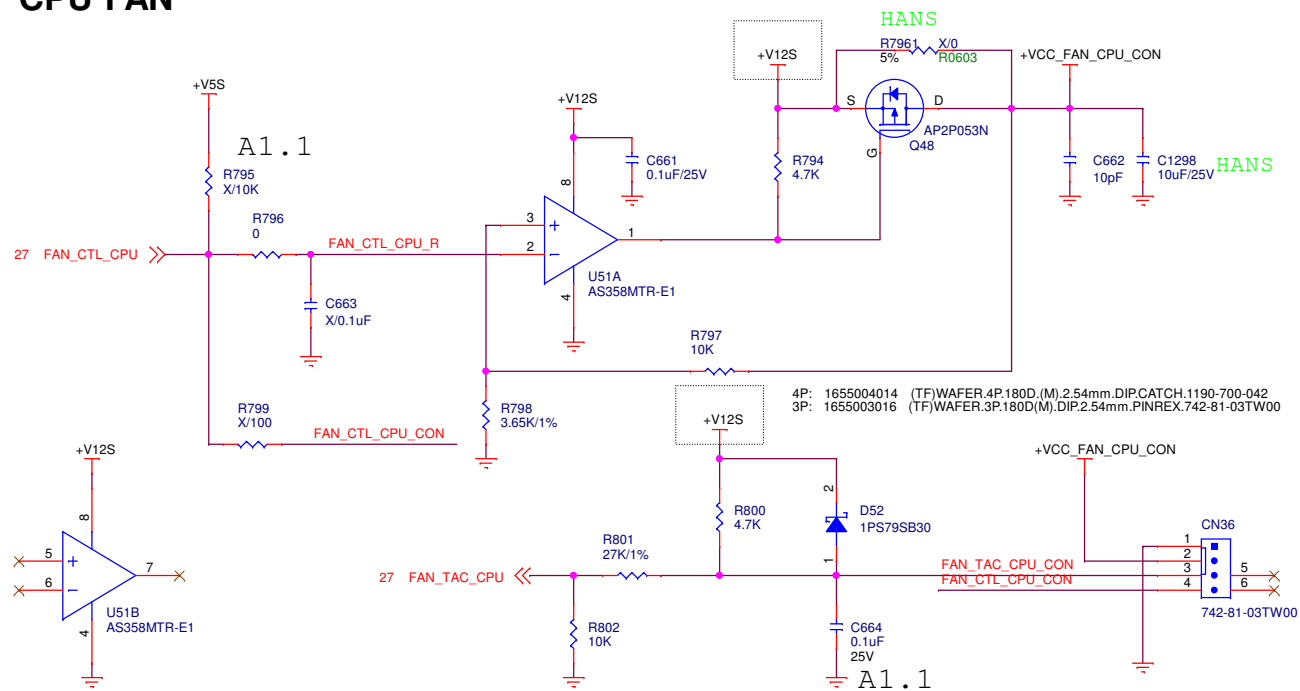


Title SATA, FAN		
Size B	Document Number GENE-KBU6-MLD	Rev: A1.1_0_0
Date: <i>Tuesday, September 08, 2020</i>		Sheet: 23 of 42


COM1

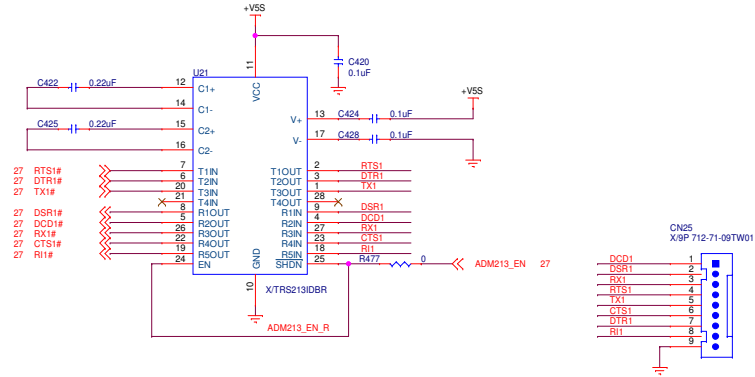


COM2

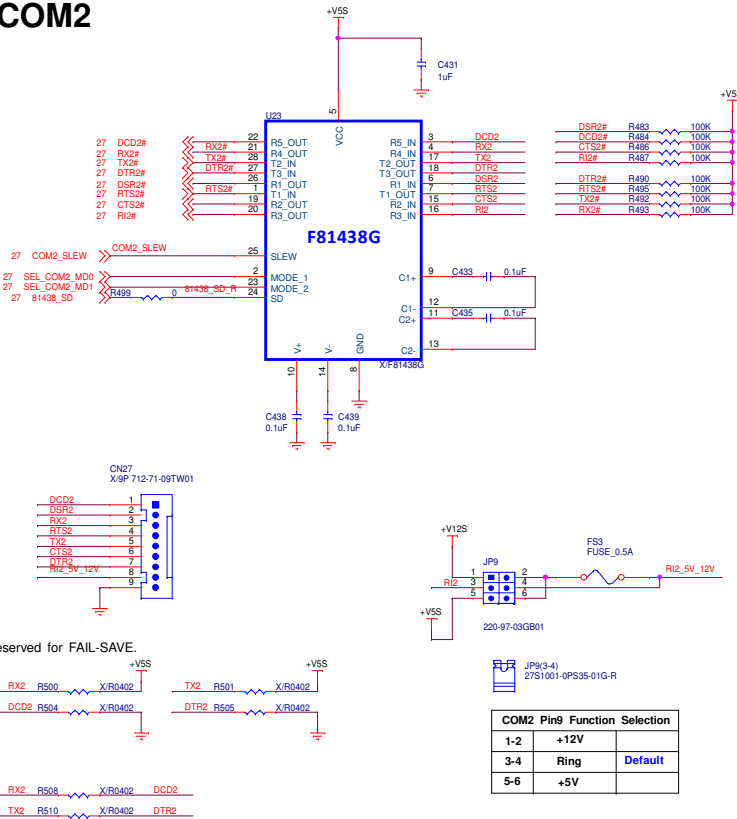

COM4

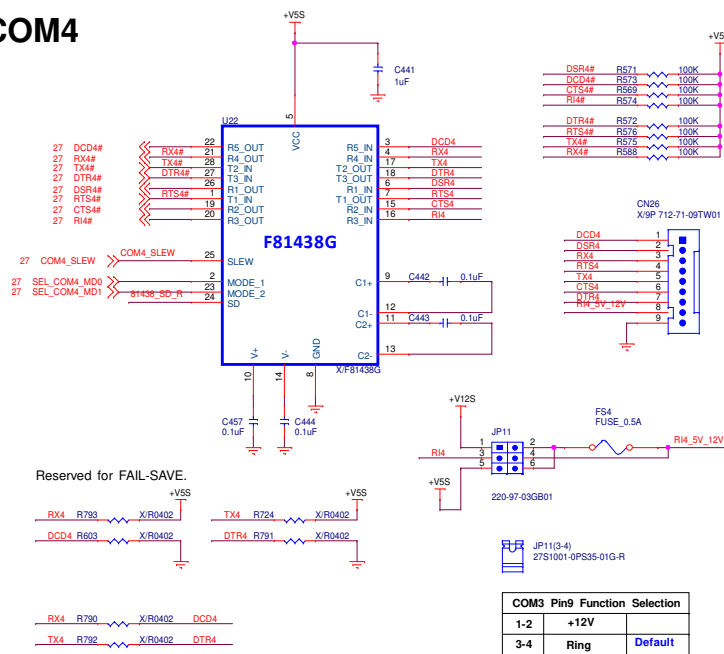

COM3

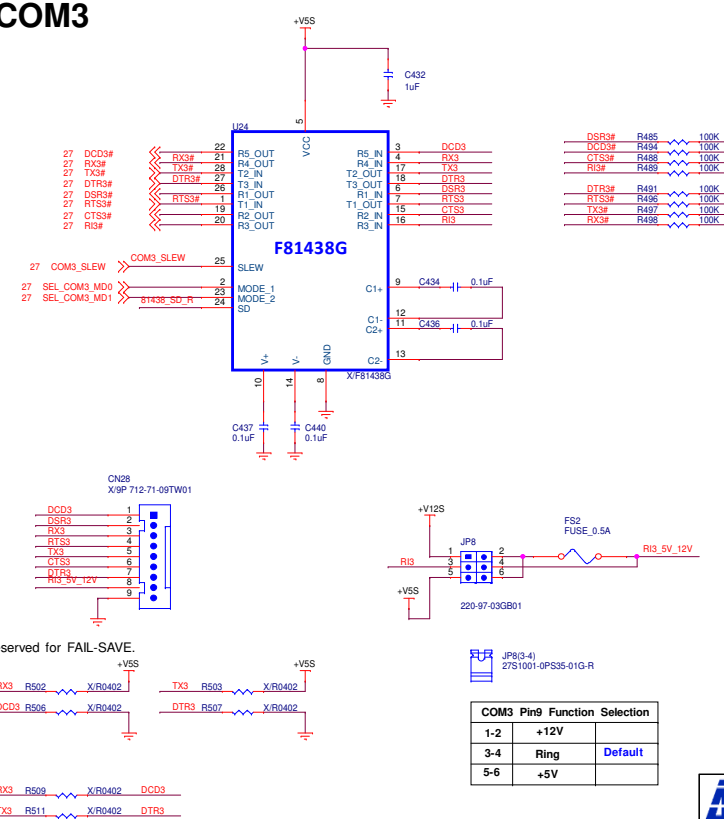


COM3 Pin9 Function Selection		
1-2	+12V	
3-4	Ring	Default
5-6	+5V	

Maximum Slew rate control		
SLEW	RS-232	RS-485/RS-422
0	1Mbps	10Mbps
1	250Kbps	250Kbps

Pin Mapping		
RS-232	RS-485	RS-422
DSR		
RTS		
TX		RS422_RX+ (A)
DTR		RS422_RX- (B)
CTS		
RI		
RX	RS485_D+ (A)	RS422_TX+ (A)
DCD	RS485_D- (B)	RS422_TX- (B)


Serial Port 2 Mode Selection			
SD	MODE_1	MODE_2	MODE
0	0	0	RS-422
0	0	1	RS-232
0	1	0	RS-485 (Driver Half Duplex)
0	1	1	RS-485 (Receiver Half Duplex)
1	X	X	Shutdown MODE

COM3 Pin9 Function Selection		
1-2	+12V	
3-4	Ring	Default
5-6	+5V	


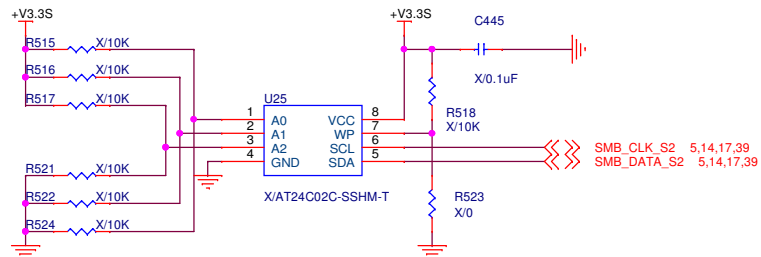


SM BUS ADDRESS 0XAC

Voltage Monitor

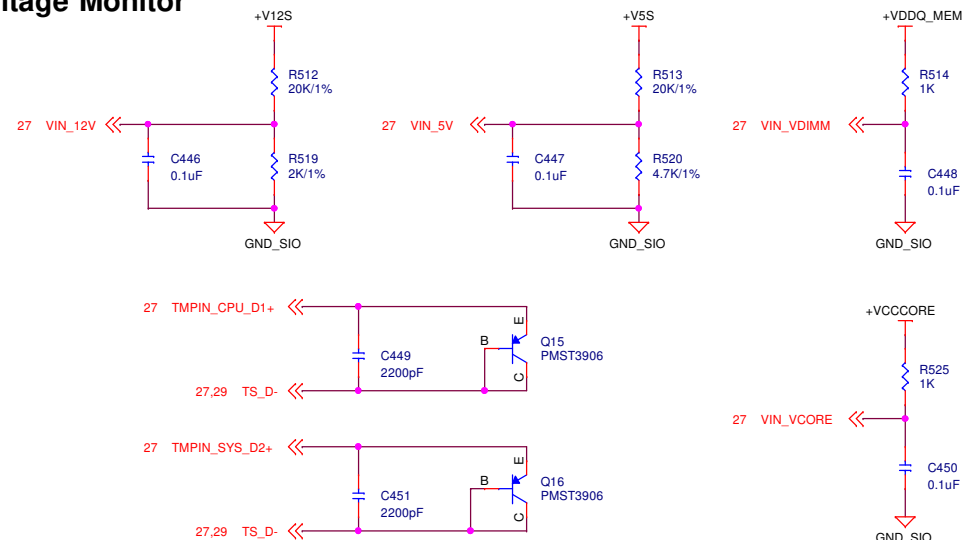

LPC Connector

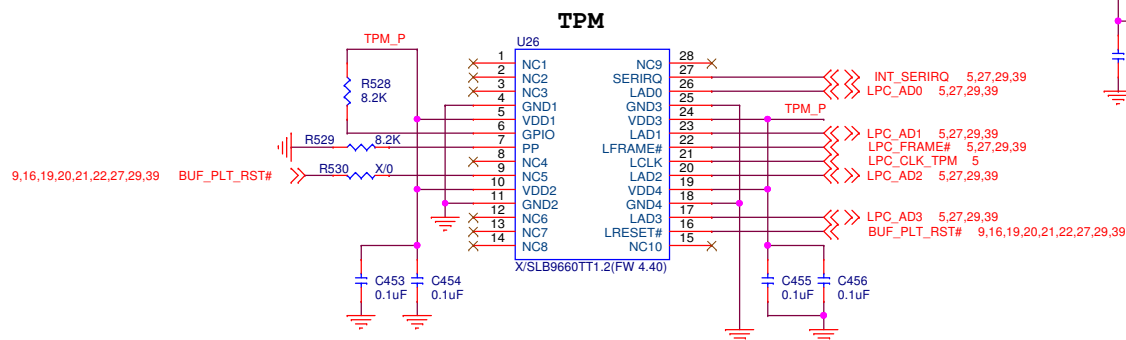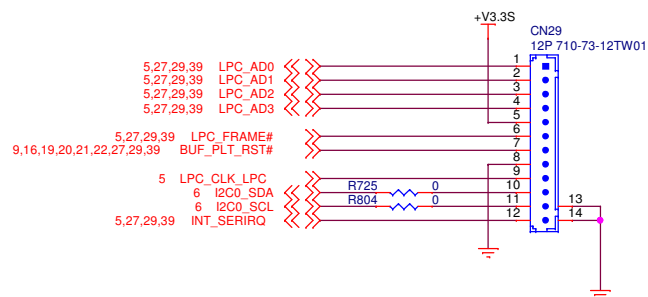

Title LPT, HW Monitor		
Size Custom	Document Number GENE-KBU6-MLD	Rev: A1.1_0_0
Date: Tuesday, September 08, 2020		Sheet: 29 of 42