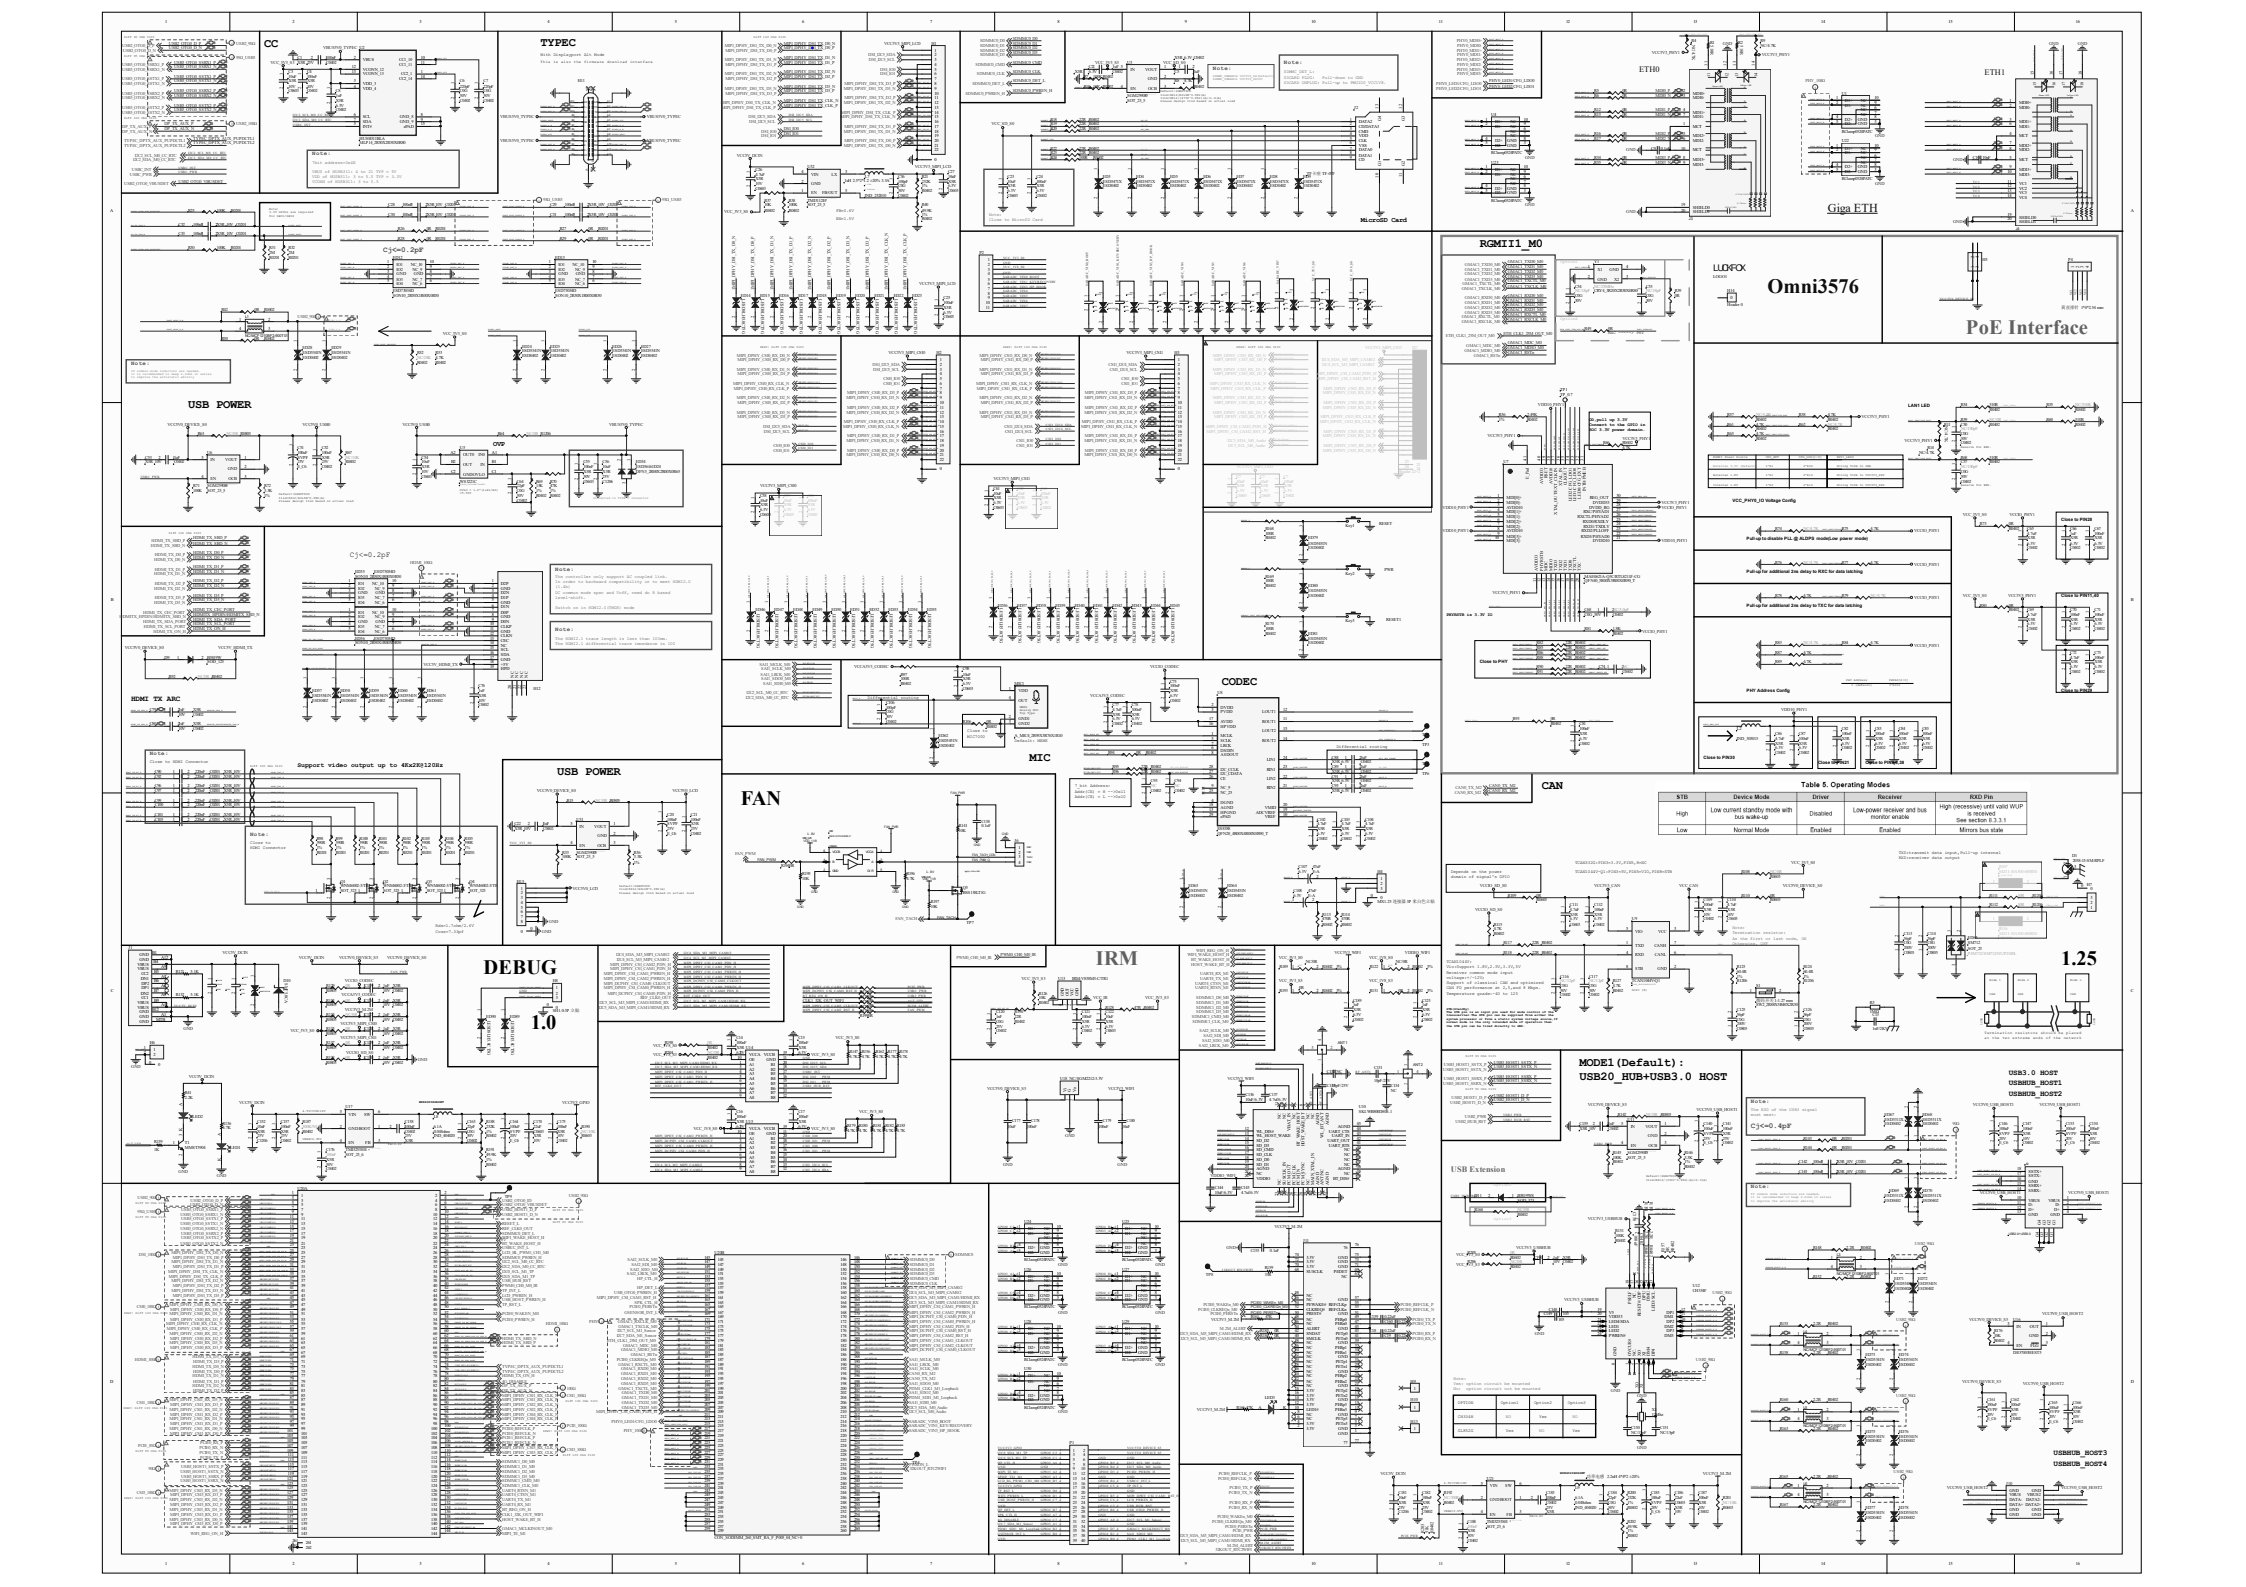
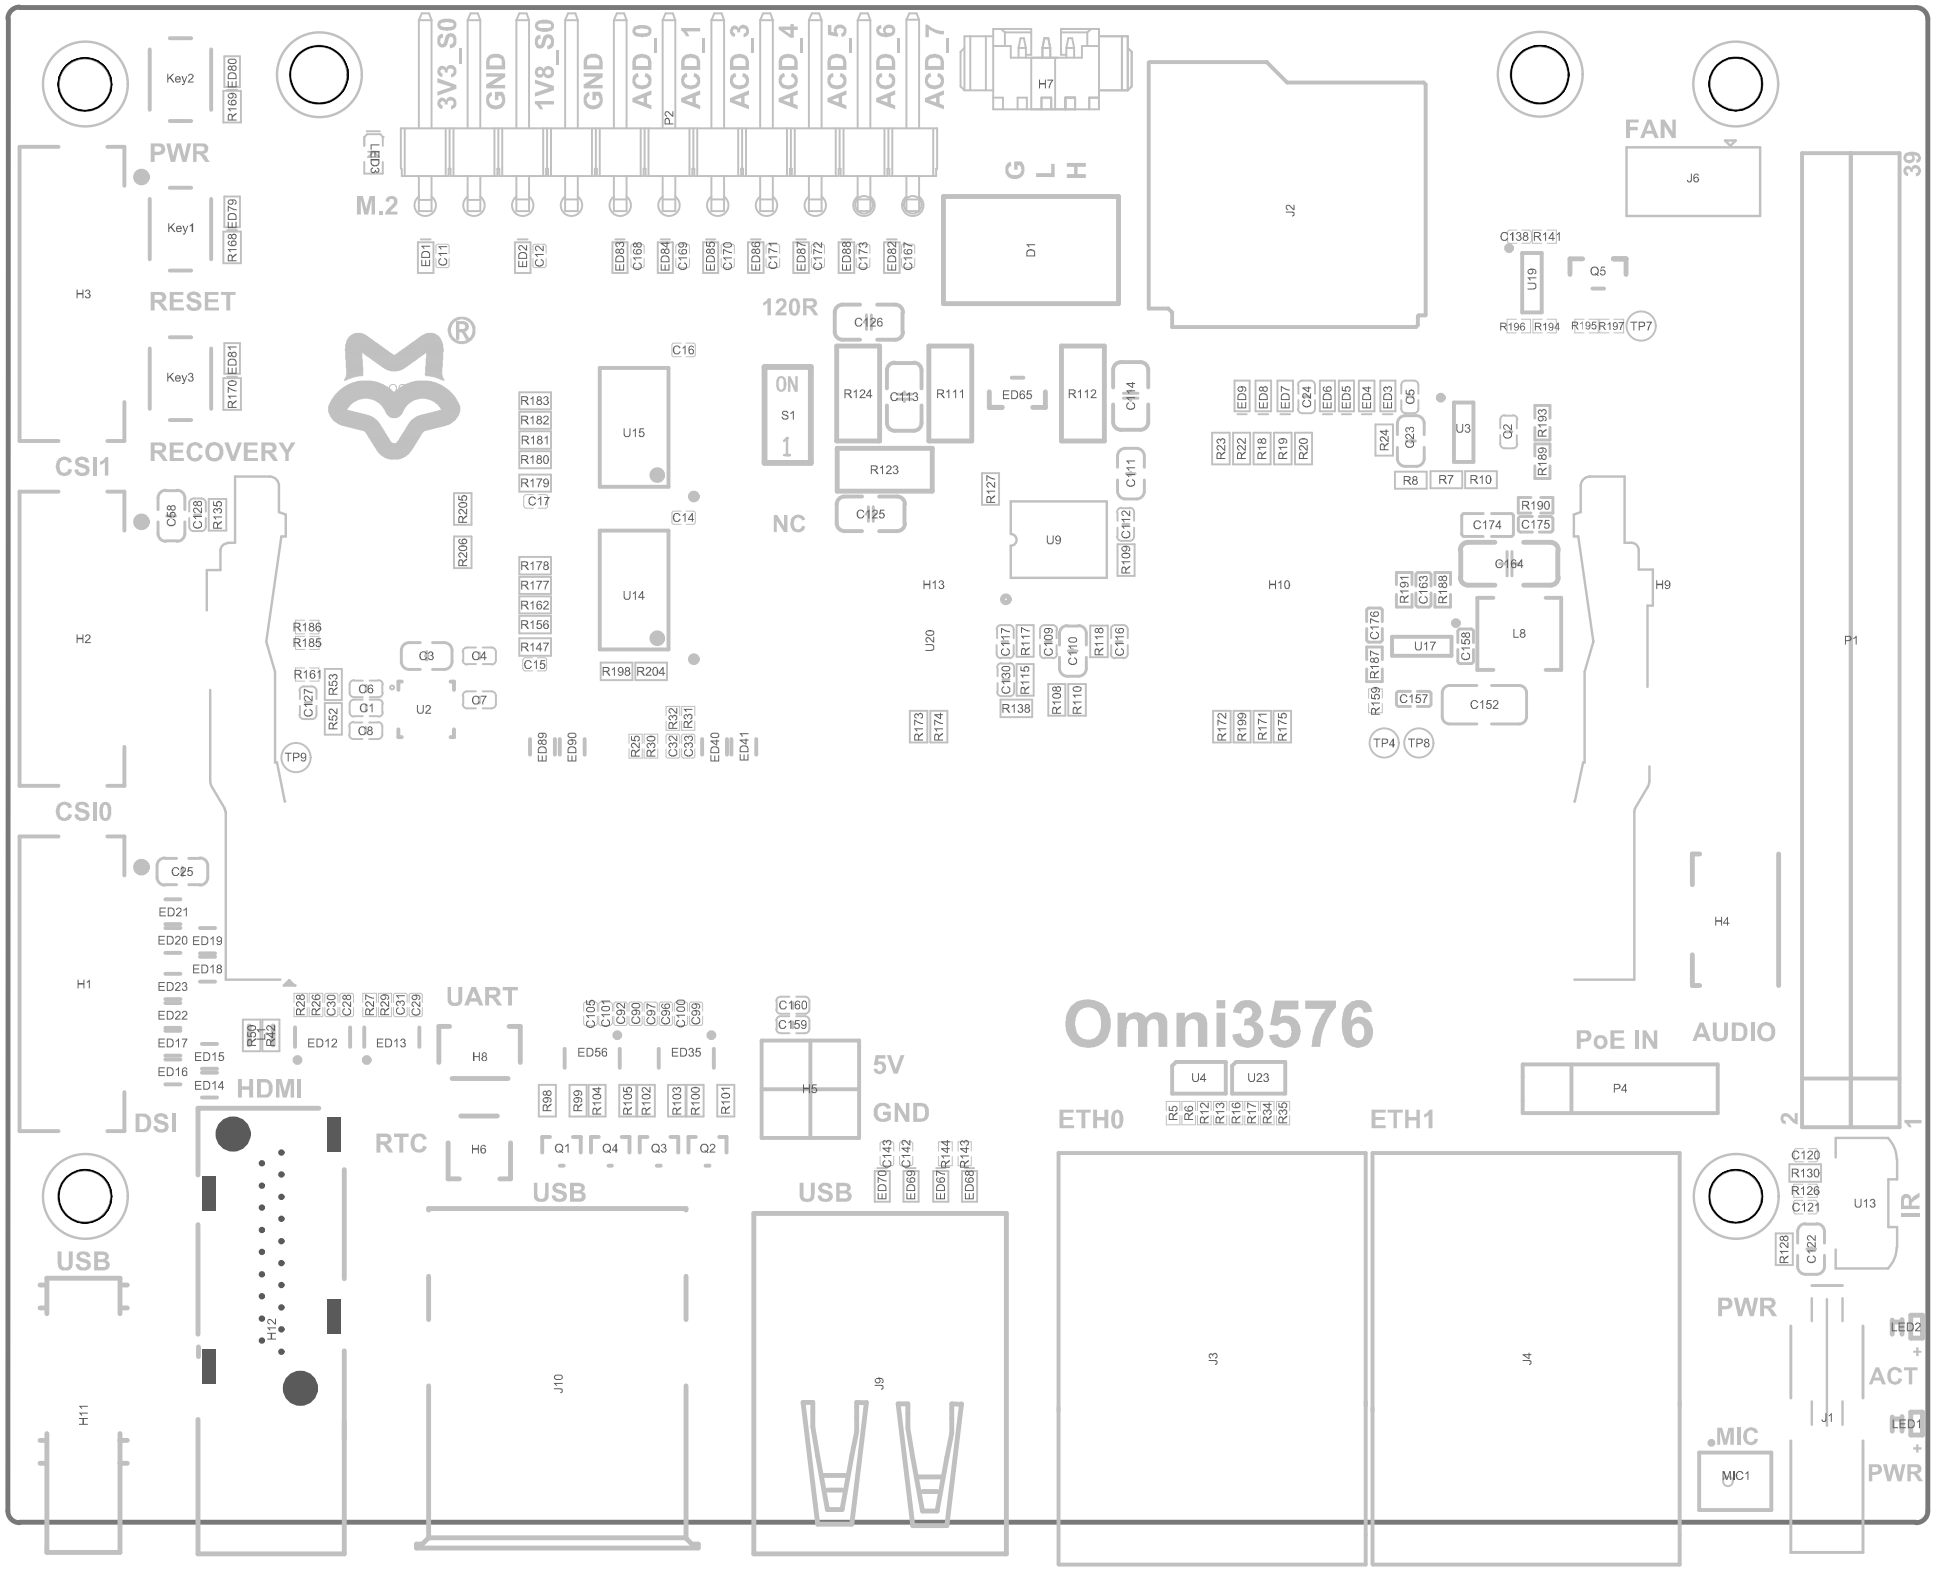
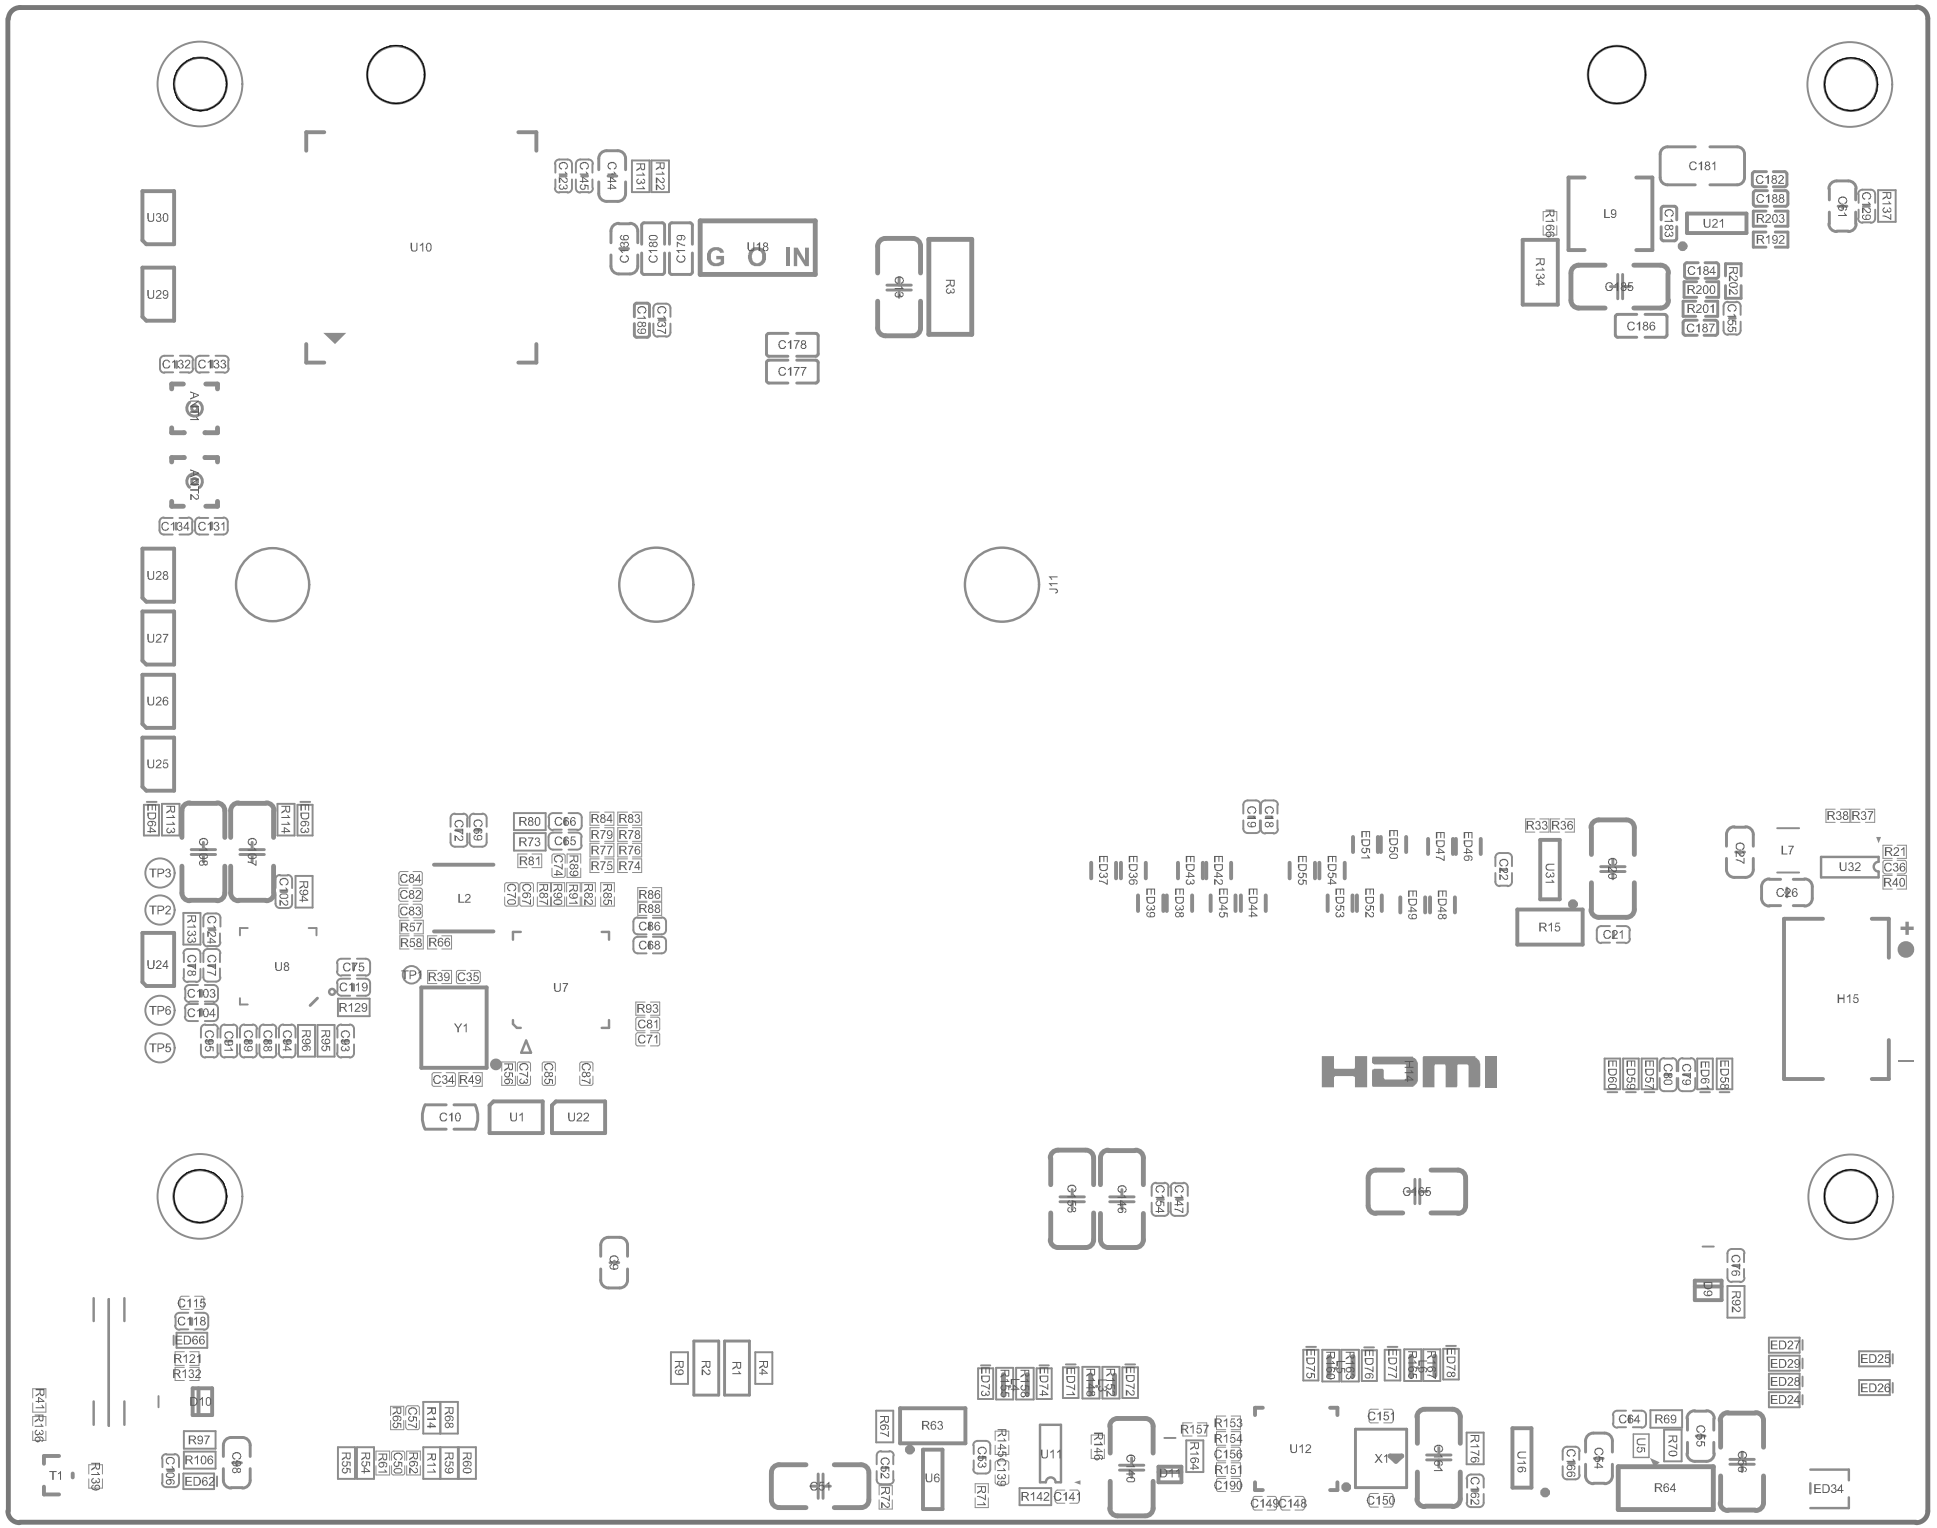

CC
TYPEC
With Snapdragon Alt Mode
This is also the firmware download interface
USB POWER
OVP
HDMI TX ARC
Support video output up to 4Kx2K@120Hz
USB POWER
FAN
DEBUG
1.0
MIC
CODEC
IRM
ETH0
ETH1
Giga ETH
RGMII1_M0
Omni3576
PoE Interface
CAN
Table 5. Operating Modes
STB
Device Mode
Driver
Receiver
RXD Pin
High
Low current standby mode with bus wake-up
Disabled
Low-power receiver and bus monitor enable
High (recessive) until valid WUP is received
See section 8.3.3.1
Low
Normal Mode
Enabled
Enabled
Mirrors bus state
1.25
MODE1(Default):
USB20_HUB+USB3.0 HOST
USB3.0 HOST
USBHUB_HOST1
USBHUB_HOST2
USB Extension
USBHUB_HOST3
USBHUB_HOST4


Omni3576
M.2
3V3_S0
GND
1V8_S0
GND
ACD_0
ACD_1
ACD_3
ACD_4
ACD_5
ACD_6
ACD_7
PWR
RESET
RECOVERY
CSI1
CSI0
DSI
HDMI
UART
RTC
USB
USB
USB
120R
NC
5V
GND
FAN
PoE IN
AUDIO
ETH0
ETH1
IR
PWR
ACT
MIC
PWR
Key1
Key2
Key3
H1
H2
H3
H4
H5
H6
H7
H8
H9
H10
H11
H12
H13
P1
P2
P4
J2
J3
J4
J6
J9
J10
U2
U3
U4
U9
U13
U14
U15
U17
U19
U20
U23
L8
D1
S1
MIC1
TP4
TP7
TP8
TP9


G O IN
HDMI