Computer Vision II: Multiple View Geometry (IN2228)

Chapter 02 Motion and Scene Representation
(Part 1 Basic Expression)

Dr. Haoang Li

26 April 2023 12:00-13:30

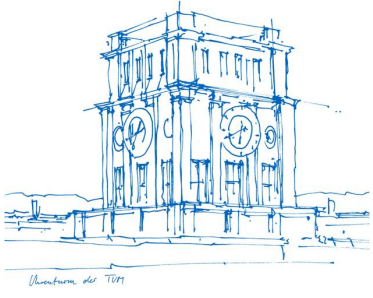

Announcements

All the following Exam information are from the Department of Studies.

➢ Summer Semester Exam

- Our exam will tentatively take place on **04 August** from **8:00 am** to **10:00 am**
- The registration for these exams is possible **between 22 May and 30 June**
- Deadline for grading of exams: **06 September 2023**

➢ Winter Semester Exam (Repeat Exam)

- Currently, the exact date has not been determined.
- Repeat exams will take place **between 02 October and 21 October**.
- The registration for these exams is possible **between 11 September and 25 September**.

Announcements

Today, we will have the first exercise class.

- ✓ Time: from 16:00 to 18:00
- ✓ Room: 102, Hörsaal 2, "Interims I" (5620.01.102)
- ✓ Detailed content will be provided by teaching assistants.

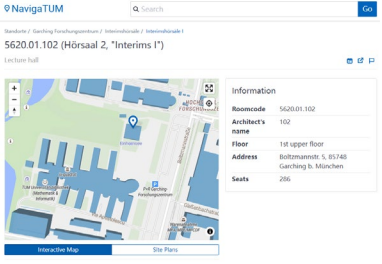

Sergei Solonets

Daniil Sinitsyn

Viktoria Ehm

Announcements

Exam Content

- ✓ If a slide contains the sentence “this knowledge will not be asked in the exam”, it means that our exam will not involve this slide.
- ✓ The reason why we prepare these slides are that they may be useful for your future research projects.
- ✓ If necessary, I will prepare a class for knowledge review in the early July (it is not finally determined).
- ✓ Other information about exam content will be released in the further.

Outline

- Overview
- Coordinate System
- Camera Motion Expression
- 3D Scene Expression

Overview

➢ General Pipeline of Solving Multi-view Geometry Problem

✓ Input: A set of observed data
✓ Procedure of problem solving
- Select a suitable model/expression with unknown parameters
- Estimate the parameters by data fitting (do not consider outliers)

✓ Output: Estimated parameters

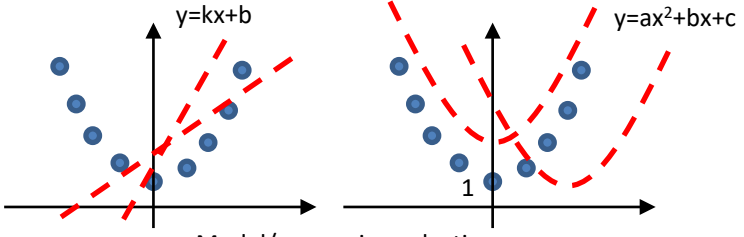



Overview

➢ Recap on Tasks of Multi-view Geometry

✓ Establish point correspondences (observed data)

need model

✓ Estimate camera motions
✓ Reconstruct 3D structure

} They require knowledge about basic expression of camera motion and 3D structure

✓ Optimization — It requires knowledge about advanced expression of camera motion, i.e., Lie group and Lie algebra

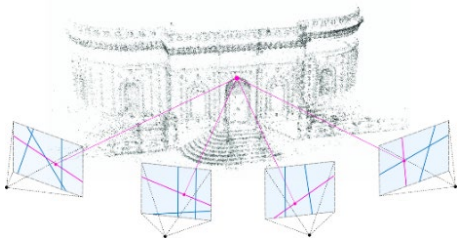

Coordinate System

- Left-hand and Right-hand Frames

Right-hand XYZ coordinate system is more common in 3D computer vision.

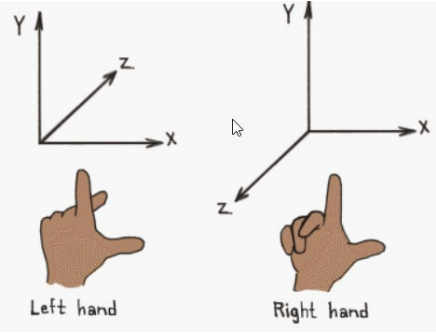

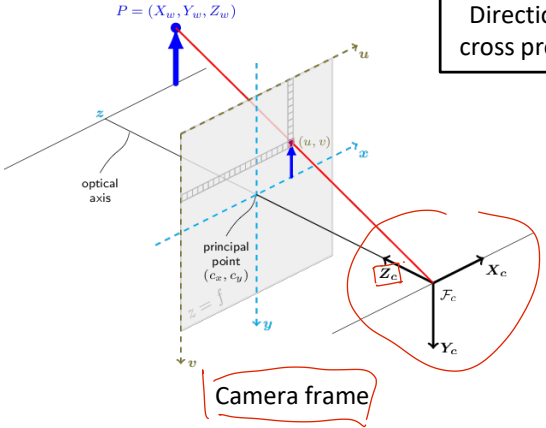



Coordinate System

- Absolute Position

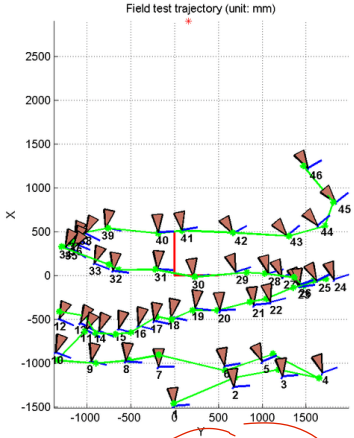

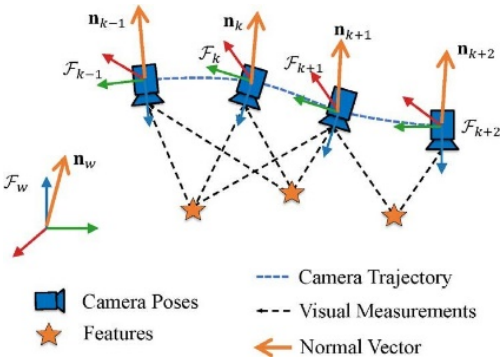

World frame and camera frames in VO/SLAM/SFM (2D case)

Coordinate System

- Absolute Position

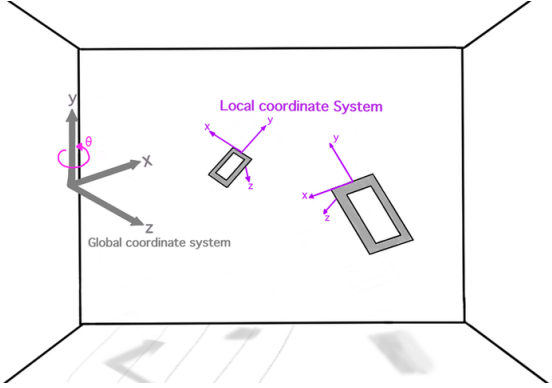

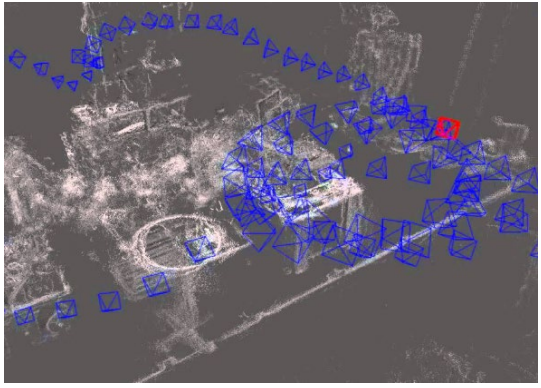

World frame and camera frames in VO/SLAM/SFM (3D case)

Coordinate System

- Relative Position

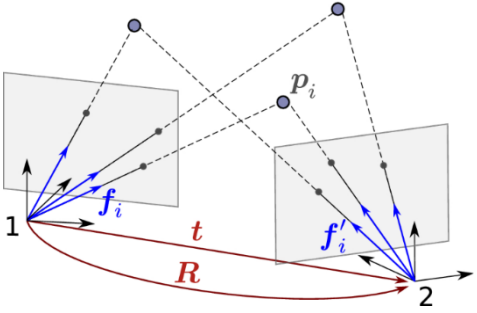

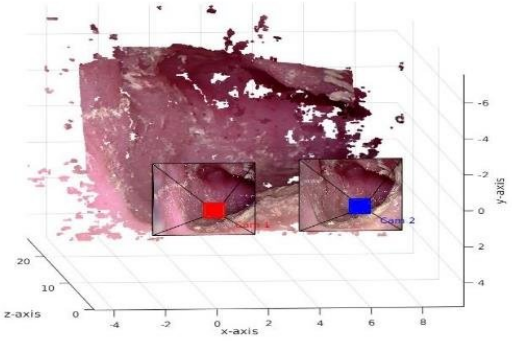

Left and right camera frames in VO/SLAM/SFM

Camera Motion Expression

- Recap on 2D Case

Euclidian/Rigid Transformation

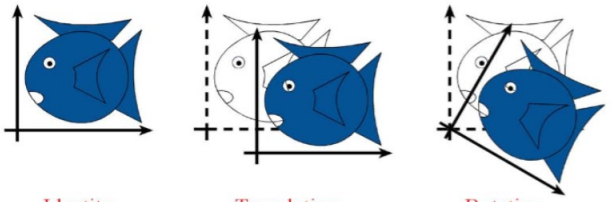



$$\begin{cases} x_w = x_r \cos\theta - y_r \sin\theta + t_x \\ y_w = x_r \sin\theta + y_r \cos\theta + t_y \end{cases}$$

$$\mathbf{x}_w = \mathbf{R}\mathbf{x}_r + \mathbf{t}$$

$$\mathbf{R} = \begin{bmatrix} \cos\theta & -\sin\theta \\ \sin\theta & \cos\theta \end{bmatrix}, \quad \mathbf{t} = [t_x, t_y]^T$$

Camera Motion Expression

- Rigid Transformation in 2D

Rigid transformation consists of rotation and translation

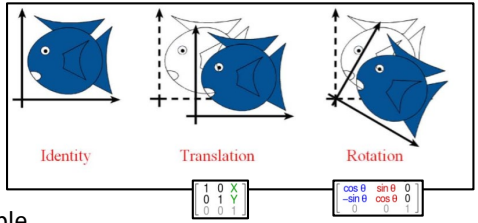

Point P is static, but the coordinate system is variable

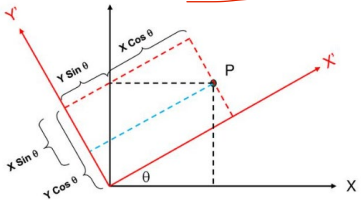

$X' = X \cos\theta + Y \sin\theta$

$Y' = Y \cos\theta - X \sin\theta$

Transforming point P from global to a local frame



$X = X' \cos\theta - Y' \sin\theta$

$Y = X' \sin\theta + Y' \cos\theta$

Transforming point P from local to a global frame



Add translation

global local

$$\mathbf{x}_w = \mathbf{R}\mathbf{x}_r + \mathbf{t}$$

$$\mathbf{R} = \begin{bmatrix} \cos\theta & -\sin\theta \\ \sin\theta & \cos\theta \end{bmatrix}, \quad \mathbf{t} = [t_x, t_y]^T$$

Camera Motion Expression

- Rigid Transformation in 3D

Rigid transformation consists of rotation and translation

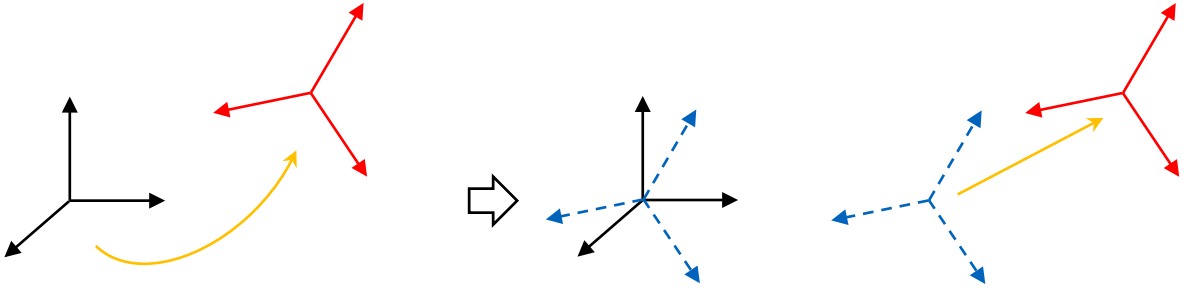

Camera Motion Expression

- Rigid Transformation in 3D

For the a 3D point ***p***, its coordinates in the world frame $\boldsymbol{p}_W$ and coordinates in the camera frame $\boldsymbol{p}_C$ are different.



Linear expression

$$[\mathbf{e}_1, \mathbf{e}_2, \mathbf{e}_3] \begin{bmatrix} a_1 \\ a_2 \\ a_3 \end{bmatrix} = [\mathbf{e}'_1, \mathbf{e}'_2, \mathbf{e}'_3] \begin{bmatrix} a'_1 \\ a'_2 \\ a'_3 \end{bmatrix}$$

Basis

Coefficients
(3D coordinates)

Camera Motion Expression

- Rigid Transformation in 3D



$$[\mathbf{e}_1, \mathbf{e}_2, \mathbf{e}_3] \begin{bmatrix} a_1 \\ a_2 \\ a_3 \end{bmatrix} = [\mathbf{e}'_1, \mathbf{e}'_2, \mathbf{e}'_3] \begin{bmatrix} a'_1 \\ a'_2 \\ a'_3 \end{bmatrix}$$

$$\Rightarrow \quad \begin{bmatrix} \mathbf{e}_1^T \\ \mathbf{e}_2^T \\ \mathbf{e}_3^T \end{bmatrix} [\mathbf{e}_1, \mathbf{e}_2, \mathbf{e}_3] \begin{bmatrix} a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} \mathbf{e}_1^T \\ \mathbf{e}_2^T \\ \mathbf{e}_3^T \end{bmatrix} [\mathbf{e}'_1, \mathbf{e}'_2, \mathbf{e}'_3] \begin{bmatrix} a'_1 \\ a'_2 \\ a'_3 \end{bmatrix}$$

$$\Rightarrow \quad \begin{bmatrix} a_1 \\ a_2 \\ a_3 \end{bmatrix} = \underbrace{\begin{bmatrix} \mathbf{e}_1^T\mathbf{e}'_1 & \mathbf{e}_1^T\mathbf{e}'_2 & \mathbf{e}_1^T\mathbf{e}'_3 \\ \mathbf{e}_2^T\mathbf{e}'_1 & \mathbf{e}_2^T\mathbf{e}'_2 & \mathbf{e}_2^T\mathbf{e}'_3 \\ \mathbf{e}_3^T\mathbf{e}'_1 & \mathbf{e}_3^T\mathbf{e}'_2 & \mathbf{e}_3^T\mathbf{e}'_3 \end{bmatrix}}_{\text{rotation matrix}} \begin{bmatrix} a'_1 \\ a'_2 \\ a'_3 \end{bmatrix} \triangleq \mathbf{R}\mathbf{a}'$$

Camera Motion Expression

- Rigid Transformation in 3D

Rotation (special orthogonal group)

$$\mathbf{a} = \mathbf{R}\mathbf{a}'$$

正交矩阵

$$\mathrm{SO}(n) = \{\mathbf{R} \in \mathbb{R}^{n \times n} | \mathbf{R}\mathbf{R}^T = \mathbf{I}, \det(\mathbf{R}) = 1\}$$

$$\mathbf{a}' = \mathbf{R}^{-1}\mathbf{a} = \mathbf{R}^T\mathbf{a}$$



Translation $\in \mathbb{R}^3$

$$\mathbf{a}' = \mathbf{R}\mathbf{a} + \mathbf{t}$$



Camera Motion Expression

- Rigid Transformation in 3D



Multiple transformations

- Imprecise way

$$\mathbf{b} = \mathbf{R}_1\mathbf{a} + \mathbf{t}_1, \quad \mathbf{c} = \mathbf{R}_2\mathbf{b} + \mathbf{t}_2$$

$$\mathbf{c} = \mathbf{R}_2\left(\mathbf{R}_1\mathbf{a} + \mathbf{t}_1\right) + \mathbf{t}_2$$

- More compact way

$$\tilde{\mathbf{b}} = \mathbf{T}_1\tilde{\mathbf{a}}, \ \tilde{\mathbf{c}} = \mathbf{T}_2\tilde{\mathbf{b}} \quad \Rightarrow \tilde{\mathbf{c}} = \mathbf{T}_2\mathbf{T}_1\tilde{\mathbf{a}}$$

How to achieve this?

Camera Motion Expression

- Rigid Transformation in 3D

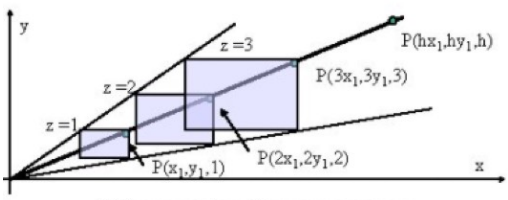

3D Representation of homogeneous space

Multiple transformations

- Homogeneous coordinates

$$\begin{bmatrix} \mathbf{a}' \\ 1 \end{bmatrix} = \begin{bmatrix} \mathbf{R} & \mathbf{t} \\ \mathbf{0}^T & 1 \end{bmatrix} \begin{bmatrix} \mathbf{a} \\ 1 \end{bmatrix} \triangleq \mathbf{T} \begin{bmatrix} \mathbf{a} \\ 1 \end{bmatrix}$$

- Definition of special Euclidean group

$$\mathrm{SE}(3) = \left\{ \mathbf{T} = \begin{bmatrix} \mathbf{R} & \mathbf{t} \\ \mathbf{0}^T & 1 \end{bmatrix} \in \mathbb{R}^{4\times 4} | \mathbf{R} \in \mathrm{SO}(3), \mathbf{t} \in \mathbb{R}^3 \right\}$$

Camera Motion Expression

➢ Rigid Transformation in 3D

Inverse transformation

- Derivation

$$Y = RX + t \quad \Rightarrow \quad X = R^T(Y - t) = R^T Y - R^T t$$

- Conclusion

$$\mathbf{T}^{-1} = \begin{bmatrix} \mathbf{R}^T & -\mathbf{R}^T\mathbf{t} \\ \mathbf{0}^T & 1 \end{bmatrix}$$

Camera Motion Expression

- Rigid Transformation in 3D

From absolute poses to relative pose

- Given absolute poses (R_1, t_1) and (R_2, t_2), how to compute the relative pose (R_{12}, t_{12}) ?

$$X_W = R_1 X_1 + t_1 = R_2 X_2 + t_2$$

$$R_1 X_1 + (t_1 - t_2) = R_2 X_2$$

$$\underbrace{R_2^T R_1}_{R_{12}} X_1 + \underbrace{R_2^T (t_1 - t_2)}_{t_{12}} = X_2$$

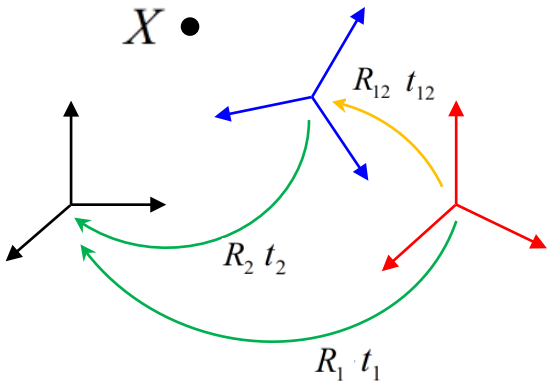

Camera Motion Expression

- Rigid Transformation in 3D

Camera position and translation

To express the position of a camera in the world frame, which one should we use?

$(\mathbf{R}_{W\to C}, \mathbf{t}_{W\to C})$

$(\mathbf{R}_{C\to W}, \mathbf{t}_{C\to W})$ ✔

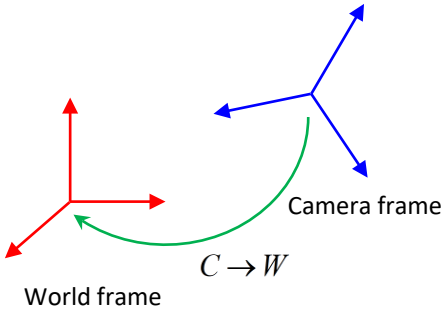

Origin of the camera in the world frame

$$\begin{bmatrix} \mathbf{t} \\ 1 \end{bmatrix} = \begin{bmatrix} \mathbf{R} & \mathbf{t} \\ \mathbf{0}^T & 1 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}$$

$R_{C\to W}$

Origin of the camera in the camera frame

Camera Motion Expression

- Similarity Transformation in 3D

Definition

$$\mathrm{SE}(3) \quad \mathbf{T} = \begin{bmatrix} \mathbf{R} & \mathbf{t} \\ \mathbf{0}^T & 1 \end{bmatrix}$$

6 degrees of freedom (DOF)

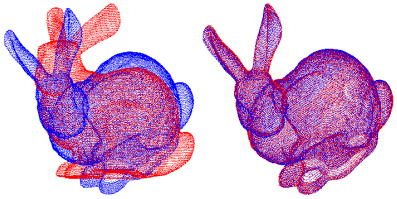

$$\mathrm{Sim}(3) \quad \mathbf{T}_S = \begin{bmatrix} s\mathbf{R} & \mathbf{t} \\ \mathbf{0}^T & 1 \end{bmatrix}$$

7 degrees of freedom (DOF)

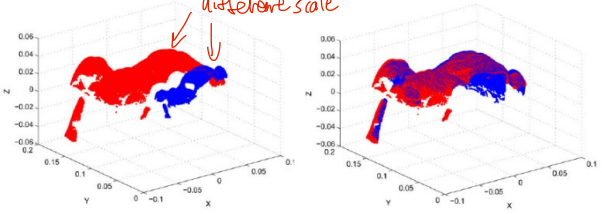

Camera Motion Expression

- Similarity Transformation in 3D

Application of Sim(3)

Loop

(a) before optimisation (b) 6 DoF optimisation (c) 7 DoF optimisation

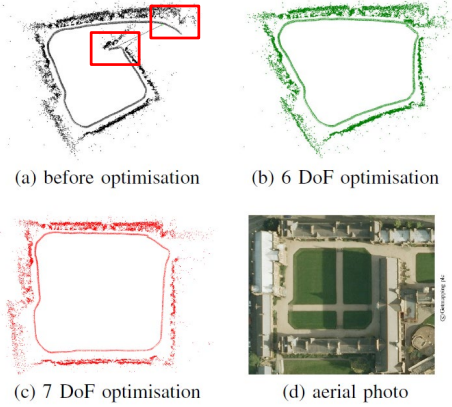

(a) before optimisation (b) 6 DoF optimisation (c) 7 DoF optimisation (d) aerial photo

Camera Motion Expression

- Motion of 3D Line

Plücker coordinates

v: direction of 3D line (typically a unit vector)
n: normal of projection plane

$\mathbf{n} = \mathbf{Q} \times \mathbf{v}$
$||\mathbf{n}|| = d * ||\mathbf{v}||$

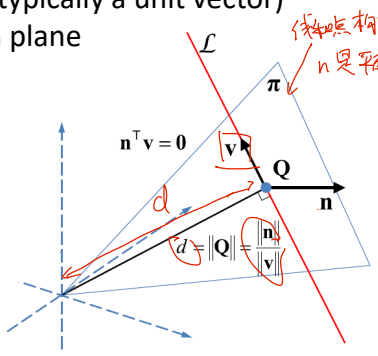

$$\|\mathbf{a} \times \mathbf{b}\| = \|\mathbf{a}\| \, \|\mathbf{b}\| \sin\theta$$

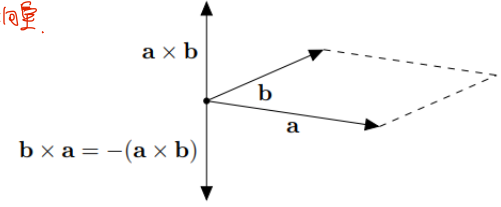

Camera Motion Expression

➢ Motion of 3D Line

Plücker coordinates defined by endpoints

$$v = \begin{bmatrix} px - qx \\ py - qy \\ pz - qz \end{bmatrix}$$

$$n = p \times v = [p]_\times v \quad \textbf{Cross product}$$

$$= \begin{pmatrix} 0 & -pz & py \\ pz & 0 & -px \\ -py & px & 0 \end{pmatrix} \begin{bmatrix} px - qx \\ py - qy \\ pz - qz \end{bmatrix} = \begin{bmatrix} -pz \cdot (py - qy) + py \cdot (pz - qz) \\ pz \cdot (px - qx) - px \cdot (pz - qz) \\ -py \cdot (px - qx) + px \cdot (py - qy) \end{bmatrix} = \begin{bmatrix} pz \cdot qy - py \cdot qz \\ -pz \cdot qx + px \cdot qz \\ py \cdot qx - px \cdot qy \end{bmatrix}$$

✓ Homogeneous coordinates $[v, n]$ are up to scale

✓ Two directions are orthogonal $n^T v = 0$

Degrees of freedom: 4



Camera Motion Expression

- Motion of 3D Line

普吕克座标

Plücker coordinates defined by endpoints

$$L = \begin{pmatrix} \bar{l} \\ m \end{pmatrix} = \begin{pmatrix} \frac{\overline{M}}{m} - \frac{\overline{N}}{n} \\ \overline{M} \times \overline{N} \end{pmatrix} = \begin{pmatrix} n\overline{M} - m\overline{N} \\ \overline{M} \times \overline{N} \end{pmatrix} = \begin{pmatrix} b \\ a \end{pmatrix}$$

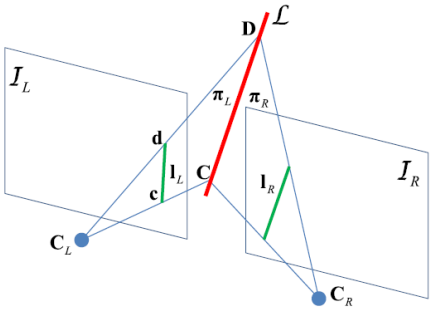

✓ Homogeneous coordinates is up to scale

✓ Two directions are orthogonal $a^T b = 0$

Degrees of freedom: 4

Camera Motion Expression

- Motion of 3D Line

The transformation for the Plücker line coordinates [1]

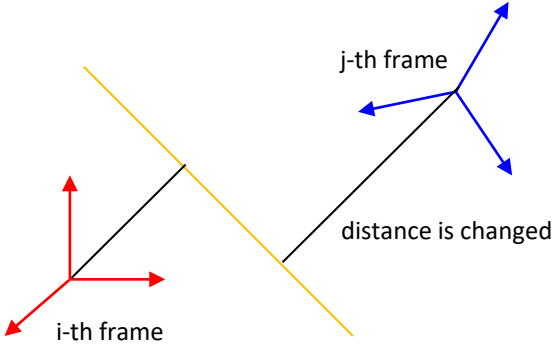



Norm of **n** is changed

$$\begin{bmatrix}\mathbf{n}_j\\ \mathbf{v}_j\end{bmatrix}=\begin{bmatrix}\mathrm{R}_{ji} & [\mathbf{t}_{ji}]_\times \mathrm{R}_{ji}\\ \mathbf{0} & \mathrm{R}_{ji}\end{bmatrix}\begin{bmatrix}\mathbf{n}_i\\ \mathbf{v}_i\end{bmatrix}$$

Norm of **v** is unchanged

一条直线在刚体变换下的表示

[1] A. Bartoli and P. Sturm, "The 3D line motion matrix and alignment of line reconstructions," in Proc. IEEE Comput. Soc. Conf. Comput. Vision Pattern Recog., 2001, vol. 1, pp. 287–292.

Camera Motion Expression

➢ Rotation Expression

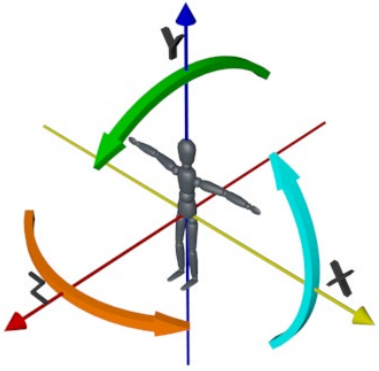

Common methods

- Rotation matrix
- Euler angles
- Angle-axis (rotation vector)
- Quaternion
- Cayley's representation

Relationship

- There is no ideal rotation representation for all purposes
- in some sense, all are equivalent because each representation has an equivalent rotation matrix representation.
- A choice must indeed be made for calculations and coordinate conventions.

Camera Motion Expression

➢ Euler Angles

- 本质旋转是指与附着在运动体上的坐标系XYZ的轴有关的旋转（即围绕当前坐标中的轴的旋转，如物体空间）。

- 外在旋转是相对于固定坐标系xyz的轴而言的（即围绕原始坐标中的轴的旋转，像世界空间）。

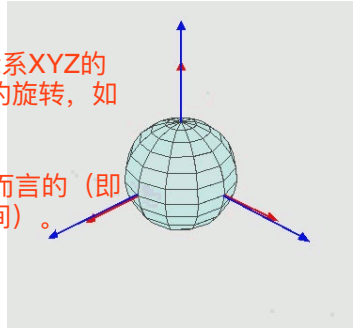

Definition

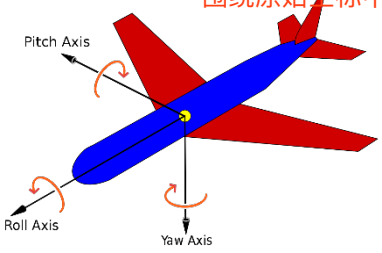

An intuitive illustration

坐标系旋转

- Intrinsic rotations are w.r.t. axes of a coordinate system XYZ attached to a moving body (i.e. rotation about axis in the current coordinate, like object space).
- Extrinsic rotations are w.r.t. the axes of the fixed coordinate system xyz (i.e. rotation about axis in the original coordinate, like world space).

Camera Motion Expression

- Euler Angles

Convert Euler angles to rotation matrix

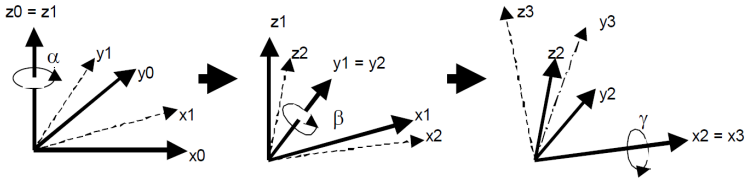

Euler angles in the ZYX order

$$T_{0,3} = T_{0,1}T_{1,2}T_{2,3} = \begin{bmatrix} r_{11} & r_{12} & r_{13} \\ r_{21} & r_{22} & r_{23} \\ r_{31} & r_{32} & r_{33} \end{bmatrix} = \begin{bmatrix} \cos(\alpha) & -\sin(\alpha) & 0 \\ \sin(\alpha) & \cos(\alpha) & 0 \\ 0 & 0 & 1 \end{bmatrix} * \begin{bmatrix} \cos(\beta) & 0 & \sin(\beta) \\ 0 & 1 & 0 \\ -\sin(\beta) & 0 & \cos(\beta) \end{bmatrix} * \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos(\gamma) & -\sin(\gamma) \\ 0 & \sin(\gamma) & \cos(\gamma) \end{bmatrix} =$$

$$\begin{bmatrix} \cos(\alpha)\cos(\beta) & \cos(\alpha)\sin(\beta)\sin(\gamma) - \sin(\alpha)\cos(\gamma) & \cos(\alpha)\sin(\beta)\cos(\gamma) + \sin(\alpha)\sin(\gamma) \\ \sin(\alpha)\cos(\beta) & \sin(\alpha)\sin(\beta)\sin(\gamma) + \cos(\alpha)\cos(\gamma) & \sin(\alpha)\sin(\beta)\cos(\gamma) - \cos(\alpha)\sin(\gamma) \\ -\sin(\beta) & \cos(\beta)\sin(\gamma) & \cos(\beta)\cos(\gamma) \end{bmatrix}$$

Camera Motion Expression

- Euler Angles

Convert Euler angles to rotation matrix

$$R = \begin{bmatrix} r_{11} & r_{12} & r_{13} \\ r_{21} & r_{22} & r_{23} \\ r_{31} & r_{32} & r_{33} \end{bmatrix}$$

$$\theta_x = atan2\left(r_{32}, r_{33}\right)$$

$$\theta_y = atan2\left(-r_{31}, \sqrt{r_{32}^2 + r_{33}^2}\right)$$

$$\theta_z = atan2\left(r_{21}, r_{11}\right)$$



atan2(y, x) returns the angle θ between the ray to the point (x, y) and the positive x-axis, confined to (−π, π].



Illustration of atan2

Camera Motion Expression

- Euler Angles

A main limitation (gimbal lock)



When the pitch (green) and yaw (magenta) gimbals become aligned, changes to roll (blue) and yaw apply the same rotation to the airplane.



The original axes



First along Z axis



Second along rotated Y axis



Finally along rotate X axis

Gimbal Lock



First along Z axis



Pitch is 90 degree
X is rotated to -Z



The third rotation along X is same to the original Z axis, losing DoF

The third rotation is using the same axis as the first one

Camera Motion Expression

- Axis–angle Representation (Rotation Vector)



Definition

The angle **θ** and axis unit vector **e** define a rotation, concisely represented by the rotation vector **θe**.

Example

$$(\text{axis}, \text{angle}) = \left(\begin{bmatrix} e_x \\ e_y \\ e_z \end{bmatrix}, \theta \right) = \left(\begin{bmatrix} 0 \\ 0 \\ -1 \end{bmatrix}, \frac{-\pi}{2} \right)$$



Camera Motion Expression

- Axis–angle Representation (Rotation Vector)

Convert axis-angle representation to rotation matrix

Rodrigues' rotation formula

$$\mathbf{R} = \cos\theta\mathbf{I} + (1 - \cos\theta)\mathbf{n}\mathbf{n}^T + \sin\theta\mathbf{n}^\wedge$$

$$\mathbf{R}(\mathbf{n}, \theta) = \begin{bmatrix} n_x^2(1-c\theta) + c\theta & n_x n_y(1-c\theta) + n_z s\theta & n_x n_z(1-c\theta) - n_y s\theta \\ n_x n_y(1-c\theta) - n_z s\theta & n_y^2(1-c\theta) + c\theta & n_y n_z(1-c\theta) + n_x s\theta \\ n_x n_z(1-c\theta) + n_y s\theta & n_y n_z(1-c\theta) - n_x s\theta & n_z^2(1-c\theta) + c\theta \end{bmatrix}$$

Camera Motion Expression

➢ Axis–angle Representation (Rotation Vector)

Convert rotation matrix to axis-angle representation

- Rotation angle

$$\begin{aligned}\operatorname{tr}(\mathbf{R}) &= \cos\theta \operatorname{tr}(\mathbf{I}) + (1-\cos\theta)\operatorname{tr}\left(\mathbf{n}\mathbf{n}^T\right) + \sin\theta \operatorname{tr}(\mathbf{n}^\wedge) \\ &= 3\cos\theta + (1-\cos\theta) \\ &= 1 + 2\cos\theta.\end{aligned}$$

"tr" represents trace of matrix

$$\theta = \arccos\left(\frac{\operatorname{tr}(\mathbf{R})-1}{2}\right)$$

- Rotation axis

$$\mathbf{n} = \frac{1}{2\sin\theta}\begin{bmatrix} R_{32} - R_{23} \\ R_{13} - R_{31} \\ R_{21} - R_{12} \end{bmatrix}$$

Camera Motion Expression

- Quaternion

Definition



Euler's formula

0 deg. -> 1+0i
90 deg. -> 0+1i
180 deg. -> -1+0i
270 deg. -> 0-1i

From 2D to 3D

real

$$\boldsymbol{q} = (q_0, \underbrace{q_1, q_2, q_3}_{\text{imaginary}})$$

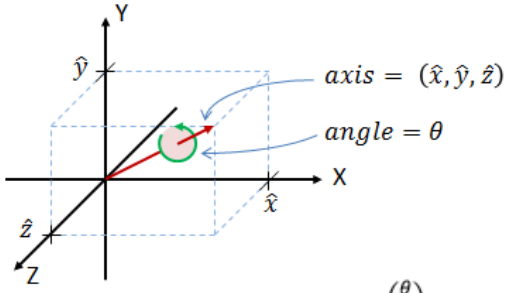

$$q_0 = \cos\left(\frac{\theta}{2}\right)$$

$$q_1 = \hat{x}\sin\left(\frac{\theta}{2}\right)$$

$$q_2 = \hat{y}\sin\left(\frac{\theta}{2}\right)$$

$$q_3 = \hat{z}\sin\left(\frac{\theta}{2}\right)$$

Camera Motion Expression

- Quaternion

$e^{i\varphi} = \cos\varphi + i\sin\varphi$

2D

Definition

$$\boldsymbol{q} = (q_0, q_1, q_2, q_3)$$

$$q_0 = \cos\left(\frac{\theta}{2}\right)$$

$$q_1 = \hat{x}\sin\left(\frac{\theta}{2}\right)$$

$$q_2 = \hat{y}\sin\left(\frac{\theta}{2}\right)$$

$$q_3 = \hat{z}\sin\left(\frac{\theta}{2}\right)$$

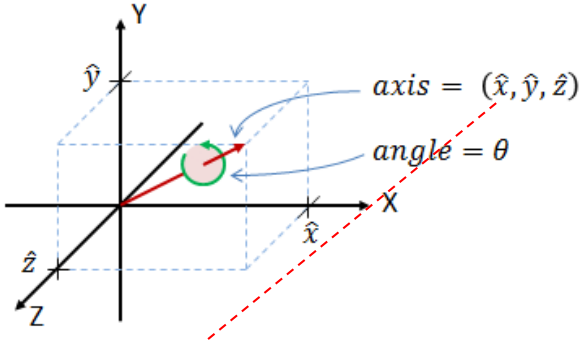

Euler's formula $\mathbf{q} = e^{\frac{\theta}{2}(u_x\mathbf{i}+u_y\mathbf{j}+u_z\mathbf{k})} = \cos\frac{\theta}{2} + (u_x\mathbf{i} + u_y\mathbf{j} + u_z\mathbf{k})\sin\frac{\theta}{2}$

Camera Motion Expression

- Quaternion

Application to SLAM

Ground-truth trajectories

We provide the groundtruth trajectory as a text file containing the translation and orientation of the camera in a fixed coordinate frame. Note that also our automatic evaluation tool expects both the groundtruth and estimated trajectory to be in this format.

- Each line in the text file contains a single pose.
- The format of each line is '**timestamp tx ty tz qx qy qz qw**'
- **timestamp** (float) gives the number of seconds since the Unix epoch.
- **tx ty tz** (3 floats) give the position of the optical center of the color camera with respect to the world origin as defined by the motion capture system.
- **qx qy qz qw** (4 floats) give the orientation of the optical center of the color camera in form of a unit quaternion with respect to the world origin as defined by the motion capture system.
- The file may contain comments that have to start with "#".

https://cvg.cit.tum.de/data/datasets/rgbd-dataset/file_formats

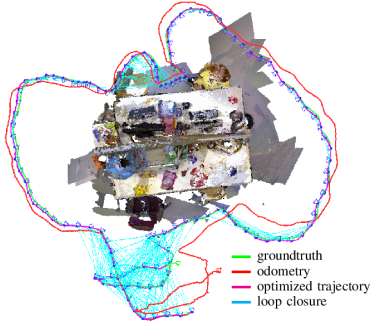

TUM RGB-D SLAM Dataset

Camera Motion Expression

- Quaternion

Convert quaternion to a matrix rotation

Quaternion

$$\mathbf{q} = q_r + q_i\mathbf{i} + q_j\mathbf{j} + q_k\mathbf{k} \Rightarrow \mathbf{q} = [\underbrace{\cos\frac{\theta}{2}}_{\text{real}}, \underbrace{\mathbf{n}\sin\frac{\theta}{2}}_{\text{imaginary}}]$$

A 3D point is treated as a quaternion with a real coordinate equal to zero

$$\mathbf{p} = (p_x, p_y, p_z) = p_x\mathbf{i} + p_y\mathbf{j} + p_z\mathbf{k} \Rightarrow \mathbf{p} = [\underbrace{0}_{\text{real}}, \underbrace{x, y, z}_{\text{imaginary}}] = [0, \mathbf{v}]$$

Camera Motion Expression

- Quaternion

Convert quaternion to a matrix rotation



$$\mathbf{p}' = \mathbf{q}\mathbf{p}\mathbf{q}^{-1}$$

(Hamilton product)

Real part is zero

$$\mathbf{n}^T(\mathbf{n} \times \mathbf{v}) = 0$$

Just for derivation

$$\mathbf{p}' = \mathbf{R}\mathbf{p}, \qquad \mathbf{R} = \begin{bmatrix} 1 - 2s(q_j^2 + q_k^2) & 2s(q_i q_j - q_k q_r) & 2s(q_i q_k + q_j q_r) \\ 2s(q_i q_j + q_k q_r) & 1 - 2s(q_i^2 + q_k^2) & 2s(q_j q_k - q_i q_r) \\ 2s(q_i q_k - q_j q_r) & 2s(q_j q_k + q_i q_r) & 1 - 2s(q_i^2 + q_j^2) \end{bmatrix}$$

Remembering this conclusion is enough for engineering projects

$$s = 1^{-2} = 1$$ for unit quaternion

Camera Motion Expression

- Summary

Representation	Parameters
Matrix	3×3 matrix R with 9 parameters, with 6 d.o.f. removed via orthogonality constraints.
Euler angles:	3 parameters (ϕ, θ, ψ), in range $[0, 2\pi) \times [-\pi/2, \pi/2] \times [0, 2\pi)$
Axis-angle	3 + 1 parameters $(\mathbf{a}, \theta)$, in range $S_2 \times [0, \pi)$ with 1 d.o.f. removed via unit vector constraint
Rot. vector	3 parameters $\mathbf{m}$, in range
Quaternion	4 parameters (q_0, q_1, q_2, q_3), with 1 d.o.f. removed via unit quaternion constraint.

Camera Motion Expression

➢ Cayley's Representation

✓ Definition

The Cayley transform, which maps any skew-symmetric matrix A to a rotation matrix

$$A \mapsto (I + A)(I - A)^{-1}$$

$$\begin{bmatrix} 0 & \tan\frac{\theta}{2} \\ -\tan\frac{\theta}{2} & 0 \end{bmatrix} \leftrightarrow \begin{bmatrix} \cos\theta & -\sin\theta \\ \sin\theta & \cos\theta \end{bmatrix}$$

2D case

The 180° rotation matrix is excluded, because tan θ/2 goes to infinity.

quaternion

$$q_0 = \cos\left(\frac{\theta}{2}\right)$$
$$q_1 = \hat{x}\sin\left(\frac{\theta}{2}\right)$$
$$q_2 = \hat{y}\sin\left(\frac{\theta}{2}\right)$$
$$q_3 = \hat{z}\sin\left(\frac{\theta}{2}\right)$$

$(\hat{x}, \hat{y}, \hat{z})$ is the rotation axis

$$\begin{bmatrix} 0 & -z & y \\ z & 0 & -x \\ -y & x & 0 \end{bmatrix} \mapsto$$

$$\frac{1}{1 + x^2 + y^2 + z^2} \begin{bmatrix} 1 + x^2 - y^2 - z^2 & 2xy - 2z & 2y + 2xz \\ 2xy + 2z & 1 - x^2 + y^2 - z^2 & 2yz - 2x \\ 2xz - 2y & 2x + 2yz & 1 - x^2 - y^2 + z^2 \end{bmatrix}.$$

3D case

$x = \hat{x}\tan(\theta/2)$

The 180° rotation matrix is excluded, because tan θ/2 goes to infinity.

This knowledge will not be asked in the exam.

Camera Motion Expression

➢ Cayley's Representation

✓ Discussion

- Although in practical applications we can hardly afford to ignore 180° rotations, the Cayley transform is still a potentially useful tool.
- For example, in SLAM, we have prior knowledge of a rough constant velocity motion model. We can leverage this information for disambiguation.
- This rotation parameterization is free of trigonometric functions.
- It has a smaller number of parameters than quaternion.

This knowledge will not be asked in the exam.

Camera Motion Expression

➢ From Representation to Estimation: An Overview

✓ Solution 1: Disentangle translation from rotation

- Generate a linear system with respect to translation.

$$\mathbf{A}\mathbf{t} = \mathbf{b}$$

A and **b** are with respect to unknown rotation and/or known coordinates of correspondences

- Obtain the least-squares solution of translation with respect to rotation.

$$\mathbf{t} = \left(\mathbf{A}^\top \mathbf{A}\right)^{-1} \mathbf{A}^\top \mathbf{b}$$

- Define an objective function with respect to translation.

$$\min_{\mathbf{R},\mathbf{t}} F(\mathbf{R},\mathbf{t}) \triangleq \sum_{i=0}^{m} f_i^2(\mathbf{R},\mathbf{t}) + \sum_{j=0}^{n} g_j^2(\mathbf{R},\mathbf{t}) \Rightarrow \min_{\mathbf{s}} F(\mathbf{s})$$

s represents the rotation parameters, e.g., Euler angles

Camera Motion Expression

➢ From Representation to Estimation: An Overview

✓ Solution 1: Disentangle translation from rotation

- Generate a high-order univariate polynomial or multivariate polynomial system

$$\begin{aligned} f_1(x_1, \ldots, x_m) &= 0 \\ &\vdots \\ f_n(x_1, \ldots, x_m) &= 0, \end{aligned}$$

e.g.,

$$\begin{aligned} x^2 + y^2 - 5 &= 0 \\ xy - 2 &= 0. \end{aligned}$$

$$f(x) = \sum_{k=0}^{8} \delta_k x^k = 0$$

Multivariate polynomial system
(lower order in general)

Univariate polynomial system
(higher order in general)

- Solvers [1]

Groebner basis
~~Eigenvalue of coefficient matrix~~

Eigenvalue of coefficient matrix
~~Groebner basis~~

[1] Ji Zhao, Laurent Kneip, Yijia He, and Jiayi Ma. Minimal Case Relative Pose Computation using Ray-Point-Ray Features. IEEE Transactions on Pattern Analysis and Machine Intelligence, 42(5): 1176 - 1190, 2020.

Camera Motion Expression

➢ From Representation to Estimation: An Overview

✓ Solution 2: Simultaneously computing translation and rotation

- Generate a matrix

$$\boldsymbol{x}'^{\top}(\mathbf{R}[\mathbf{t}_{\times}])\boldsymbol{x} = 0 \qquad \boldsymbol{x}'^{\top}\mathbf{E}\boldsymbol{x} = 0$$

Essential matrix

- Rotation decomposition

$$\Sigma = \begin{bmatrix}\sigma_1 & 0 & 0\\ 0 & \sigma_2 & 0\\ 0 & 0 & \sigma_3\end{bmatrix} = \begin{bmatrix}\sigma_1 & 0 & 0\\ 0 & \sigma_2 & 0\\ 0 & 0 & 0\end{bmatrix}$$

$$\hat{T} = U\begin{bmatrix}0 & \mp 1 & 0\\ \pm 1 & 0 & 0\\ 0 & 0 & 0\end{bmatrix}\Sigma V^{T} \qquad \hat{T} = \begin{bmatrix}0 & -t_z & t_y\\ t_z & 0 & t_x\\ -t_y & t_x & 0\end{bmatrix} \Rightarrow \hat{t} = \begin{bmatrix}t_x\\ t_y\\ t_z\end{bmatrix}$$

$$\hat{R} = U\begin{bmatrix}0 & \mp 1 & 0\\ \pm 1 & 0 & 0\\ 0 & 0 & 1\end{bmatrix}V^{T}$$

$$T = K_2\hat{t}$$
$$R = K_2\hat{R}K_1^{-1}$$

Singular value decomposition (SVD)

$$\lambda\begin{bmatrix}u\\ v\\ 1\end{bmatrix} = \begin{bmatrix}h_{11} & h_{12} & h_{13}\\ h_{21} & h_{22} & h_{23}\\ h_{31} & h_{32} & h_{33}\end{bmatrix}\cdot\begin{bmatrix}X_w\\ Y_w\\ 1\end{bmatrix}$$

Projection matrix (simplified by co-planarity constraint)

$$\begin{bmatrix}h_{11}^{j} & h_{12}^{j} & h_{13}^{j}\\ h_{21}^{j} & h_{22}^{j} & h_{23}^{j}\\ h_{31}^{j} & h_{33}^{j} & h_{33}^{j}\end{bmatrix} = \begin{bmatrix}\alpha_u & 0 & u_0\\ 0 & \alpha_v & v_0\\ 0 & 0 & 1\end{bmatrix}\cdot\begin{bmatrix}r_{11}^{j} & r_{12}^{j} & t_1^{j}\\ r_{21}^{j} & r_{22}^{j} & t_2^{j}\\ r_{31}^{j} & r_{32}^{j} & t_3^{j}\end{bmatrix}$$

QR decomposition

Camera Motion Expression

➢ Non-rigid Motion

Comparison between rigid and non-rigid Structure from Motion (SFM)

- ✓ Rigid SFM allowing a reconstruction of the world from different views.
- ✓ Non-rigid SFM implies that both the camera and the scene are both dynamic (time-dependent).

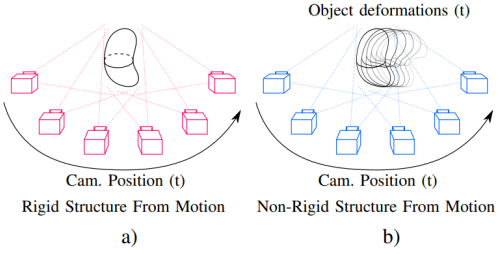

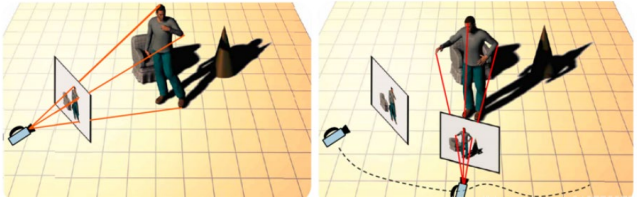

This knowledge will not be asked in the exam.

Camera Motion Expression

- Non-rigid Motion

One prior constraint: as rigid as possible



Each **edge** basically satisfies the rigid transformation

$$f(p', R) = \sum_i \sum_{j \in \mathcal{N}(i)} w_{ij} \| (p'_i - p'_j) - R_i (p_i - p_j) \|^2$$

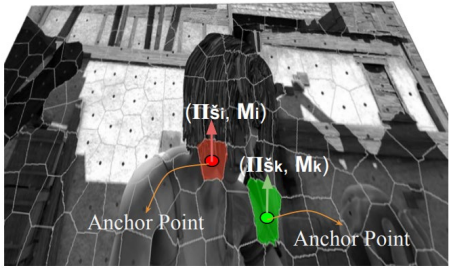

All the points from the same super pixel satisfy the same rigid transformation

This knowledge will not be asked in the exam.

3D Scene Representation

- Overview

Common 3D representation methods

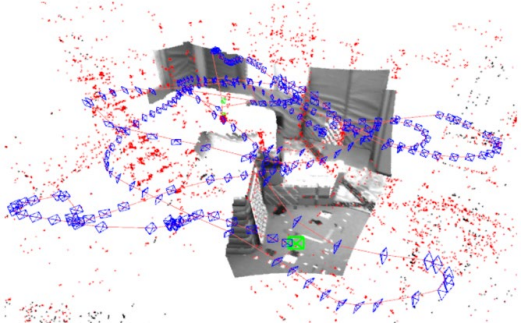

A 3D map reconstructed by a SLAM method

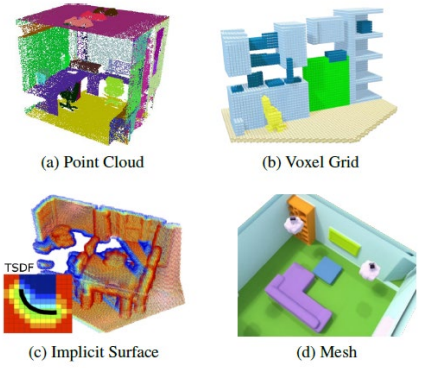

(a) Point Cloud (b) Voxel Grid (c) Implicit Surface (d) Mesh

How to choose appropriate representation?

3D Scene Representation

- Point Cloud

A point cloud is a discrete set of data points in space. The points may represent a 3D shape or object. Each point position has its set of Cartesian coordinates (X, Y, Z).

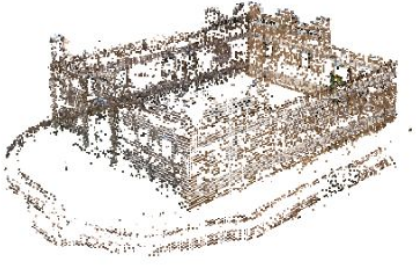

Point cloud obtained by visual SLAM

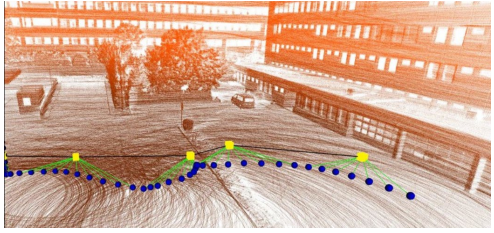

Point cloud obtained by Laser SLAM

3D Scene Representation

- Voxel Grid

A voxel grid geometry is a 3D grid of values organized into layers of rows and columns. Each row, column, and layer intersection in the grid is called a voxel or small 3D cube.



Voxels



Semantic scene completion

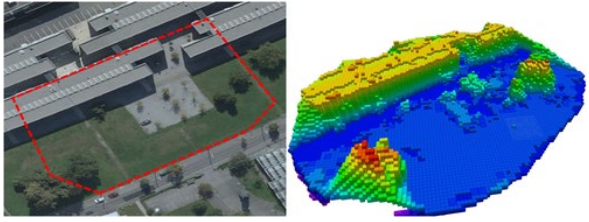

Obstacle map for drones

3D Scene Representation

- Mesh

A polygon mesh is a collection of vertices, edges and faces that defines the shape of a polyhedral object.

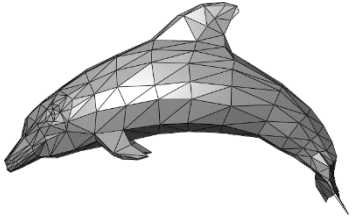

A low poly triangle mesh representing a dolphin

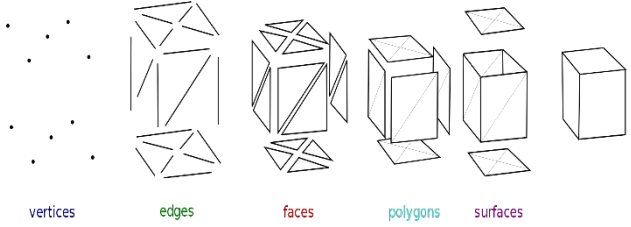

Primitives to define a mesh

3D Scene Representation

- Mesh

Triangle Mesh vs. Quad Mesh

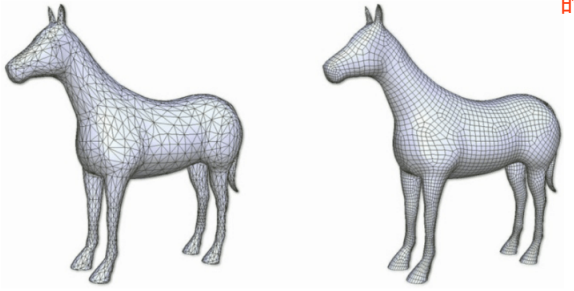

Triangle mesh　　Quad mesh

- 三角形网格类型是在几何功能相当简单和不太复杂的情况下的首选，主要用于规则的几何形状。

- 四边形网格给我们提供了相对准确的结果，在一般的复杂系统中使用较多。

- Triangle mesh type is preferred in the case where geometry function is quite easy and less complex, mostly for regular geometrical shapes.
- Quad mesh give us relatively accurate results, and are more used in complex systems in general.

3D Scene Representation

- Comparison





	Voxel	Point cloud	Polygon mesh
Memory efficiency	Poor	Not good	Good
Textures	Not good	No	Yes
For neural networks	Easy	Not easy	Not easy

3D Scene Representation

- Signed Distance Function (SDF)

Point cloud



Voxel grid



Mesh

SDF

✔

3D Scene Representation

- Signed Distance Function (SDF)

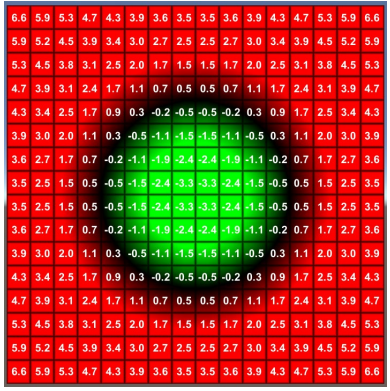

Zero-value SDF isosurface

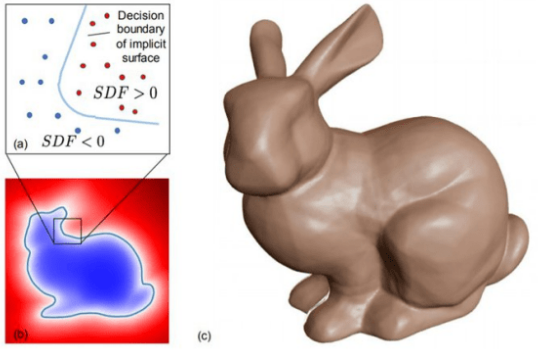

From isosurface to mesh:
Marching cubes algorithm

3D Scene Representation

- Signed Distance Function (SDF)



3D space discretization

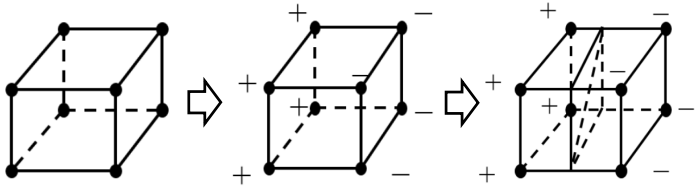

Isosurface detection based on SDF

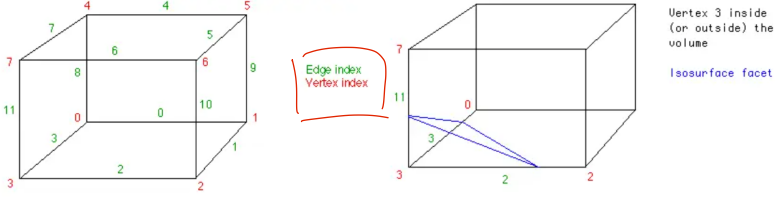

Interpolation of vertices of isosurface

3D Scene Representation

- Signed Distance Function (SDF)

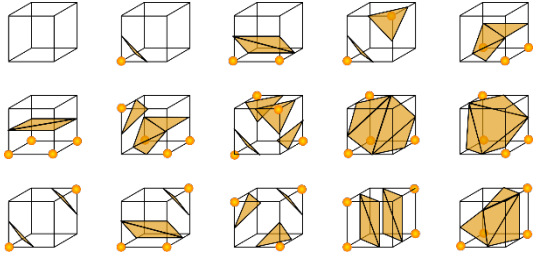

15 cube configurations



Higher number of cubes leads to higher resolution of mesh

3D Scene Representation

- Signed Distance Function (SDF)

Demo video of DeepSDF [1]

[1] Jeong Joon Park et al., “DeepSDF: Learning Continuous Signed Distance Functions for Shape Representation”, in CVPR, 2019

3D Scene Representation

- "Line" Cloud

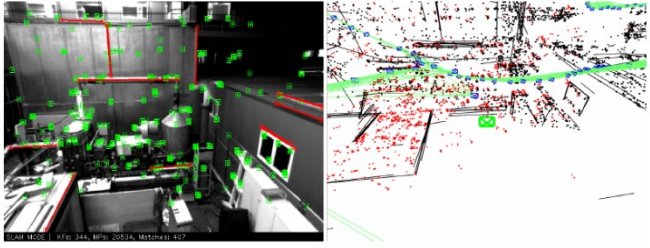

Combination of points and lines

Line cloud

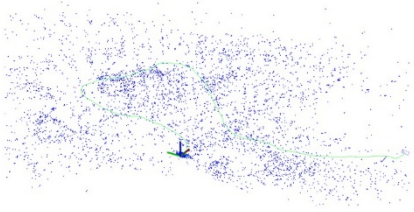

Point cloud

3D Scene Representation

➢ Integrated Information

✓ Structured information

- Parallelism and orthogonality



A map composed of structured 3D lines



2D lines clustered by vanishing points

- Co-planarity

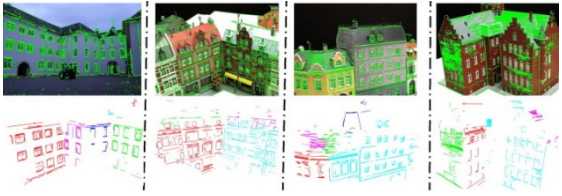

Reconstuctrued 3D maps with coplanar lines

3D Scene Representation

- Integrated Information

✓ Semantic information

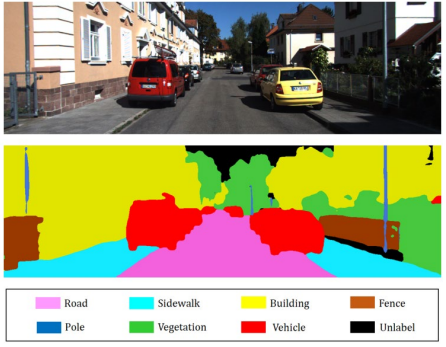

Semantic 2D maps

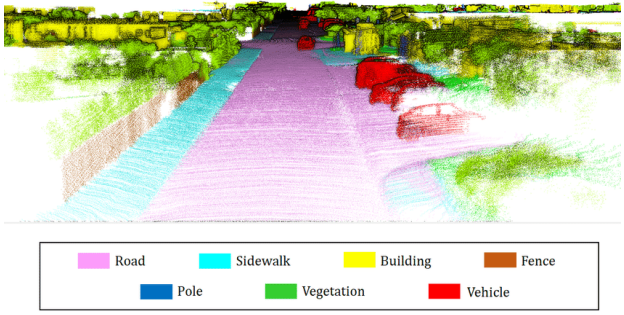

Semantic 3D maps

Summary

- Overview
- Coordinate System
- Camera Motion Expression
- 3D Scene Expression

Thank you for your listening!
If you have any questions, please come to me :-)