

Aruba Central NAC — EAP-TLS with Jamf Pro

Full onboarding: Aruba Central + Jamf Pro (UEM Onboarding, PKI SCEP, EAP-TLS)

Internal technote — Nicolas Culetto, HPE Aruba Networking

September 2026

Table of Contents

Right-click → Update Field to generate the table of contents.

Overview

Aruba Central NAC can use a UEM (Unified Endpoint Management) platform to distribute the profiles required by endpoints while keeping certificate issuance inside the Central NAC PKI. This document covers the full integration with **Jamf Pro**: configuration on the Aruba Central side (Jamf extension, identity store, roles, policies, SSID) and configuration on the Jamf Pro side (PKI/SCEP, configuration profiles, enrollment of Apple devices).

This integration is not documented anywhere else to date, neither by HPE nor by Jamf. This document is meant to fill that gap — it is adapted from the official HPE Aruba Networking technote on onboarding with Microsoft Intune, applied and validated here with Jamf Pro.

Component	Value
Subscription	Aruba Central NAC — Central Foundation
Identity store	Microsoft EntraID
UEM	Jamf Pro Cloud (<jamf-tenant>.jamfcloud.com), v11.32
Cloud IdP (Jamf side)	Microsoft EntraID
SSID	luconik-jamf
SSID security	WPA3-Enterprise (CCMP-128), EAP-TLS
Server Group	Central NAC
Devices tested	MacBook Pro M1 (macOS 26.6.2), iPad Pro 11 (iPadOS 26.6.1)

i Note — subscription tier. The Jamf integration described here is available with the Central Foundation subscription. The higher-tier Central license is only needed for multi-IdP or personal certificate — features not used in this lab.

End-to-end flow mechanism:

1. The Apple device (Mac / iPad) enrolls into Jamf Pro Cloud.
2. Jamf Pro pushes the SCEP profile to the device.
3. The device triggers a SCEPChallenge event against Jamf.
4. Jamf calls Central's Jamf extension Webhook with the Authorization Header.
5. Central returns a single-use challenge.
6. Jamf forwards this challenge to the device.
7. The device sends its request to Central's SCEP URL.
8. Central NAC issues the client certificate.
9. The device authenticates via EAP-TLS on the luconik-jamf SSID.
10. Central NAC assigns the network role based on the identity's EntraID group.

Prerequisites

- Aruba Central NAC — Central Foundation subscription.
- EntraID identity store already configured in Central (App Registration, permissions).
- Jamf Pro Cloud, version 10.32 or later (lab validated on 11.31.1-t1787060595569 / 11.32).
- Jamf Pro account with admin rights to create an API role/client and configuration profiles (Certificate, SCEP, Network payloads).

—Existing EntraID groups for NAC role mapping.

⚠ **Gotcha — Entra secret referenced in two places.** *The Entra client secret is used both in the Jamf MDM extension and in the Central identity store. Regenerating it in Entra invalidates both references at once — it must be updated in both places after regeneration.*


⚠ **Gotcha — Value vs Secret ID.** *On the Entra side, when creating the secret, it's the Value that needs to be copied, not the Secret ID. A common mistake that silently breaks the extension's authentication.*

Jamf-tenant-specific values are never reused in this document. Use <jamf-tenant>.jamfcloud.com in the examples and public screenshots.

Part 1 — Aruba Central: Jamf extension

1.1 Install the Jamf extension

1. In Aruba Central, open Global → Maintenance → Extensions (Available Extensions tab).
2. In the catalog, locate the Jamf extension — it exists natively, on the same footing as the Intune extension.

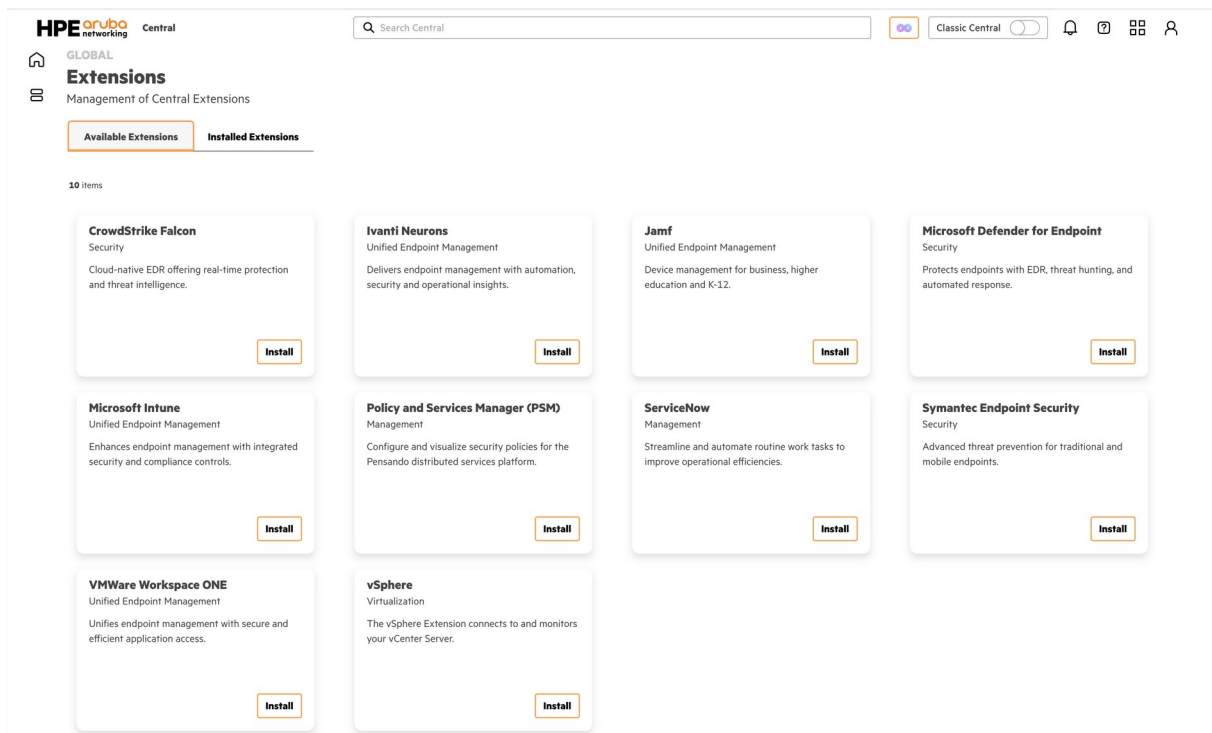

Central extensions catalog — Jamf

Click Install on the Jamf card.

1.2 Configure the extension

The install form also serves as the configuration form — there is no separate naming step ahead of the credentials configuration.

1. Give the instance a name (e.g. <jamf-instance-name>) and leave the type set to Jamf Pro.
2. Enter the Jamf Pro instance URL: <jamf-tenant>.jamfcloud.com.
3. Under Connect Using, select OAuth.
4. Enter the Client ID and Secret of the Entra ID App Registration created for this integration, along with the Token Server URL (https://<jamf-tenant>.jamfcloud.com/api/oauth/token).

Jamf

×

Name *

Luconik_Jamf

Type *

☒ Jamf Pro

☐ Jamf School

URL *

https://<tenant-jamf>.jamfcloud.com

Connect Using

☐ Credentials

☒ OAuth

Client ID *

Secret *

.....

Token

Token Server URL *


https://<tenant-jamf>.jamfcloud.com/api/oauth/token

Cancel

Install

Installing and configuring the Jamf extension

Click Install — the instance appears under the Installed Extensions tab with status Active.

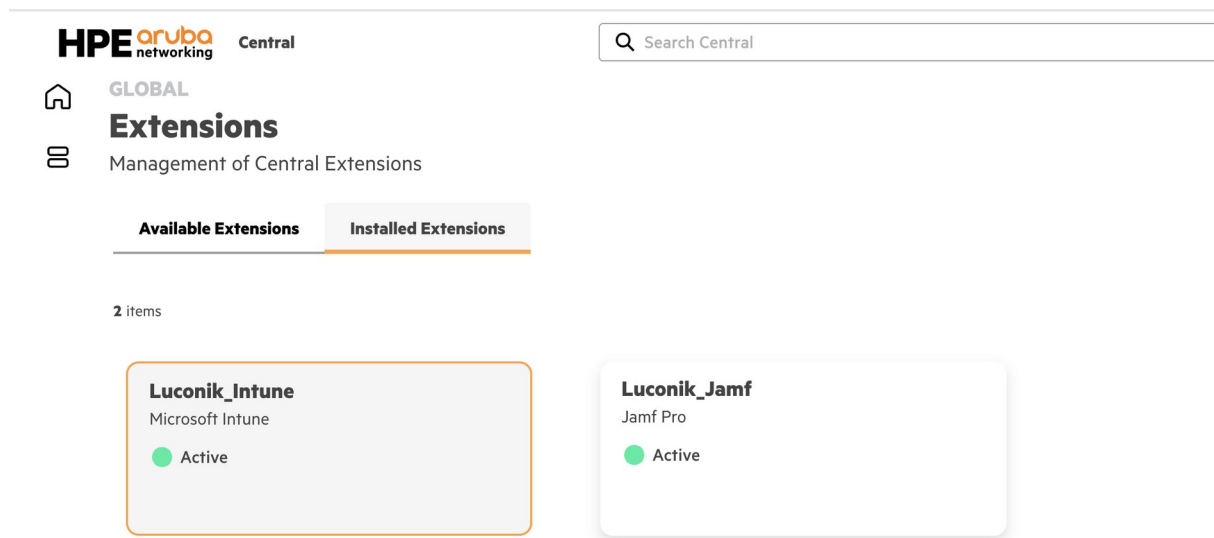

Jamf extension installed and active

⚠ **Gotcha — no "Extension" field.** Unlike the Intune extension, the Jamf UEM instance configuration screen has no Extension field for a direct app link. The integration relies entirely on the SCEP URL + SCEP Challenge Webhook URL + Authorization Header mechanism described below — this is the triad that needs to be passed to Jamf Pro.

1.3 Retrieve the SCEP URL, Webhook URL, and Authorization Header

1. Once the instance is connected, open the tab that exposes the instance's SCEP information.
2. Note and copy the following three values, to be passed to Jamf Pro's PKI configuration (see Part 4.1): SCEP URL (the endpoint the device uses to retrieve its certificate), SCEP Challenge Webhook URL (the endpoint Jamf calls on the SCEPChallenge event), Authorization Header (the auth header to configure on the Jamf side for the webhook call).

Edit Profile

<

Edit UEM Instance

×

Name *

Luconik_Jamf

Type *

Jamf Pro

SCEP URL

https://ca-euw1.cloudguest.central.arubanetworks.co...

SCEP Challenge Webhook URL

https://ca-euw1.cloudguest.central.arubanetworks.co...

SCEP Challenge Webhook Authorization Header

Download Certificate

Save

SCEP URL / Webhook URL / Authorization Header screen


Keep these three values on hand.

i Note. *These three values are entered only once on the Jamf Pro side, and the Authorization Header is not shown again in clear text afterward — note it down before leaving the screen.*

Part 2 — Aruba Central NAC: configuration

2.1 Configure the OAuth EntraID identity store

1. Open Central NAC → Configuration → Identity Management.
2. The list shows the existing identity stores (e.g. Luconik_EntraID, Luconik_Visitor, MAC Address Store, Wi-Fi Easy Connect Registration Store) along with, for each, the Authentication Profiles and Authorization Policies that reference it.
3. Select the OAuth 2.0 EntraID identity store already configured and used for the Jamf extension (1.2) — a single identity store serves both needs.
4. Verify that the Tenant ID and App Registration match the ones used on the extension side.

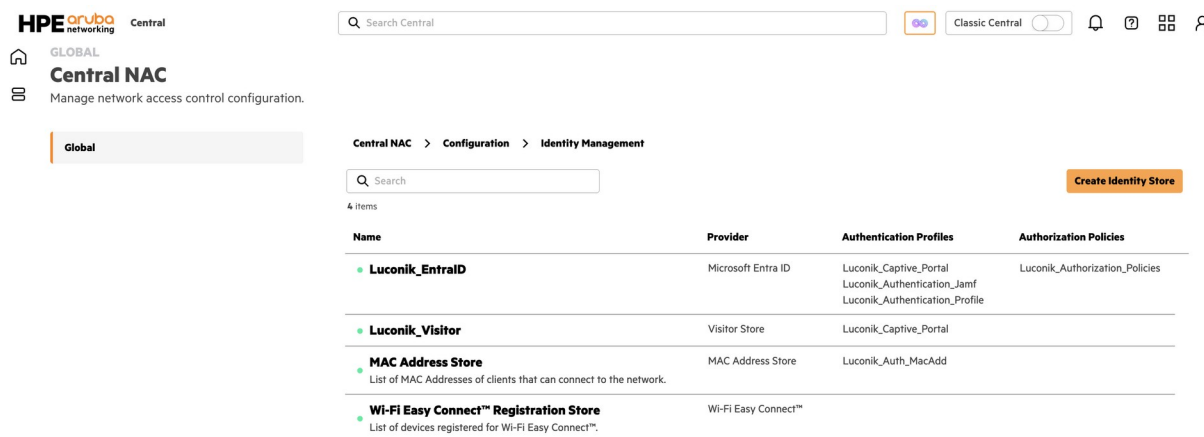

The screenshot shows the HPE Aruba Central NAC web interface. The breadcrumb trail is 'Central NAC > Configuration > Identity Management'. A table lists four identity stores. The first store, 'Luconik_EntraID', is highlighted with a green dot, indicating it is selected. The table columns are Name, Provider, Authentication Profiles, and Authorization Policies.

Name	Provider	Authentication Profiles	Authorization Policies
Luconik_EntraID	Microsoft Entra ID	Luconik_Captive_Portal Luconik_Authentication_Jamf Luconik_Authentication_Profile	Luconik_Authorization_Policies
Luconik_Visitor	Visitor Store	Luconik_Captive_Portal	
MAC Address Store List of MAC Addresses of clients that can connect to the network.	MAC Address Store	Luconik_Auth_MacAdd	
Wi-Fi Easy Connect™ Registration Store List of devices registered for Wi-Fi Easy Connect™.	Wi-Fi Easy Connect™		

Central NAC identity store list

2.2 Create the NAC roles

1. Open Global → Configuration Overview → Library → Roles & Policies tab → Roles. This role repository is shared across all of Central (not specific to Central NAC).
2. Create a role per target population, e.g. Luconik, meant to be mapped to an EntraID group (see 2.5) — assigned to the relevant device functions (Campus Access Point, Access Switch, Mobility Gateway...) at the site scope (e.g. Homelab).
3. Define the associated network rights (VLAN, ACL, etc.) according to the site's policy.

Library

Global

Site Collections

Sites

Devices

Device Groups

Profiles Roles & Policies Named Objects Services

Library > Roles

Search

Create Role



35 items

Name	GPID	Assigned Device Function	Assigned Scope	Referenced By
Contractor-role	900	-	-	-
Luconik Luconik	1100	Campus Access Point	Homelab	1 policy
Luconik-MacAddr Luconik-MacAddr	800	Campus Access Point	Homelab	2 policies
Luconik-invite Luconik-invite	1000	Campus Access Point	Homelab	1 policy
admin-role	300	Access Switch Campus Access Point Mobility Gateway	Homelab	1 policy
ap-role This is a system defined role for GW, cannot be edited	22	Mobility Gateway	Global	-
authenticated This is a system defined role for GW, cannot be edited	71	Mobility Gateway	Global	-
default System role default	0	Access Switch Aggregation Switch Core Switch	Global	-
default-lap-user-role This is a system defined role for GW, cannot be edited	41	Mobility Gateway	Global	-
default-via-role This is a system defined role for GW, cannot be edited	51	Mobility Gateway	Global	-
default-vpn-role This is a system defined role for GW, cannot be edited	61	Mobility Gateway	Global	-
default_wired_port_profile wlan access-rule default_wired_port_profile	82	Campus Access Point	Global	-
denyall This is a system defined role for GW, cannot be edited	21	Mobility Gateway	Global	-
design-role	400	Access Switch Campus Access Point Mobility Gateway	Homelab	1 policy
employee-role	600	Access Switch Campus Access Point Mobility Gateway	Homelab	1 policy
guest This is a system defined role for GW, cannot be edited	91	Mobility Gateway	Global	-
guest-logon This is a system defined role for GW, cannot be edited	52	Mobility Gateway	Global	-
infra	2	Access Switch	Global	-

Central roles library

2.3 Configure the global NAC policy

1. Open Global → Configuration Overview → Library → Roles & Policies tab → Security Policies → Role-based Policies. As with roles (2.2), this is a repository shared across all of Central, not specific to Central NAC.
2. Create (or edit) a Role-based policy (e.g. XYZ-policies), assigned to the relevant device functions at the site scope (e.g. Homelab).
3. Add one rule per role created in 2.2: Source = Access Role → select the role (e.g. admin-role), Destination = Any (or more restrictive depending on the desired segmentation), Service/Application = Any, Action = Allow.

Name	Rules	Assigned Device Function	Assigned Scope
XYZ-policies	7	AOS-S Access Switch, Access Switch, Campus Access Point, Mobility Gateway	Homelab
IP Version	Source	Destination	Service/Appli...
IPv4	Role: sales-role	Any	Any
IPv4	Role: retail-role	Any	Any
IPv4	Role: marketin...	Any	Any
IPv4	Role: employe...	Any	Any
IPv4	Role: design-r...	Any	Any
IPv4	Role: admin-r...	Any	Any
IPv4	Role: Luconik...	Any	Any
sys_central_nac	7	Campus Access Point	Global
System Default GW Policy	1	Mobility Gateway	Global
sys_allow_all	5	Campus Access Point	Global

Role-based policy — rule overview

Search Central

Edit Rule

Profiles Roles & Policies Named Objects Services

Library > Security Policies > Role-based Policies

Name	Rules	Assigned Device Function
XYZ-policies	7	AOS-S Access Switch, Access Switch, Campus Access Point, Mobility Gateway
IP Version	Source	Destination
IPv4	Role: sales-role	Any
IPv4	Role: retail-role	Any
IPv4	Role: marketin...	Any
IPv4	Role: employe...	Any
IPv4	Role: admin-r...	Any
IPv4	Role: Luconik...	Any
sys_central_nac	7	Campus Access Point
System Default GW Policy	1	Mobility Gateway
sys_allow_all	5	Campus Access Point

Description

Source

Source *

Access Role

Access Role *

admin-role

Source Role Options

Any

Destination

Destination *

Any

Choose an address family for this rule *

IPv4 Address

IPv6 Address

A rule supports a single address-family at a time.

Service/Application *

Any

Action *

Allow

Time Profile

Select

Log

QoS

DSCP

Select

802.1P

Rule detail — Source Access Role, Action Allow

Repeat for every role that needs network access (one rule = one role). This policy is what translates each NAC role's rights into actual network enforcement.

i System policies. Read-only system policies also exist (*sys_central_nac*, *System Default GW Policy*, *sys_allow_all*, *Global scope*) — do not modify them, they are managed by Central.

2.4 Create the 802.1X SSID profile

1. Open the WLAN profile for the luconik-jamf SSID (at the relevant site/AP group configuration) → Security section.
2. Security Level: Enterprise.
3. Key Management: WPA3-Enterprise (CCM 128).
4. Authentication → Server Group: Central NAC.

Update WLAN Profile

General

Name *

luconik-jamf

Description

Type

Access

☐ Use ESSID Alias

ESSID Name *

luconik-jamf

☐ Use Disable Network Alias

☐ Disable Network

Bands

☒ 2.4 GHz

☒ 5 GHz

☒ 6 GHz

Wi-Fi Protocols

☒ Wi-Fi 4 (802.11n)

☒ Wi-Fi 5 (802.11ac)

☒ Wi-Fi 6 (802.11ax)

☒ Wi-Fi 7 (802.11be)

Network Configuration

☐ Most Compatible

☒ Balanced

☐ High Density

☐ Custom

Advanced

VLAN

Traffic Forwarding Mode *

☒ Bridge

☐ Tunnel

☐ Mixed

☐ Use Named VLAN

Default VLAN *

1

Advanced

Security

Disable 6 GHz Band, Wi-Fi 7 (802.11be) to enable legacy key management methods

Security Level *

☒ Enterprise

☐ Personal

☐ Open

Key Management *

WPA3-Enterprise(CCM 128)

☐ DPP

Authentication

Server Group *

Central NAC

☐ Air Pass

Please complete the Air Pass configuration by creating an Air Pass profile in Central NAC and passpoint location profile is needed.

Reauthentication Interval

0-32768

0

Minutes

Advanced

Access

Default Role -

☐ Override default role

Default policies for role "" have been created under "Roles & Policies" > Role-Based policies". Please finish the configuration by editing said policies.

Advanced

luconik-jamf SSID profile — Security section

Deploy the profile to the relevant AP group(s).

2.5 Create the authorization policy

1. Open Central NAC → Configuration → Authorization Policies.
2. A policy groups several ordered rules, each evaluated in order (the first match applies, the last rule being a default Deny All).
3. Create a rule whose condition matches the <group-name> EntraID group, with action Allow and the NAC role created in 2.2.
4. Position the rule where needed relative to the other existing rules.

GLOBAL

Central NAC

Manage network access control configuration.

Search Central

Classic Central

Global

Central NAC > Configuration > Authorization Policies

Search

Create Policy

2 items

	Name	Rules	Identity Store	Policy Type	Status
1	Luconik_Authorization_Policies	8	Luconik_EntrolD	User	Active
	Name	Conditions	Action	Role	
1	design	1	Allow	design-role	
2	admin	1	Allow	admin-role	
3	marketing	1	Allow	marketing-role	
4	employee	1	Allow	employee-role	
5	Sales	1	Allow	sales-role	
6	retail	1	Allow	retail-role	
7	Mac-Address	1	Allow	Contractor-role	
8	Deny All	0	Deny	-	
2	Deny All Default deny for unauthorized requests	0	-	Custom	Active

Authorization policy rules

2.6 Create the EAP-TLS authentication profile

1. Open Central NAC → Configuration → Authentication Profiles.
2. Create a profile of type EAP-TLS.
3. Associate the Jamf UEM instance (Part 1) as the client certificate validation source.
4. Associate this profile with the luconik-jamf SSID created in 2.4.

Q Search Central

Central NAC > Configuration > Authentication Profiles

Q Search

1 of 4 items selected

Name	Authentication Type	Assigned Network
Luconik_Auth_MacAddr	MAC Authentication	Luconik-MacAddr Wired
Luconik_Authentication_Jamf	EAP-TLS	luconik-jamf
Luconik_Authentication_Profile	EAP-TLS	luconik-corp Wired
Luconik_Captive_Portal	Captive Portal	Luconik-invite

Edit Profile

X

Name *

Luconik_Authentication_Jamf

Description

Authentication Type *

Select authentication type to determine profile configuration.

☐ Captive Portal
 ☒ EAP-TLS
 ☐ MAC Authentication
 ☐ MPSK

Network *

Select the network to be configured with this profile.

luconik-jamf

▼

☐ Use for wired connection

ⓘ This option is already enabled on another EAP profile.

Identity Store *

Luconik_EntraID

▼

EAP-TLS Settings

Organization Name *

Name used in onboarding workflows.

CULETTO

Certificate

Select to use default or custom EAP-TLS server certificate.

☒ Default certificate
 ☐ Custom certificate

EAP-TLS Client Valid Days *

Lifetime in days of X.509 certificates issued by the internal CA.

365 days (12 months)

▼

UEM Onboarding

+

Luconik_Jamf

User Onboarding

Share this URL with end-users to onboard their clients into the network.

URL

https://euw1.cloudguest.centralarubanetw
orks.com/portal/cnx.cust-...

📄

Portal Customization

Apply customizations to the web portal for this authentication profile by selecting a portal profile.

None

▼

Save

EAP-TLS authentication profile

Part 3 — Jamf Pro: API role and Central attachment


Configuration is split between Aruba Central, which provides the PKI and NAC policies, and Jamf Pro, which distributes the Apple profiles and verifies the SCEP challenge.

3.1 Create the Jamf API role and client

The Jamf extension queries the Jamf inventory to link the device to the UEM Onboarding flow. Use a dedicated, read-only role rather than a generic admin account.


1. In Jamf Pro, open Settings > System > API roles and clients > API Roles.
2. Create the <central-nac-read-only> role with only the following privileges.

Privilege	Usage
Read Computers	Read access to enrolled Macs
Read Mobile Devices	Read access to enrolled iPads/iPhones
Read Smart Computer Groups	Read access to dynamic macOS groups
Read Smart Mobile Device Groups	Read access to dynamic iOS/iPadOS groups

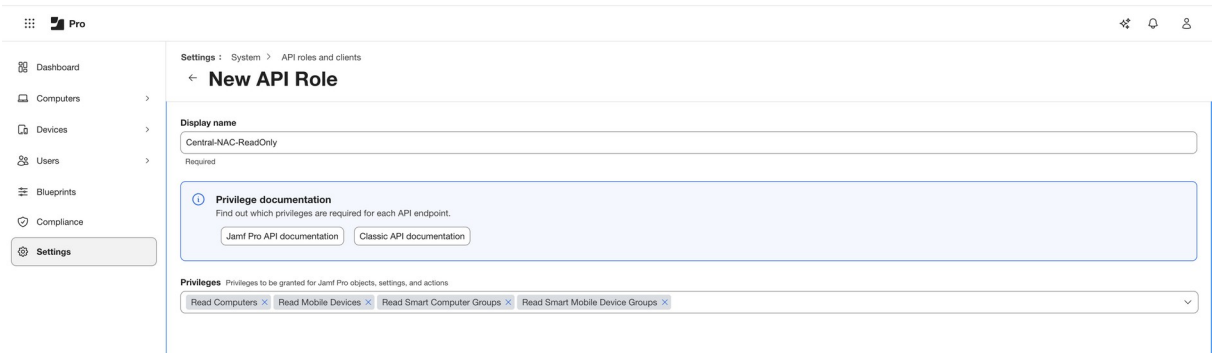

Jamf API role privileges

1. In API Clients, create a client tied to this role, enable it, and keep its secret.
2. Set Access token lifetime to 900 seconds.

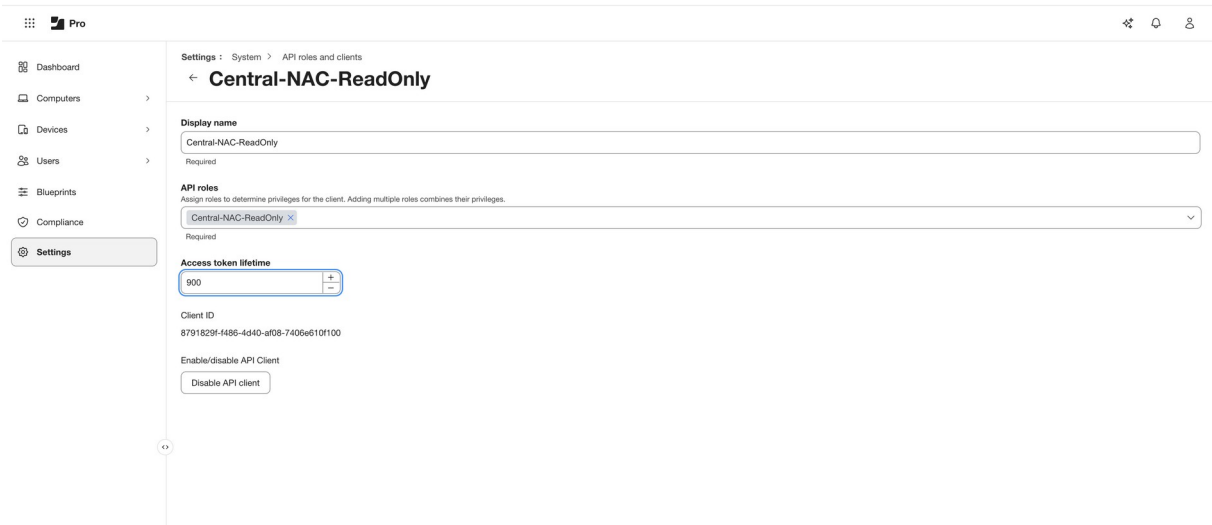

Jamf API client token lifetime

i Note. The default value of 60 seconds is too short for a reliable SCEP flow. Creating or rotating a secret should be treated as a sensitive operation: the secret is only shown once.

Part 4 — Jamf Pro: enrollment and configuration profile

On the Jamf side, everything lives in a single configuration profile combining three payloads: Certificate (the Central NAC root certificate, so the device trusts the certificate that will be issued), SCEP (pointing directly at the SCEP URL exposed by Central's Jamf extension), and Network (802.1X Wi-Fi, which consumes the identity issued by the SCEP payload).

i Correction relative to the Intune technote. *There is no separate "PKI proxy server" object to create in Jamf Pro for this integration — unlike what the name might suggest by analogy with Intune. The configuration profile's SCEP payload points directly at the SCEP URL provided by Central's Jamf extension, in Manual configuration.*

4.1 Enrollment prerequisites — User-initiated enrollment

Before the configuration profile can be pushed, devices must already be enrolled as managed devices in Jamf Pro. Configuration observed in the lab, under Settings > Global > User-initiated enrollment:

- General: "Skip certificate installation during enrollment" checked (an internal/trusted third-party SSL certificate is already in place on the instance); "Restrict re-enrollment to authorized users only" and "Use a third-party signing certificate" unchecked.
- Messaging: default English enrollment message (Enroll Your Device) — to be adapted/translated if needed.
- Computers: "Enable user-initiated enrollment for computers" checked (enrollment URL <https://<jamf-tenant>.jamfcloud.com/enroll>). Managed admin account, forced SSH, and Self Service launch left disabled in the lab.
- Devices: "Enable for institutionally owned devices" checked under Profile-Driven Enrollment via URL. Account-Driven options (Managed Apple ID) are not used in this lab.
- Access: the Directory Service Groups table restricts who can self-enroll, by group and by mode (Profile-Driven / Account-Driven).

Pro

Dashboard

Computers

Devices

Users

Blueprints

Compliance

Settings

Resource center

Settings : Global

←

User-initiated enrollment

General

Messaging

Computers

Devices

Access

☐ Restrict re-enrollment to authorized users only

Only allow re-enrollment of mobile devices and computers if the user has the applicable privilege ("Mobile Devices" or "Computers") or their username matches the Username field in User and Location information.

☒ Skip certificate installation during enrollment

Certificate installation step is skipped during enrollment if your environment has an SSL certificate that was obtained from an internal CA or a trusted third-party vendor.

☐ Use a third-party signing certificate

Ensure that the certificate signs configuration profiles sent to computers and mobile devices, and appears as verified to users during user-initiated enrollment.

14290000

Edit

User-initiated enrollment — General

Pro

Dashboard

Computers

Devices

Users

Blueprints

Compliance

Settings

Resource center

Settings : Global

←

User-initiated enrollment

General

Messaging

Computers

Devices

Access

Language-Specific Enrollment Messaging

Language to use to display enrollment messaging to users. All text entered for enrollment messaging is displayed to the user exactly as it appears in Jamf Pro

Language	Page Title for Enrollment
English	Enroll Your Device

↩

⌚

Micronu

✎

Edit

User-initiated enrollment — Messaging

Pro

Dashboard

Computers

Devices

Users

Blueprints

Compliance

Settings

Resource center

Settings : Global

←

User-initiated enrollment

General

Messaging

Computers

Devices

Access

☒

Enable user-initiated enrollment for computers

Allow users to enroll computers by going to https://JAMF_PRO_URL.jamfcloud.com/enroll (hosted in Jamf Cloud) or https://JAMF_PRO_URL.com:8443/enroll (hosted on-premise)

Managed local administrator account

☐

Create managed local administrator account

Account to be used for computers enrolled via PreStage enrollment or user-initiated enrollment. This account is created by the Jamf management framework.

☐

Ensure SSH is enabled

Enable SSH (Remote Login) on computers that have it disabled

☐

Launch Self Service when done

Ensure that computers launch Self Service immediately after they are enrolled

Account-Driven Device Enrollment

☐

Enable for institutionally owned computers

↻

Micronu

Edit

User-initiated enrollment — Computers

Pro

Dashboard

Computers

Devices

Users

Blueprints

Compliance

Settings

Resource center

Settings : Global

←

User-initiated enrollment

General

Messaging

Computers

Devices

Access

Profile-Driven Enrollment via URL

Allow users to enroll by going to https://JAMF_PRO_URL-jamfcloud.com/enroll (hosted in Jamf Cloud) or https://JAMF_PRO_URL.com:8443/enroll (hosted on-premise)

☒ Enable for institutionally owned devices

☐ Enable for personally owned devices

Personal data on devices enrolled via User Enrollment is retained when the MDM profile is removed. (iOS 17.7.2 or earlier, iPadOS 17.7.2 or earlier)

Account-Driven User Enrollment

Allow users to enroll by signing in to their device using a Managed Apple ID

☐ Enable for personally owned mobile devices

Personal data on devices enrolled via account-driven User Enrollment is retained when the MDM profile is removed. (iOS 15 or later, iPadOS 15 or later)

☐ Enable for personally owned Vision Pro devices

Personal data on devices enrolled via account-driven User Enrollment is retained when the MDM profile is removed. (visionOS 1.1 or later)

☐ Merge matching Managed Apple Account usernames

Merge matching usernames during device enrollment if the device user's username matches an existing Managed Apple Account username. Deselecting this option will create a new Managed Apple Account if matching usernames exist.

Account-Driven Device Enrollment

☐ Enable for institutionally owned mobile devices

☐ Enable for institutionally owned Vision Pro devices. (visionOS 1.1 or later)

vietnru Edit

User-initiated enrollment — Devices

Restricted distribution — HPE internal / partner use only
21

Pro

Dashboard

Computers

Devices

Users

Blueprints

Compliance

Settings

Resource center

Settings : Global

←

User-initiated enrollment

General

Messaging

Computers

Devices

Access

Directory Service Groups

Directory Service groups to configure enrollment access for

Group	Profile-Driven	Account-Driven	
admin	Institutional, Personal	Yes	Q
All Directory Service Users	Institutional	No	Q
Design	Institutional, Personal	Yes	Q
Employee	Institutional, Personal	Yes	Q
Marketing	Institutional, Personal	Yes	Q
Retail	Institutional, Personal	Yes	Q
Sales and Marketing	Institutional, Personal	Yes	Q

Micronu


Edit

User-initiated enrollment — Access, Directory Service groups

i Scope. *This configuration only covers initial MDM enrollment (getting a managed Mac/iPad into Jamf) — it is independent of the EAP-TLS flow, which relies on the configuration profile pushed once the device is already enrolled.*

4.2 Create the configuration profile (Certificate + SCEP + Network)

1. Open Computers > Configuration Profiles and create a profile. Give it an explicit name, e.g. Luconik-CentralNAC-EAPTLS.



Restricted distribution — HPE internal / partner use only

The screenshot shows the Jamf Pro interface for configuring a profile. The left sidebar contains navigation options like Computers, Inventory, Policies, and Configuration profiles. The main area is titled 'Luconik-CentralNAC-EAPTLS' and shows a list of configuration options. The 'Certificate' option is selected, and its details are shown on the right. The details include a Certificate Name, a Certificate to be used for this configuration, a Select Certificate Option dropdown, and a list of certificate details: Filename (54492cb9-33fc-4e4b-aaa6-e892847058d6.cer), Issuer Name (CN=Cloud Authentication Private Root CA (powered by HPE Aruba), O=0e2bdac8fd3811f0a4dfb2087510d02d), Expiration Date (02/28/2028), Password, and Verify Password. There are also checkboxes for 'Allow all apps access' and 'Allow export from keychain'.

Certificate payload — Central NAC root certificate

3. Add the SCEP payload, with Certificate authority type: Manual configuration, and fill in:

Field	Value
URL	SCEP URL provided by Central's Jamf extension (Part 1)
Name	instance identifier, e.g. CentralNAC
Subject	CN=\$USERNAME
SAN type	Uniform Resource Identifier
SAN value	cnac+jamf:///DeviceId=\$JSSID
Challenge Type	Dynamic
Key Size	2048

Computers : Configuration profiles

← Luconik-CentralNAC-EAPTLS

Options Scope ☐ Show in Jamf Pro Dashboard

Search...

- General
- Certificate 1 payload configured
- Network 1 payload configured
- SCEP 1 payload configured

SCEP

Certificate authority type
Select the type of certificate authority you want to configure for SCEP.

☐ Manual configuration

The "External CA" and "AD CS" certificate authority types are only available when they are configured in PKI certificates.

URL
The base URL for the SCEP server

Name
The name of the instance: CA-IDENT

Redistribute Profile
Redistribute the profile automatically when its SCEP-issued certificate is the specified number of days from expiring. Configuring this option adds "\$PROFILE_IDENTIFIER" to the Subject field

Subject
Representation of a X.500 name (e.g. "O=CompanyName, CN=Foo")

Subject Alternative Names (Optional)
Add one or more subject alternative names

SAN TYPE	SAN NAME
Uniform Resource Identifier	cnac+jamf:///DeviceId=\$JSSID

Challenge Type
Type of challenge password to use

Retries
Number of times to retry after PENDING response

Retry Delay
Number of seconds to wait before each retry

Seconds

Certificate Expiration Notification Threshold
The number of days before the certificate expires to notify to start showing the expiration date

Days

History Logs Download Clone Delete Edit

SCEP payload: URL, subject, and SAN

The `cnac+jamf://` scheme is specific to the Jamf integration. It replaces the `cnac+intune://` scheme from the Intune technote. `$JSSID` is resolved by Jamf using the device's Jamf identifier; since the Computer and Mobile Device sequences are distinct, a Mac and an iPad can both have `DeviceId=1`.

After issuance, verify on the device that the certificate contains the following SAN:

```
URI:cnac+jamf:///DeviceId=<jamf-id>
```

```
luconik@luconiks-MacBook-Pro ~ % openssl x509 -in /tmp/c6.pem -noout -text
| grep -A5 "Alternative Name"
X509v3 Subject Alternative Name:
  URI:cnac+jamf:///DeviceId=1
X509v3 Key Usage:
  Digital Signature, Non Repudiation, Key Encipherment, Key
Agreement
X509v3 Extended Key Usage:
  TLS Web Client Authentication
luconik@luconiks-MacBook-Pro ~ %
```

SAN URI of the issued certificate (openssl verification)

4. Add the Network payload: Network Interface = Wi-Fi; Service Set Identifier (SSID) = luconik-jamf; Security Type = WPA3 Enterprise.

Computers : Configuration profiles

← Luconik-CentralNAC-EAPTLS

Options Scope

Search...

Network

Network Interface
Type of network interface on the device
Wi-Fi

Service Set Identifier (SSID)
Identification of the wireless network to connect to
luconik-jamf

☐ Hidden Network
Enable if target network is not open or broadcasting

☒ Auto Join
Automatically join this wireless network

☐ Disable MAC Address Randomization (macOS 15 or later)
Disables MAC Address randomization for this wireless network while the device is connected with the network

Proxy Setup
Configures proxy settings to be used with this network
None

Security Type
Wireless network encryption to use when connecting
WPA3 Enterprise

☐ Use as a Login Window configuration
User logs in to authenticate the Mac to the network

Network Security Settings
Configurations options for 802.1X network authentication

Protocols Trust

Accepted EAP Types
Authentication protocols supported on target network


☒ TLS

☐ TTLS

Cancel Save

Network payload — SSID and Security Type

Under the Protocols tab, check TLS in Accepted EAP Types. Under the Trust tab: Identity Certificate = the SCEP payload created in step 3 (it appears in the list as SCEP (<Name>)); Trusted Certificates = the root certificate uploaded in step 2 (CentralNAC_Certificate).

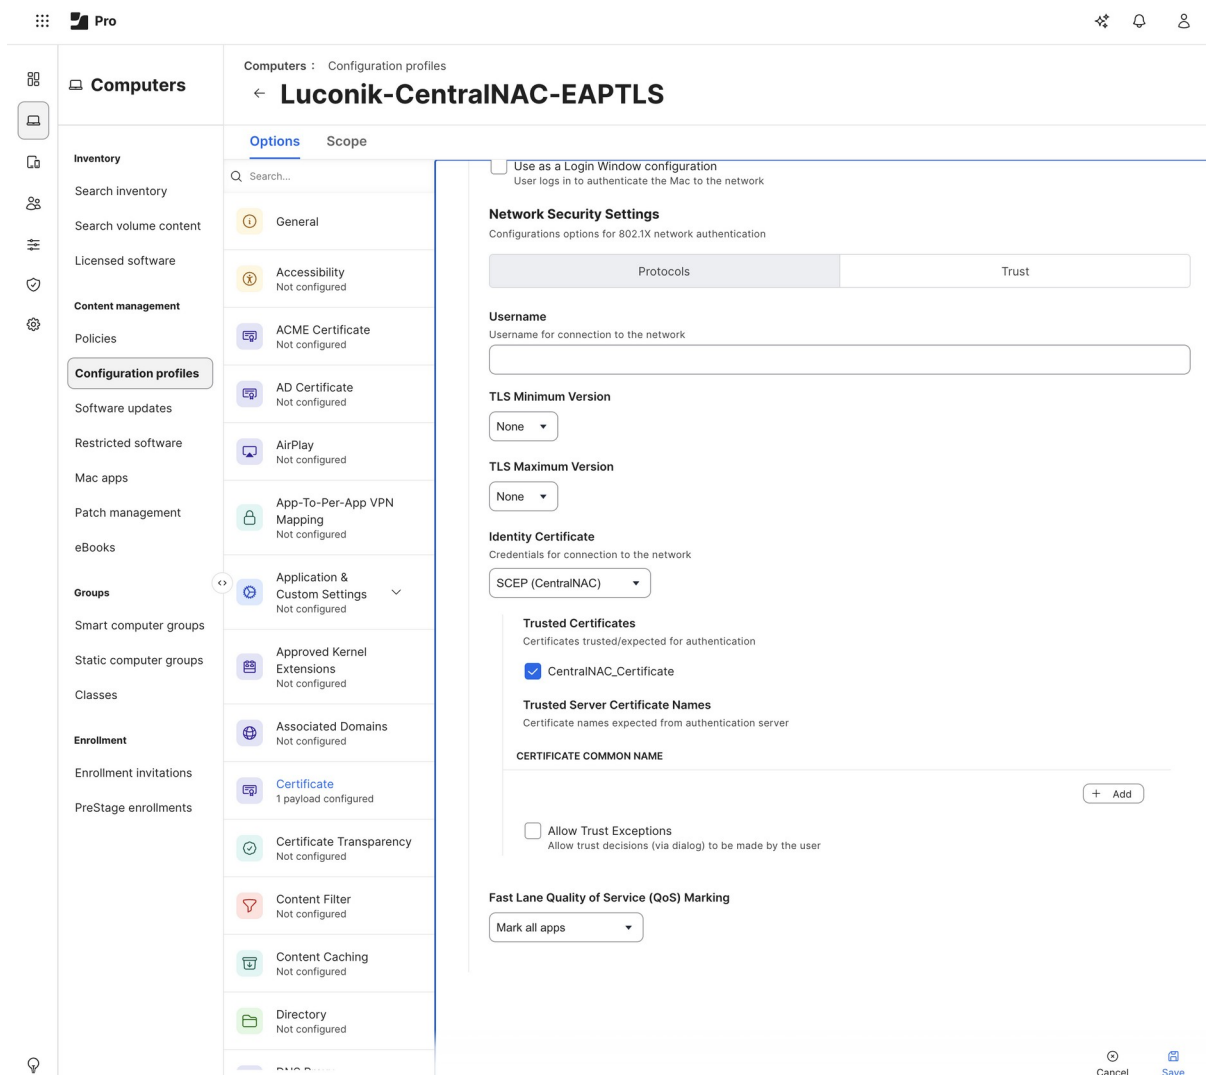

Network payload — Trust tab, Identity Certificate and Trusted Certificates

5. Save the profile.

4.3 Deploy the profile

1. In the profile's Scope tab, assign the target devices. A Smart Computer Group / Smart Mobile Device Group is recommended in production for deployment at scale; in a lab, targeting specific devices directly (Specific Computers / Specific Mobile Devices) is enough.
2. Save and wait for the devices' next check-in.

Computers : Configuration profiles

← **Luconik-CentralNAC-EAPTLS**

Options **Scope** ☐ Show in Jamf Pro Dashboard

Targets Limitations Exclusions

Target Computers
Computers to assign the profile to
Specific Computers

Target Users
Users to distribute the profile to
Specific Users

TARGET	TYPE
luconik's MacBook Pro	Computer


History Logs Download Clone Delete Edit

macOS profile scope — Target Computers

i Note. An Apple device can only be enrolled in a single MDM at a time. Unenroll the device from any previous MDM before enrolling it into Jamf Pro.

4.4 iOS/iPadOS: a dedicated profile

The same principle (Certificate + SCEP + Network/Wi-Fi) applies to iOS/iPadOS, but in a separate mobile configuration profile — Jamf Pro keeps Computers and Mobile Devices profiles separate. Duplicate the naming convention with a suffix, e.g. Luconik-CentralNAC-EAPTLS-iOS.



Restricted distribution — HPE internal / partner use only

Pro

⚙️

🔔

👤

📱

📁

🔍

👤

🔧

🛡️

⚙️

💡

Devices

Inventory

Search inventory

Search volume content

Content management

Configuration profiles

Software updates

Provisioning profiles

Mobile device apps

eBooks

Groups

Smart device groups

Static device groups

Classes

Enrollment

Enrollment profiles

Enrollment invitations

PreStage enrollments

Mobile devices : Configuration profiles

← Luconik-CentralNAC-EAPTLS-iOS

Options

Scope

Search...

Network Relay

Not configured

Network Usage Rules

Not configured

Notifications

Not configured

Passcode

Not configured

Restrictions

Not configured

SCEP

1 payload configured

Skip Setup Items

Not configured

Single Sign-On Extensions

Not configured

Single App Mode

Not configured

Subscribed Calendars

Not configured

Single Sign-On

Not configured

TV Remote

Not configured

VPN

Not configured

Web Clips

Not configured

Wi-Fi

1 payload configured

Security Type

Wireless network encryption to use when connecting

WPA3 Enterprise (iOS 13 or later)

Network Security Settings

Configuration options for 802.1X network authentication

Protocols

Trust

Trusted Certificates

Certificates trusted/expected for authentication

☒ CentralNAC

Trusted Server Certificate Names

Certificate names expected from authentication server

CERTIFICATE COMMON NAME

+ Add

☐ Allow Trust Exceptions

Allow trust decisions (via dialog) to be made by the user

Network Type

Configures network to appear as legacy or Hotspot 2.0

Standard

Fast Lane Quality of Service (QoS) Marking

Mark all apps

Cancel


Save

iOS Wi-Fi payload — Trust tab

Restricted distribution — HPE internal / partner use only
30

Part 5 — Validation


1. In Jamf Pro, verify that the Mac and the iPad are managed and that the SCEP and Wi-Fi profiles are installed. On the Mac, this can also be checked directly under System Settings > General > Device Management: the Luconik-CentralNAC-EAPTLS profile should appear with its 3 payloads (Certificate + SCEP + Network).

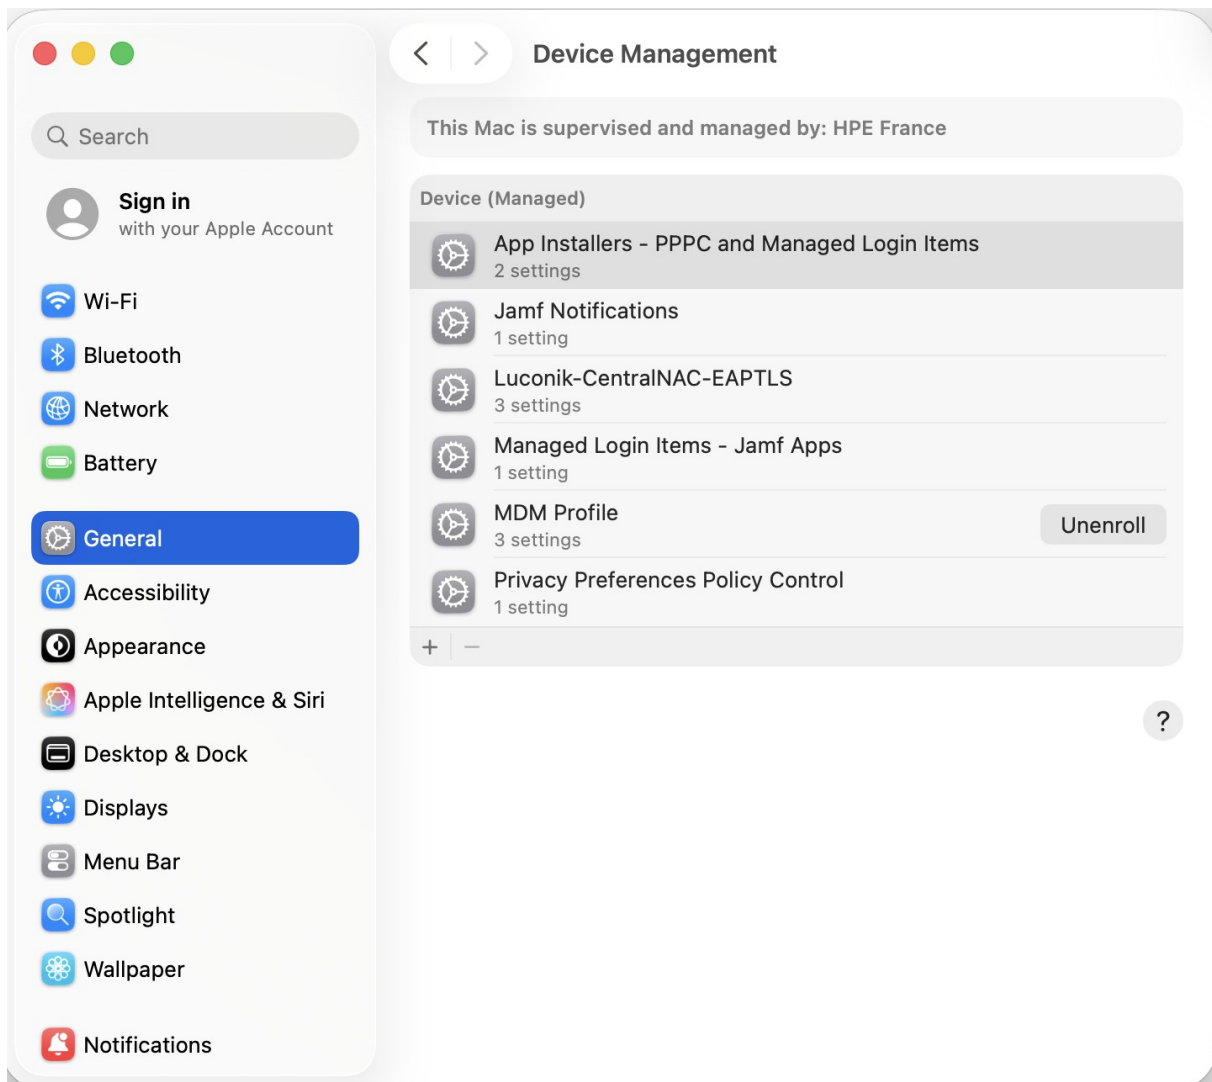

macOS device management — Luconik-CentralNAC-EAPTLS profile installed

On the device, verify the certificate's SAN, then the automatic connection to the luconik-jamf SSID.

⚠ **Certificate picker on macOS.** If several client identities are present on the device (e.g. an enrollment identity tied to a Managed Apple ID), macOS may prompt to manually pick the certificate to use for the SSID instead of automatically retaining the one from the SCEP payload. Select the certificate issued by the Central NAC PKI (SAN `cnac+jamf://...`), not an Apple ID enrollment identity.

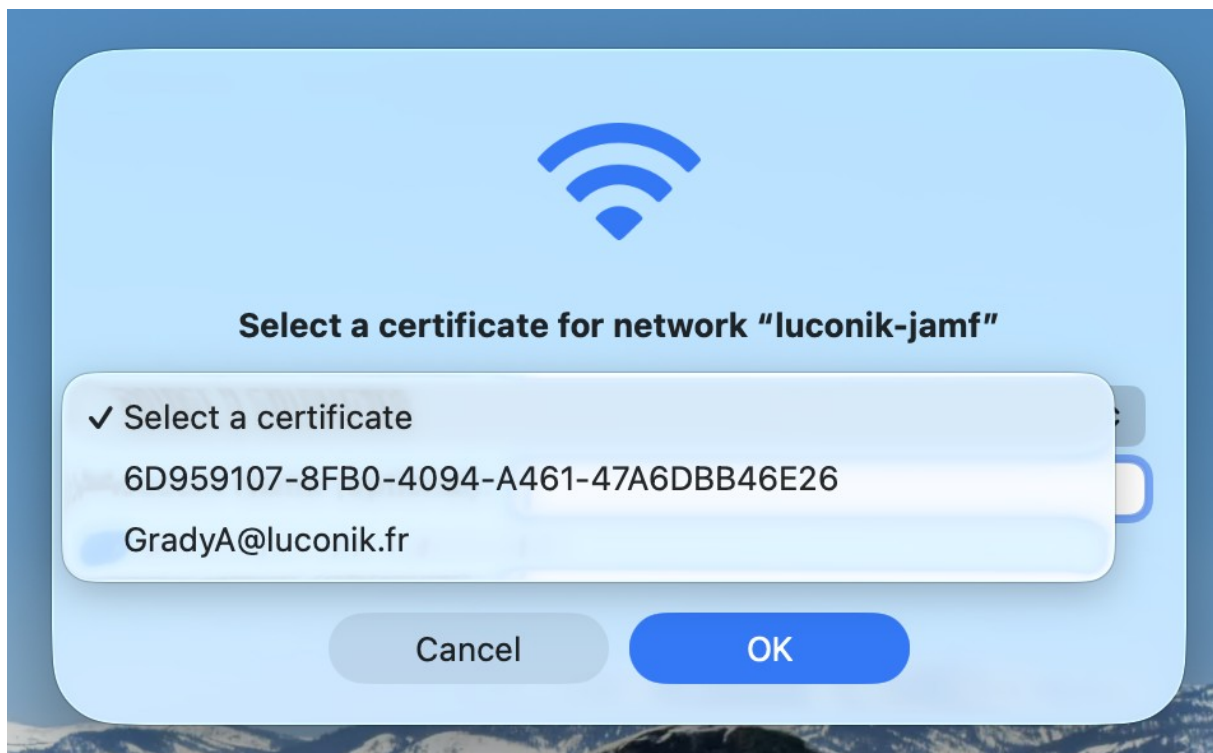

macOS certificate picker for the luconik-jamf SSID

1. In Central, open Menu > Central NAC > Clients and select the period covering the test.
2. Verify that the session is Accepted, that the WLAN is luconik-jamf, and that the role matches the EntraID group.

The screenshot shows the HPE Aruba Central NAC interface. The left sidebar has a menu with 'Global', 'Sites', and 'Clients'. The 'Clients' section is selected, showing a list with 'GradyA@luconik.fr'. The main area displays a 'Requests' bar chart for the last 3 hours. Below this is the 'NAC Client' section for 'GradyA@luconik.fr'.

NAC Client Overview:

- Status:** Accepted
- Last Authentication Time:** September 10, 2026 3:42 PM
- MAC Address:** 02:9e:73:94:5c:71
- IP Address:** 10.10.14.234

Authentication:

- Request attributes at latest authentication time:**
- Authentication Type:** EAP-TLS (Certificate)
- Certificate Status:** Valid until 09 September 2027, 21:59
- Revoke Certificate** button

Authorization:

- Request attributes at latest authorization time:**
- Assigned Role:** design-role
- Matching Policy:** Luconik_Authorization_Policies
- Identity Store:** Luconik_EntraID
- Matching Rule:** design
- User Groups:** -

Connectivity:

Diagram showing the client 'GradyA@luconik.fr' connected to the 'luconik-jamf' WLAN, which is connected to the 'XYZ-AP-01' access point, and finally to the 'Central NAC'.

Classification:


- Category:** Computing Systems
- Function:** Operating System
- Vendor:** Apple
- Model/OS:** Mac OS
- Tags:** -

NAC Events:

Occurred	Category	Event
Today at 4:47 PM	Accounting	Session terminated.
Today at 3:42 PM	Accounting	Session started.
Today at 3:42 PM	Authentication	Authentication accepted for GradyA@luconik.fr. Assigned role: design-role.
Today at 3:42 PM	Accounting	Session terminated.
Today at 3:40 PM	Accounting	Session started.


17 more items

Mac NAC session

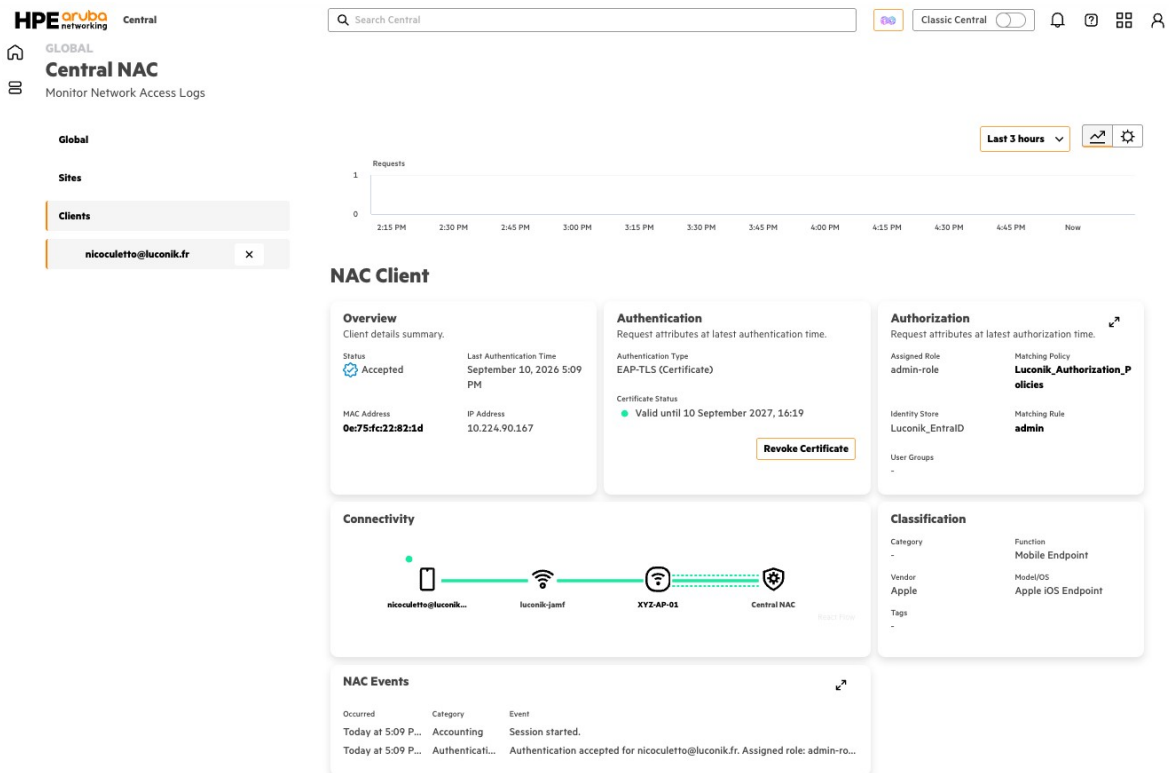

iPad NAC session

Observed anomaly (to be reported to HPE). The User Groups field in the NAC Client view stays empty with the Jamf profile, while it is correctly populated with the Intune profile — same account, same identity store, identical authentication profiles field for field. The authorization rule still matches correctly and the expected role is correctly assigned: the anomaly is display-only, not functional. Not blocking, but worth flagging for investigation.

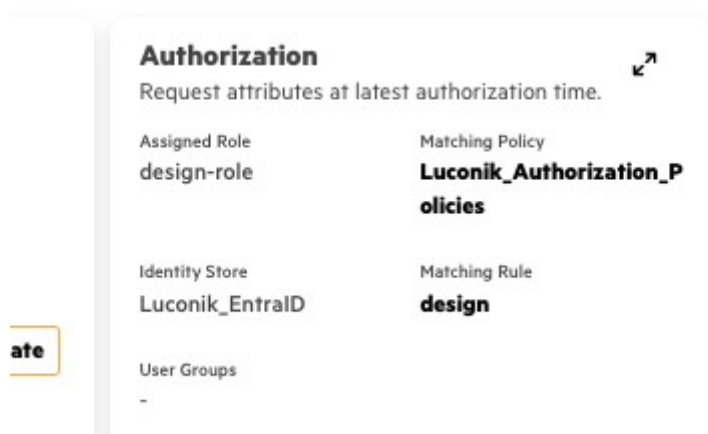

Anomaly — empty User Groups field (Jamf profile)

References

- HPE TechDocs technote — Central NAC + Microsoft Intune (reference for this document's structure): arubanetworking.hpe.com/techdocs/NAC/central-nac/central-nac-uem-onboarding-intune/
- Central NAC — Authentication and Authorization: arubanetworking.hpe.com/techdocs/NAC/central-nac/central-nac-authorization/
- Central NAC — Configuring EAP-TLS Profile: arubanetworking.hpe.com/techdocs/new-central/content/nac/config-eap.htm

Revision history

Date	Version	Author	Changes
September 2026	1.0	Nicolas Culetto	Initial version — integration validated in lab (Central Foundation + Jamf Pro Cloud 11.32)