



Temperatures and feasibility, stressed capacity (mdot = 0.50)


Source temperatures (command T_{0s} bounded 14-26 C)

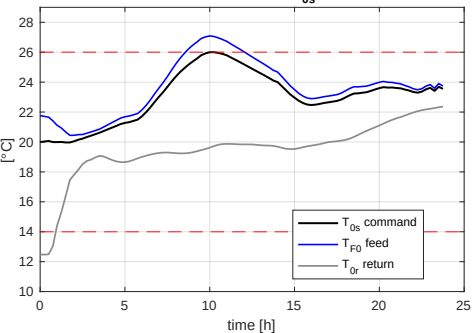

Consumer supply temperature $T_s^{(i)}$

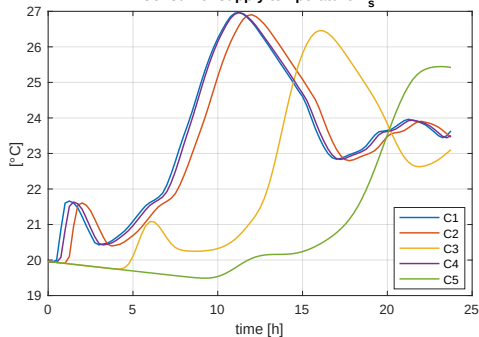

Consumer return temperature $T_r^{(i)}$ (floor 15 C)

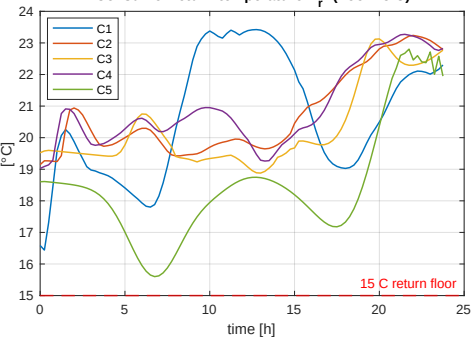

Solve time per step (median 954 ms, step = 900 s)

