
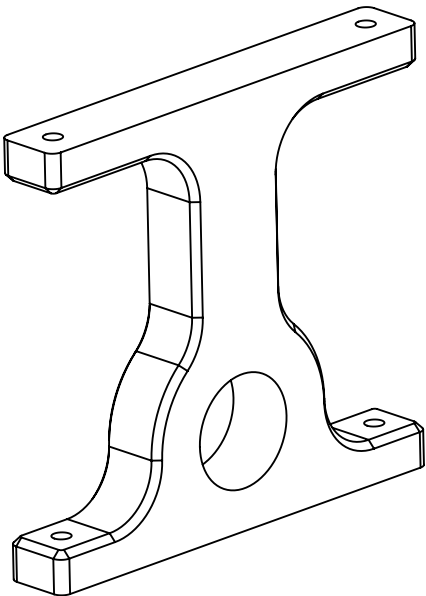
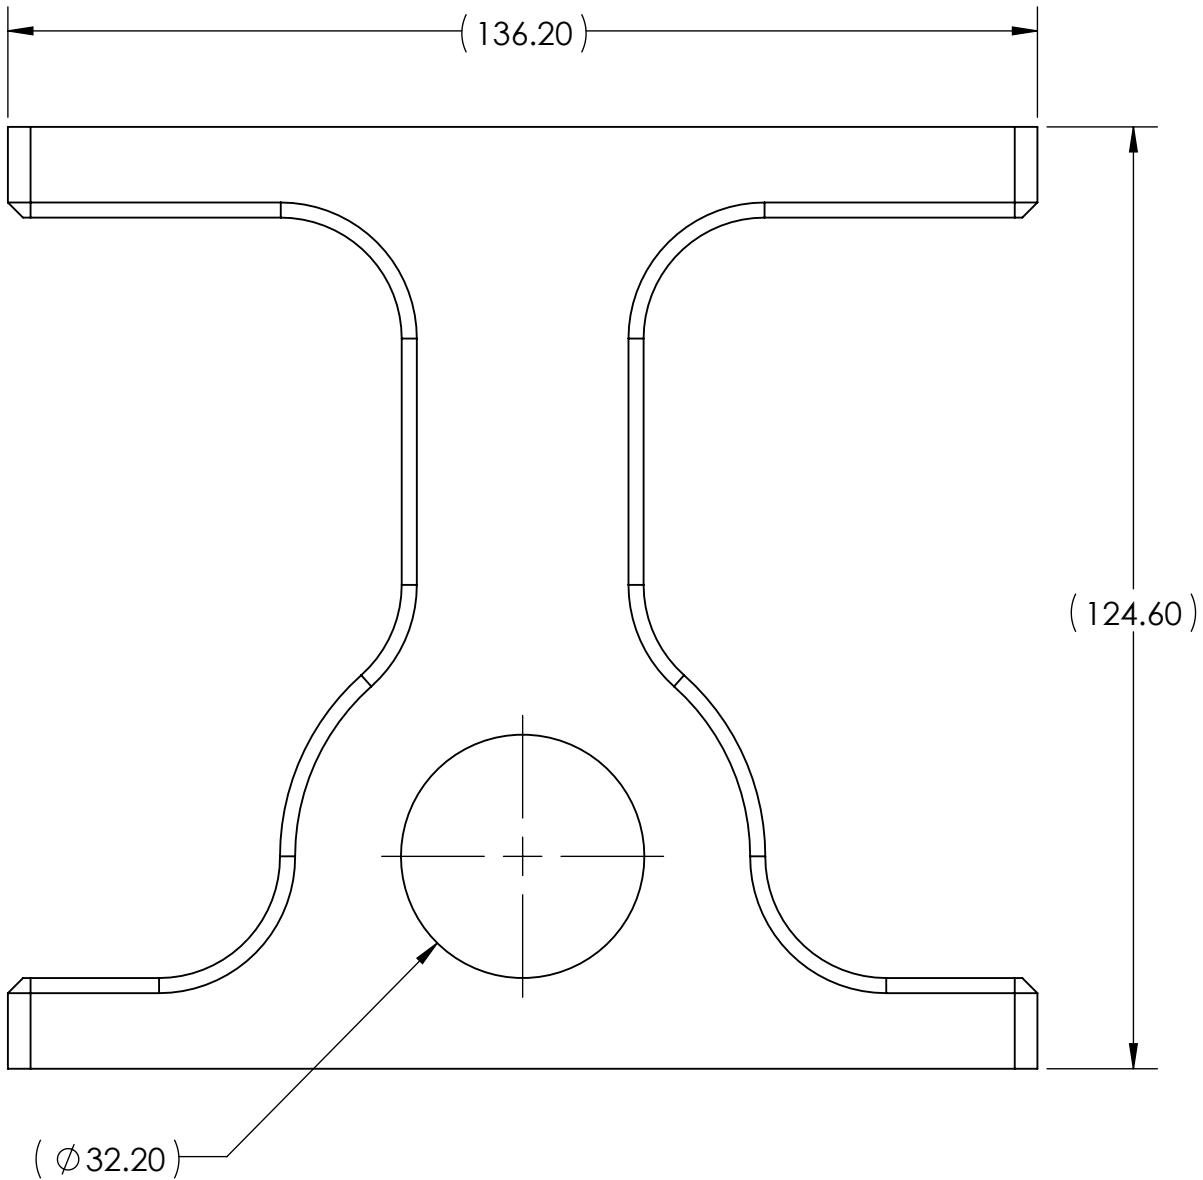


REVISIONS			
REV.	DESCRIPTION	DATE	APPR.
1	INITIAL RELEASE	2023-02-05	

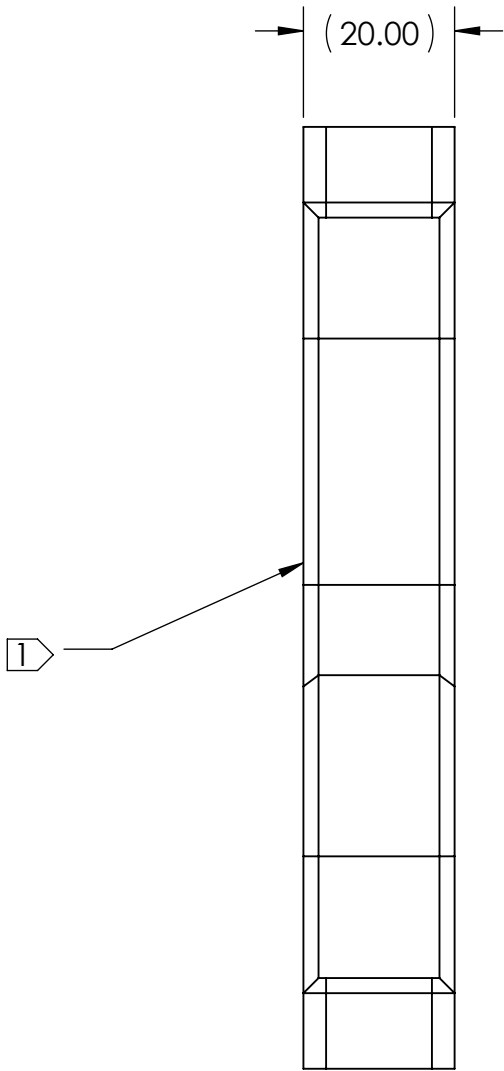

NOTES:

1. PART SHALL BE PRINTED WITH FACE ON BUILD PLATE
2. PART SHALL BE 3D PRINTED WITH THE FOLLOWING SLICER SETTINGS:
- 1. INFILL DENSITY: 30%
 - 2. ROOF AND WALL LAYERS: 4
 - 3. WALL LAYERS: 4

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<div>UOROVER</div> <div>TITLE</div> <div>CHASSIS I-PIECE SUPPORT</div>	
DIMS. ARE IN MILLIMETERS TOLERANCE ON ANGLES 0.5° 0 PLACE DECIMAL ± 0.5mm 1 PLACE DECIMAL ± 0.25mm 2 PLACE DECIMAL ± 0.13mm BREAK ALL SHARP EDGES .25-.50mm		DRAWN	V.CÔTÉ-LAROCHE		
INTERPRET THIS DRAWING IN ACCORDANCE WITH: ASME Y14.5-2018		CHECKED			
MATERIAL MARKFORGED ONYX		MFG APPR.			
		Q.A.		SIZE	
		MATL. SPEC.	SURFACE TEXTURE 1.6/√	DWG. NO.	
		HEAT TREAT		REV	
DO NOT SCALE DRAWING		FINISH		SCALE: 1:1	WEIGHT: [g]
				SHEET 1 OF 1	