


REVISIONS								
REV.	DESCRIPTION	DATE	APPR.					
1	INITIAL RELEASE	2023-02-05						

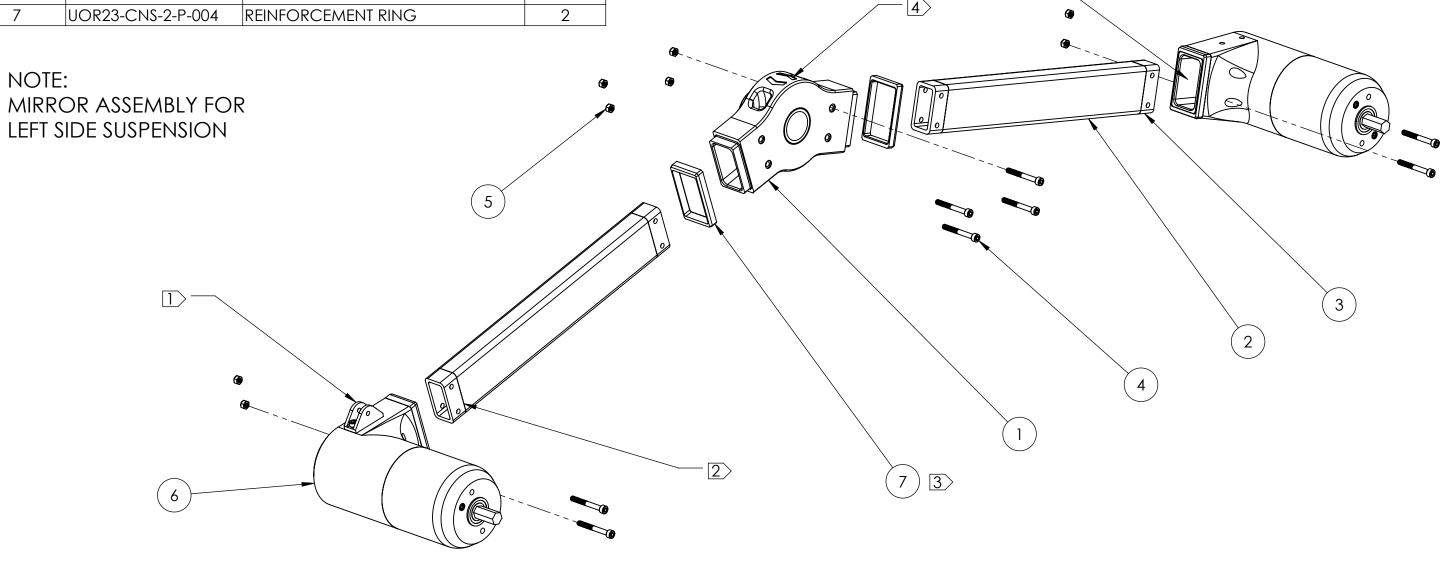


5

NOTES:

NOTE:

- ENSURE LINK ROD MOUNT IS ORIENTED TOWARDS THE TOP.
- BOND TUBE ADAPTER INSIDE CFRP TUBE WITH EPOXY, ENSURE EXCESS EPOXY IS WIPED AWAY.
- 3> BOND REINFORCEMENT RING TO PIVOT WITH EPOXY, ENSURE EXCESS EPOXY IS WIPED AWAY.
- [4] ENSURE ORANGE COLOURED CHEVRON IS POINTING TOWARDS THE FRONT (DRIVE UNIT WITH NO LINK ROD MOUNT).
- ENSURE SNUG FIT BETWEEN THE TUBE ADAPTER AND DRIVE ASSEMBLY, FILE AWAY MATERIAL OR ADD MASKING TAPE IF NECESSARY.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE			7701/-	
DIMS. ARE IN MILLIMETERS	DRAWN	V. CÔTÉ-LAROUCHE	2023-02-07		U	DROVE	:K
TOLERANCE ON ANGLES 0.5° 0 PLACE DECIMAL ± 0.5mm	CHECKED			TITLE			
1 PLACE DECIMAL ± 0.25mm 2 PLACE DECIMAL ± 0.13mm	MFG APPR.						
BREAK ALL SHARP EDGES .2550mm	Q.A.			SHP	SPENIS	ION ASSEMBL	Y RICHT
INTERPRET THIS DRAWING IN ACCORDANCE WITH: ASME Y14.5-2018	MATERIAL				JI LINJ	IOI 1 7 (33E/VIDI	_1, KIOI11
	MATL. SPEC.	SURFACE TEXTURE	2.7	SIZE	DWG. NO.		REV
			1.6/	D		O CNIC O A	001D 1
	HEAT TREAT			D	UURZ	23-CNS-2-A-(JUIR I
DO NOT SCALE DRAWING	FINISH			SCA	ALE: 1:4	WEIGHT: [g]	SHEET 1 OF 2

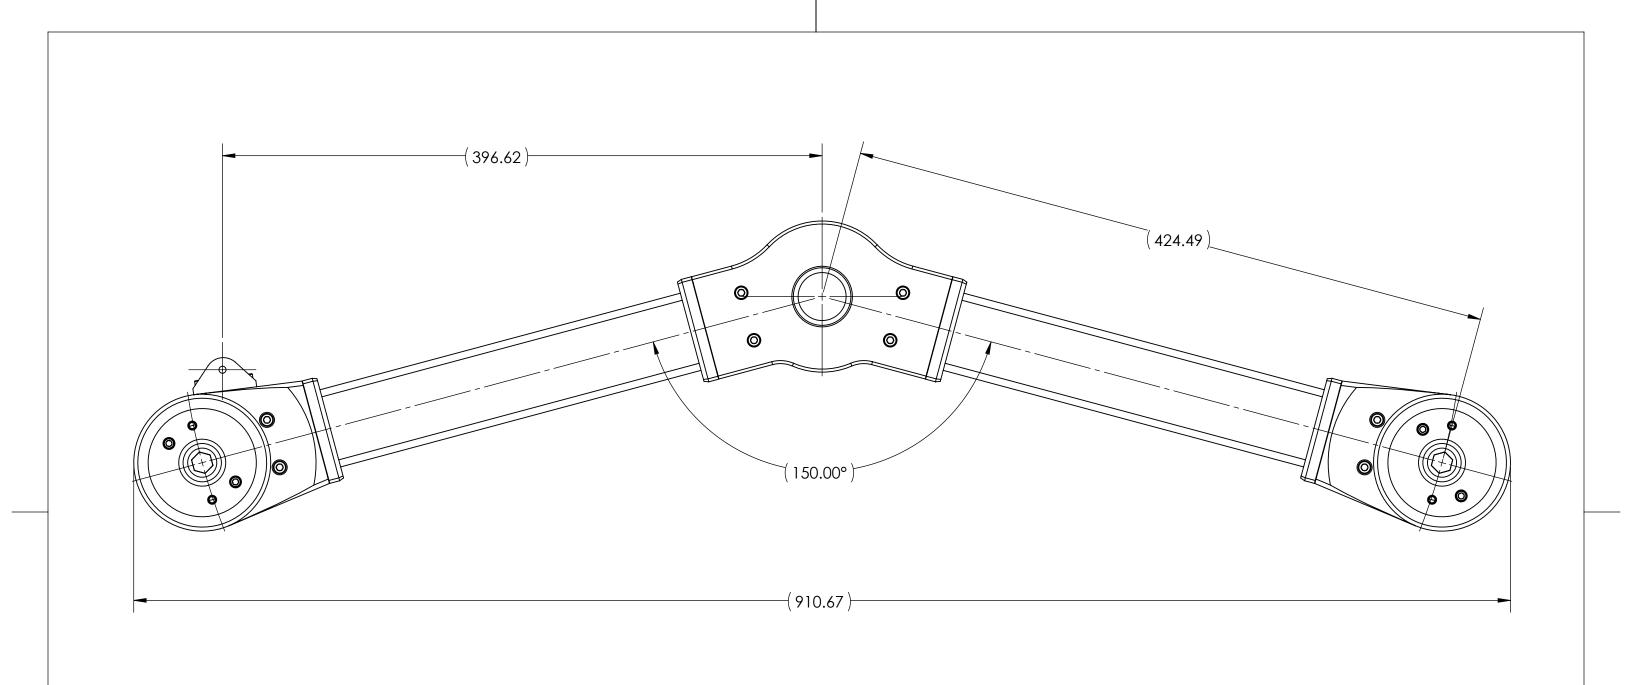

	UNLESS OTHERWISE SPECIFIED:		NAME	DATE		
TOLEF 0 PL/ 1 PL/	DIMS. ARE IN MILLIMETERS TOLERANCE ON ANGLES 0.5°	DRAWN	V. CÔTÉ-LAROUCHE	2023-02-07	UOROVER	
	0 PLACE DECIMAL ± 0.5mm	CHECKED			TITLE	
	1 PLACE DECIMAL ± 0.25mm 2 PLACE DECIMAL ± 0.13mm	MFG APPR.				
	BREAK ALL SHARP EDGES .2550mm	Q.A.			SUSPENSION ASSEMBLY, RIGI	ΗТ
	INTERPRET THIS DRAWING IN ACCORDANCE WITH: ASME Y14.5-2018	MATERIAL			3031 EN31011 / (33E/VIDE1 / KIO)	
	$\overline{}$	MATL. SPEC.	SURFACE TEXTURE	/	SIZE DWG. NO.	REV
	444			1.6/	D HODOS CNS S A COLD	1
	\bigcirc	HEAT TREAT			B UOR23-CNS-2-A-001R	ı
	DO NOT SCALE DRAWING	FINISH		·	SCALE: 1:2.5 WEIGHT: [g] SHEET 2 C	OF 2
					VED 1	2021/04/03