

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|-----------------------------|------|
| 1 | 6391K296 | OIL EMBEDDED SLEEVE BEARING | 1 |

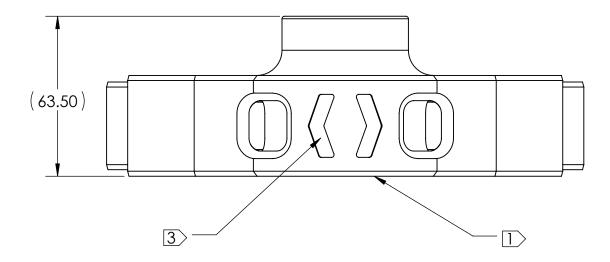


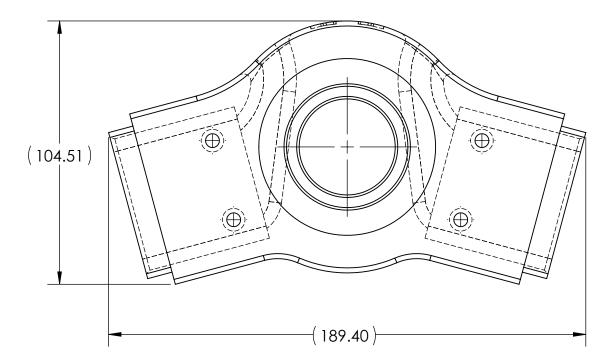


NOTES:

- T PART SHALL BE PRINTED WITH FACE ON BUILD PLATE.
- 12 INSTALL SLEEVE BEARING PER MANUFACTURER'S INSTRUCTIONS.
- COLOUR WITH ORANGE PAINT MARKER APPROPRIATE CHEVRON POINTING TOWARDS ROVER FRONT DEPENDING ON SUSPENSION SIDE.
 PART SHALL BE 3D PRINTED WITH THE FOLLOWING SLICER SETTINGS:
- - INFILL DENSITY: 30% ROOF AND WALL LAYERS: 4
 - WALL LAYERS: 4

| | REVISIONS | | | |
|------|-----------------|------------|-------|--|
| REV. | DESCRIPTION | DATE | APPR. | |
| 1 | INITIAL RELEASE | 2023-02-04 | | |

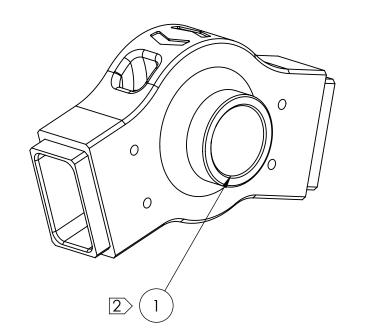



| | UNLESS OTHERWISE SPECIFIED: | | NAME | DATE | | | | | |
|---|--|-----------------|------------------|------------|-------|-----------|-------------|------------|-------------------|
| | DIMS. ARE IN MILLIMETERS TOLERANCE ON ANGLES 0.5° | DRAWN | V. CÔTÉ-LAROUCHE | 2023-02-07 | | U | DROV | | |
| | 0 PLACE DECIMAL ± 0.5mm | CHECKED | | | TITLE | | | | |
| | 1 PLACE DECIMAL ± 0.25mm 2 PLACE DECIMAL ± 0.13mm | MFG APPR. | | | | | | | |
| | BREAK ALL SHARP EDGES .2550mm | Q.A. | | |] (| | ENSION | | ìΤ |
| | INTERPRET THIS DRAWING IN ACCORDANCE WITH: ASME Y14.5-2018 | MARKFORGED ONYX | | ' | 3031 | | | / I | |
| | $\overline{}$ | MATL. SPEC. | SURFACE TEXTURE | / | SIZE | DWG. NO. | | | REV |
| | 4 | | | 1.6/ | D | LIOD | 02 CNIC 0 F | 0.001 | 1 |
| | | HEAT TREAT | | | D | UUR | 23-CNS-2-F | -001 | |
| Ì | DO NOT SCALE DRAWING | FINISH | | | SCA | LE: 1:1.5 | WEIGHT: [g] | SHEET | 1 OF 1 |
| | | | | | | | | | VER. 1: 2021/04/0 |