


## NOTES:


- T> PART NUMBER SHALL BE MARKED IN APPROXIMATE LOCATION SHOWN WITH
  - FINE TIP SHARPIE AND CLEAR TAPE
    PART NUMBER: UOR23-ARM-P-005-LINK\_2
- 2> PART SHALL BE PRINTED WITH FACE ON BUILD PLATE
- EIGER SETTINGS:

  - FILL DENSITY: 55% ROOF AND FLOOR LAYERS: 4
  - WALL LAYERS: 4

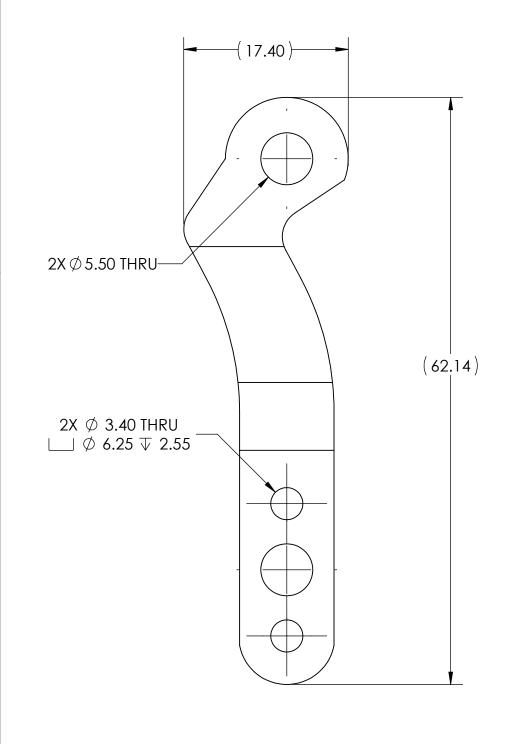

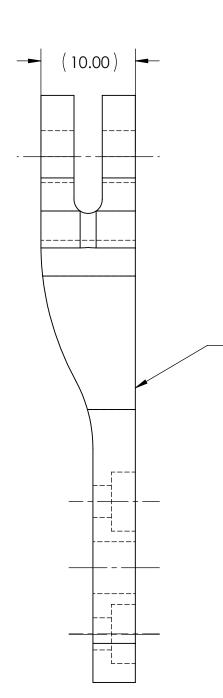



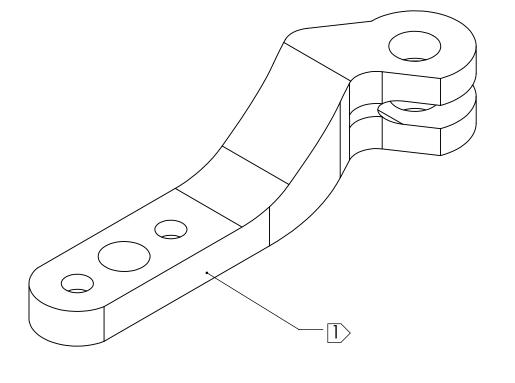

UNLESS OTHERWISE SPECIFIED:			NAME	DATE		
DIMS. ARE IN MILLIMETERS	DRAWN		S.TAN	2023-01-17		U
TOLERANCE ON ANGLES 0.5° 0 PLACE DECIMAL± 0.5mm	CHECKED			2023-01-20	TITLE	
1 PLACE DECIMAL ± 0.25mm 2 PLACE DECIMAL ± 0.13mm	MFG APPR.	)				LIN
BREAK ALL SHARP EDGES .2550mm	Q.A.					
INTERPRET THIS DRAWING IN ACCORDANCE WITH: ASME Y14.5-2018	material MARKFORGED ONYX					
	MATL. SPEC.		SURFACE TEXTURE		SIZE	DWG. NO.
(+)				1.6/	R	LIOR
	HEAT TREAT	N/A	I/A			001
DO NOT SCALE DRAWING	FINISH	NATURAL			SCALE: 2:1	

**UOROVER** 

LINK 2 - END EFFECTOR, ROBOTIC ARM, **UOROVER** 

WEIGHT: 3.34[g]

UOR23-ARM-1-P-005

SHEET 1 OF 1

REV