


S1_Monterrey

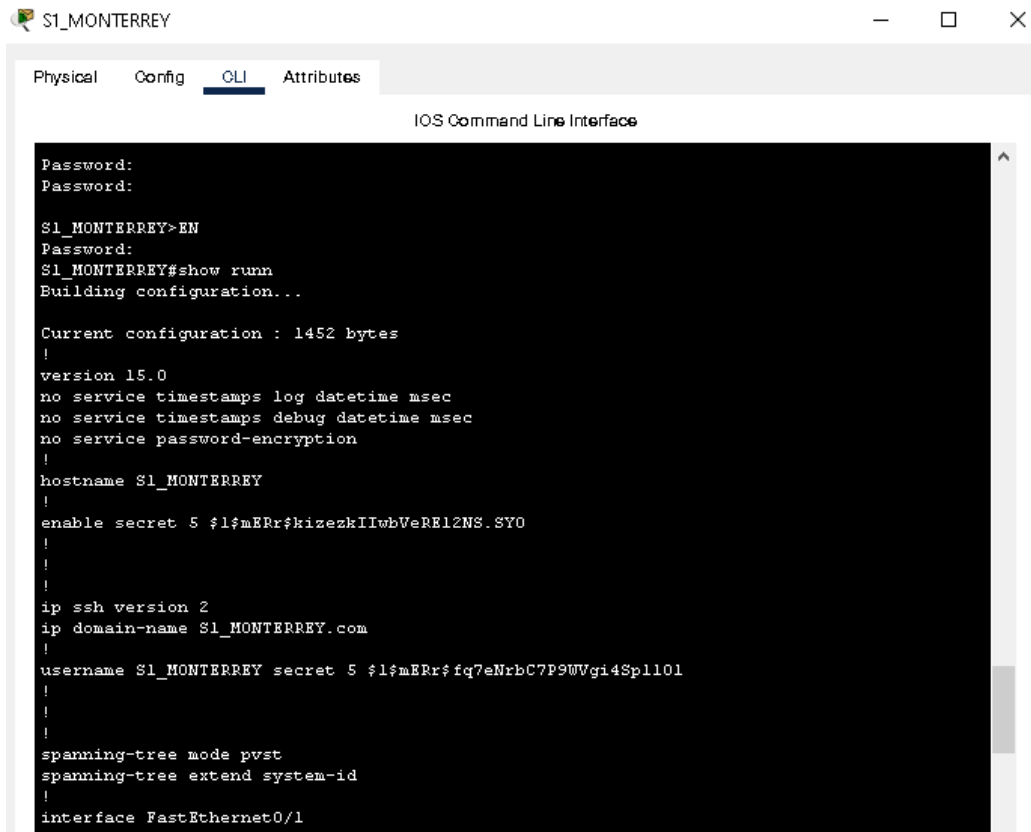


The screenshot shows the S1_MONTERREY CLI interface with the following commands and output:

```
Physical Config CLI Attributes
IOS Command Line Interface

Password:
Password:

S1_MONTERREY>EN
Password:
S1_MONTERREY#show runn
Building configuration...

Current configuration : 1452 bytes
!
version 15.0
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname S1_MONTERREY
!
enable secret 5 $l$mERr#kizezkIIwbVeREl2NS.SY0
!
!
!
ip ssh version 2
ip domain-name S1_MONTERREY.com
!
username S1_MONTERREY secret 5 $l$mERr#fq7eNrbC7P9WVgi4Sp1101
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
```

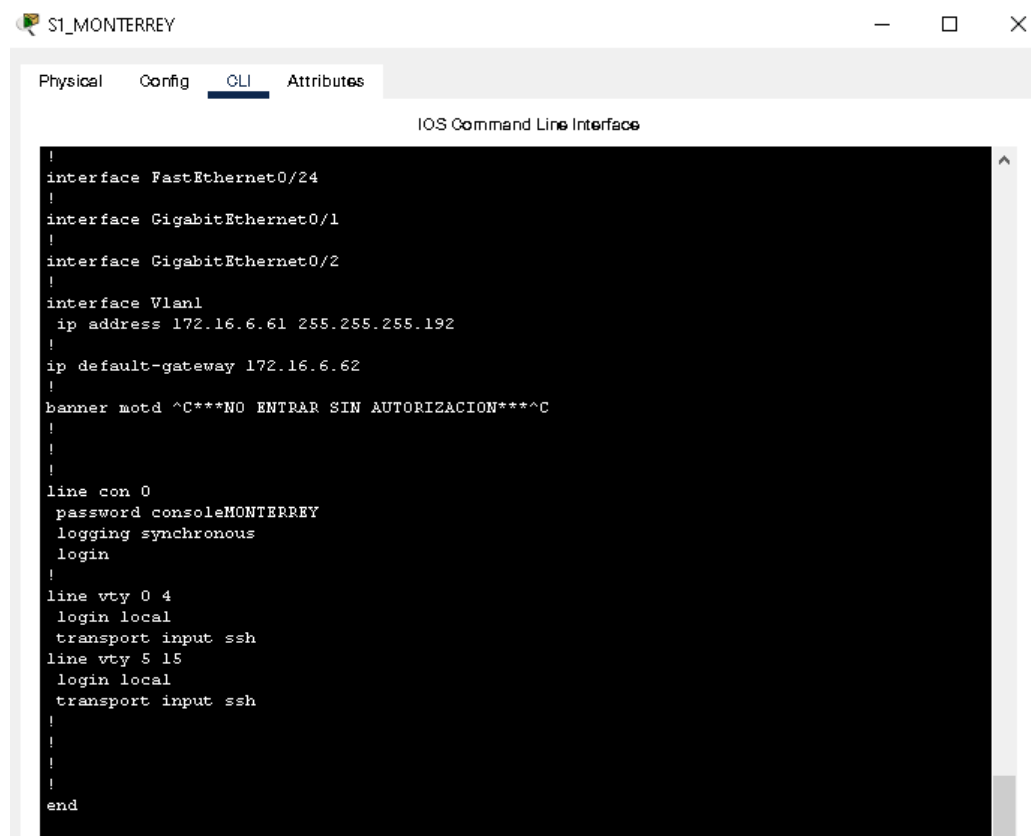


The screenshot shows the S1_MONTERREY CLI interface with the following commands and output:

```
Physical Config CLI Attributes
IOS Command Line Interface

!
interface FastEthernet0/24
!
interface GigabitEthernet0/1
!
interface GigabitEthernet0/2
!
interface Vlan1
ip address 172.16.6.61 255.255.255.192
!
ip default-gateway 172.16.6.62
!
banner motd ^C***NO ENTRAR SIN AUTORIZACION***^C
!
!
!
line con 0
password consoleMONTERREY
logging synchronous
login
!
line vty 0 4
login local
transport input ssh
line vty 5 15
login local
transport input ssh
!
!
!
end
```


S2_Monterrey

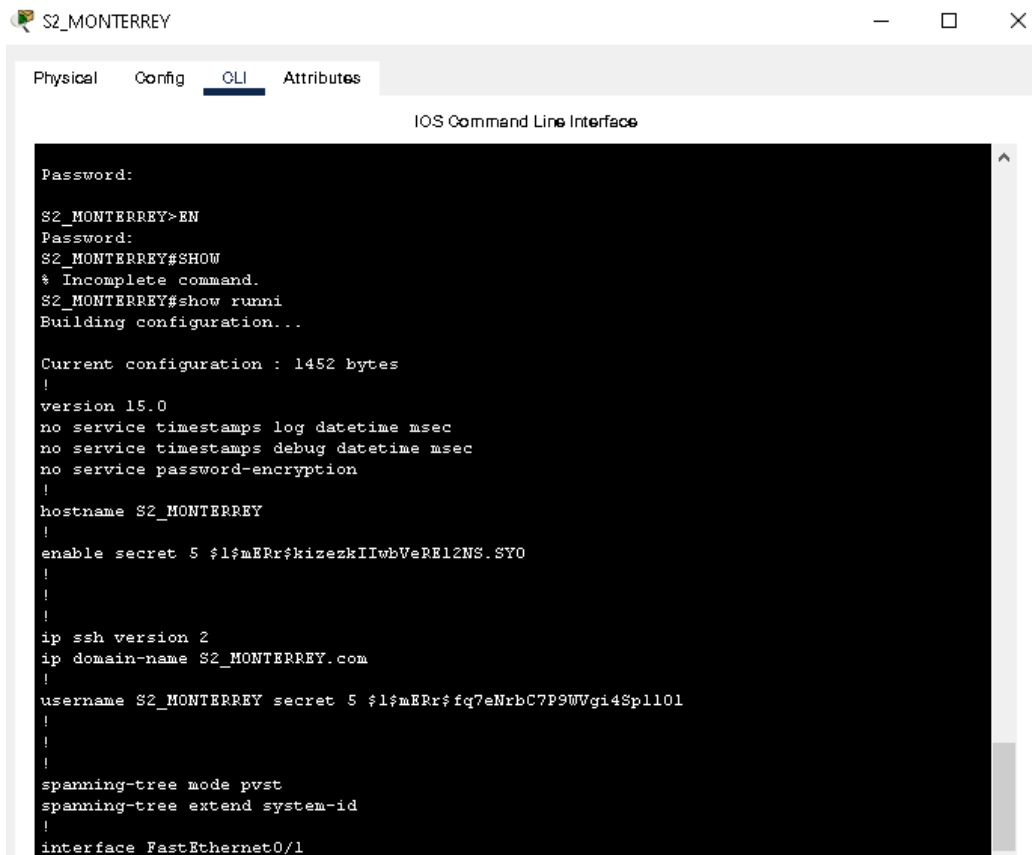

The screenshot shows the S2_MONTERREY CLI interface with the 'CLI' tab selected. The command 'show run' has been entered, and the output displays the current configuration of the device. The configuration includes the version (15.0), service timestamps, hostname (S2_MONTERREY), enable secret, SSH version (2), domain-name (S2_MONTERREY.com), username (S2_MONTERREY) with a secret, spanning-tree mode (pvst), and the first interface (FastEthernet0/1).

```
Password:
S2_MONTERREY>EN
Password:
S2_MONTERREY#SHOW
% Incomplete command.
S2_MONTERREY#show run
Building configuration...

Current configuration : 1452 bytes
!
version 15.0
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname S2_MONTERREY
!
enable secret 5 $l$mERr$kizezkIIwbVeREl2NS.SY0
!
!
!
ip ssh version 2
ip domain-name S2_MONTERREY.com
!
username S2_MONTERREY secret 5 $l$mERr$fq7eNrbC7P9WVgi4Spl101
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
```

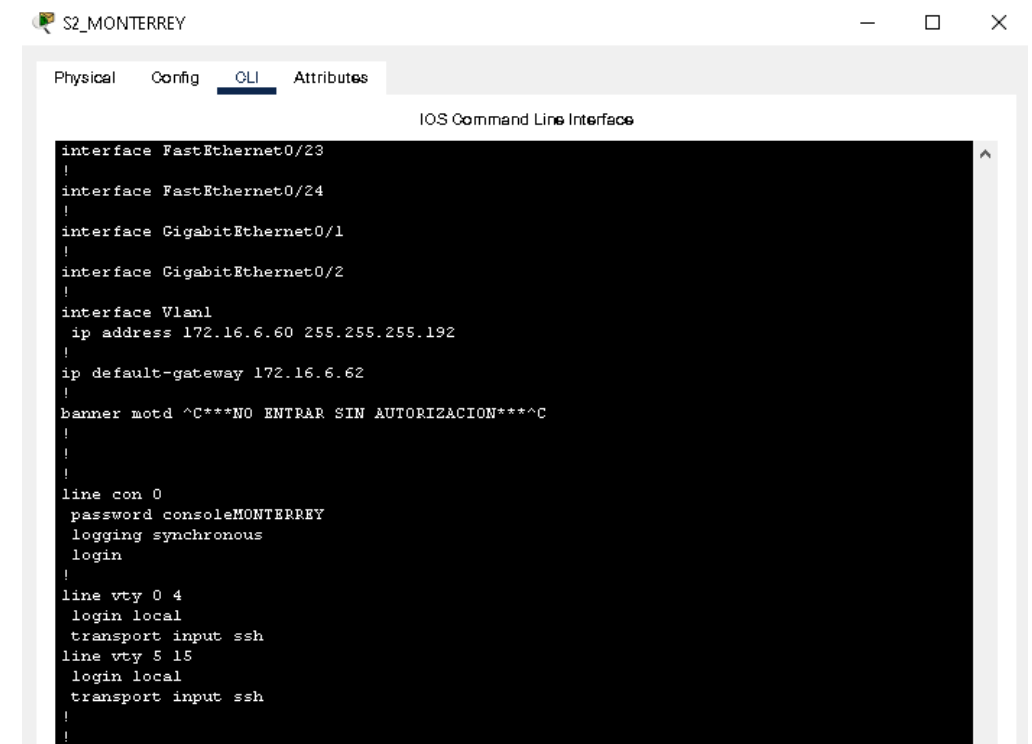

The screenshot shows the S2_MONTERREY CLI interface with the 'CLI' tab selected. The command 'show run' has been entered, and the output displays the configuration for interfaces and global settings. The configuration includes interfaces FastEthernet0/23, FastEthernet0/24, GigabitEthernet0/1, and GigabitEthernet0/2, as well as VLAN1 with IP address 172.16.6.60 and default gateway 172.16.6.62. It also shows the banner motd, console line (con 0) with password MONTERREY, and vty lines (0-4 and 5-15) with local login and SSH transport.

```
interface FastEthernet0/23
!
interface FastEthernet0/24
!
interface GigabitEthernet0/1
!
interface GigabitEthernet0/2
!
interface Vlan1
 ip address 172.16.6.60 255.255.255.192
!
 ip default-gateway 172.16.6.62
!
 banner motd ^C***NO ENTRAR SIN AUTORIZACION***^C
!
!
!
line con 0
 password consoleMONTERREY
 logging synchronous
 login
!
line vty 0 4
 login local
 transport input ssh
line vty 5 15
 login local
 transport input ssh
!
!
```