



Acclimatized activated sludge for enhanced phenolic wastewater treatment using pinewood biochar

Mohammadreza Kamali ^a, Tejraj M. Aminabhavi ^{b,*}, Luís A.C. Tarelho ^c, Rens Hellemans ^a, Joren Cuypers ^a, Isabel Capela ^c, Maria Elisabete V. Costa ^d, Raf Dewil ^a, Lise Appels ^{a,*}

^a KU Leuven, Department of Chemical Engineering, Process and Environmental Technology Lab, J. De Nayerlaan 5, 2860 Sint-Katelijne-Waver, Belgium

^b School of Advanced Sciences, KLE Technological University, Hubballi, Karnataka, 580 031, India

^c Department of Environment and Planning & Centre for Environmental and Marine Studies, University of Aveiro, 3810-193 Aveiro, Portugal

^d Department of Materials and Ceramics Engineering, Aveiro Institute of Materials, CICECO, University of Aveiro, 3810-193 Aveiro, Portugal



ARTICLE INFO

Keywords:

Biochar
Activated sludge
Acclimatization process

ABSTRACT

Activated sludge acclimatization was assessed for pinewood biochar to study phenol biodegradation from synthetic effluents. The biochar was produced in a continuous pyrolysis system (auger reactor) at 525 °C and was characterized by scanning electron microscopy (SEM), X-ray diffraction, Fourier Transform Infrared (FTIR), elemental analysis, and particle size evaluation. Sludge acclimatization greatly facilitated the phenol biodegradation rate, especially in the presence of biochar. Specific biodegradation rates increased from 0.0017 (g phenol/g VSS/h) for as-received activated sludge to 0.0184 (g phenol/g VSS/h) and 0.041 (g phenol/g VSS/h) for activated sludge acclimatized without (control) and with biochar, respectively at pH ~6.5, for a phenol concentration of 250 mg/L and at room temperature ($T = 15\text{--}18\text{ }^{\circ}\text{C}$). The results furthermore demonstrated the positive effects of biochar on microbial colonization and growth. The volatile suspended solids (VSS) increased from 1 g/L for as-received sludge to 1.97 g/L and 2.96 g/L for control and activated sludge acclimatized in the presence of biochar. The sludge volume index decreased from 108 (mL/g MLSS) to 60, while for the control it increased to 298 (mL/g MLSS). The system studied showed a high degree of stability and resistance to the load shock loading when the initial phenol concentration was increased from 250 to 500 mg/L.

1. Introduction

Water pollution is considered to be one of the most challenging environmental issues worldwide [1]. A wide range of environmental contaminants including heavy metals and phenolic organics are generally present as emerging effluents from various industrial activities; these can cause severe ecotoxicological and health-related problems if they are released into the environment without proper treatment [2,3]. There is thus a need for developing sustainable treatment technologies with acceptable efficiencies while being environmentally friendly and cost-effective [4,5].

Among the various technologies developed to deal with highly polluted effluents, the activated sludge system (AS) has been widely implemented for the treatment of both sewage [6] and industrial waste effluents [7] due to its inherent advantages over the other physico-chemical and biological treatment methods in view of simplicity and cost-effectiveness. However, its relatively low efficiency to deal with

high concentrations of phenolic effluents has been the main challenge to apply this method for treating high strength phenolic effluents [8]. Acclimatization has been employed to gradually adjust microbial communities to harsh environmental conditions such as pH, temperature, and pollution load [9]. Reports in the literature show that acclimatization can lead to microbial communities capable of degrading relatively high concentration of phenolics [10]. In many cases biodegradation kinetics of acclimatized AS are relatively low for the phenolic wastewaters. Therefore, the development of an acclimatization process that promotes the microbial communities for an efficient treatment of phenolic effluents is highly desired.

Biochar is a carbon-rich product of biomass pyrolysis at temperatures above 250 °C under oxygen-free (or limited oxygen content) conditions [11]. This low-cost material that can satisfy the sustainability considerations by sequestering carbon [12] has been recently employed in several areas, including as soil amendment to improve the soil properties [13] and crop production [14], and in wastewater treatment to adsorb

* Corresponding authors at: School of Advanced Sciences, KLE Technological University, Hubballi, Karnataka, 580 031 India (T. Aminabhavi).

E-mail addresses: aminabhavit@gmail.com (T.M. Aminabhavi), lise.appels@kuleuven.be (L. Appels).

inorganic pollutants such as heavy metals [15] and nutrients [16] or catalyse the degradation of various types of organic and inorganic pollutants via advanced oxidation processes (AOPs) [17]. In anaerobic wastewater treatment systems, the biochar (as a conductive material) furthermore can facilitate interspecies electron transfer between electron-donating bacteria and electron-accepting methanogens to promote anaerobic digestion processes [18]. In this study, biochar was prepared through the pyrolysis of pinewood. The acclimatization of the as-received sludge was performed in the presence of biochar to investigate biodegradation of synthetic phenolic wastewater and the study was developed to address the need for efficient as well as low-cost technologies to treat the phenolic wastewaters. Since the activated sludge is considered a cost-effective treatment method, further improvements in its performance can promote the applicability of this process to deal with highly polluted effluents.

2. Materials and methods

2.1. Biochar production

Biochar was produced in a continuous pyrolysis system (auger-reactor) using pinewood as the feedstock. The pyrolysis reactor was operated at steady-state conditions with continuous feeding of the biomass employing a rotating screw feeder. The pyrolysis reactor was electrically heated. The operating conditions were a pyrolysis temperature of 525 °C and a residence time of 8 min.

2.2. Biochar characterization

X-ray powder diffraction (XRD) (Panalytical X'Pert PRO 3, Netherlands) analysis was performed to examine the crystallinity of the biochar. A continuous scan from 10° to 100° of 2θ was conducted at a scan rate of 2° 20/min. The elemental composition of the biochar was determined using a Philips PW-1400 sequential x-ray fluorescence spectrometer (XRF). Scanning electron microscopy (SEM) was performed using a Hitachi SU-70 SEM. The slurry containing the as-prepared materials suspended in ethanol was ultrasonically irradiated for 10 min to allow the separation of particles. A drop of the slurry was then placed on the grid and was dried before the microscopic analysis. The carbon, hydrogen, nitrogen, and sulfur (CHNS) contents of the produced biochar were determined using an organic elemental analyzer (Thermo Finnigan, Flash 2000, Thermo Scientific). For the analysis, biochar sample was weighed into tin capsules and introduced sequentially in the equipment. Fourier Transform Infrared (FTIR) analysis was performed using a Bruker Tensor 27 system. The spectrum was obtained from 256 scans with a resolution of 4 cm⁻¹ under transmittance mode in the range of 4000–400 cm⁻¹. A laser diffraction particle size analyser (model CILAS) was also utilized to identify the average size of the biochar particles.

2.3. Phenol volatilization

Volatilization of phenol was first assessed by introducing 500 mL of the synthetic effluent containing 25, 50, 100, 250, and 500 mg/L phenol in 1000 mL batch reactor without activated sludge (mixed liquor volatile suspended solids (MLVSS) = 0 mg/L) [19]. Samples were collected at specific sampling points from the top of the reactors to determine any loss of phenol during the volatilization.

2.4. Acclimatization process

Acclimatization of as-received activated sludge from a full-scale municipal wastewater treatment plant (Aquafin, Mechelen-Noord, Belgium) to increasing phenol concentrations including 250 mg/L (days 1–7), 50 mg/L (days 8–14), 100 mg/L (days 15–21), and 250 mg/L (days 22–28) of phenol (purchased from Acros Organics > 98%) was

carried out using two 5 L cylindrical reactors equipped with an air diffusion. One of the reactors was fed by the activated sludge only (reactor 1) and the second (reactor 2) with the activated sludge and the biochar (1.5 g). Both were operated in batch mode. Samples were collected at specific sampling points from the top of the reactors. The phenol concentrations profiles attained during the acclimatization process was based on the literature search [20–22]. Both reactors were daily charged with the pre-determined concentration of phenol. The AS with an initial MLVSS of 1 g/L was acclimatized in both the reactors with the nutrients as reported by the composition of peptone (188 mg/L), ammonium chloride (172 mg/L), magnesium sulfate (49 mg/L), dipotassium hydrogen phosphate (250 mg/L) and sodium bicarbonate (14.7 mg/L) as per our earlier study [23]. The acclimatization process was conducted at room temperature ($T = 15\text{--}18\text{ }^{\circ}\text{C}$) without applying external heating or/cooling.

2.5. Analytical methods

Microscopic images of the sludge were taken using a ZEISS (imager A.2) microscope at various stages of the acclimatization process. The phenol concentration was determined using an Agilent 1100 HPLC system (Agilent Technologies, Waldbronn, Germany). The system consisted of a binary pump (G1312A), as well as a thermostatted column compartment (G1316A), an auto-sampler (G1367A) and a VWD detector (G1314A). A C18 column (Agilent Eclipse Plus, 4.6 × 100 mm; particle size (dp) 3.5 μm) was utilized for the analysis. Total suspended solids (TSS), volatile suspended solids (VSS), and sludge volume index (SVI), defined as the volume (in mL) occupied by 1 g of activated sludge after settling the aerated liquid for 30 min, were measured according to the standard methods [24].

3. Results and discussion

3.1. Biochar characterization

The XRD pattern of the prepared pinewood biochar is presented in Fig. 1. As observed, a broad pattern without sharp peaks was obtained, thus indicating an amorphous structure of the prepared powders, which is typical for the biochars prepared under low to moderate pyrolysis temperatures [25]. XRF and CHNS elemental analysis confirmed that biochar is mainly composed of C (72%wt), O (14%wt), H (4%wt) as well as metallic elements including Ca (6%wt), and K (1.5%wt). Trace amounts (>1%wt) of Al, Si, P, S, Cl, Ti, Mn, Fe, Ni, Cu, Zn, and Sr were also detected in the composition of the biochar. No sulphur and nitrogen were detected in the structure of the biochar prepared.

SEM images of the biochar samples are depicted in Fig. 2. The particles represent an irregular shape (Fig. 2, a) with smooth surfaces

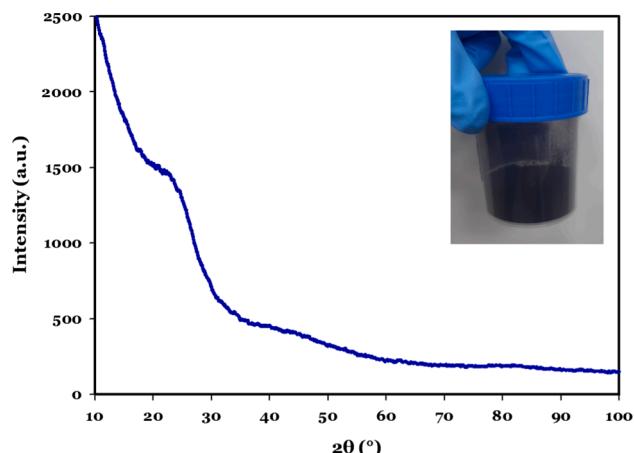


Fig. 1. X-ray diffraction pattern of the prepared pinewood biochar.

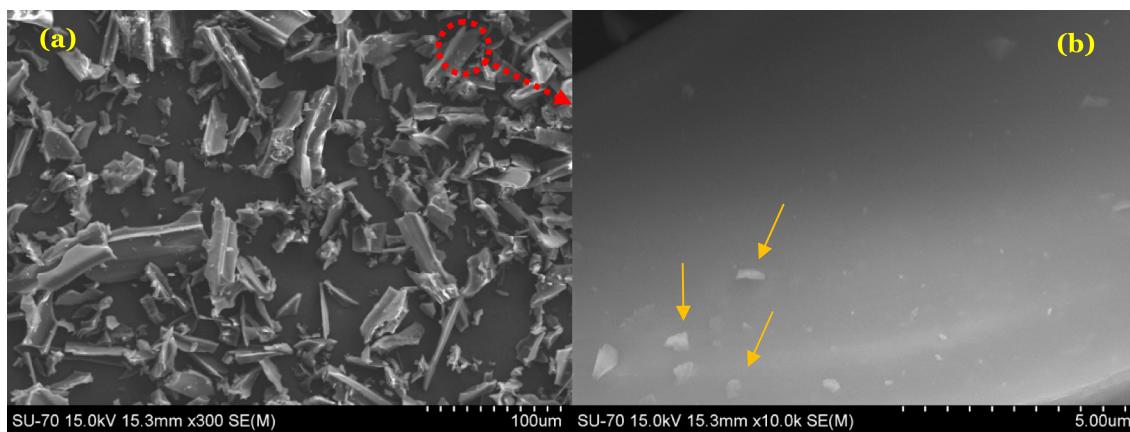


Fig. 2. SEM of the prepared biochar powder with different magnifications demonstrating the formation of micro-size particles (right) with a smooth surface (left).

(Fig. 2,b) as previously reported in the literature for the biochar prepared from various feedstock materials [26,27]. One can see some smaller size particles (Fig. 2, b) and the prepared powder represents an average particle size of 53.8 μm .

Fig. 3 represents the FTIR spectra of the biochar sample. The low-intensity peak that appeared at 420 cm^{-1} confirms the presence of oxygen bonded to metals such as Ca and K. The representative peak at 812 cm^{-1} is also originated from the aromatic structure of the biochar [28]. The presence of C-N stretching can be confirmed at 1187 cm^{-1} [29]. Also, the peak at 1576 cm^{-1} can be related to the C = C grouping vibrations in an aromatic ring, coupled with the C = O carbonyl group indicating the formation of organo-oxygen containing compounds [30]. The presence of CO₂ which remained at the surface of the product from the reaction can also be confirmed by the appearance of C-O band at 2342 cm^{-1} [31].

3.2. Phenol biodegradation

3.2.1. Phenol volatilization

The results of the phenol volatilization demonstrate that the loss of phenol at the investigated phenol concentrations seems to be negligible (<5% in all the cases). The results are in agreement with the previous reports for the volatilization of phenol [23,32,33].

3.2.2. As-received sludge without acclimatization

Fig. 4 indicates the potential of non-acclimatized as-received AS for the removal of phenol as well as the respective specific phenol

biodegradation rate and reactors were inoculated with 1 g/L MLVSS of the as-received sludge.

Phenol was only completely degraded for the initial concentration of 25 mg/L owing to the highest specific phenol biodegradation rate (SPBR) achieved in the case of as-received sludge (0.0065 g phenol/g VSS/h). The SPBR represents a decreasing trend when increasing the initial phenol concentrations, equalling 0.0059, 0.0048, and 0.0017 for the initial phenol concentrations of 50 mg/L, 100 mg/L, and 250 mg/L, respectively. The results demonstrate the low tendency for phenol degradation for the as-received AS.

3.2.3. Effects of biochar supplementation

3.2.3.1. Microbial growth. During the acclimatization process, biomass concentration (expressed as MLVSS) increased both in the absence (reactor A) as well as the presence of the biochar (reactor B) as displayed in Fig. 5. For reactor B, the increase was much more outspoken. After 7 days of acclimatization ($[\text{phenol}]_0 = 25 \text{ mg/L}$), the MLVSS in reactor A showed a slight increase to 1.06 g/L, while reactor B experienced a faster microbial growth, reaching to 1.49 g/L. Between days 8–14 ($[\text{phenol}]_0 = 50 \text{ mg/L}$), the increase in MLVSS continued and reached to 1.21 g/L and 1.7 g/L in reactor A, and reactor B, respectively.

By increasing the initial phenol concentration to 100 mg/L between days 15–21, microbial growth was accelerated in both reactors and reached to 1.46 g/L and 2.13 g/L in reactor A, and reactor B, respectively. The highest microbial growth rate occurred during the final phase of the acclimatization (days 22–28) in response to an increase in the initial phenol concentration to 250 mg/L. MLVSS in the presence of biochar (reactor B) finally reached 2.96 g/L vs 1.97 g/L for the non-biochar supplemented reactor (reactor A). The results thus confirm positive effects of the biochar on microbial growth. Fig. 6 indicates the microscopic image of the acclimatized sludge without (a) and with (b) biochar supplementation on the final day of the acclimatization process. As can be observed, biochar (black) particles acted as the nucleation cores for biomass growth during the acclimatization process. This has potentially led to the promotion of the growth of the microorganisms, especially under the elevated concentration of a hardly-biodegradable compound. These findings suggest that activated sludge after the acclimatization process mainly consisted of flocks of phenol-degrading microorganisms forming the denser colonies in the sludge containing biochar compared to sludge that did not contain biochar. Only a very limited number of reports can be found in the literature discussing the effects of carbonaceous materials on the promotion of microbial growth. According to Cheng et al., [29] functional graphene materials can promote microbial colonization by creating suitable microenvironments for the adhesion of microbes and their growth. The results of the present study thus confirm the applicability of biochar as a low-cost material for

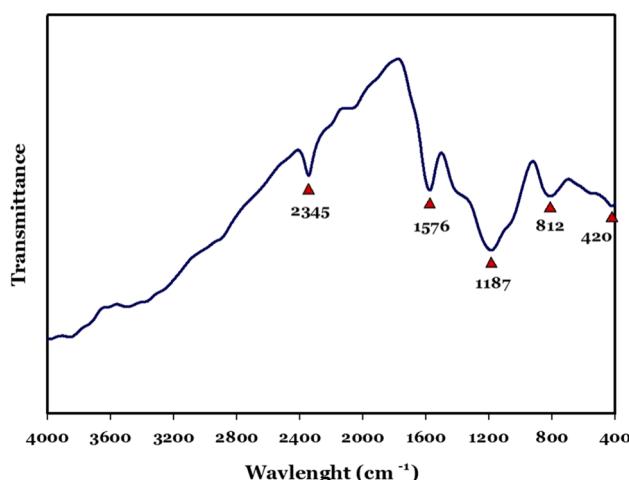


Fig. 3. FTIR spectra of the prepared pinewood biochar.

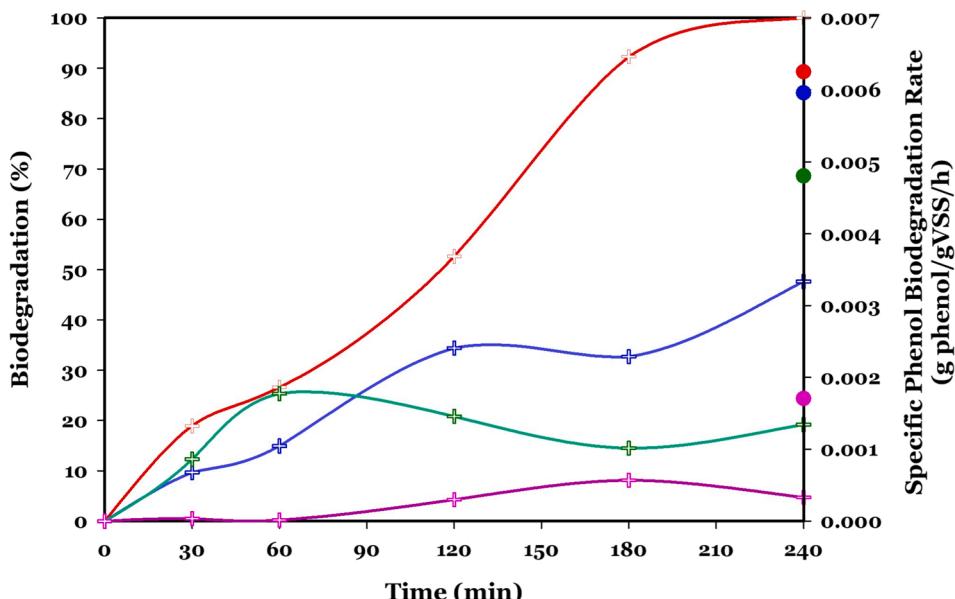


Fig. 4. Phenol biodegradation potential of as-received sludge (%) under different initial phenol concentrations and the respective specific phenol biodegradation rate (g phenol/g VSS/h), MLVSS: 1 g/L.

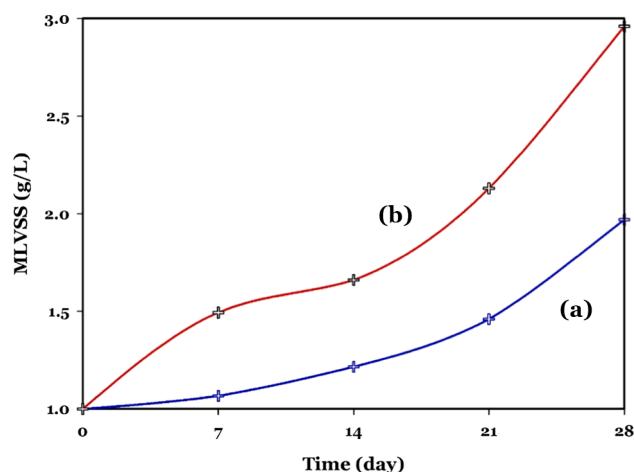


Fig. 5. The changes in MLVSS of the reactor without biochar supplementation (a) and with biochar supplementation (b).

the promotion of efficiency of the biological treatment process.

In the literature, several reports can be found stating that microbial strains such as *Arthrobacter citreus* [34], *Pseudomonas putida* [35,36], *Serratia marcescens* [37], *Acinetobacter* [38], *Bacillus subtilis* [39], *Rhodococcus erythropolis* [40], *Sphingomonas* [41], *Alcaligenes faecalis* [42], and *Bacillus brevis* [43] are able to degrade phenol present in polluted wastewaters. From the micrographs of the present study, strains such as *Acinetobacter calcoaceticus* [44] as well as stalked ciliates such as *Paramecium* sp., *Epistylis* sp., *Opercularia* sp., and *Vorticella* sp. can be distinguished in the acclimatized sludge with biochar [23,45,46]. The synergistic effects of such species can further improve the biodegradation of aromatic hydrocarbons from wastewater [23,46].

The enhanced microbial growth in the presence of biochar can be also considered as a sign of the non-toxic nature of the biochar towards microbial communities. This can be correlated with the type of feedstock (pinewood) used in this study and the applied pyrolysis conditions. The origin of the biochar can also play a significant role in the presence of toxic elements in its chemical structure. For instance, biochar prepared from the pulp and paper mill effluent treatment plant sludge may

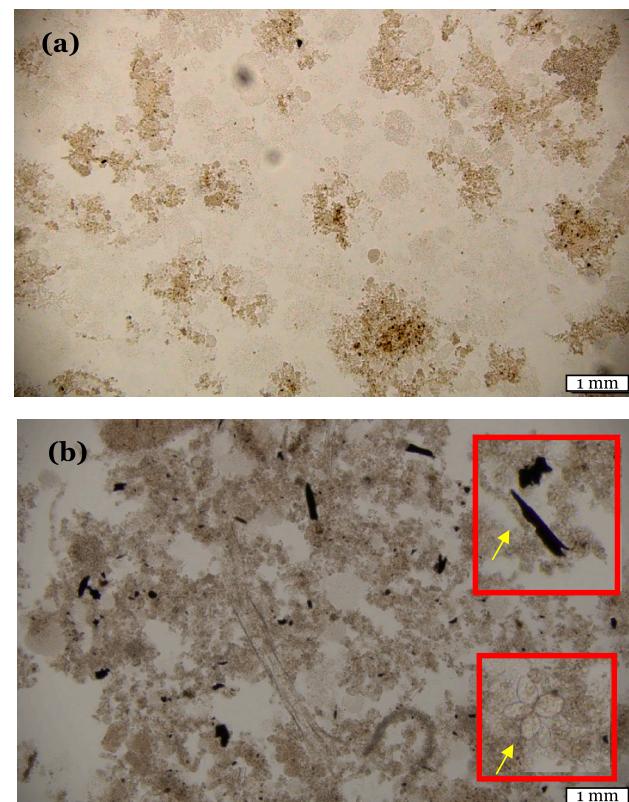


Fig. 6. Micrographs of the acclimatized activated sludge with (a) and without biochar (b) supplementation.

contain relatively high heavy metal concentrations [47,48].

As per the results achieved in this study, the biochar prepared from pinewood, which contains low concentrations of metallic elements. In addition, hazardous elements such as Cd and Pb, which can cause toxic effects [49] were not detected in the biochar. Notice that some published reports also confirm the effects of pyrolysis temperature on the composition and hence, toxic effects from the biochars since they were

produced at the elevated temperatures (>500 °C) [50,51] and may contain less toxic compounds.

3.2.3.2. Specific biodegradation rate. Batch reactors were utilized to test the phenol biodegradation potential of the activated sludge during the acclimatization process with and without the biochar supplementation under the initial phenol concentrations of 25–250 mg/L, at pH≈6.5 and room temperature conditions. The results are presented in Figs. 7 and 8; Fig. 9 illustrates SPBRs over the acclimatization period. After 7 days of acclimatization, both the reactors exhibited enhanced SPBRs compared to as-received AS. Reactor A was able to degrade the phenol at an initial concentration of 25 mg/L within 120 min (SPBR = 0.0117 g phenol/g VSS/h, Fig. 9). The microbial community in reactor B also showed a higher SPBR (0.008 g phenol/g VSS/h) compared to non-acclimatized sludge, and complete phenol biodegradation was achieved within 150 min.

At the initial concentration of 50 mg/L (day 14), an increase in SPBR was observed from 0.0059 g phenol/g VSS/h in the case of as-received sludge to 0.0085 and 0.015 for reactor A and reactor B, respectively, demonstrating an enhancement in the performance of the microbial community towards phenol biodegradation, especially for those acclimatized in the presence of the biochar. However, reactor A (without biochar-supplementation) failed to complete the degradation of phenol within 4 h (82 %, Fig. 7), while the biochar-containing reactor reached 100 % of phenol biodegradation after 120 min (Fig. 8). Between days 15–21, the initial concentration of phenol in both the reactors increased to 100 mg/L. Although SPBRs was increased in reactor A up to 0.015 g phenol/g VSS/h (Fig. 9) at day 21 compared to that of the as-received sludge (0.0048 g phenol/g VSS/h), the reactor was not able to completely degrade the phenol (88% after 240 min). On the other hand, reactor B demonstrated a 0.023 g phenol/g VSS/h phenol biodegradation rate and 100% phenol biodegradation within 150 min. When the initial phenol concentration was increased between days 22–28 to 250 mg/L, only a moderate biodegradation efficiency of 59% was obtained after day 28 in reactor A, corresponding to an SPBR of 0.018 g phenol/g VSS/h. However, reactor B represented the highest SPBR of 0.041 g phenol/g VSS/h, resulting in 100% degradation of phenol within 150 min.

Currently, biological treatment of phenolic effluents does not comply with sustainability requirements mainly due to the treatment efficiency and costs associated to the relatively long hydraulic retention time [1]. However, studies have suggested the effectiveness of acclimatization for the promotion of AS process to deal with phenolic effluents. For instance, Rajan [52] and Marrot et al., [53] achieved a phenol biodegradation rate of 0.011 g phenol/g VSS/h and 0.036 g phenol/g VSS/h,

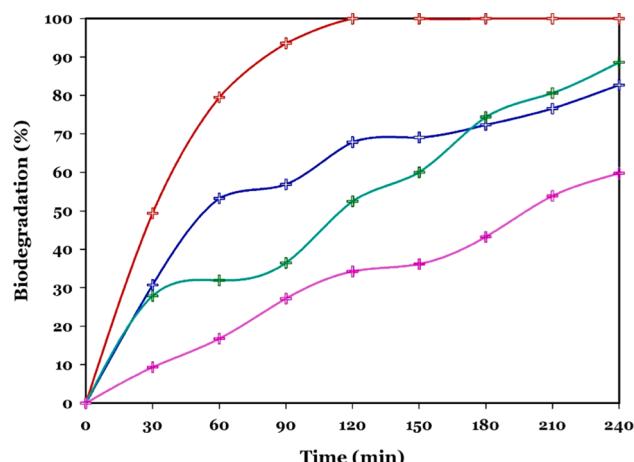


Fig. 7. Phenol biodegradation potential of the acclimatized sludge (%) under different initial phenol concentrations; MLVSS values are presented in Fig. 5.

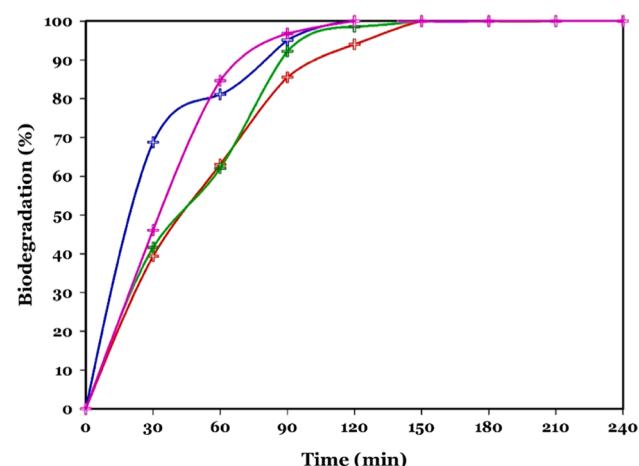


Fig. 8. Phenol biodegradation potential of the biochar supplemented acclimatized sludge (%) under different initial phenol concentration.

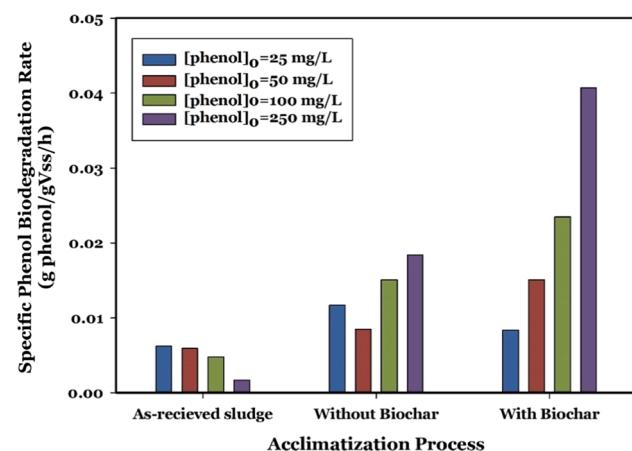


Fig. 9. Specific phenol biodegradation rate of biochar supplemented acclimatized sludge and the control (without biochar supplementation).

respectively. In any case, the results of this study demonstrated the possibility of enhancing the treatment efficiency with a reduction of treatment time, which can enhance the capacity of the respective treatment plants along with the overall treatment costs [44,54].

3.2.3.3. Sludge volume index. Sludge volume index (SVI) is an important parameter to determine the quality of the sludge. This parameter can directly influence the performance cycle of the aerobic biological treatment systems (such as aerobic sequencing batch reactors (SBRs)) [55]. SVI is also an important parameter determining the sludge settleability in the secondary clarifiers after biological treatment. Lower the SVI, better will be the separation of the sludge from the treated water. As illustrated in Fig. 10, the SVI was changed during the acclimatization process in both reactors, especially after day 14 when the initial phenol concentration was raised to 100 mg/L. In the non-biochar supplemented reactor, an increase in SVI was observed from 109 mL/g to 168.21 mL/g between days 14 and 21, which further continued to increase to 298.08 mL/g at day 28. This can be attributed to both an increase in the F/M ratio and phenol biodegradation inhibition at higher phenol concentrations [56,57]. On the contrary, in reactor B, SVI decreased to 60.45 at day 28, which falls within the optimum SVI for the AS systems (40–70 mL/g) [58]. According to Fig. 5 and Fig. 10, reactor B shows an increase in the biomass concentration (MLVSS from 1 to 2.96) during the acclimatization process, while decreasing the SVI from 108.74 to 60.45, which is evidence of strong colonization in this reactor. Fig. 11 shows

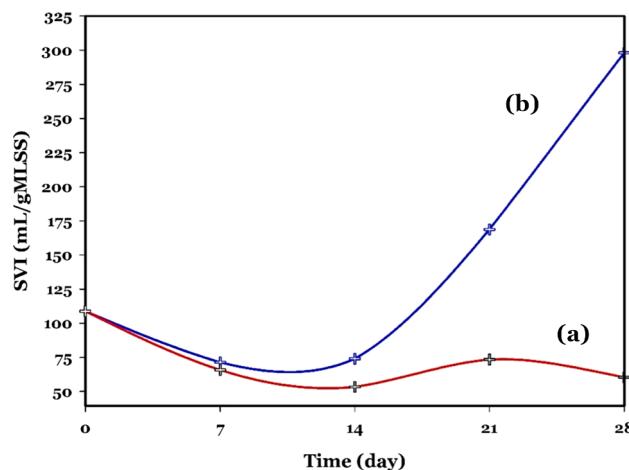


Fig. 10. The changes in SVI of the reactor without biochar supplementation (a) and with biochar supplementation (b).

the settling properties of the sludge after acclimatization with and without the biochar.

3.2.3.4. The effects of phenol shock. The impact of phenol stress on the performance of AS process was also studied by a sudden increase in initial phenol concentration from 250 mg/L (day 28) to 500 mg/L (day 29); these data are shown in Fig. 12. After 240 min, the efficiency of

reactor A dropped from 59% to 31% (Fig. 7), while in the biochar B still a in the complete phenol biodegradation was observed within 210 min. In addition, SPBR in reactor B continued to increase from 0.041 g phenol/g VSS/h [pheno] = 250 mg/L to 0.054 g phenol/g VSS/h. In contrast, no significant change was observed in the SPBR of reactor A. It may thus be concluded that both the reactors were able to continue their performances under the initial phenol shock. However, the biochar-supplemented reactor represented an enhanced performance compared to initial phenol concentration of 250 mg/L.

4. Research challenges and future considerations

Various feedstocks have so far been used for the production of biochar with various compositions and properties. For instance, biochars prepared from the sludge are normally rich in phosphorous and nitrogen [59,60], while woody biochars have a high carbon content [61] similar to the present study for biochar from the pinewood. The produced biochars have been used for several applications such as (waste)water treatment [11], soil applications [48], and recovery of the valuable compounds such as P, and N [62]. They were recently applied to enhance the methane production yield in anaerobic digestion processes via mechanisms such as promoting the direct electron transfer among the microorganisms responsible for the decomposition of organic compounds [63]. To the best of our best knowledge, the present study is the first report on the applicability of biochar for the promotion of activated sludge as the widely used technique to deal with the effluents from the various origins. The results indicate that biochar addition promotes the microbial colonization and growth as reflected in the VSS of biochar

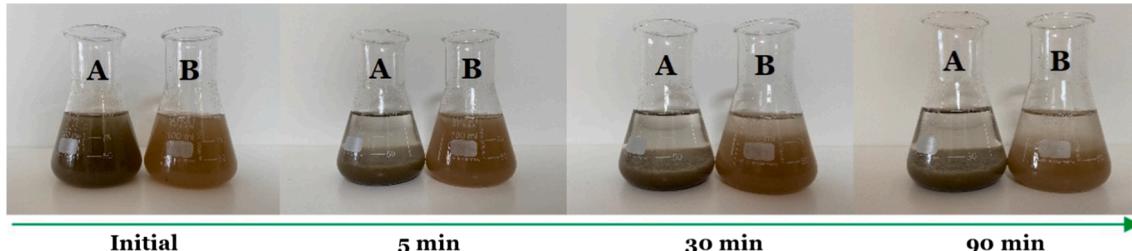


Fig. 11. The settling properties of the sludge after acclimatized process with (A) and without (B) biochar after 5, 30, and 90 min.

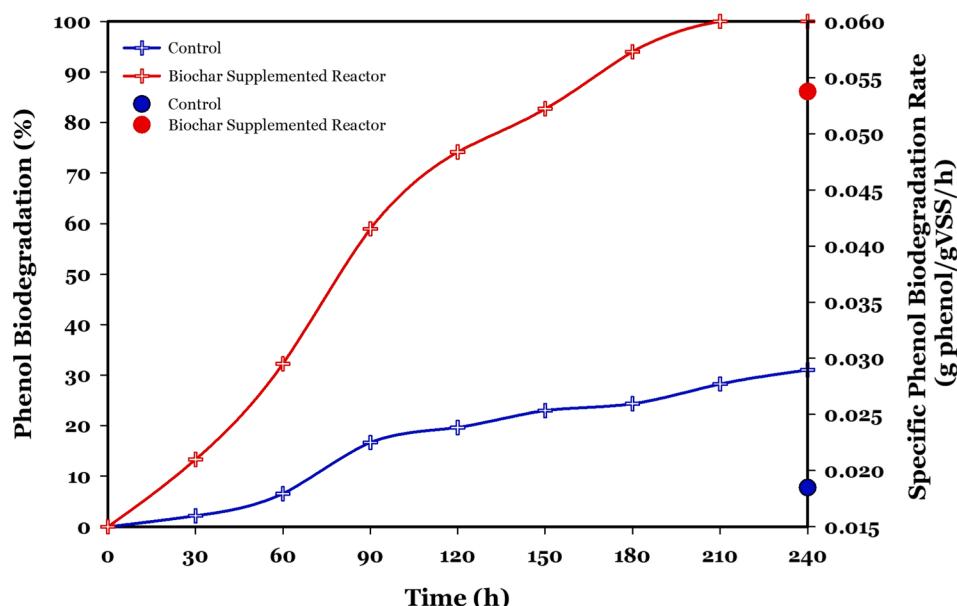


Fig. 12. The performance of the anaerobic sludge acclimatized in presence of pinewood biochar compared to control (without biochar supplementation) under initial phenol concentration shock (to 500 mg/L).

supplemented activated sludge process, and thereby enhancing the phenol specific biodegradation rate. The acclimatized sludge in the presence of biochar represented a low SVI, resulting in a shorter treatment time, and hence higher capacity for the treatment system, and higher quality for the treated effluents. The potential of the biochar to tolerate the load shock can also indicate the stability of the process, which together with the enhanced efficiency and higher quality of the treated effluents could satisfy sustainability considerations [1].

For future studies, one can recommend to use the biochar from various feedstocks and properties (such as magnetic biochar [26]) to reach optimum conditions for the application of these technologies for real applications. The possibility of release of specific compounds such as metallic compounds, which can be originated from some biochar feedstocks such as sewage sludge [64], and its effects on microbial communities and final quality of the treated product are also of high priority to investigate in the future. However, development of economic methods for the treatment of highly polluted effluents is another research challenge. Even though biochar is an expensive material, some measures can be still adopted to decrease the production cost and push the technologies for commercialization. For instance, renewable sources of energy can be used to provide the energy required for the pyrolysis process under relatively high temperatures [65].

5. Conclusions

This study reports the application of pinewood biochar for the promotion of activated sludge properties including the microbial growth, specific biodegradation rate, and sludge volume index during the acclimatization process. The addition of biochar promoted the colonization of microorganisms and hence, enhanced the microbial growth as well as phenol biodegradation capacity. The highest specific phenol biodegradation rate of 0.041 g phenol/g VSS/h was observed after 28 days of the acclimatization process under an initial phenol concentration of 250 mg/L. In addition, the system could efficiently tolerate the shock load in phenol concentration of 500 mg/L, thereby showing specific phenol biodegradation rate of 0.054 g phenol/g VSS/h. Furthermore, sludge volume index of the biochar supported that acclimatized sludge decreased to 60.45 compared to 108.74 for the as-received activated sludge. Since the produced biochar is a low-cost and non-toxic material, the method developed in this study would offer sustainable option for enhancing the performance of biological methods for efficient treatment of phenolic wastewaters.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgments

Mohammadreza Kamali holds a postdoctoral research grant awarded by the Research Council of KU Leuven [PDM/19/104]. Also, thanks are due to the Portuguese Foundation for Science and Technology (FCT)/Ministry of Science, Technology and Higher Education (MCTES) for the financial support to CESAM (UIDP/50017/2020+UIDB/50017/2020), through national funds, and to project BioValChar - Sustainable valorisation of residual biomass for biochar (PCIF-GVB-0034-2019).

References

- [1] M. Kamali, M.E.M.E. Costa, T.M. Aminabhavi, I. Capela, Sustainability of treatment technologies for industrial biowastes effluents, *Chem. Eng. J.* 370 (2019) 1511–1521, <https://doi.org/10.1016/j.cej.2019.04.010>.
- [2] M. Kamali, L. Appels, X. Yu, T.M. Aminabhavi, R. Dewil, Artificial intelligence as a sustainable tool in wastewater treatment using membrane bioreactors, *Chem. Eng. J.* 417 (2021) 128070, <https://doi.org/10.1016/j.cej.2020.128070>.
- [3] M. Kamali, D.P. Suhas, M.E. Costa, I. Capela, T.M. Aminabhavi, Sustainability considerations in membrane-based technologies for industrial effluents treatment, *Chem. Eng. J.* 368 (2019) 474–494, <https://doi.org/10.1016/j.cej.2019.02.075>.
- [4] X. Zhang, C. Ye, K. Pi, J. Huang, M. Xia, A.R. Gerson, Sustainable treatment of desulfurization wastewater by ion exchange and bipolar membrane electrodialysis hybrid technology, *Sep. Purif. Technol.* 211 (2019) 330–339, <https://doi.org/10.1016/j.seppur.2018.10.003>.
- [5] B. Wang, Z. Wang, Y. Jiang, G. Tan, N. Xu, Y. Xu, Enhanced power generation and wastewater treatment in sustainable biochar electrodes based bioelectrochemical system, *Bioresour. Technol.* 241 (2017) 841–848, <https://doi.org/10.1016/j.biortech.2017.05.155>.
- [6] J. Radjenović, M. Petrović, D. Barceló, Fate and distribution of pharmaceuticals in wastewater and sewage sludge of the conventional activated sludge (CAS) and advanced membrane bioreactor (MBR) treatment, *Water Res.* 43 (3) (2009) 831–841, <https://doi.org/10.1016/j.watres.2008.11.043>.
- [7] A. Anastasi, F. Spina, A. Romagnolo, V. Tigini, V. Prigione, G.C. Varese, Integrated fungal biomass and activated sludge treatment for textile wastewaters bioremediation, *Bioresour. Technol.* 123 (2012) 106–111, <https://doi.org/10.1016/j.biortech.2012.07.026>.
- [8] P. Van Aken, N. Lambert, R. Van den Broeck, J. Degrève, R. Dewil, Advances in ozonation and biodegradation processes to enhance chlorophenol abatement in multisubstrate wastewaters: A review, *Environ. Sci. Water Res. Technol.* 5 (3) (2019) 444–481, <https://doi.org/10.1039/C8EW00562A>.
- [9] A. BARRIOSMARTINEZ, E. BARBOT, B. MARROT, P. MOULIN, N. ROCHE, Degradation of synthetic phenol-containing wastewaters by MBR, *J. Membr. Sci.* 281 (1-2) (2006) 288–296, <https://doi.org/10.1016/j.memsci.2006.03.048>.
- [10] A. Nuhoglu, B. Yalcin, Modelling of phenol removal in a batch reactor, *Process Biochem.* 40 (3-4) (2005) 1233–1239, <https://doi.org/10.1016/j.procbio.2004.04.003>.
- [11] M. Kamali, L. Appels, E.E. Kwon, T.M. Aminabhavi, R. Dewil, Biochar in water and wastewater treatment - a sustainability assessment, *Chem. Eng. J.* 420 (2021) 129946, <https://doi.org/10.1016/j.cej.2021.129946>.
- [12] M. Davarazar, A. Mostafaie, D. Jahanianfar, P. Davarazar, S.A.B. Ghiasi, M. Gorrichi, B. Nemati, M. Kamali, T.M. Aminabhavi, Treatment technologies for pharmaceutical effluents-A scientometric study, *J. Environ. Manage.* 254 (2020) 109800, <https://doi.org/10.1016/j.jenvman.2019.109800>.
- [13] V.S. Koshkina, A.A. Serova, V.Y. Timofeev, Environmental-Toxicological Characteristics of Waters and Their Sources at Magnitogorsk with the Its Iron and Steel Industry, *IOP Conf. Ser. Mater. Sci. Eng.* 142 (2016), <https://doi.org/10.1088/1757-899X/142/1/012117>.
- [14] A. El-Naggar, S.S. Lee, J. Rinklebe, M. Farooq, H. Song, A.K. Sarmah, A. R. Zimmerman, M. Ahmad, S.M. Shaheen, Y.S. Ok, Biochar application to low fertility soils: A review of current status, and future prospects, *Geoderma*. 337 (2019) 536–554, <https://doi.org/10.1016/j.geoderma.2018.09.034>.
- [15] N.K. Niazi, I. Bibi, M. Shahid, Y.S. Ok, S.M. Shaheen, J. Rinklebe, H. Wang, B. Murtaza, E. Islam, M. Farrakh Nawaz, A. Lüttege, N. Khan, I. Bibi, M. Shahid, Y. Sik, S.M. Shaheen, J. Rinklebe, H. Wang, B. Murtaza, E. Islam, M.F. Nawaz, A. Lüttege, Arsenic removal by Japanese oak wood biochar in aqueous solutions and well water: Investigating arsenic fate using integrated spectroscopic and microscopic techniques, *Sci. Total Environ.* 621 (2018) 1642–1651, <https://doi.org/10.1016/j.scitotenv.2017.10.063>.
- [16] S.X. Zhao, N. Ta, X.D. Wang, Effect of temperature on the structural and physicochemical properties of biochar with apple tree branches as feedstock material, *Energies*. 10 (2017) 1293, <https://doi.org/10.3390/en10091293>.
- [17] W. Li, Y. Li, D. Zhang, Y. Lan, J. Guo, CuO-Co3O4@CeO2 as a heterogeneous catalyst for efficient degradation of 2,4-dichlorophenoxyacetic acid by peroxymonosulfate, *J. Hazard. Mater.* 381 (2020) 121209, <https://doi.org/10.1016/j.jhazmat.2019.121209>.
- [18] J. Wang, Z. Zhao, Y. Zhang, Enhancing anaerobic digestion of kitchen wastes with biochar: Link between different properties and critical mechanisms of promoting interspecies electron transfer, *Renew. Energy*. 167 (2021) 791–799, <https://doi.org/10.1016/j.renene.2020.11.153>.
- [19] E.T. Yoong, P.A. Lant, P.F. Greenfield, *In situ* respirometry in an SBR treating wastewater with high phenol concentrations, *Water Res.* 34 (1) (2000) 239–245.
- [20] Z. Duan, Microbial Degradation Of Phenol By Activated Sludge In A Batch Reactor, *Environ. Prot. Eng.* 37 (2011) 53–63.
- [21] S. Dey, S. Mukherjee, Performance and kinetic evaluation of phenol biodegradation by mixed microbial culture in a batch reactor, *Int. J. Water Resour. Environ. Eng.* 2 (2010) 40–49. <http://www.academicjournals.org/ijwree>.
- [22] M. Kamali, S.A. Alavi-Borazjani, Z. Khodaparast, M. Khalaj, A. Jahanshahi, E. Costa, I. Capela, Additive and additive-free treatment technologies for pulp and paper mill effluents: Advances, challenges and opportunities, *Water Resour. Ind.* 21 (2019) 100109, <https://doi.org/10.1016/j.wri.2019.100109>.
- [23] M. Kamali, T. Gameiro, M.E. Costa, I. Capela, T.M. Aminabhavi, Enhanced biodegradation of phenolic wastewaters with acclimatized activated sludge – A kinetic study, *Chem. Eng. J.* 378 (2019) 122186, <https://doi.org/10.1016/j.cej.2019.122186>.
- [24] APHA, APHA, 2005. Standard Methods for the Examination of Water and Wastewater, Washington, D.C., USA, 21st ed. Washington, D.C., USA, 2005. <http://scholar.google.com/scholar?hl=en&btnG=Search&q=intitle:APHA,+2005,+Standard+Methods+for+the+Examination+of+Water+and+Wastewater#0> (accessed September 2, 2014).
- [25] A. Tomczyk, Z. Sokołowska, P. Boguta, Biochar physicochemical properties: pyrolysis temperature and feedstock kind effects, *Rev. Environ. Sci. Biotechnol.* 19 (1) (2020) 191–215, <https://doi.org/10.1007/s11157-020-09523-3>.

- [26] K. Phoungthong, T. Suwunwong, Magnetic biochar derived from sewage sludge of concentrated natural rubber latex (CNRL) for the removal of Al³⁺ and Cu²⁺ ions from wastewater, *Res. Chem. Intermed.* 46 (1) (2020) 385–407, <https://doi.org/10.1007/s11164-019-03956-4>.
- [27] P. Sun, C. Hui, R.A. Khan, J. Du, Q. Zhang, Y.H. Zhao, Efficient removal of crystal violet using Fe3O4-coated biochar: The role of the Fe3O4 nanoparticles and modeling study their adsorption behavior, *Sci. Rep.* 5 (2015) 1–12, <https://doi.org/10.1038/srep12638>.
- [28] H. Chen, J. Zhang, L. Tang, M. Su, D. Tian, L. Zhang, Z. Li, S. Hu, Enhanced Pb immobilization via the combination of biochar and phosphate solubilizing bacteria, *Environ. Int.* 127 (2019) 395–401, <https://doi.org/10.1016/j.envint.2019.03.068>.
- [29] C. Cheng, S. Li, A. Thomas, N.A. Kotov, R. Haag, Functional Graphene Nanomaterials Based Architectures: Bionteractions, Fabrications, and Emerging Biological Applications, *Chem. Rev.* 117 (3) (2017) 1826–1914, <https://doi.org/10.1021/acs.chemrev.6b00520>.
- [30] K. Wystalska, A. Kwarciak-Kozlowska, The effect of biodegradable waste pyrolysis temperatures on selected biochar properties, *Materials (Basel.)* 14 (2021) 1644, <https://doi.org/10.3390/ma14071644>.
- [31] C. Yang, C. Wöll, IR spectroscopy applied to metal oxide surfaces: adsorbate vibrations and beyond, *Adv. Phys. X* 2 (2) (2017) 373–408, <https://doi.org/10.1080/23746149.2017.1296372>.
- [32] M.L. Leong, K.M. Lee, S.O. Lai, B.S. Ooi, Sludge characteristics and performances of the sequencing batch reactor at different in fl uent phenol concentrations, *Desalination* 270 (1–3) (2011) 181–187, <https://doi.org/10.1016/j.desal.2010.11.043>.
- [33] A. Hussain, S.K. Dubey, V. Kumar, Kinetic study for aerobic treatment of phenolic wastewater, *Water Resour. Ind.* 11 (2015) 81–90, <https://doi.org/10.1016/j.wri.2015.05.002>.
- [34] C. Karigar, A. Mahesh, M. Nagenahalli, D.J. Yun, Phenol degradation by immobilized cells of *Arthrobacter citreus*, *Biodegradation* 17 (1) (2006) 47–55, <https://doi.org/10.1007/s10532-005-3048-y>.
- [35] M. Abarian, M. Hassanshahian, A. Esbah, Degradation of phenol at high concentrations using immobilization of *Pseudomonas putida* P53 into sawdust entrapped in sodium-alginate beads, *Water Sci. Technol.* 79 (2019) 1387–1396, <https://doi.org/10.2166/wst.2019.134>.
- [36] R. Dong, D. Chen, N. Li, Q. Xu, H. Li, J. He, J. Lu, Removal of phenol from aqueous solution using acid-modified *Pseudomonas putida*-sepiolite/ZIF-8 bio-nanocomposites, *Chemosphere* 239 (2020) 124708, <https://doi.org/10.1016/j.chemosphere.2019.124708>.
- [37] A.R. Padmavathi, B. Abinaya, S.K. Pandian, Phenol, 2,4-bis(1,1-dimethylethyl) of marine bacterial origin inhibits quorum sensing mediated biofilm formation in the uropathogen *Serratia marcescens*, *Biofouling* 30 (9) (2014) 1111–1122, <https://doi.org/10.1080/08927014.2014.972386>.
- [38] Y. Liu, W. Wang, S.B. Shah, G. Zanaroli, P. Xu, H. Tang, Phenol biodegradation by *Acinetobacter radioreducens* APH1 and its application in soil bioremediation, *Appl. Microbiol. Biotechnol.* 104 (1) (2020) 427–437, <https://doi.org/10.1007/s00253-019-10271-w>.
- [39] A. Boutafda, Y. Zeggouti, L. El Fels, Y. Alkaa, S. Jamil, Y. Ouhdouch, F. Bekkoui, L. Kouissi, M. Hafidi, Optimization of the process conditions for biodegradation of phenolic compounds in olive mill wastewater using *bacillus subtilis* in bioreactor cultures, *Desalin. Water Treat.* 194 (2020) 101–109, <https://doi.org/10.5004/dwt.2020.25838>.
- [40] D. Pospíšilová, O. Schreiberová, V. Jirků, T. Lederer, Effects of Magnetic Field on Phenol Biodegradation and Cell Physicochemical Properties of *Rhodococcus erythropolis*, *Bioremediat. J.* 19 (3) (2015) 201–206, <https://doi.org/10.1080/1088968.2015.1029114>.
- [41] B. Ruan, P. Wu, M. Chen, X. Lai, L. Chen, L. Yu, B. Gong, C. Kang, Z. Dang, Z. Shi, Z. Liu, Immobilization of *Sphingomonas* sp. GY2B in polyvinyl alcohol-alginate-kaolin beads for efficient degradation of phenol against unfavorable environmental factors, *Ecotoxicol. Environ. Saf.* 162 (2018) 103–111, <https://doi.org/10.1016/j.ecoenv.2018.06.058>.
- [42] S. Mandal, B. Bhunia, A. Kumar, D. Dasgupta, T. Mandal, S. Datta, P. Bhattacharya, A statistical approach for optimization of media components for phenol degradation by *Alcaligenes faecalis* using Plackett-Burman and response surface methodology, *Desalin. Water Treat.* 51 (31–33) (2013) 6058–6069, <https://doi.org/10.1080/19443994.2013.769746>.
- [43] V. ARUTCHELVAN, V. KANAKASABAI, R. ELANGOVAN, S. NAGARAJAN, V. MURALIKRISHNAN, Kinetics of high strength phenol degradation using *Bacillus brevis*, *J. Hazard. Mater.* 129 (1–3) (2006) 216–222, <https://doi.org/10.1016/j.jhazmat.2005.08.040>.
- [44] Z. Liu, W. Xie, D. Li, Y. Peng, Z. Li, S. Liu, Biodegradation of phenol by bacteria strain *Acinetobacter Calcoaceticus* PA isolated from phenolic wastewater, *Int. J. Environ. Res. Public Health.* 13 (3) (2016) 300, <https://doi.org/10.3390/jerph13030300>.
- [45] B.E. Zima-Kulisiewicz, A. Delgado, Synergetic microorganismic convection generated by *Opercularia asymmetrica* ciliates living in a colony as effective fluid transport on the micro-scale, *J. Biomech.* 42 (14) (2009) 2255–2262, <https://doi.org/10.1016/j.jbiomech.2009.06.018>.
- [46] L. Kachieng'a, M.N.B. Momba, The synergistic effect of a consortium of protozoan isolates (*Paramecium* sp., *Vorticella* sp., *Epistylis* sp. and *Opercularia* sp.) on the biodegradation of petroleum hydrocarbons in wastewater, *J. Environ. Chem. Eng.* 6 (4) (2018) 4820–4827, <https://doi.org/10.1016/j.jece.2018.07.005>.
- [47] P. Devi, A.K. Saroha, Risk analysis of pyrolyzed biochar made from paper mill effluent treatment plant sludge for bioavailability and eco-toxicity of heavy metals, *Bioreour. Technol.* 162 (2014) 308–315, <https://doi.org/10.1016/j.biortech.2014.03.093>.
- [48] A.C.M. Vilas-Boas, L.A.C. Tarelho, M. Kamali, T. Hauschild, D.T. Pio, D. Jahanianfar, A.P.D. Gomes, M.A.A. Matos, Biochar from slow pyrolysis of biological sludge from wastewater treatment: characteristics and effect as soil amendment, *Biofuels, Bioprod. Bioref.* 15 (4) (2021) 1054–1072, <https://doi.org/10.1002/bbb.v15.410.1002/bbb.2220>.
- [49] T. Liu, B. Liu, W. Zhang, Nutrients and heavy metals in biochar produced by sewage sludge pyrolysis: Its application in soil amendment, *Polish J. Environ. Stud.* 23 (2014) 271–275.
- [50] C. Anyika, Z.A. Majid, M. Rashid, A.B. Isa, N. Ismail, M.P. Zakaria, A. Yahya, Toxic and nontoxic elemental enrichment in biochar at different production temperatures, *J. Clean. Prod.* 131 (2016) 810–821, <https://doi.org/10.1016/j.jclepro.2016.04.043>.
- [51] H. Lyu, Y. He, J. Tang, M. Hecker, Q. Liu, P.D. Jones, G. Codling, J.P. Giesy, Effect of pyrolysis temperature on potential toxicity of biochar if applied to the environment *, *Environ. Pollut.* 218 (2016) 1–7, <https://doi.org/10.1016/j.envpol.2016.08.014>.
- [52] V. Rajani, *Microbial Degradation of Phenol- A Review* 2 (2015) 46–54.
- [53] B. Marrot, A. Barrios-Martinez, P. Moulin, N. Roche, Biodegradation of high phenol concentration by activated sludge in an immersed membrane bioreactor, *Biochem. Eng. J.* 30 (2) (2006) 174–183, <https://doi.org/10.1016/j.bej.2006.03.006>.
- [54] S. Tan, X. Chen, C. Cui, Y. Hou, W. Li, H. You, Biodegradation of saline phenolic wastewater in a biological contact oxidation reactor with immobilized cells of *Oceanimonas* sp, *Biotechnol. Lett.* 39 (1) (2017) 91–96, <https://doi.org/10.1007/s10529-016-2226-9>.
- [55] A. Kruglova, M. Kråkström, M. Riska, A. Mikola, P. Rantanen, R. Vahala, L. Kronberg, Comparative study of emerging micropollutants removal by aerobic activated sludge of large laboratory-scale membrane bioreactors and sequencing batch reactors under low-temperature conditions, *Bioreour. Technol.* 214 (2016) 81–88, <https://doi.org/10.1016/j.biortech.2016.04.037>.
- [56] P. Van Aken, R. Van den Broeck, J. Degrève, R. Dewil, The effect of ozonation on the toxicity and biodegradability of 2,4-dichlorophenol-containing wastewater, *Chem. Eng. J.* 280 (2015) 728–736, <https://doi.org/10.1016/j.cej.2015.06.019>.
- [57] C. Zhang, F. Cheng, H. Zhao, J. Li, Enhanced phenol degradation under different shock-stress in LAC/AS system: The combination effects of LAC toxicity mitigation and microbial community shift, *J. Water Process Eng.* 40 (2021) 101824, <https://doi.org/10.1016/j.jwpe.2020.101824>.
- [58] M. von Sperling, Activated sludge and aerobic biofilm reactors, *IWA Publishing*, 2007, <https://doi.org/10.2166/9781780402123>.
- [59] P. Wang, H. Peng, S. Adhikari, B. Higgins, P. Roy, W. Dai, X. Shi, Enhancement of biogas production from wastewater sludge via anaerobic digestion assisted with biochar amendment, *Bioreour. Technol.* 309 (2020) 123368, <https://doi.org/10.1016/j.biortech.2020.123368>.
- [60] A. Gopinath, G. Divyapriya, V. Srivastava, A.R. Laiju, P.V. Nidheesh, M.S. Kumar, Conversion of sewage sludge into biochar: A potential resource in water and wastewater treatment, *Environ. Res.* 194 (2021) 110656, <https://doi.org/10.1016/j.envres.2020.110656>.
- [61] M. Kamali, N. Sweygers, S. Al-Salem, L. Appels, T.M. Aminabhavi, R. Dewil, Biochar for soil applications-sustainability aspects, challenges and future prospects, *Chem. Eng. J.* 428 (2022) 131189, <https://doi.org/10.1016/j.cej.2021.131189>.
- [62] M.M. Thant Zin, D.-J. Kim, Simultaneous recovery of phosphorus and nitrogen from sewage sludge ash and food wastewater as struvite by Mg-biochar, *J. Hazard. Mater.* 403 (2021) 123704, <https://doi.org/10.1016/j.jhazmat.2020.123704>.
- [63] C. Cimon, P. Kadota, C. Eskicioglu, Effect of biochar and wood ash amendment on biochemical methane production of wastewater sludge from a temperature phase anaerobic digestion process, *Bioreour. Technol.* 297 (2020) 122440, <https://doi.org/10.1016/j.biortech.2019.122440>.
- [64] Z. Huang, Q. Lu, J. Wang, X. Chen, X. Mao, Z. He, J. Paz-Ferreiro, Inhibition of the bioavailability of heavy metals in sewage sludge biochar by adding two stabilizers, *PLoS One.* 12 (8) (2017) e0183617, <https://doi.org/10.1371/journal.pone.0183617>.
- [65] M.C. Ndukwu, I.T. Horsfall, E.A. Ubouf, F.N. Orji, I.E. Ekop, N.R. Ezejiofor, Review of solar-biomass pyrolysis systems: Focus on the configuration of thermal-solar systems and reactor orientation, *J. King Saud Univ. - Eng. Sci.* In press 33 (6) (2021) 413–423, <https://doi.org/10.1016/j.ksues.2020.05.004>.