

STM32CUBEMX.ioc - Pinout & Configuration

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout



Categories

A->Z

System Core >

Analog >

Timers >

Connectivity >

Computing >

Middleware >

Pinout view

System view

Middleware

System Core

Analog

Timers

Connectivity

Computing

DMA

GPIO ✓

NVIC ✓

RCC ✓

SYS ✓

TIM3 ✓

I2C2 ✓

Activate Windows
Go to Settings to activate Windows.





Project Explorer X main.c STM32CUBEMX.ioc X

- IDE STM32CUBEMX
 - Binaries
 - Includes
 - Core
 - Drivers
 - Debug
 - STM32F103C8TX_FLASH.Id
 - MX STM32CUBEMX.ioc

STM32CUBEMX.ioc - Pinout & Configuration

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search

Categories A-Z

System Core >

Analog >

Timers >


Connectivity >

Computing >

Middleware >

Pinout view

System view

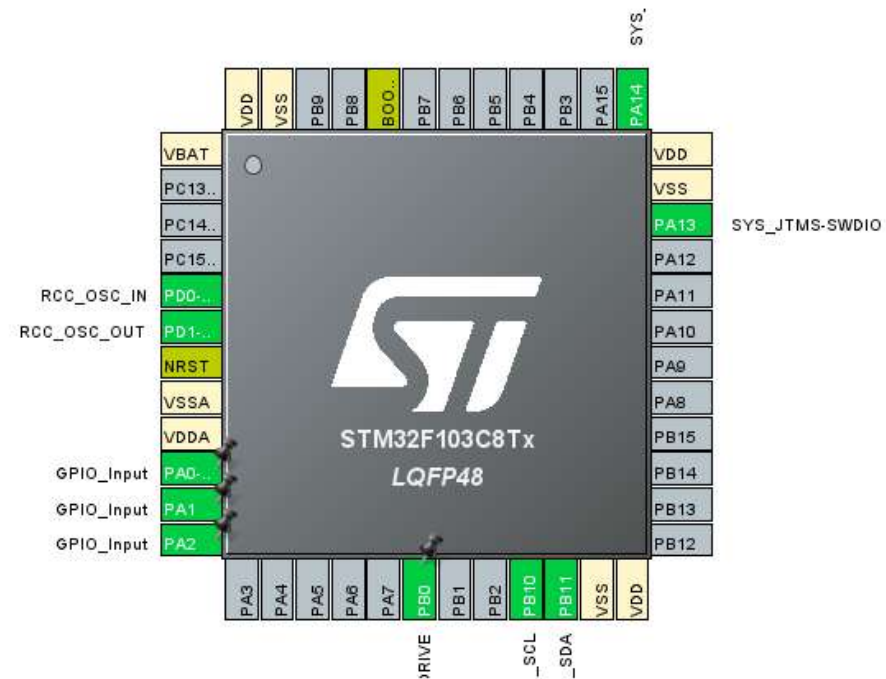

Activate Windows
Go to Settings to activate Windows.



- IDE STM32CUBEMX
 - Binaries
 - Includes
 - Core
 - Drivers
 - Debug
 - STM32F103C8TX_FLASH.Id
 - MX STM32CUBEMX.ioc

STM32CUBEMX.ioc - Pinout & Configuration

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search

Categories A->Z

System Core >

Analog >


Timers >

Connectivity >

Computing >

Middleware >

Pinout view System view

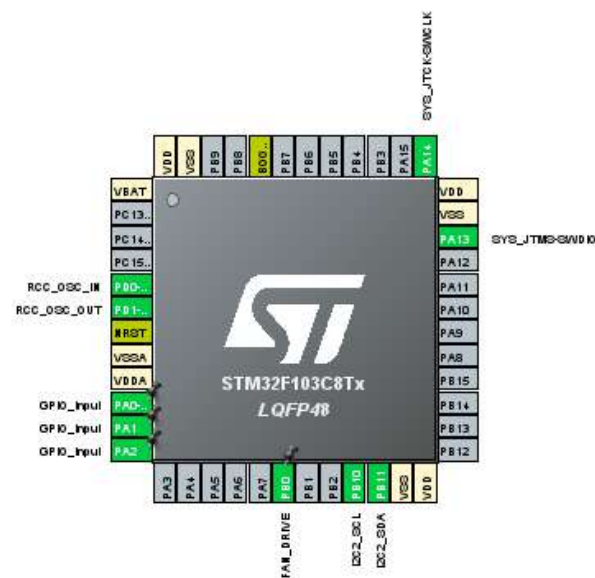

Activate Windows
Go to Settings to activate Windows.

https://sw-center.s...0.2/content.xml.xz

STM32CUBEMX.ioc - Pinout & Configuration

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search

RCC Mode and Configuration

Categories A-Z

System Core

- DMA
- GPIO
- IWDG
- NVIC
- ☒ RCC
- ☒ SYS
- WWDG

Analog

Timers

Connectivity

Computing

Middleware

Mode

High Speed Clock (HSE) Crystal/Ceramic ...

Low Speed Clock (LSE) Disable

☐ Master Clock Output

Configuration

Reset Configuration

- ☒ NVIC Settings
- ☒ GPIO Settings
- ☒ Parameter Settings
- ☒ User Constants

Configure the below parameters :

Search (Ctrl+F)

RCC Parameters


HSI Calibration... 16

HSE Startup ... 100

LSE Startup ... 5000

Pinout view

System view

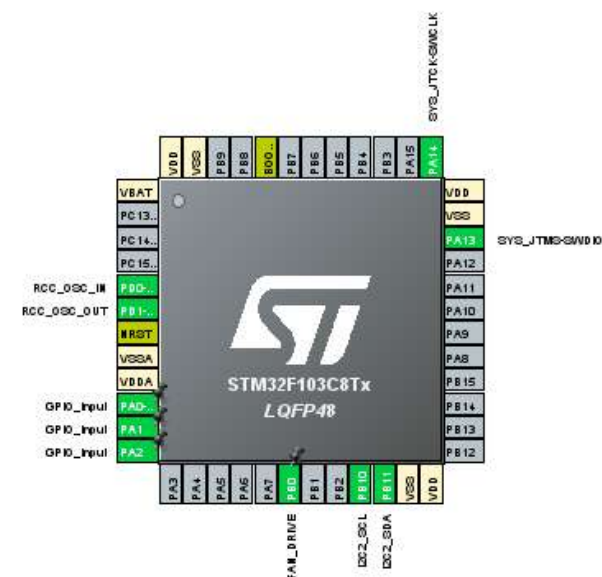

Activate Windows

Go to Settings to activate Windows.

<https://sw-center.s....7.0/content.xml.xz>

- > Binaries
- > Includes
- > Core
- > Drivers
- > Debug
- STM32F103C8TX_FLASH.Id
- MX STM32CUBEMX.ioc

STM32CUBEMX.ioc - Pinout & Configuration

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search

SYS Mode and Configuration

Categories A-Z

Mode

System Core

- DMA
- GPIO
- IWDG
- NVIC
- ✓ RCC
- ▲ SYS
- WWDG

Analog >

Timers >

Connectivity >

Computing >

Middleware >

Debug Serial Wire

System Wake-Up

Timebase Source SysTick


conflict with:
PA0-WKUP mapped with GPIO_Input

Configuration

Warning: This peripheral has no parameters to be configured

Pinout view

System view

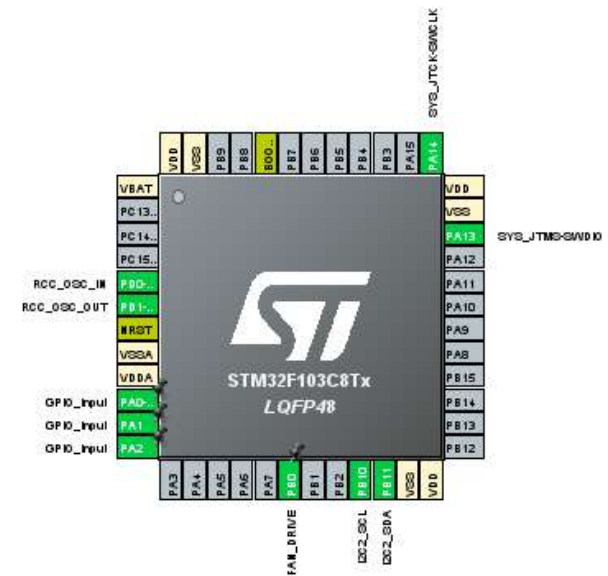

- > Binaries
- > Includes
- > Core
- > Drivers
- > Debug
- STM32F103C8TX_FLASH.Id
- STM32CUBEMX.ioc

STM32CUBEMX.ioc - Pinout & Configuration

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search

GPIO Mode and Configuration

Categories A-Z

System Core

- DMA
- GPIO
- IWDG
- NVIC
- ✓ RCC
- ▲ SYS
- WWDG

Analog

Timers

Connectivity

Computing

Middleware

Configuration

Group By Peripherals

✓ GPIO ✓ I2C ✓ RCC ✓ SYS

Search Signals

Search (Ctrl+F)


☐ Show only Modified Pins

	Sign...	GPI...	GPI...	GPI...	Max...	User...	Mod...
PA0...	n/a	n/a	Inpu...	Pull...	n/a		✓
PA1	n/a	n/a	Inpu...	Pull...	n/a		✓
PA2	n/a	n/a	Inpu...	Pull...	n/a		✓
PB0	n/a	Low	Out...	No ...	Low	FAN...	✓

Select Pins from table to configure them. Multiple se

Pinout view

System view

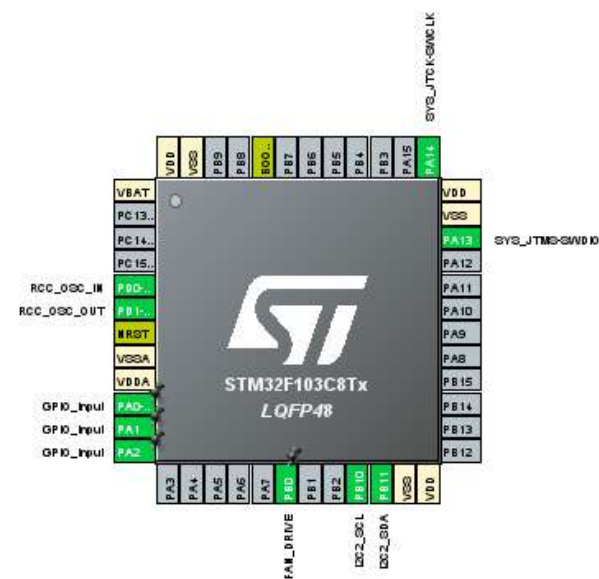



Project Explorer

STM32CUBEMX

- > Binaries
- > Includes
- > Core
- > Drivers
- > Debug
- STM32F103C8TX_FLASH.Id
- STM32CUBEMX.ioc

STM32CUBEMX.ioc - Pinout & Configuration

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search

TIM3 Mode and Configuration

Categories A-Z

System Core >

Analog >

Timers >

Connectivity >

Computing >

Middleware >

Mode

Slave Mode Disable

Trigger Source Disable

☒ Internal Clock

Channel1 Disable

Channel2 Disable

Channel3 Disable

Channel4 Disable

Combined Channels Disable

Configuration

Reset Configuration

☒ NVIC Settings☒ DMA Settings☒ Parameter Settings☒ User Constants

NVIC Interrupt Table

Enabled

Preemption Pr


TIM3 global interrupt

☒

0

Pinout view

System view

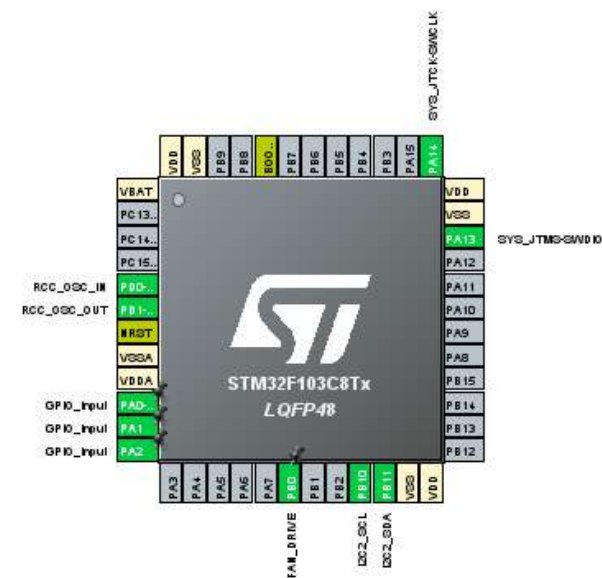

Activate Windows

Go to Settings to activate Windows.

<https://sw-center.s...mpositeContent.jar>