


PK-4

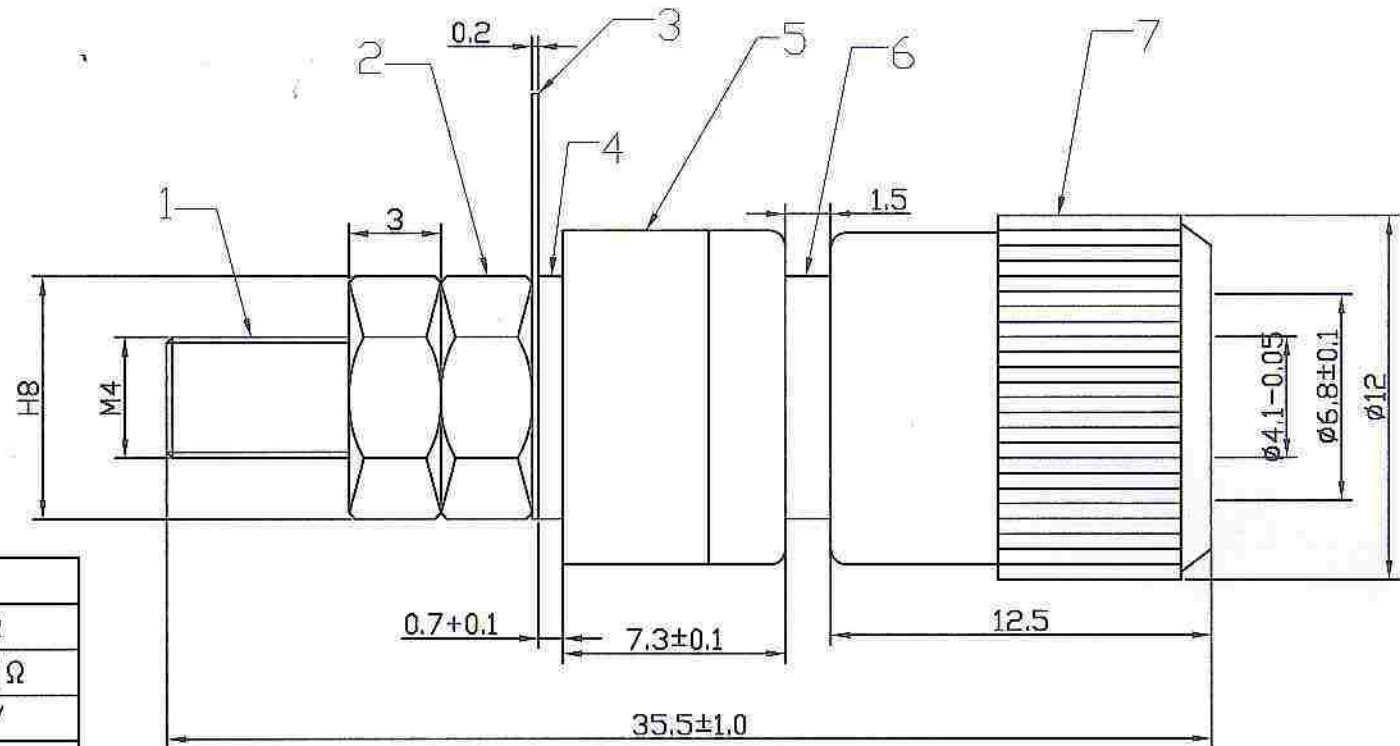

# ELECTRICAL CHARACTERISTIC

(1)	CONTACT RESISTANCE: $\leq 20M\Omega$
(2)	INSULATION RESISTANCE: $\geq 10M\Omega$
(3)	WITHSTAND VOLTAGE: DC300V
(4)	CURRENT RATING: 5A/DC150V
(5)	OPERATING TEMPERATURE: $-30^{\circ}C \sim 60^{\circ}C$

7	SHELL	ABS
6	COPPER PATCH	Cu
5	PLASTIC HANDLE	ABS
4	WASHER	Cu
3	EARTHING PATCH	Cu
2	NUT	Zn
1	BODY	Cu

ITEM	DESIGNATION	MATERIAL
REV	PART NO.&SAMPLE NO.	DATE BY
A	T-1/PK-4	
B		

TOLERANCE	SIGNATURES	DATE
0-10 $\pm 0.05$ 10-99 $\pm 0.5$ 100-999 $\pm 10.0$ 1000-9999 $\pm 100.00$ 10000-99999 $\pm 1000.00$	DRAFT: Henry	11.5.15
	CHECKED: Thomas	
	APPROVAL: Jeffrey	
	SCALE	UNIT
	1:1	mm
		REV

<p>貿太實業有限公司</p> <p>MORETECH COMPONENTS PVT. LTD.</p>	
TITLE	Binding Post
CUSTOMER	Horst Roder