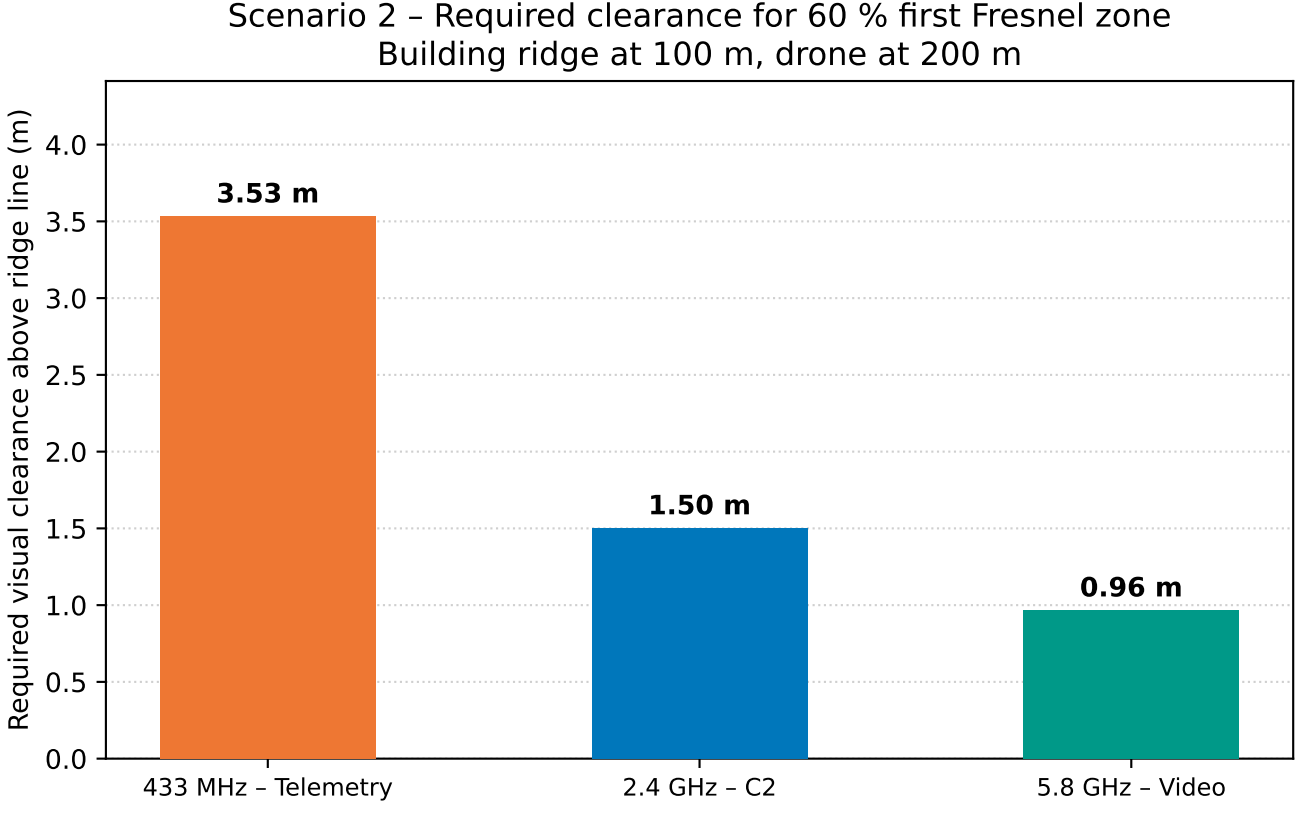
Scenario 2 – Required clearance for 60 % first Fresnel zone
Building ridge at 100 m, drone at 200 m
Required visual clearance above ridge line (m)
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0
3.53 m
1.50 m
0.96 m
433 MHz – Telemetry
2.4 GHz – C2
5.8 GHz – Video