



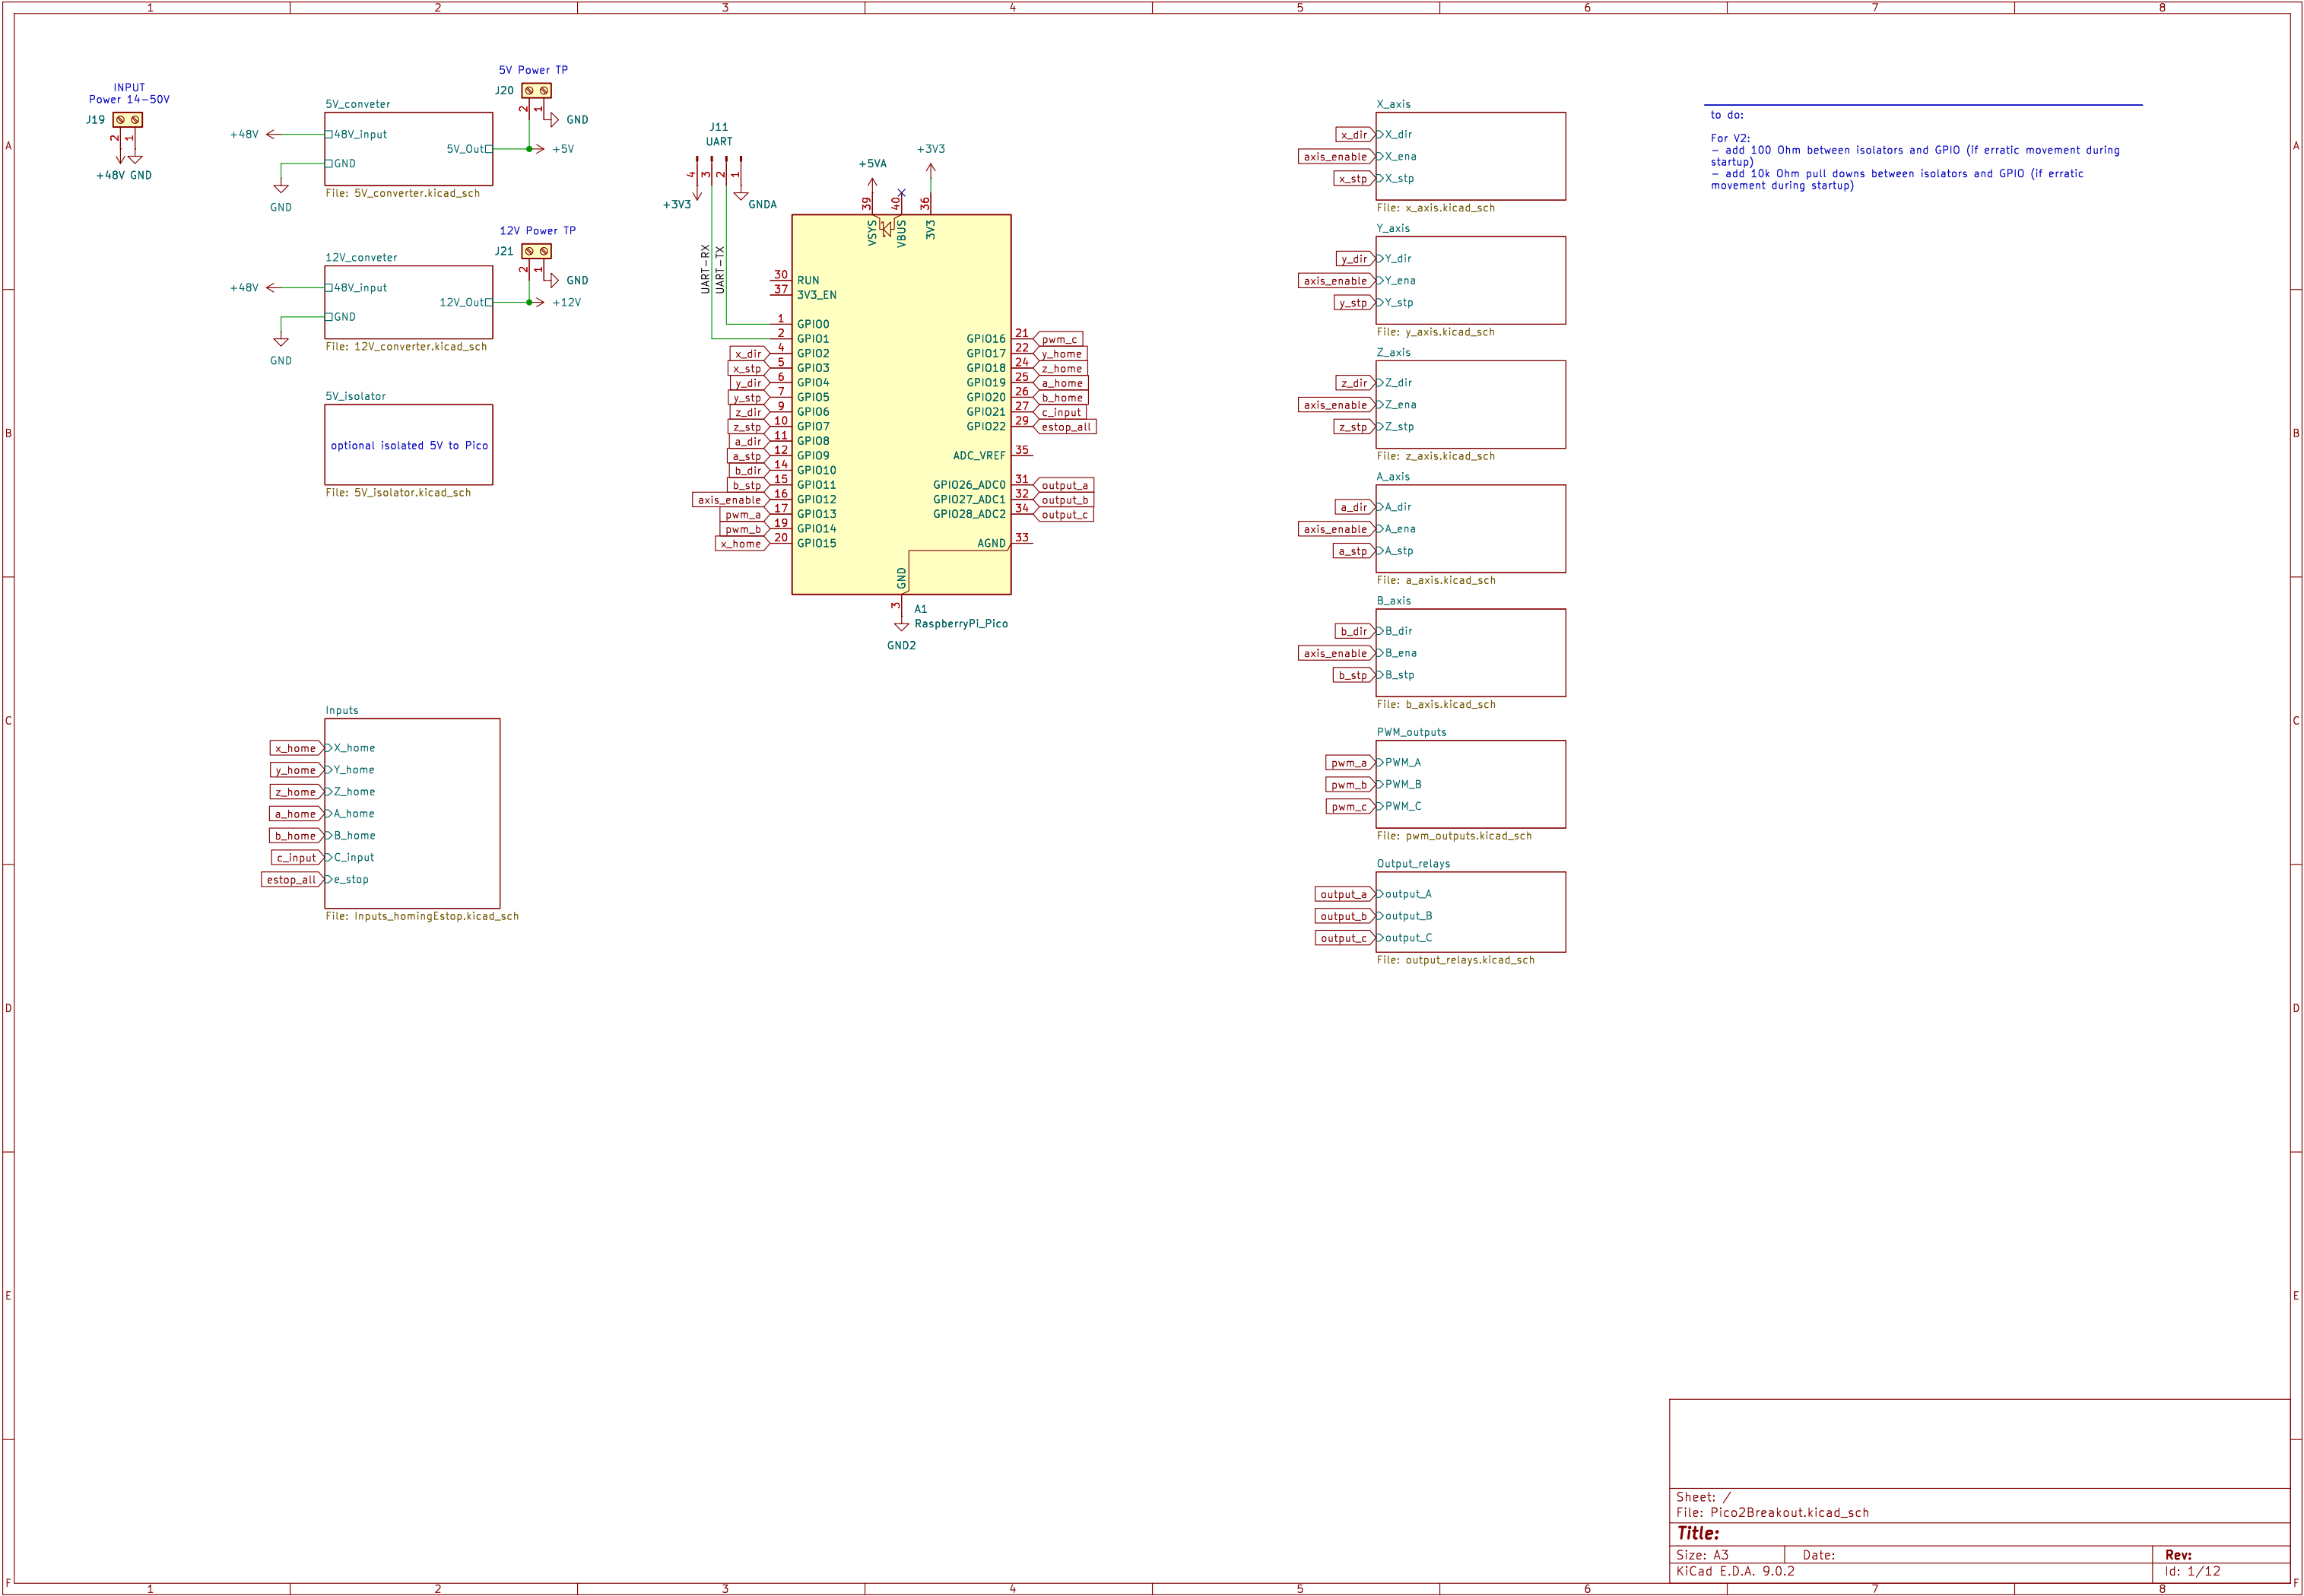

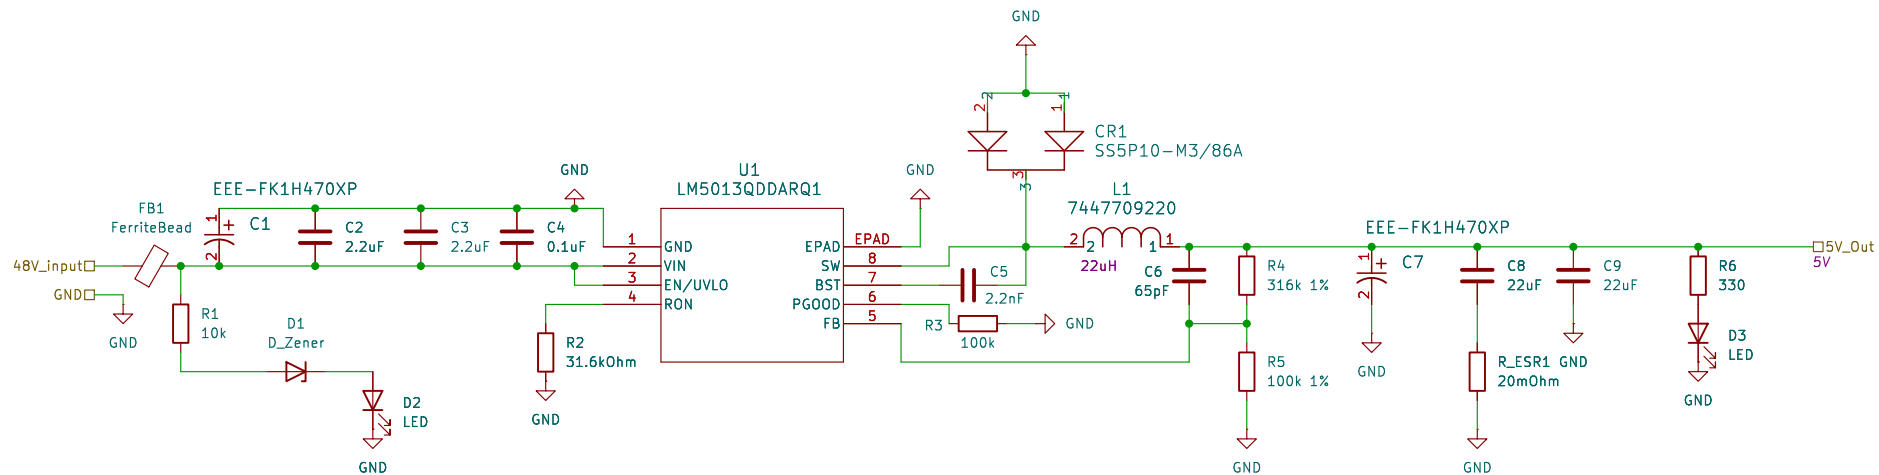

3A contrinuous max

Otis Robotics

Sheet: /5V_conveter/

File: 5V_converter.kicad_sch

Title: 5 Volt converter


Size: A4

Date: 2025-07-22

Rev: 1

KiCad E.D.A. 9.0.2

Id: 2/12

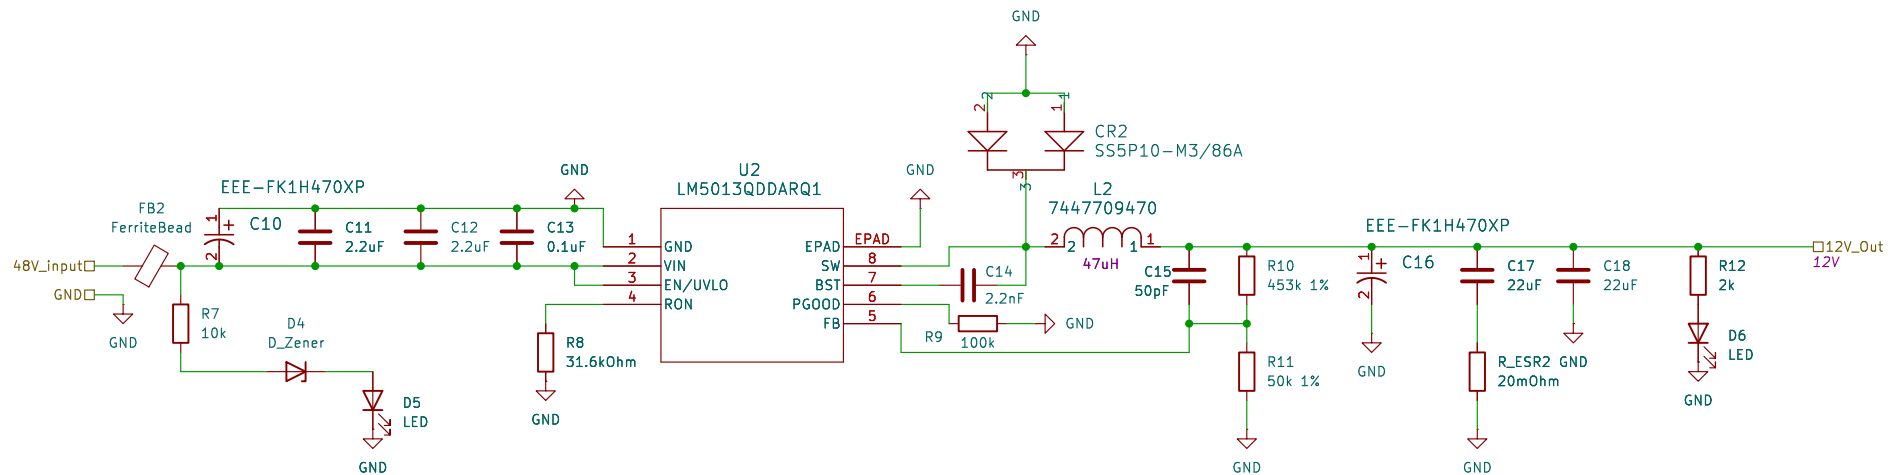

Expected Load: ~500mA typical, 1.5A max

Otis Robotics

Sheet: /12V_conveter/

File: 12V_converter.kicad_sch

Title: 12 Volt converter


Size: A4

Date: 2025-07-22

Rev: 1

KiCad E.D.A. 9.0.2

Id: 3/12

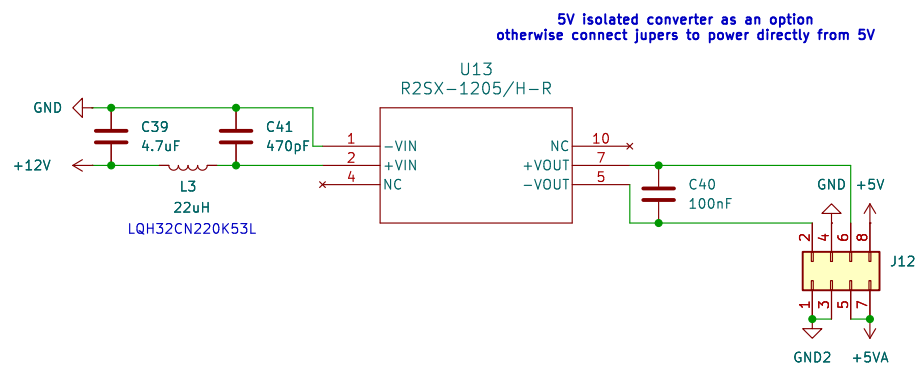

Isolator 2W max
selectable Pico power via Jumpers

Otis Robotics

Sheet: /5V_isolator/

File: 5V_isolator.kicad_sch

Title: (Optional) 5V isolation Pico input


Size: A4

Date: 2025-07-24

Rev: 1

KiCad E.D.A. 9.0.2

Id: 4/12

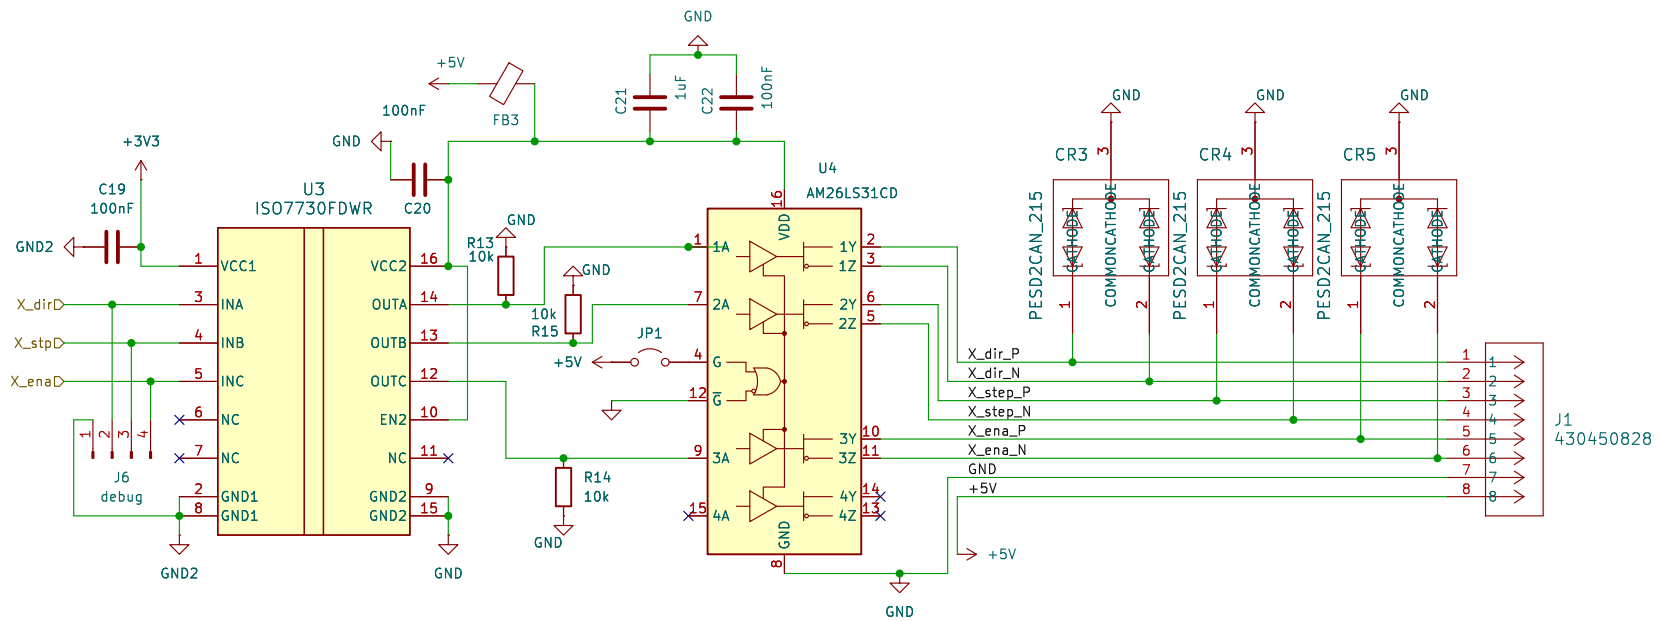

Otis Robotics

Sheet: /X_axis/

File: x_axis.kicad_sch

Title: Axis Output


Size: A4

Date: 2025-07-20

KiCad E.D.A. 9.0.2

Rev: 1

Id: 5/12

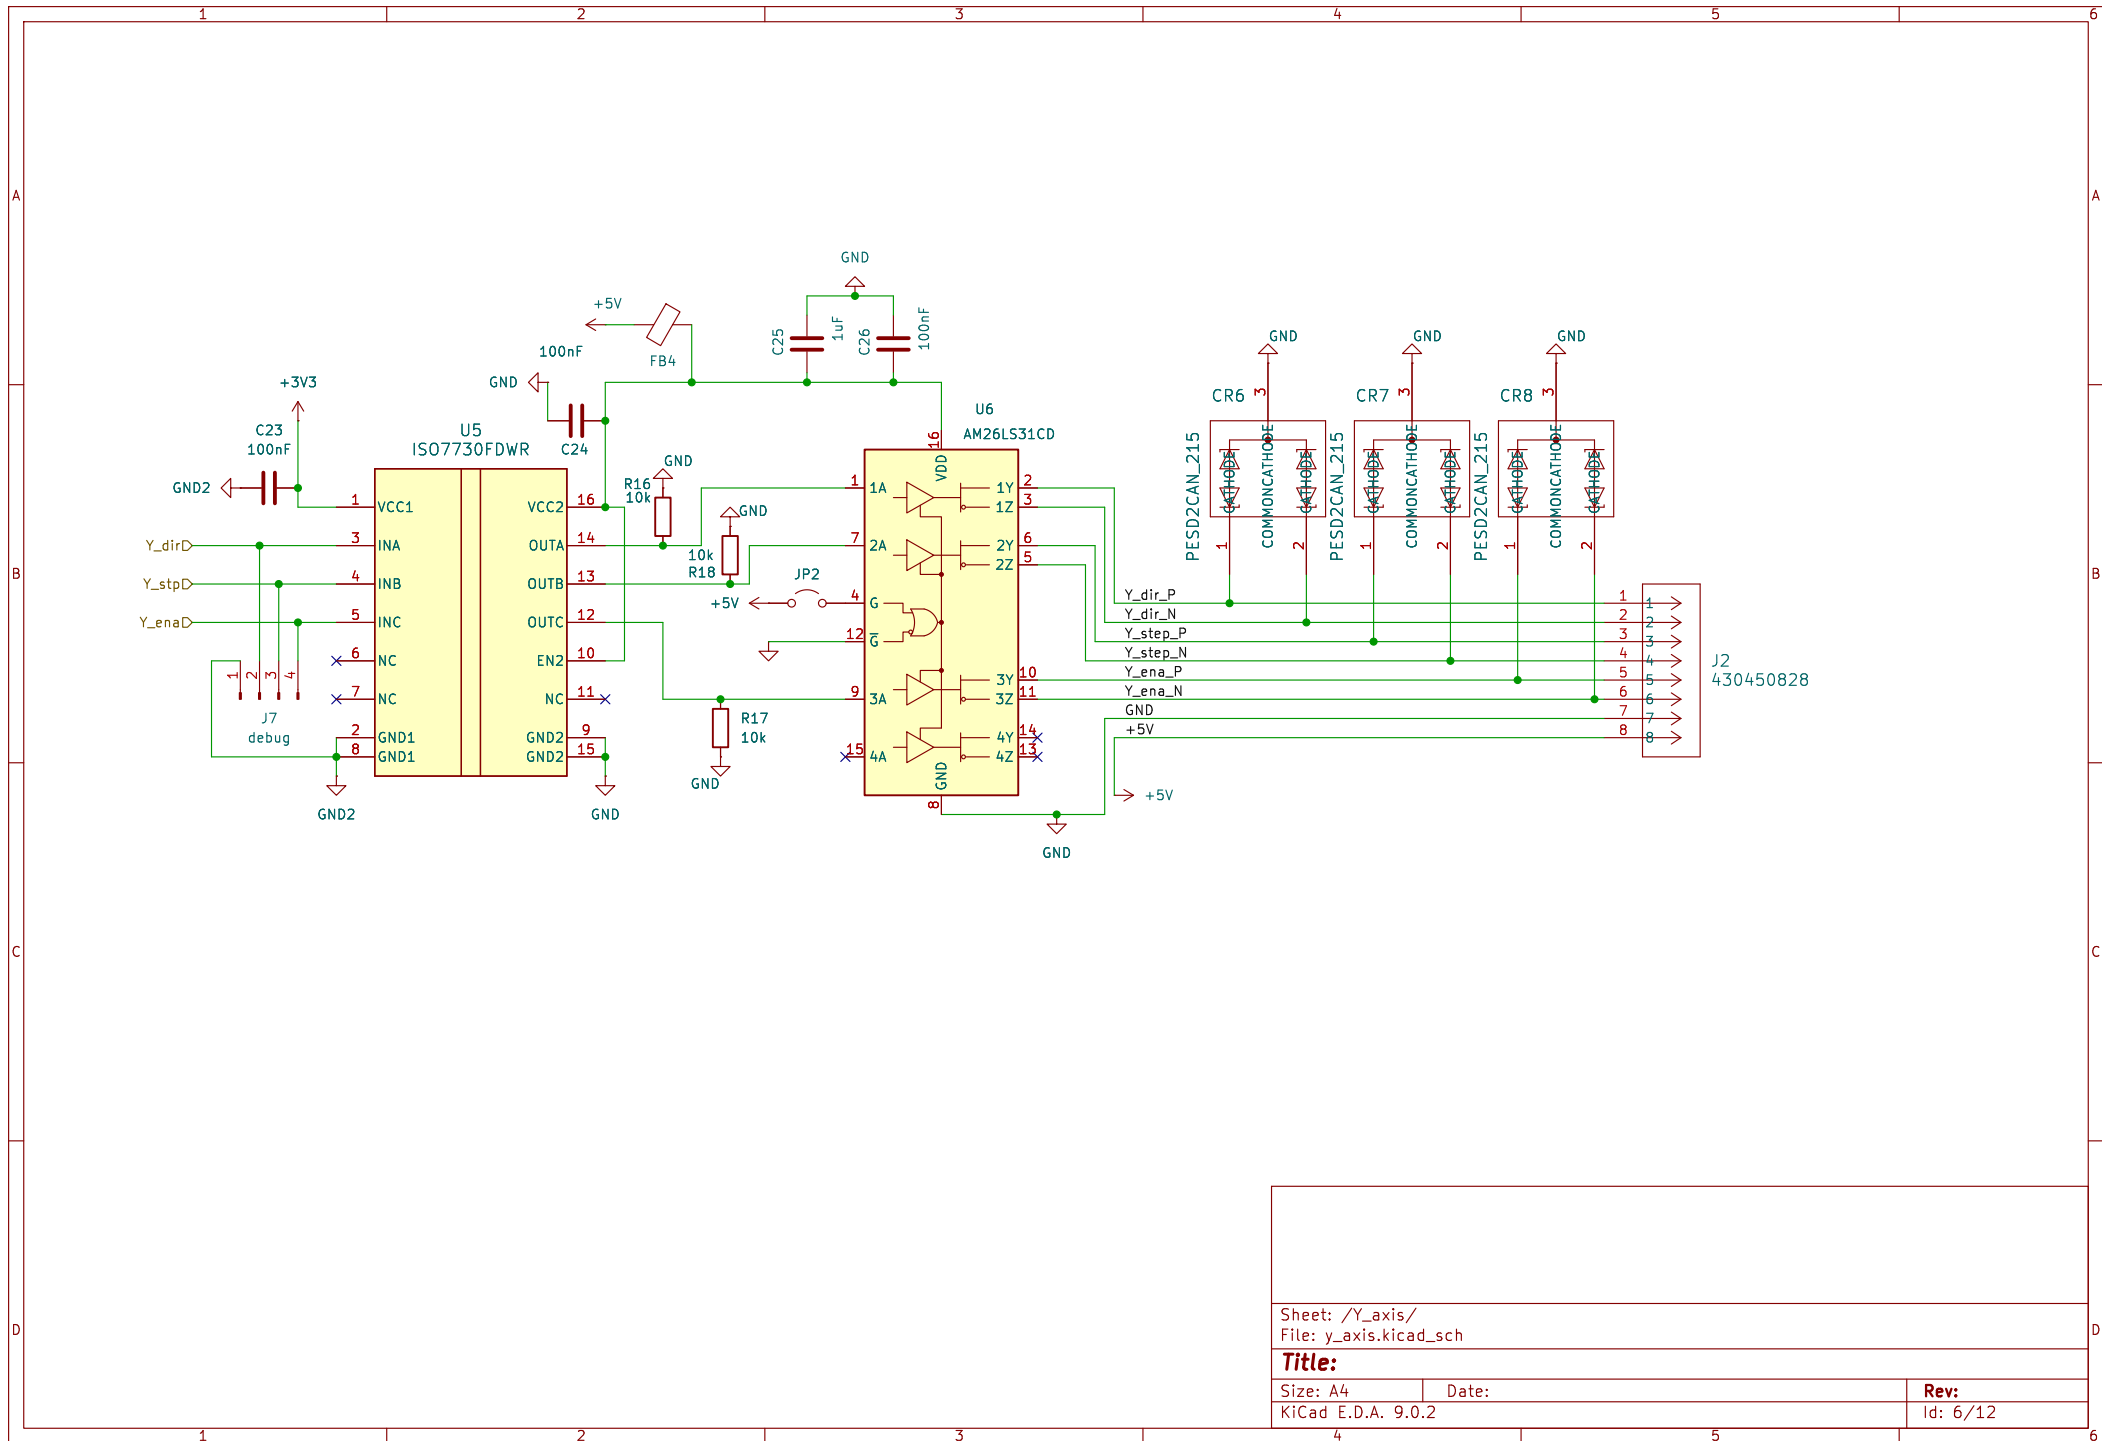

Sheet: /Y_axis/
File: y_axis.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.2

Rev:

Id: 6/12

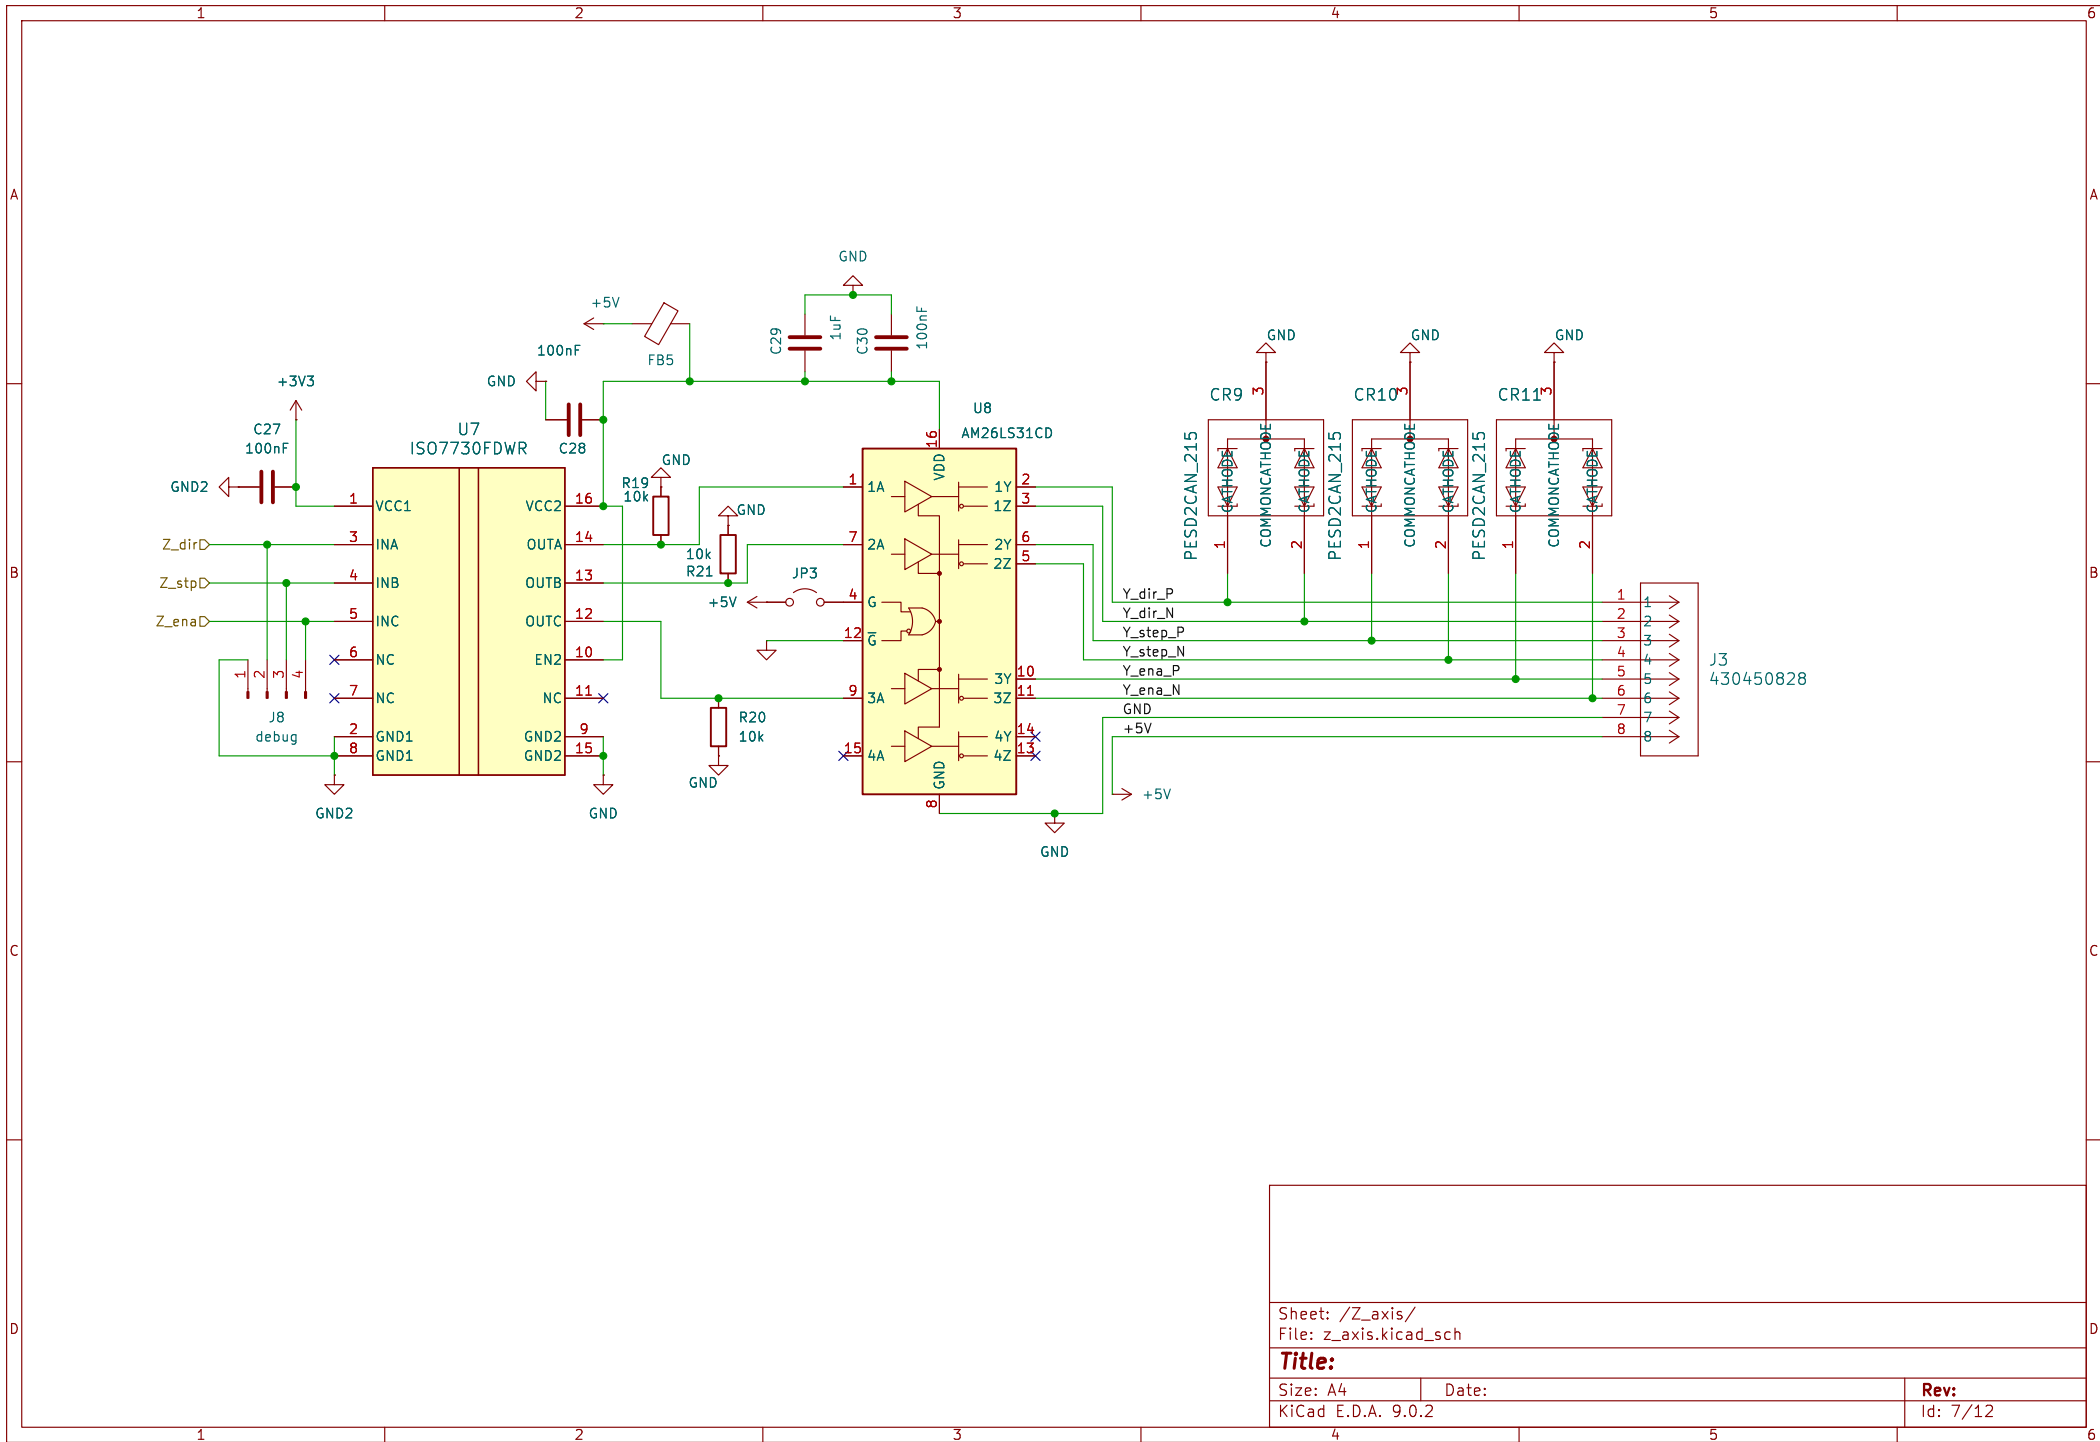

Sheet: /Z_axis/
File: z_axis.kicad_sch


Title:

Size: A4
KiCad E.D.A. 9.0.2

Date:

Rev:

Id: 7/12

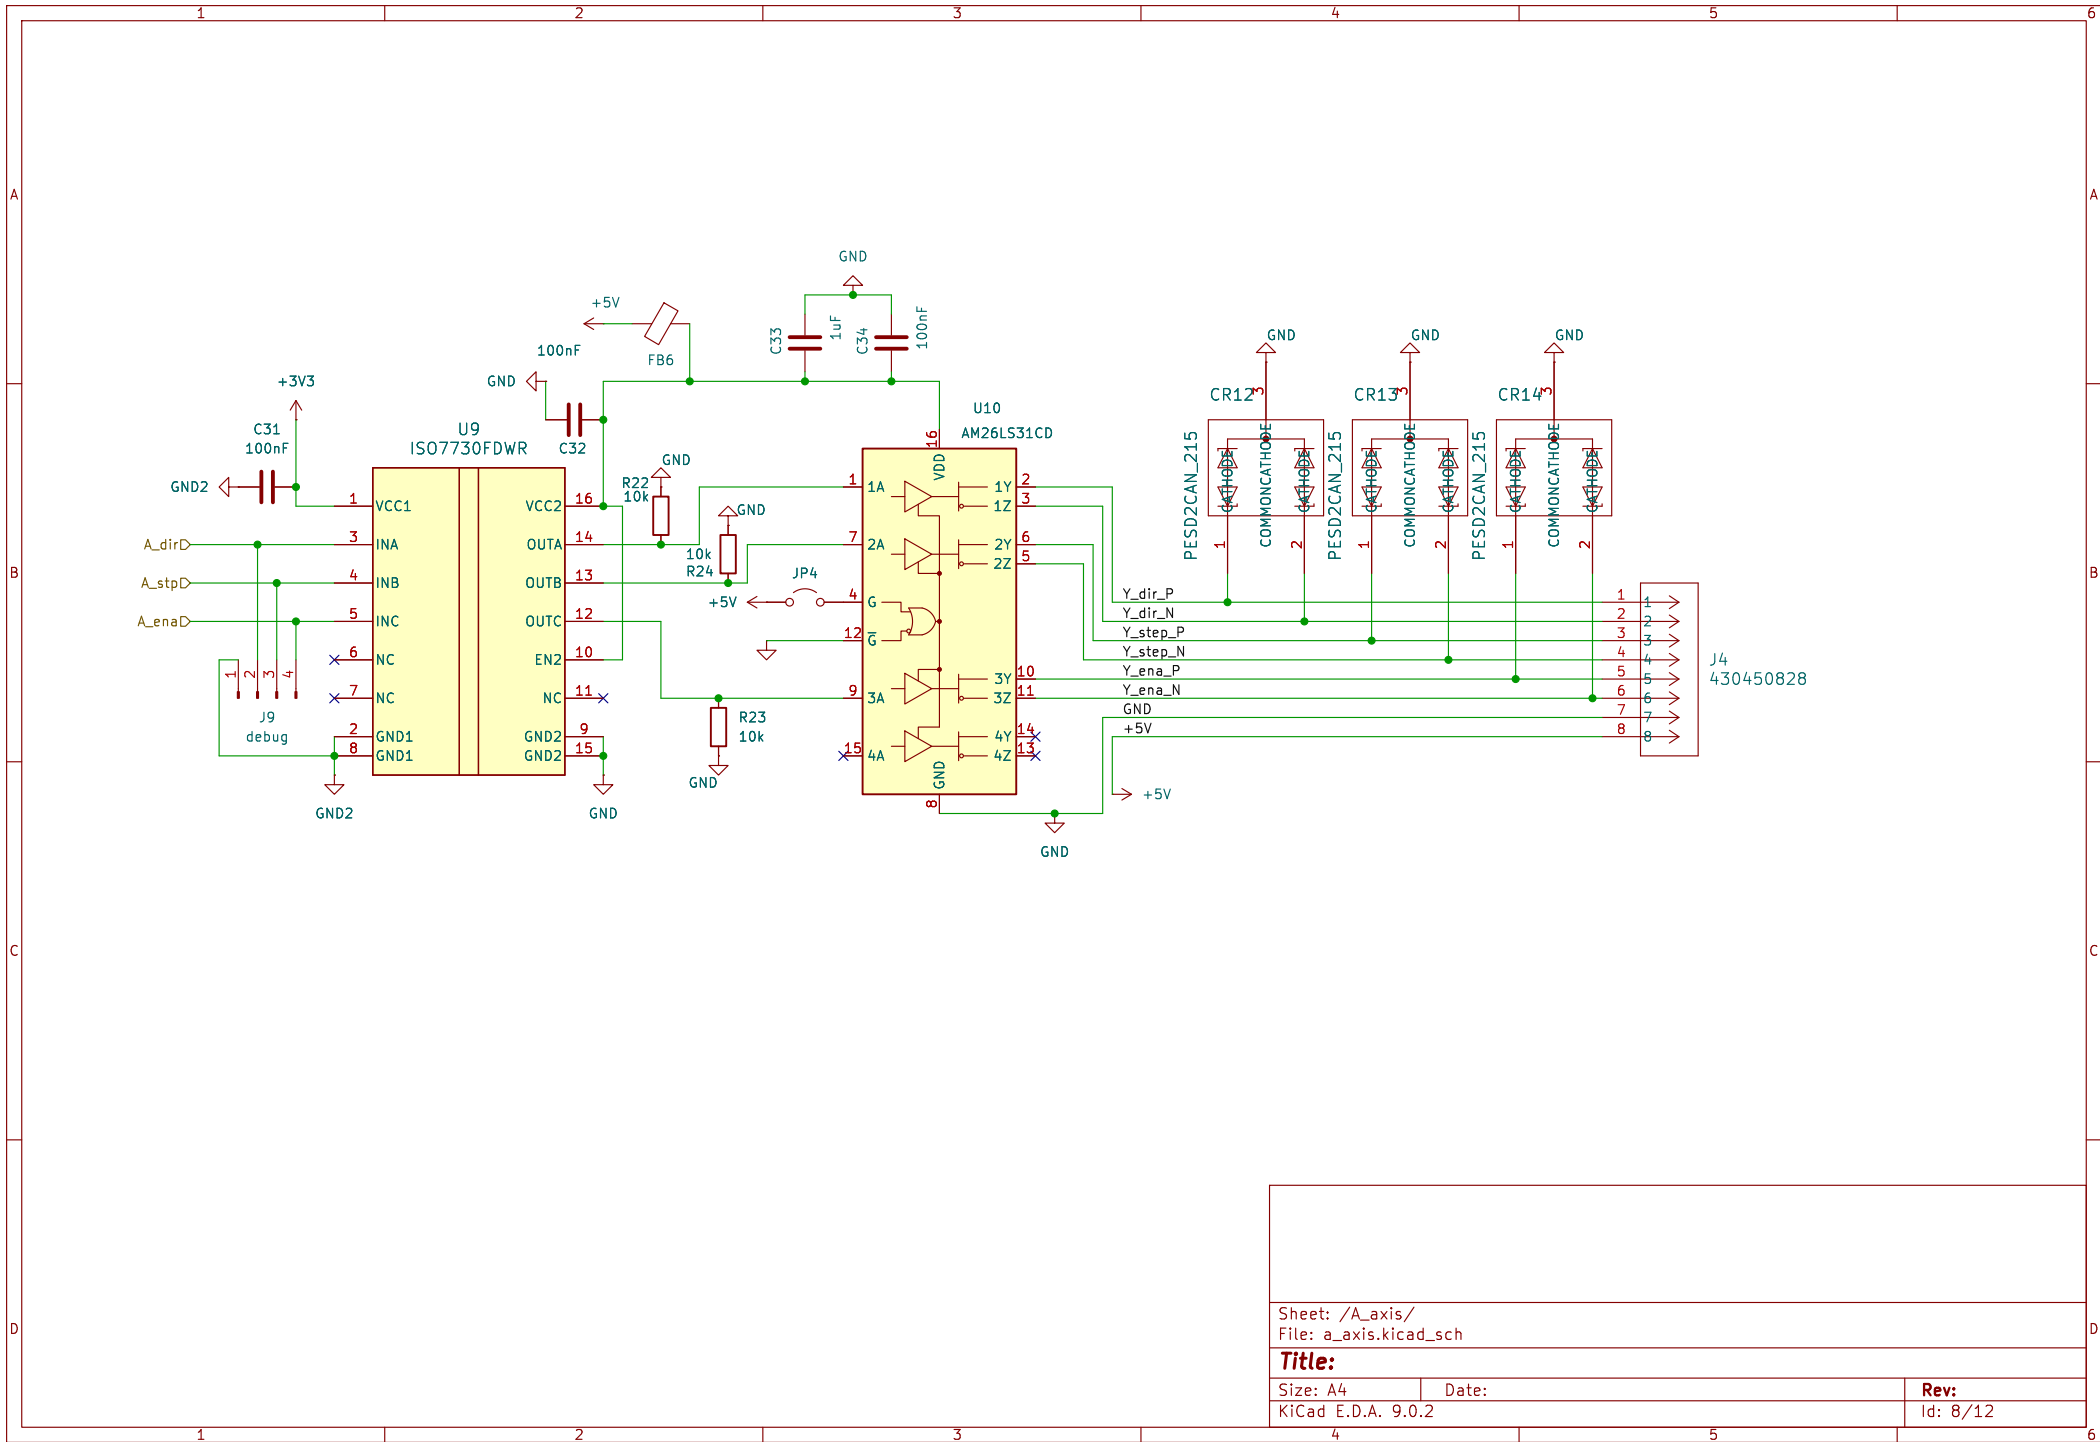

Sheet: /A_axis/
File: a_axis.kicad_sch


Title:


Size: A4
KiCad E.D.A. 9.0.2

Date:

Rev:

Id: 8/12

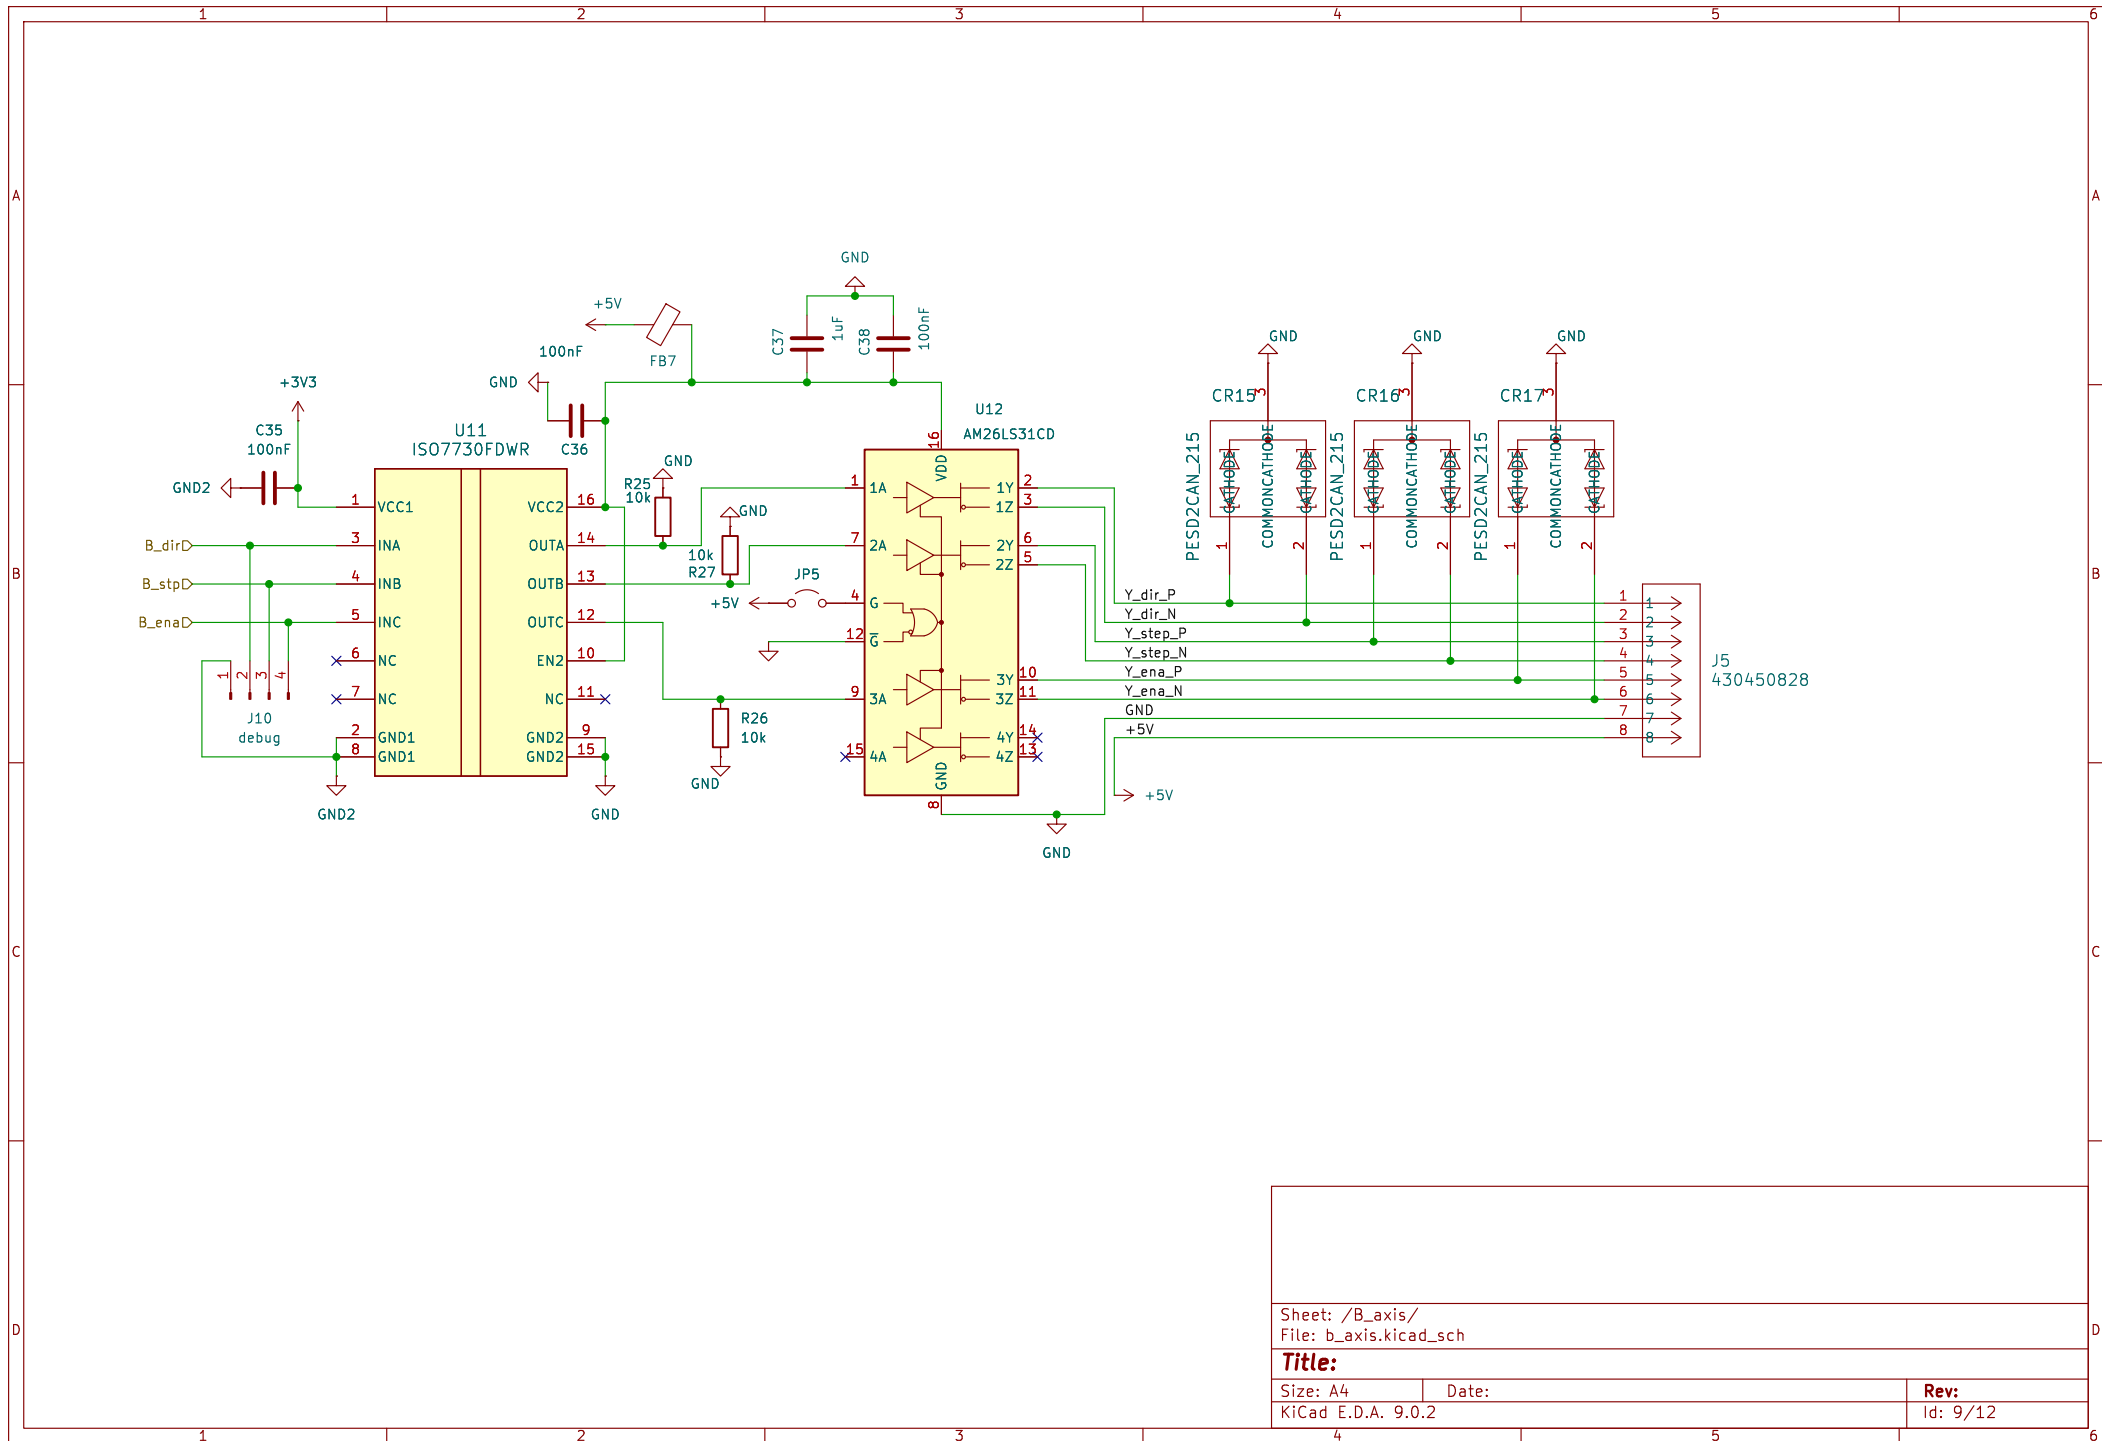

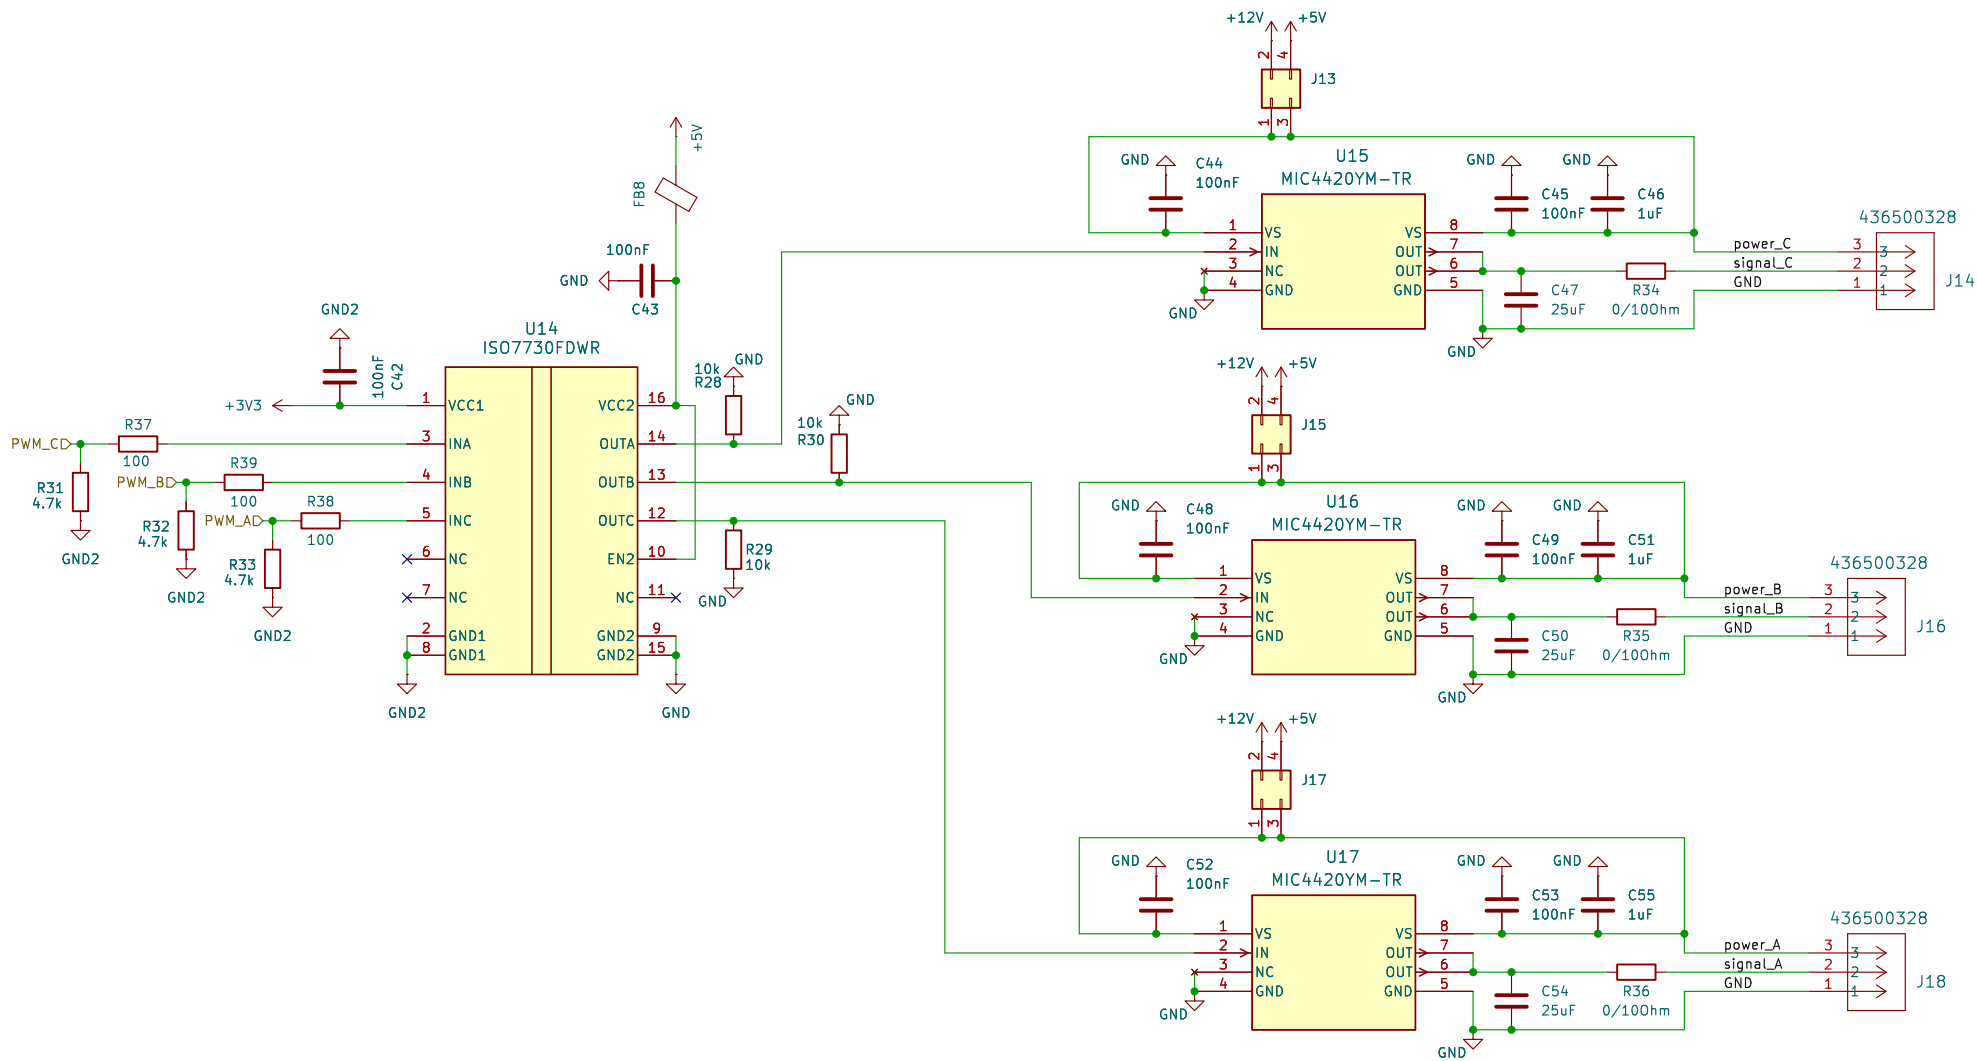

Otis Robotics

Sheet: /PWM_outputs/
File: pwm_outputs.kicad_sch

Title: PWM isolation and conversion


Size: A4

Date: 2025-07-27

Rev: 1

KiCad E.D.A. 9.0.2

Id: 10/12

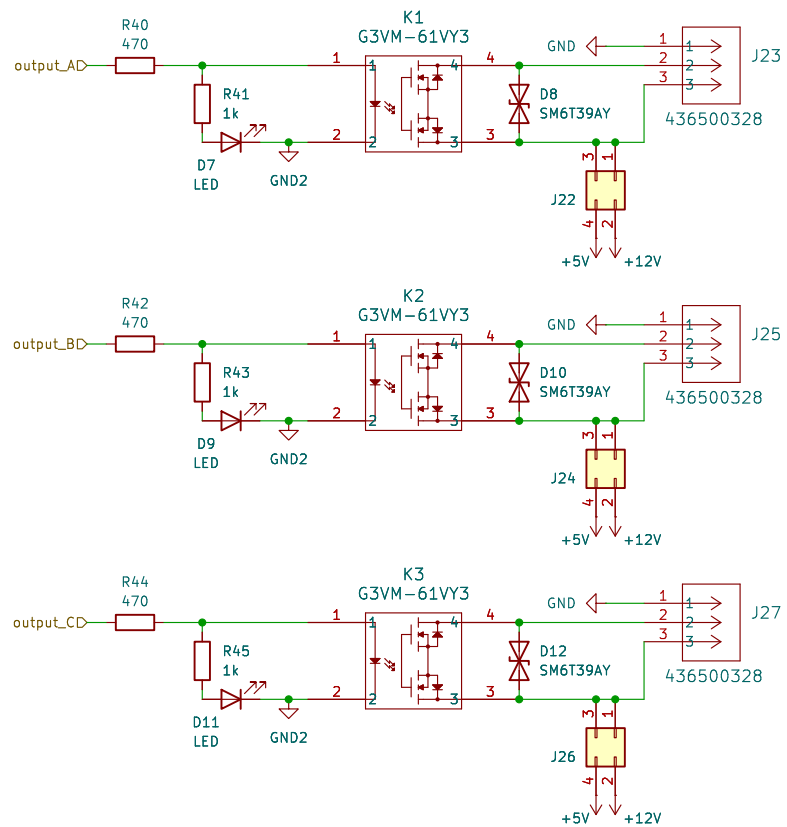

Otis Robotics

Sheet: /Output_relays/
File: output_relays.kicad_sch


Title: Solid state relay drivers 0.7A max

Size: A4 Date: 2025-07-28

KiCad E.D.A. 9.0.2

Rev: 1

Id: 11/12

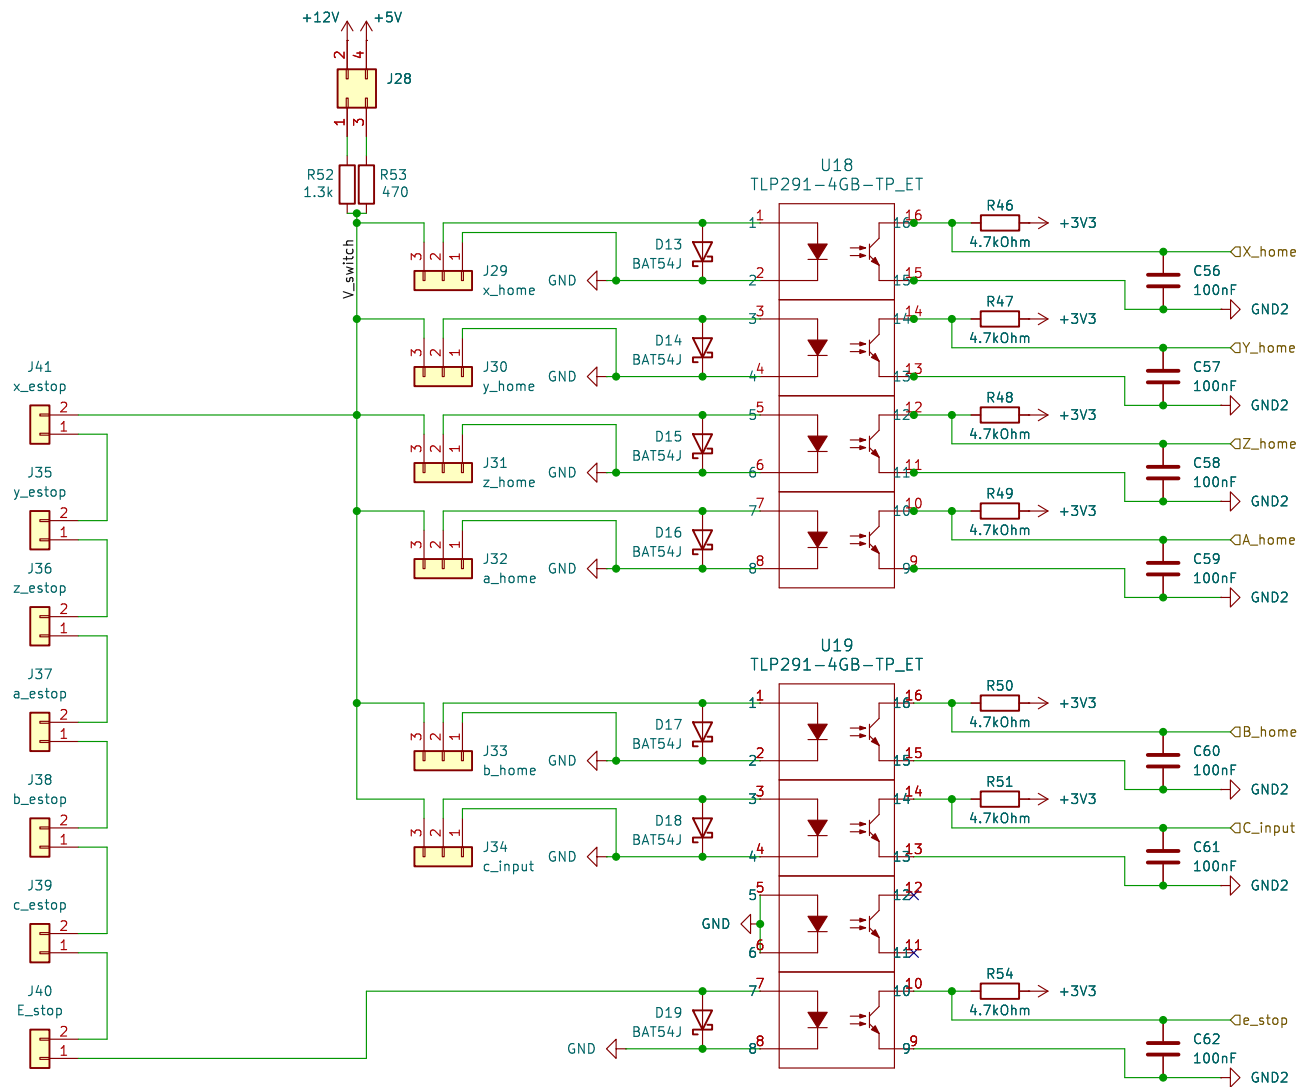

Sheet: /Inputs/
File: Inputs_homingEstop.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.2

Id: 12/12