

A Comparative Analysis of Botball Servo Models

Nico Stolz*, Lukas Sanz, Sebastian Lampl,
Raphael Wiedemann, Johannes Kosche, Stefan Bleier
Höhere Technische Bundes Lehr- und Versuchsanstalt Wiener Neustadt
(Federal Technical Secondary College)
Department of Computer Science
2700 Wiener Neustadt, Austria

*Corresponding author's email: stolz.nico@student.htlwrn.ac.at

Abstract—The objective of this work is to inform Botball teams about the specific strengths of the servos they are using, while also providing OPEN teams with possible servo alternatives.

Looking at the different designs, it is clear that certain tasks can be solved better with a different model. An example of this is the weight of the servo, which should be as low as possible for a fast and agile robot.

In this work, four different servos are compared on the basis of various criteria such as price, size, weight, speed and lifting force, all of which are important when choosing a servo.

At the end there is a clear overview of the data of the servos used in this test.

I. INTRODUCTION

The objective of this paper is to identify the most suitable servo for specific tasks, such as heavy lifting. A comparison is made between the Absima S90MH servo and the MEX 85MG servo, along with their standard and micro Botball servos. The Absima S90MH and MEX85MG were selected due to their availability from nearby vendors. The comparison is based on factors such as price, size, weight, speed, and lifting force, which are all significant when choosing a servo for a specific objective.



Fig. 1. Servo Model Visualization

II. LITERATURE REVIEW

The cited work [1] offers a fundamental insight into servos, making it particularly useful for newcomers to the field. While the study focuses on the comparative analysis of specific servo models, it also explains more general distinctions, such as the difference between standard hobby servos and continuous

rotation servos, or the distinction between micro, standard and giant servos. Additionally, it provides a comprehensive understanding of servo mechanics and their operating principles.

For those OPEN tournament competitors whose requirements extend beyond the four servos analysed in this study, the extensive servo database presented in [2] is a valuable resource. The servos used for comparison in this paper are not included in this database. Despite the potentially overwhelming array of choices, this database serves as a recommended starting point for identifying the most suitable servo for specific applications.

III. COMPARISON DETAILS

A. Price

Price is an important consideration when choosing a servo. It is crucial to ensure accuracy in price comparison. The prices were obtained from official websites and converted to the appropriate currency for comparison. The exchange rate used was 1.00 USD to 1.09 EUR on 27th February.

B. Size

To ensure precise measurements, the size of each servo is measured using a caliper. The measurements include length, width, and height, and also take into account the servo head and handles.

C. Weight

Due to the limited availability of specialised measuring instruments, the weight measurements of the servos are conducted using a commercially available scale with a specified accuracy of up to one gram. The servo cable is included in the weight, resulting in a small bias in the measurement.

D. Speed

To compare the speed the turning servos is recorded on a 60-Frame-Per-Second camera and analyzed frame by frame. The number of frames required for each servo to turn 60° are counted and used to calculate a value in second/60° for each servo. This test is repeated 6 times and the arithmetic mean is calculated to ensure accuracy. There is a possibility of bias and the values may be slightly higher or lower.

E. Lifting Force

The capacity to lift weight is usually measured in kg/cm, although precise measurement can be challenging. In this work, weight is added gradually to the servo until it begins to struggle. The Botball servos had been in use for an extended period, which may have negatively impacted the data.

IV. RESULTS

A. Price

Upon closer inspection of the price data presented in Figure 2, it is clear that the Absima S90MH servo is more expensive than the standard Botball servo. Similarly, a comparison between the micro Botball servo and the MEX 85MG shows a comparable trend, albeit with a smaller price difference. When selecting a servo, it is crucial to consider both the cost and its potential benefits for the robot's design and operation.

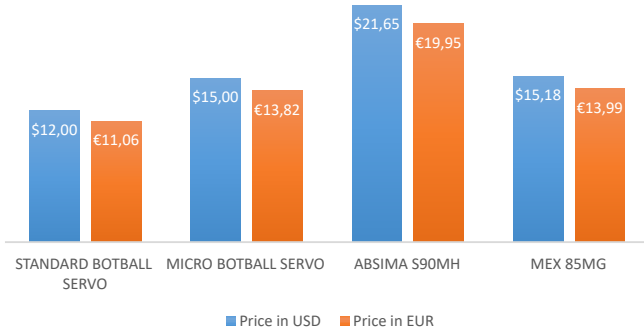


Fig. 2. Comparison of servo prices in EUR and USD

The references can be viewed in [3]–[6], while the exchange course can be viewed in [7]

B. Size

Servo dimensions are a critical aspect of robot design, particularly in situations with spatial constraints or specific enclosure requirements. Oversized servos can complicate the design process, while smaller ones may offer greater flexibility. Therefore, selecting the appropriate size is essential for optimizing robot functionality.

The data indicates that the standard Botball servo is larger than the Absima S90MH, while the micro Botball servo is more compact than the MEX 85MG. This comparison of sizes, as shown in Fig. 3, can assist designers in making informed decisions to meet specific spatial requirements in their robotics projects.

C. Weight

Weight is a critical factor in robot design and functionality as it affects stability and agility. The choice of a heavier or lighter servo can significantly impact the robot's overall balance. Heavier servos can provide necessary stability, especially when placed at the robot's center of gravity, while lighter

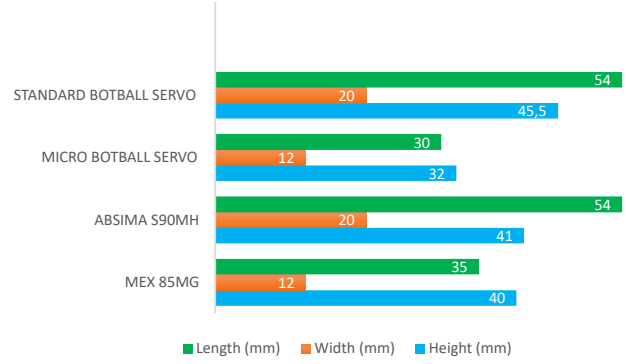


Fig. 3. Comparison of servo dimensions in millimeters

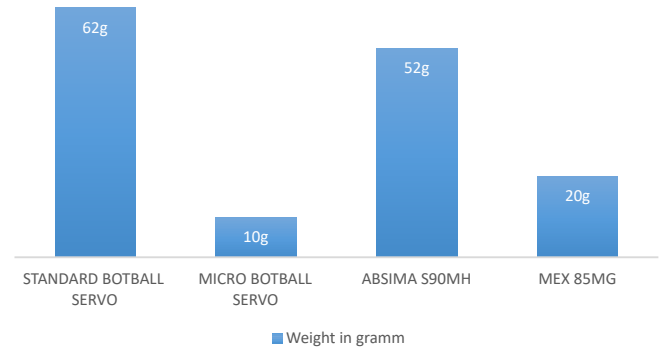


Fig. 4. Comparison of servo weight in gramm

options may be advantageous for applications that require swift movements or strict weight constraints.

As anticipated, there is a correlation between the size and weight of the servos. The micro Botball servo, being smaller, is also lighter than its counterparts. However, it is important to note the different rotating mechanisms of the micro Botball servo compared to others, which must be taken into consideration when applying it. Therefore, selecting the appropriate servo requires more than just considering its size and weight. Designers should evaluate each servo's characteristics to ensure they align with the project's specific requirements.

D. Speed

In robotics, especially in competitive environments, servo speed is crucial. Servos must execute movements quickly to ensure optimal performance in competitions. The average of these measurements is presented in Figure 5.

Based on the findings, the micro Botball servo has the fastest response time, completing a 60-degree rotation in just 0.06 seconds. It is important to carefully select the servo to meet specific performance criteria, as even slight speed differences can be decisive in competitive robotics.

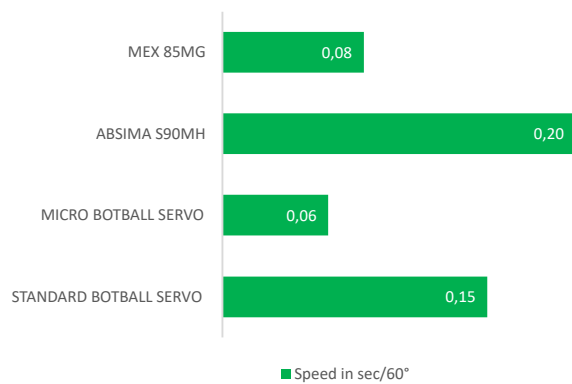


Fig. 5. Comparison of servo speed in sec/60°

E. Lifting Force

The lifting capacity of a servo is a crucial factor when constructing any lifting mechanism for a Botball tournament. It determines whether the servo will break during testing or, worse, during the tournament. Therefore, it is important to ensure that the weight a servo can lift is sufficient for the task at hand.

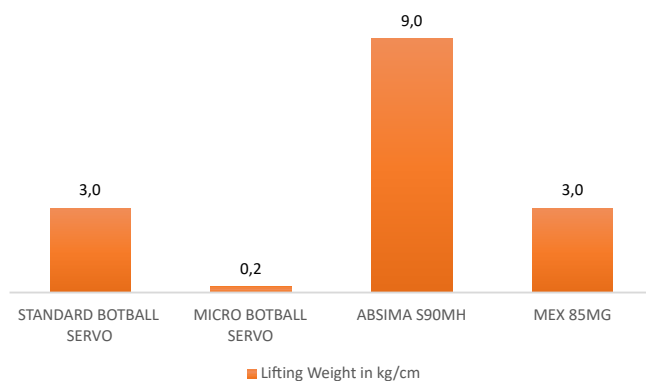


Fig. 6. Comparison of servo lifting weight

Figure 6 demonstrates that the Absima S90MH and the MEX 85MG perform well in this category, while the Botball ones seem to be less impressive.

V. CONCLUSION

When selecting a servo, it is important to consider its intended application.

For basic mechanisms used in Botball and OPEN tournaments, the Botball servos are sufficient. However, for tasks that require substantial lifting power, the Absima S90MH is recommended as it outperforms the standard Botball servo in capacity, albeit at the expense of reduced speed. Despite its lower weight and compact size, the cost must be justified before considering it as an alternative.

It is worth noting that the MEX 85MG is marginally larger than the micro Botball servo, but surpasses it in velocity.

Conversely, the micro Botball servo is recommended for tasks that require high speed and low weight, while the MEX 85MG should be considered when great force and speed are required for a certain task.

VI. ACKNOWLEDGEMENTS

The authors express their gratitude to Michael Stifter, Jakob Eichberger, and the members of robo4you for their valuable support in preparing this paper. A particular acknowledgment is due to Konstantin Lindorfer for proofreading the paper multiple times.

REFERENCES

- [1] Basics about servos
<https://www.sparkfun.com/servos>
(last accessed on February 27, 2024)
- [2] Servo database
<https://servodatabase.com/servos/all>
(last accessed on February 27, 2024)
- [3] Standard Botball servo
<https://botball-swg.myshopify.com/collections/motos-and-servos/products/standard-servo>
(last accessed on February 27, 2024)
- [4] Micro Botball servo
<https://botball-swg.myshopify.com/collections/motos-and-servos/products/micro-servo>
(last accessed on February 27, 2024)
- [5] MEX 85Mg servo
<https://modster.at/komponenten-zubehoer/servos/2263/servo-mex-85mg-modster?c=170>
(last accessed on February 27, 2024)
- [6] Absima S90MH servo
https://www.absima.shop/pp/absima-S90MH-9kg-servo-25t-metal-gear.htm?shop=absima_en&SessionId=&a=article&ProdNr=2030004&t=19114&c=19129&p=19129
(last accessed on February 27, 2024)
- [7] EUR/USD Exchange Rate
<https://www.google.com/finance/quote/EUR-USD>
(last accessed on February 27, 2024)