

10mm LEDs

Order code	Manufacturer code	Description
55-0330	L-813SRD/C	10MM 350MC RED SUPERBRIGHT LED
55-0340	L-813SRD/E	10MM 550MCD SUPERBRIGHT LED
55-0360	L-813SRC/C	10MM 1600MCD ULTRABRIGHT LED
55-0365	n/a	n/a
55-0370	L-813SRC/E	10MM 3000MCD ULTRABRIGHT LED

10mm LEDs	Page 1 of 4
The enclosed information is believed to be correct, Information may change 'without notice' due to product improvement. Users should ensure that the product is suitable for their use. E. & O. E.	Revision A 04/07/2003

10mm SUPER BRIGHT BIG LAMPS

L-813SR SUPER BRIGHT RED


Features

- ULTRA BRIGHTNESS.
- 10mm DIAMETER BIG LAMP.
- WIDE VIEWING ANGLE.
- I.C. COMPATIBLE.
- BOTH DIFFUSED AND WATER CLEAR LENS ARE AVAILABLE.
- RELIABLE AND RUGGED.
- LONG LIFE - SOLID STATE RELIABILITY.

Description

The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diode .

Package Dimensions

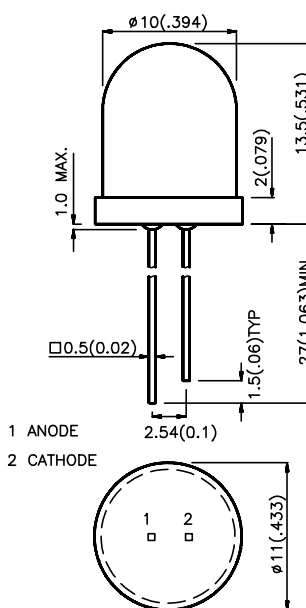

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
3. Lead spacing is measured where the lead emerges package.
4. Specifications are subjected to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 20 mA		Viewing Angle 2 ϕ /2
			Min.	Max.	
L-813SRC-B	SUPER BRIGHT RED (GaAlAs)	WATER CLEAR	500	1000	40°
L-813SRC-C			1000	1600	40°
L-813SRC-D			1600	2000	40°
L-813SRC-E			2000	3000	40°
L-813SRD-B		RED DIFFUSED	120	200	60°
L-813SRD-C			200	350	60°
L-813SRD-D			350	450	60°
L-813SRD-E			450	550	60°
L-813SRD-F			550	650	60°
L-813SRD-G			650	800	60°

Note:

Note:
1. $\theta_{1/2}$ is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at T_A=25°C


Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ_{peak}	Peak Wavelength	Super Bright Red	660		nm	IF=20mA
$\Delta\lambda_{1/2}$	Spectral Line Halfwidth	Super Bright Red	20		nm	IF=20mA
C	Capacitance	Super Bright Red	95		pF	VF=0V;f=1MHz
V _F	Forward Voltage	Super Bright Red	1.85	2.5	V	IF=20mA
I _R	Reverse Current	Super Bright Red	10		uA	VR = 5V

Absolute Maximum Ratings at T_A=25°C

Parameter	Super Bright Red	Units
Power dissipation	100	mW
DC Forward Current	30	mA
Peak Forward Current [1]	150	mA
Reverse Voltage	5	V
Operation/Storage Temperature	-40°C To +85 °C	
Lead Solder Temperature [2]	260 °C For 5 Seconds	

Notes:

- 1/10 Duty Cycle, 0.1ms Pulse Width.
2. 4mm below package base.

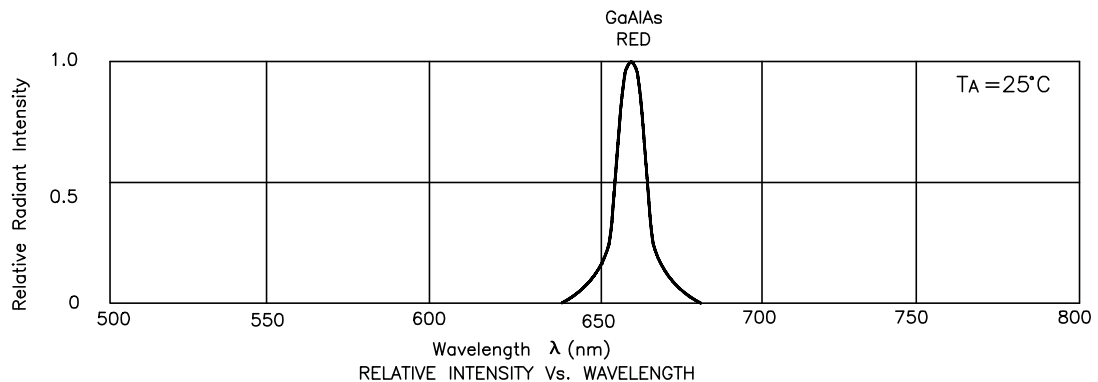

Super Bright Red L-813SRC / L-813SRD

