

LUCE

DIVA

light & form

DIVA LUCE

www.divaluce.com

INDOOR ARCHITECTURAL + 24|25

INDOOR

24|25
ARCHITECTURAL +

DIVA LUCE
light & form

ARCHITECTURAL LIGHTING +

INSPIRED
TECHNICAL
EFFICIENT
QUALITY
RELIABLE

DIVA LUCE
light & form



LIGHT
&
FORM





PRODUCT ADVANTAGES

High CRI

Color rendering is revealing the colors of object under light source; the closer to the nature light or standard light the better effect it will be.

A color rendering index (CRI) is a quantitative measure of the ability of a light source to reveal the colors of various objects faithfully in comparison with an ideal or natural light source. Light sources with a higher CRI, it can better to reveal the colors of various objects faithfully.

ING is applied for imported worldwide high quality LED chip, which its Ra can reach to 97, revealing the color of objects and space perfectly.

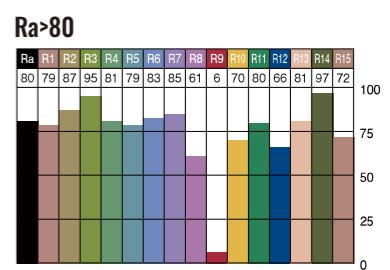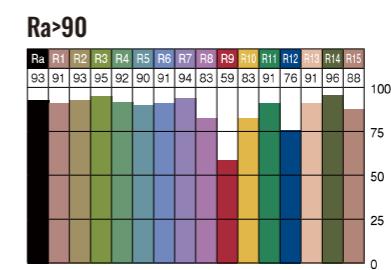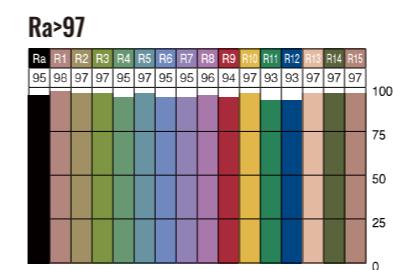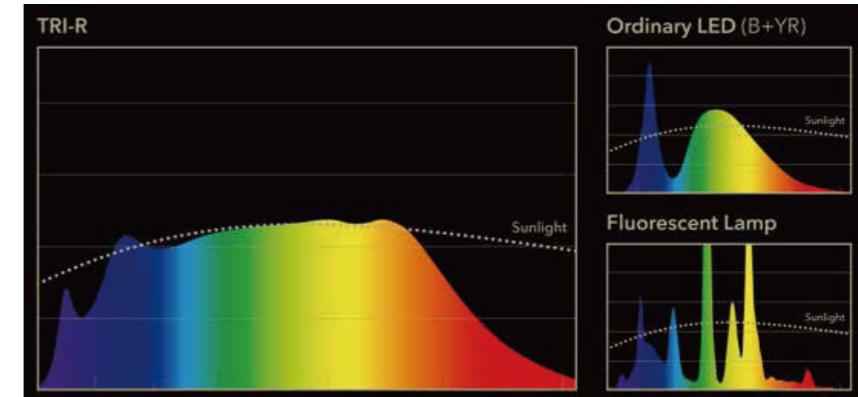

Ra evaluation index




Ra is an average of CRI, also means an average of R1-R8. Re is an average of R1-R15. Red(R9), yellow(R10), green(R11), blue(R12), light complexion(R13), olive-green(R14), Asian complexion(R15). E.g. R9 is the quantitative measure of the ability of saturated red, the higher R9, the brighter color of fruits and flowers can be showed.

Among of them, R1-R8 is standard CRI(Mid-saturated color), R9-R15 is special CRI(High-saturated color). The more saturated it is, the brighter color it can be. So it can't be good enough in visual sense with high Ra only, it should be both high Ra and R9.

Color Saturation Comparison

- Gorgeous Light
- General Light
- Standard Light

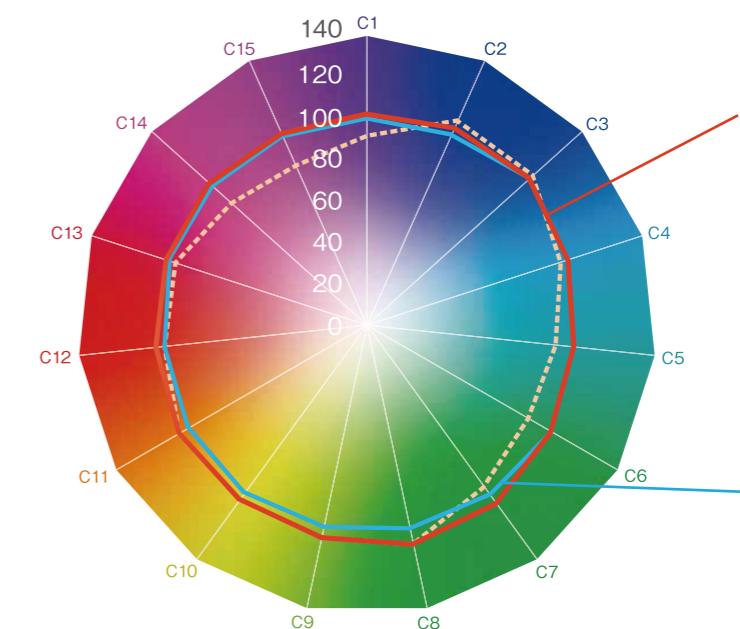



PRODUCT ADVANTAGES

Darklight Concept

Unobtrusive and discrete lighting setups that set a more natural mood light that is so discrete you can barely see the light source can be termed dark light. So basically you can see the light but not the source unless you are standing directly under it looking up. Dark light sets a more natural mood because you cannot see the artificial light source, thereby creating unobtrusive lighting.

Instead of having bright areas of light dominating a space, dark light luminaires can be used to create a discreet lighting setup where it is hard to notice where the light comes from. With discreet lighting, especially when indirect light is combined, it is possible to create a harmonious, natural lighting atmosphere. This is where dark light luminaires offer a perfect solution.

The diagram below represents a typical field of vision. The central area represents the area where an image is at its sharpest to the eye. An average person has a horizontal peripheral vision of approximately 90 degrees. However vertical peripheral vision is less than 60 degrees.

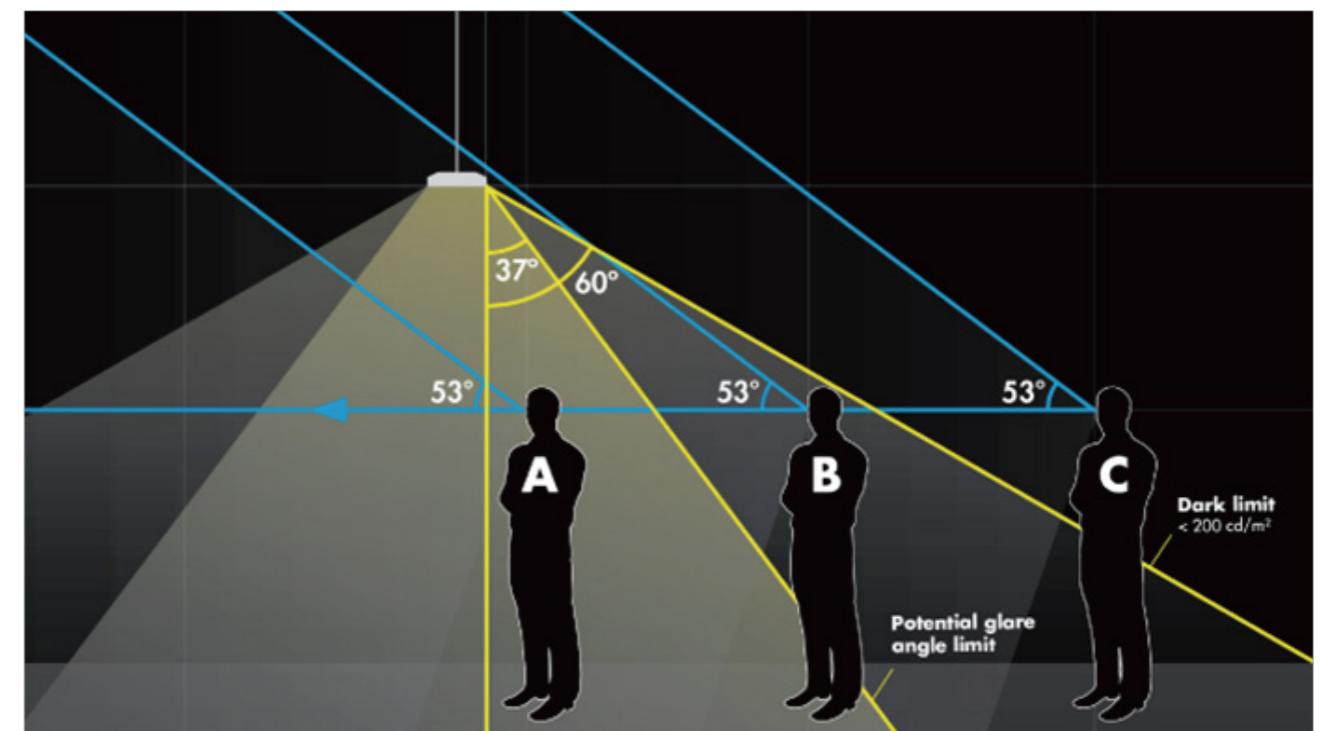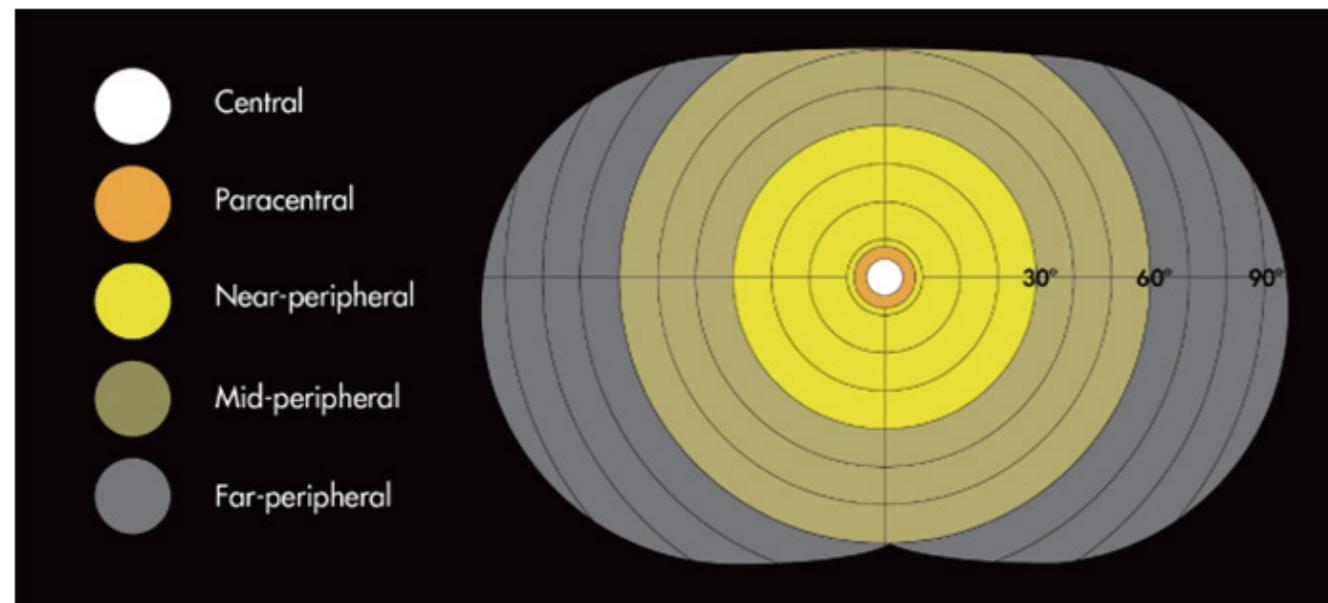

In the following diagram Person A cannot see the luminaire and therefore not the light source, so glare is not an issue. Person C is standing outside the beam of light i.e. beyond the dark limit, and cannot determine the light source even though he can see the luminaire. Person B can see the luminaire and he can see some mild light intensities given the light is limited to not cause glare above the potential glare angle limit.

A luminaire can be classified as "dark light" only when it fulfills the requirements for dark limit, which means there must be less than $200 \text{ cd}/\text{m}^2$ above 60-degree viewing angle.

**Light is a beautiful way
to sense the world**



INDEX

ARCHITECTURAL INDOOR

MINI DOWNLIGHT	01-10
LOW GLARE DOWNLIGHT	01-10
IP65 DOWNLIGHT	01-10
SEMI-SURFACE DOWNLIGHT	01-10
UNIVERSAL DOWNLIGHT	01-10
MULTIPLE DOWNLIGHT	01-10
SURFACE DOWNLIGHT	01-10
LINEAR DOWNLIGHT	01-10
FOCUS DOWNLIGHT	01-10
RETAIL TRACK LIGHT	01-10

MINI DOWNLIGHT

NICO series



KINDLE series



TUBO series



ELF series




LOW GLARE DOWNLIGHT

HERTZ series



FANO series**PICCO** series**BRAVO** series**NICO** series**IP65 DOWNLIGHT****ALBA** series**GINA** series**UNIVERSAL DOWNLIGHT****NEMO** series

SEMI-SURFACE DOWNLIGHT**ENZO series**DL-9803
9W
PAGE.01DL-9803S1
9W
PAGE.01**DASH S**DL-7381
8W
PAGE.01DL-7381S1
8W
PAGE.01**KONDA series**DL-9432
13W
PAGE.01DL-9433
13W
PAGE.01DL-9434
13W
PAGE.01**MULTIPLE DOWNLIGHT****STATION series**DL-9800
9W
PAGE.01DL-9800S1
9W
PAGE.01DL-9800S2
2x9W
PAGE.01DL-9800
15W
PAGE.01DL-9800S1
15W
PAGE.01DL-9800S2
2x15W
PAGE.01DL-9800
24W
PAGE.01DL-9800S1
24W
PAGE.01DL-9800S2
2x24W
PAGE.01DL-9800
35W
PAGE.01DL-9800S1
35W
PAGE.01DL-9800S2
2x35W
PAGE.01**DAS series**DL-2027A
13W
PAGE.01DL-2023A
15W
PAGE.01DL-2019A
35W
PAGE.01DL-2022A
2x15W
PAGE.01DL-2018A
2x35W
PAGE.01

INDEX

SURFACE DOWNLIGHT**LIMA series**DL-9331
13W
PAGE.01DL-9345
20W
PAGE.01DL-9333
35W
PAGE.01**SCOTT series**DL-3061
12W
PAGE.01DL-3062
17W
PAGE.01**LINEAR DOWNLIGHT****TINO series**DL-1078A
12W
PAGE.01**TURBINE series**DL-9748S1
5W
PAGE.01DL-9748S2
10W
PAGE.01DL-9748S2
20W
PAGE.01**METZ series**DL-3049
12W
PAGE.01DL-3055
10W
PAGE.01DL-3056
10W
PAGE.01DL-3055A
10W
PAGE.01DL-3056A
10W
PAGE.01

FOCUS DOWNLIGHT

PACO series**LUCA** series**PIRA** series**DIX** series**TOM** series

INDEX

FENDI series

RETAIL TRACK LIGHT

MIA series**COMO** series**ONTI** series**BAR** series**ORBIT** series

MINI DOWNLIGHT



NICO series

PRODUCT INTRODUCTION

Minimalism and simplicity are the key words to describe collection, coming directly from the ceiling, slim lighting design, narrow beam angle, just 10 °, most dramatic lighting effects can be created through the high contrast between dark and light. trim and trimless version, Different spaces and different functions. However, the building will be mostly used to hotel areas.

NICO series



NICO series

PRODUCT INTRODUCTION

In this typology of products, not only a high technical performance of the luminaires is required, but also a decorative elegance, which is vital.

RECESSED DOWNLIGHT



BRIDGE LUX	50,000hrs	6W	3000K 4000K 5000K	10° 15° 24°	Fixed Adj.	Ra >90	UGR <19	IP20	3	CE
------------	-----------	----	-------------------------	-------------------	---------------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	10°	DL-1090-06-3010-P-C
				15°	DL-1090-06-3015-P-C
				24°	DL-1090-06-3024-P-C
COB LED	6W	AC220-240V	4000K	10°	DL-1090-06-4010-P-C
				15°	DL-1090-06-4015-P-C
				24°	DL-1090-06-4024-P-C
COB LED	6W	AC220-240V	5000K	10°	DL-1090-06-5010-P-C
				15°	DL-1090-06-5015-P-C
				24°	DL-1090-06-5024-P-C
COB LED	6W	AC220-240V	3000K	10°	DL-1090A-06-3010-P-C
				15°	DL-1090A-06-3015-P-C
				24°	DL-1090A-06-3024-P-C
COB LED	6W	AC220-240V	4000K	10°	DL-1090A-06-4010-P-C
				15°	DL-1090A-06-4015-P-C
				24°	DL-1090A-06-4024-P-C
COB LED	6W	AC220-240V	5000K	10°	DL-1090A-06-5010-P-C
				15°	DL-1090A-06-5015-P-C
				24°	DL-1090A-06-5024-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver)






Controller: On / Off, Dimmable, DALI

DIMENSION unit:mm

DL-1090-06



DL-1090A-06



NICO series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX	9W	3000K 4000K 5000K	15° 24° 36° 50°	Fixed	Ra >90	UGR <19	IP20	3 DALI	CE
------------	----	-------------------------	--------------------------	-------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	9W	AC220-240V	3000K	15°	DL-1091-09-3015-P-C
				24°	DL-1091-09-3024-P-C
				36°	DL-1091-09-3036-P-C
				50°	DL-1091-09-3050-P-C
COB LED	9W	AC220-240V	4000K	15°	DL-1091-09-4015-P-C
				24°	DL-1091-09-4024-P-C
				36°	DL-1091-09-4036-P-C
				50°	DL-1091-09-4050-P-C
COB LED	9W	AC220-240V	5000K	15°	DL-1091-09-5015-P-C
				24°	DL-1091-09-5024-P-C
				36°	DL-1091-09-5036-P-C
				50°	DL-1091-09-5050-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-1094-15-3015-P-C
				24°	DL-1094-15-3024-P-C
				36°	DL-1094-15-3036-P-C
				50°	DL-1094-15-3050-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1094-15-4015-P-C
				24°	DL-1094-15-4024-P-C
				36°	DL-1094-15-4036-P-C
				50°	DL-1094-15-4050-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1094-15-5015-P-C
				24°	DL-1094-15-5024-P-C
				36°	DL-1094-15-5036-P-C
				50°	DL-1094-15-5050-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver)





Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-1091-09



DL-1094-15



NICO series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGE LUX	9W	3000K 4000K 5000K	15° 24° 36° 50°	Adj.	Ra >90	UGR <19	IP20	3 DALI	CE
------------	----	-------------------------	--------------------------	------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	9W	AC220-240V	3000K	15°	DL-1091A-09-3015-P-C
				24°	DL-1091A-09-3024-P-C
				36°	DL-1091A-09-3036-P-C
				50°	DL-1091A-09-3050-P-C
COB LED	9W	AC220-240V	4000K	15°	DL-1091A-09-4015-P-C
				24°	DL-1091A-09-4024-P-C
				36°	DL-1091A-09-4036-P-C
				50°	DL-1091A-09-4050-P-C
COB LED	9W	AC220-240V	5000K	15°	DL-1091A-09-5015-P-C
				24°	DL-1091A-09-5024-P-C
				36°	DL-1091A-09-5036-P-C
				50°	DL-1091A-09-5050-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-1094A-15-3015-P-C
				24°	DL-1094A-15-3024-P-C
				36°	DL-1094A-15-3036-P-C
				50°	DL-1094A-15-3050-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1094A-15-4015-P-C
				24°	DL-1094A-15-4024-P-C
				36°	DL-1094A-15-4036-P-C
				50°	DL-1094A-15-4050-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1094A-15-5015-P-C
				24°	DL-1094A-15-5024-P-C
				36°	DL-1094A-15-5036-P-C
				50°	DL-1094A-15-5050-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver)





Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-1091A-09



DL-1094A-15



NICO series

TRIMLESS FIXED DOWNLIGHT



BRIDGE LUX	9W	3000K 4000K 5000K	15° 24° 36° 50°	Fixed	Ra >90	UGR <19	IP20	3	CE
------------	----	-------------------------	--------------------------	-------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	9W	AC220-240V	3000K	15°	DL-1092-09-3015-P-C
				24°	DL-1092-09-3024-P-C
				36°	DL-1092-09-3036-P-C
				50°	DL-1092-09-3050-P-C
COB LED	9W	AC220-240V	4000K	15°	DL-1092-09-4015-P-C
				24°	DL-1092-09-4024-P-C
				36°	DL-1092-09-4036-P-C
				50°	DL-1092-09-4050-P-C
COB LED	9W	AC220-240V	5000K	15°	DL-1092-09-5015-P-C
				24°	DL-1092-09-5024-P-C
				36°	DL-1092-09-5036-P-C
				50°	DL-1092-09-5050-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-1093-15-3015-P-C
				24°	DL-1093-15-3024-P-C
				36°	DL-1093-15-3036-P-C
				50°	DL-1093-15-3050-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1093-15-4015-P-C
				24°	DL-1093-15-4024-P-C
				36°	DL-1093-15-4036-P-C
				50°	DL-1093-15-4050-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1093-15-5015-P-C
				24°	DL-1093-15-5024-P-C
				36°	DL-1093-15-5036-P-C
				50°	DL-1093-15-5050-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-1092-09



DL-1093-15



NICO series

TRIMLESS ADJUSTABLE DOWNLIGHT



BRIDGE LUX	9W	3000K 4000K 5000K	15° 24° 36° 50°	Adj.	Ra >90	UGR <19	IP20	3	CE
------------	----	-------------------------	--------------------------	------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	9W	AC220-240V	3000K	15°	DL-1092A-09-3015-P-C
				24°	DL-1092A-09-3024-P-C
				36°	DL-1092A-09-3036-P-C
				50°	DL-1092A-09-3050-P-C
COB LED	9W	AC220-240V	4000K	15°	DL-1092A-09-4015-P-C
				24°	DL-1092A-09-4024-P-C
				36°	DL-1092A-09-4036-P-C
				50°	DL-1092A-09-4050-P-C
COB LED	9W	AC220-240V	5000K	15°	DL-1092A-09-5015-P-C
				24°	DL-1092A-09-5024-P-C
				36°	DL-1092A-09-5036-P-C
				50°	DL-1092A-09-5050-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-1093A-15-3015-P-C
				24°	DL-1093A-15-3024-P-C
				36°	DL-1093A-15-3036-P-C
				50°	DL-1093A-15-3050-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1093A-15-4015-P-C
				24°	DL-1093A-15-4024-P-C
				36°	DL-1093A-15-4036-P-C
				50°	DL-1093A-15-4050-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1093A-15-5015-P-C
				24°	DL-1093A-15-5024-P-C
				36°	DL-1093A-15-5036-P-C
				50°	DL-1093A-15-5050-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-1092A-09



DL-1093A-15



MINI DOWNLIGHT

MINI DOWNLIGHT



5W / 7W / 9W
15° / 24° / 36°



COB

+



Reflector

Tiny cut out & Hight power



KINDLE series



KINDLE series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX | 5W | 3000K / 4000K / 5000K | 25° | Fixed | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	5W	AC220-240V	3000K	25°	DL-9806-05-3025-P-C
COB LED	5W	AC220-240V	4000K	25°	DL-9806-05-4025-P-C
COB LED	5W	AC220-240V	5000K	25°	DL-9806-05-5025-P-C
COB LED	5W	AC220-240V	3000K	25°	DL-9807-05-3025-P-C
COB LED	5W	AC220-240V	4000K	25°	DL-9807-05-4025-P-C
COB LED	5W	AC220-240V	5000K	25°	DL-9807-05-5025-P-C
COB LED	5W	AC220-240V	3000K	25°	DL-9808-05-3025-P-C
COB LED	5W	AC220-240V	4000K	25°	DL-9808-05-4025-P-C
COB LED	5W	AC220-240V	5000K	25°	DL-9808-05-5025-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm


DL-9806-05



DL-9807-05



DL-9808-05



KINDLE series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX | 5W | 3000K / 4000K / 5000K | 25° | Fixed | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	5W	AC220-240V	3000K	25°	DL-9809-05-3025-P-C
COB LED	5W	AC220-240V	4000K	25°	DL-9809-05-4025-P-C
COB LED	5W	AC220-240V	5000K	25°	DL-9809-05-5025-P-C
COB LED	5W	AC220-240V	3000K	25°	DL-9810-05-3025-P-C
COB LED	5W	AC220-240V	4000K	25°	DL-9810-05-4025-P-C
COB LED	5W	AC220-240V	5000K	25°	DL-9810-05-5025-P-C
COB LED	5W	AC220-240V	3000K	25°	DL-9811-05-3025-P-C
COB LED	5W	AC220-240V	4000K	25°	DL-9811-05-4025-P-C
COB LED	5W	AC220-240V	5000K	25°	DL-9811-05-5025-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black)




White Reflector Black Reflector


Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm


DL-9809-05



DL-9810-05



DL-9811-05



TUBO series



TUBO series

DL-1096-10 (TRIMLESS DOWNLIGHT)

DL-1097-10 (NARROW RECESSED DOWNLIGHT)

DL-1098-10 (WIDE RECESSED DOWNLIGHT)

RECESSED(TRIMLESS) FIXED DOWNLIGHT



BRIDGE LUX	10W	3000K 4000K 5000K	24° 36°	Fixed	Ra >90	UGR <19	IP20	3 DALI	CE
------------	-----	-------------------------	------------	-------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	10W	AC220-240V	3000K	24° 36°	DL-1096-10-3024-P-C DL-1096-10-3036-P-C
COB LED	10W	AC220-240V	4000K	24° 36°	DL-1096-10-4024-P-C DL-1096-10-4036-P-C
COB LED	10W	AC220-240V	5000K	24° 36°	DL-1096-10-5024-P-C DL-1096-10-5036-P-C
COB LED	10W	AC220-240V	3000K	24° 36°	DL-1097-10-3024-P-C DL-1097-10-3036-P-C
COB LED	10W	AC220-240V	4000K	24° 36°	DL-1097-10-4024-P-C DL-1097-10-4036-P-C
COB LED	10W	AC220-240V	5000K	24° 36°	DL-1097-10-5024-P-C DL-1097-10-5036-P-C
COB LED	10W	AC220-240V	3000K	24° 36°	DL-1098-10-3024-P-C DL-1098-10-3036-P-C
COB LED	10W	AC220-240V	4000K	24° 36°	DL-1098-10-4024-P-C DL-1098-10-4036-P-C
COB LED	10W	AC220-240V	5000K	24° 36°	DL-1098-10-5024-P-C DL-1098-10-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)



Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm


DL-1096-10



050

1-25mm
Ceiling Thickness


DL-1097-10



045

1-25mm
Ceiling Thickness

DL-1098-10



055

1-25mm
Ceiling Thickness

ELF series


TRIMLESS FIXED DOWNLIGHT



ELF series

PRODUCT INTRODUCTION

pinhole is the perfect combination of clean design and visual comfort. The minimalist look and backward optics provide both discreet light, a concentrated beam and excellent glare protection.

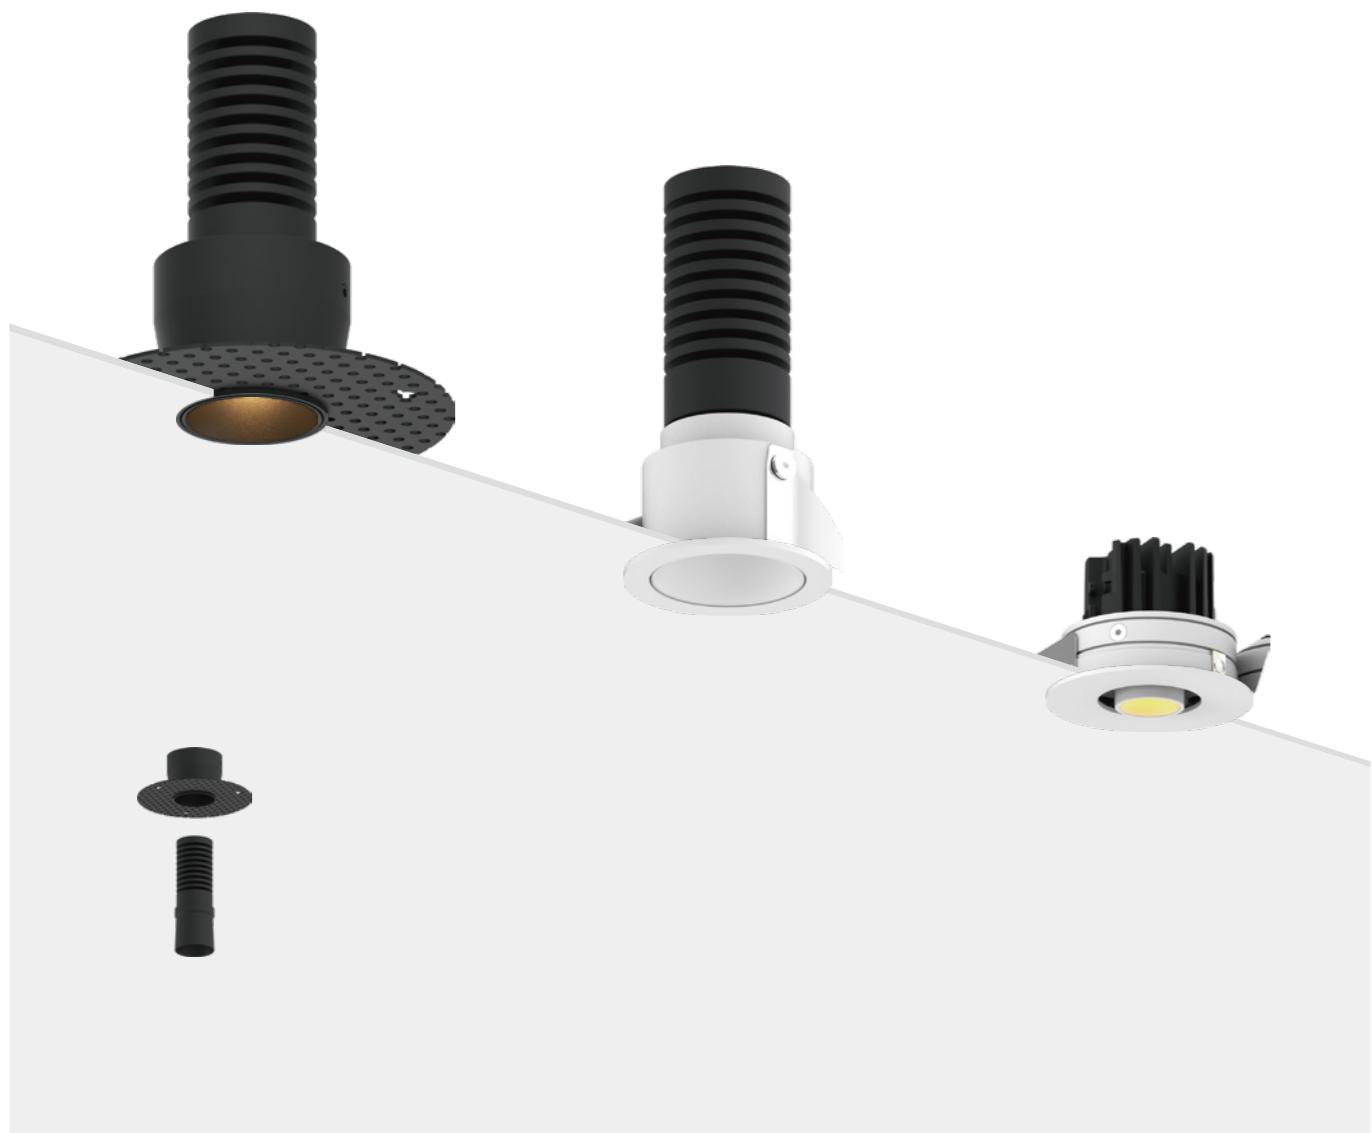

BRIDGE LUX	50,000hrs	6W	3000K 4000K 5000K	15° 24° 36°	Fixed	Ra >90	UGR <19	IP20	IEC	CE
------------	-----------	----	-------------------------	-------------------	-------	--------	---------	------	-----	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	15°	DL-1202-06-3015-P-C
				24°	DL-1202-06-3024-P-C
				36°	DL-1202-06-3036-P-C
COB LED	6W	AC220-240V	4000K	15°	DL-1202-06-4015-P-C
				24°	DL-1202-06-4024-P-C
				36°	DL-1202-06-4036-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1202-06-5015-P-C
				24°	DL-1202-06-5024-P-C
				36°	DL-1202-06-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)




Colour Finish: C (WW-White / White BB-Black / Black)



Controller: On / Off, Dimmable, DALI

DIMENSION

unit:mm



ELF series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX	50,000hrs	6W	3000K 4000K 5000K	15° 24° 36°	Fixed	Ra >90	UGR <19	IP20		
------------	-----------	----	-------------------------	-------------------	-------	--------	---------	------	--	--

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	15°	DL-1202A-06-3015-P-C
				24°	DL-1202A-06-3024-P-C
				36°	DL-1202A-06-3036-P-C
COB LED	6W	AC220-240V	4000K	15°	DL-1202A-06-4015-P-C
				24°	DL-1202A-06-4024-P-C
				36°	DL-1202A-06-4036-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1202A-06-5015-P-C
				24°	DL-1202A-06-5024-P-C
				36°	DL-1202A-06-5036-P-C


Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black)



Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm



ELF series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX	50,000hrs	8W	3000K 4000K 5000K	15° 24° 36°	Fixed	Ra >90	UGR <19	IP20		
------------	-----------	----	-------------------------	-------------------	-------	--------	---------	------	--	--

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	8W	AC220-240V	3000K	15°	DL-10019-08-3015-P-C
				24°	DL-10019-08-3024-P-C
				36°	DL-10019-08-3036-P-C
COB LED	8W	AC220-240V	4000K	15°	DL-10019-08-4015-P-C
				24°	DL-10019-08-4024-P-C
				36°	DL-10019-08-4036-P-C
COB LED	8W	AC220-240V	5000K	15°	DL-10019-08-5015-P-C
				24°	DL-10019-08-5024-P-C
				36°	DL-10019-08-5036-P-C




Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)



Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm



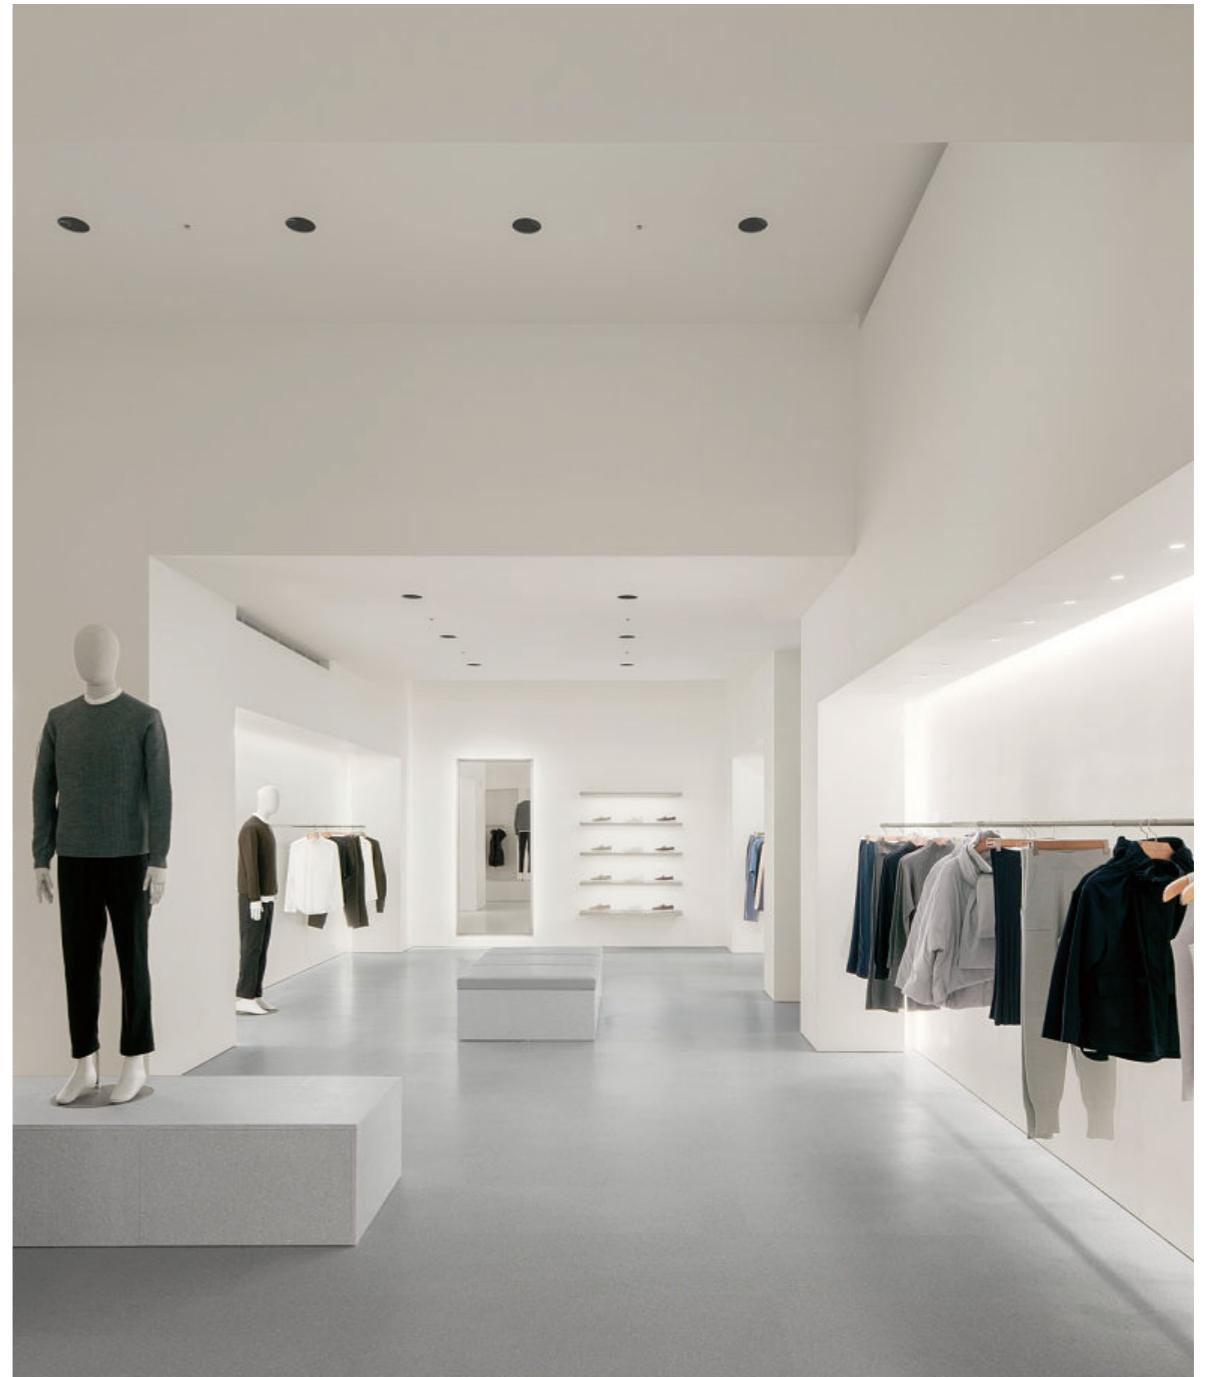

HERTZ series



PRODUCT INTRODUCTION

The top Aksu spray paint surface treatment of aviation aluminum is adopted, and the texture is delicate.

The curvature of the face ring is 12.8 degrees, which can be integrated with the ceiling, making its installation effect more beautiful.

Shift structure, 0-6mm precise dimming and light control to achieve the best lighting effect.

The anti-glare depth reaches 7.5 depth, achieving the effect of seeing the light without seeing the light, Rinio optical principle.

Uses the principle of breathing dynamics of the Politecnico di Milano air convection radiator.



HERTZ series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGE LUX 50,000hrs | 7W 10W 3000K 4000K 5000K | 15° 24° 36° | Ra >90 UGR <19 IP20 | 3 | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	7W	AC220-240V	3000K	15°	DL-HZ01-55-07-3015-P-C
				24°	DL-HZ01-55-07-3024-P-C
				36°	DL-HZ01-55-07-3036-P-C
COB LED	7W	AC220-240V	4000K	15°	DL-HZ01-55-07-4015-P-C
				24°	DL-HZ01-55-07-4024-P-C
				36°	DL-HZ01-55-07-4036-P-C
COB LED	7W	AC220-240V	5000K	15°	DL-HZ01-55-07-5015-P-C
				24°	DL-HZ01-55-07-5024-P-C
				36°	DL-HZ01-55-07-5036-P-C
COB LED	10W	AC220-240V	3000K	15°	DL-HZ01-75-10-3015-P-C
				24°	DL-HZ01-75-10-3024-P-C
				36°	DL-HZ01-75-10-3036-P-C
COB LED	10W	AC220-240V	4000K	15°	DL-HZ01-75-10-4015-P-C
				24°	DL-HZ01-75-10-4024-P-C
				36°	DL-HZ01-75-10-4036-P-C
COB LED	10W	AC220-240V	5000K	15°	DL-HZ01-75-10-5015-P-C
				24°	DL-HZ01-75-10-5024-P-C
				36°	DL-HZ01-75-10-5036-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-HZ01-95-15-3015-P-C
				24°	DL-HZ01-95-15-3024-P-C
				36°	DL-HZ01-95-15-3036-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-HZ01-95-15-4015-P-C
				24°	DL-HZ01-95-15-4024-P-C
				36°	DL-HZ01-95-15-4036-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-HZ01-95-15-4015-P-C
				24°	DL-HZ01-95-15-4024-P-C
				36°	DL-HZ01-95-15-4036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WM-White / Matte Silver WG-Gloss Silver WO-White / Orange WR-White / Rose Gold WG-White / Gold)




Matte Silver Reflector, Gloss Silver Reflector, Orange Reflector, Rose Gold Reflector, Gold Reflector

Controller: On / Off, Dimmable, DALI

DIMENSION unit:mm

DL-HZ01-55-07




— 060 —



055

DL-HZ01-75-10




— 081 —




075

DL-HZ01-95-15



— 0101 —



095

NEMO series

TRIMLESS ADJUSTABLE DOWNLIGHT



BRIDGE LUX 50,000hrs | 7W 10W 3000K 4000K 5000K | 15° 24° 36° | Ra >90 UGR <19 IP20 | 3 | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	7W	AC220-240V	3000K	15°	DL-HZ02-55-07-3015-P-C
				24°	DL-HZ02-55-07-3024-P-C
				36°	DL-HZ02-55-07-3036-P-C
COB LED	7W	AC220-240V	4000K	15°	DL-HZ02-55-07-4015-P-C
				24°	DL-HZ02-55-07-4024-P-C
				36°	DL-HZ02-55-07-4036-P-C
COB LED	7W	AC220-240V	5000K	15°	DL-HZ02-55-07-5015-P-C
				24°	DL-HZ02-55-07-5024-P-C
				36°	DL-HZ02-55-07-5036-P-C
COB LED	10W	AC220-240V	3000K	15°	DL-HZ02-75-10-3015-P-C
				24°	DL-HZ02-75-10-3024-P-C
				36°	DL-HZ02-75-10-3036-P-C
COB LED	10W	AC220-240V	4000K	15°	DL-HZ02-75-10-4015-P-C
				24°	DL-HZ02-75-10-4024-P-C
				36°	DL-HZ02-75-10-4036-P-C
COB LED	10W	AC220-240V	5000K	15°	DL-HZ02-75-10-5015-P-C
				24°	DL-HZ02-75-10-5024-P-C
				36°	DL-HZ02-75-10-5036-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-HZ02-95-15-3015-P-C
				24°	DL-HZ02-95-15-3024-P-C
				36°	DL-HZ02-95-15-3036-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-HZ02-95-15-4015-P-C
				24°	DL-HZ02-95-15-4024-P-C
				36°	DL-HZ02-95-15-4036-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-HZ02-95-15-4015-P-C
				24°	DL-HZ02-95-15-4024-P-C
				36°	DL-HZ02-95-15-4036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WM-White / Matte Silver WG-Gloss Silver WO-White / Orange WR-White / Rose Gold WG-White / Gold)




Matte Silver Reflector, Gloss Silver Reflector, Orange Reflector, Rose Gold Reflector, Gold Reflector


Controller: On / Off, Dimmable, DALI

DIMENSION unit:mm

DL-HZ02-55-07




— 075 —



055

DL-HZ02-75-10




— 095 —



075

DL-HZ02-95-15



— 0116 —





FANO series

PRODUCT INTRODUCTION

Recessed LED downlight with quality aluminum body in powder-coated, with multiple reflecting angles of anti-dazzle refelctor for selection, excellent heat sink capability, remote LED driver.

Application

Supermarket, chain store, shopping mall, villa, hotel, hall.



FANO series

RECESSED (FIXED/ADJUSTABLE) DOWNLIGHT



BRIDGE LUX	15W	3000K 4000K 5000K	15° 25° 38°	Adj. Fixed	Ra >90	UGR <19	IP20	3 DALI	CE
------------	-----	-------------------------	-------------------	---------------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	15°	DL-5222A-15-3015-P-C
				25°	DL-5222A-15-3025-P-C
				38°	DL-5222A-15-3038-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-5222A-15-4015-P-C
				25°	DL-5222A-15-4025-P-C
				38°	DL-5222A-15-4038-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-5222A-15-5015-P-C
				25°	DL-5222A-15-5025-P-C
				38°	DL-5222A-15-5038-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-5222-15-3015-P-C
				25°	DL-5222-15-3025-P-C
				38°	DL-5222-15-3038-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-5222-15-4015-P-C
				25°	DL-5222-15-4025-P-C
				38°	DL-5222-15-4038-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-5222-15-5015-P-C
				25°	DL-5222-15-5025-P-C
				38°	DL-5222-15-5038-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)



Colour Finish: C (WW-White / White BB-Black / Black)

White Reflector Black Reflector

Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-5222A-15



DL-5222-15



FANO series

RECESSED (FIXED/ADJUSTABLE/FIXED) DOWNLIGHT



BRIDGE LUX	15W	3000K 4000K 5000K	15° 25° 38°	Adj. Fixed	Ra >90	UGR <19	IP20	3 DALI	CE
------------	-----	-------------------------	-------------------	---------------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	15°	DL-5224A-15-3015-P-C
				25°	DL-5224A-15-3025-P-C
				38°	DL-5224A-15-3038-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-5224A-15-4015-P-C
				25°	DL-5224A-15-4025-P-C
				38°	DL-5224A-15-4038-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-5224A-15-5015-P-C
				25°	DL-5224A-15-5025-P-C
				38°	DL-5224A-15-5038-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-5224-15-3015-P-C
				25°	DL-5224-15-3025-P-C
				38°	DL-5224-15-3038-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-5224-15-4015-P-C
				25°	DL-5224-15-4025-P-C
				38°	DL-5224-15-4038-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-5224-15-5015-P-C
				25°	DL-5224-15-5025-P-C
				38°	DL-5224-15-5038-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)



Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-5224A-15




— 093 —

085

1-25mm
Ceiling Thickness

DL-5224-15



— 093 —

085

1-25mm
Ceiling Thickness

FANO series

TRIMLESS (FIXED/ADJUSTABLE/FIXED) DOWNLIGHT



BRIDGE LUX	15W	3000K 4000K 5000K	15° 25° 38°	Adj. Fixed	Ra >90	UGR <19	IP20	3 DALI	CE
------------	-----	-------------------------	-------------------	---------------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	15°	DL-5223A-15-3015-P-C
				25°	DL-5223A-15-3025-P-C
				38°	DL-5223A-15-3038-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-5223A-15-4015-P-C
				25°	DL-5223A-15-4025-P-C
				38°	DL-5223A-15-4038-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-5223A-15-5015-P-C
				25°	DL-5223A-15-5025-P-C
				38°	DL-5223A-15-5038-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-5223-15-3015-P-C
				25°	DL-5223-15-3025-P-C
				38°	DL-5223-15-3038-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-5223-15-4015-P-C
				25°	DL-5223-15-4025-P-C
				38°	DL-5223-15-4038-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-5223-15-5015-P-C
				25°	DL-5223-15-5025-P-C
				38°	DL-5223-15-5038-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)



Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-5223A-15




— 085 —

090

1-25mm
Ceiling Thickness

DL-5223-15




— 085 —

090




1-25mm
Ceiling Thickness



LOW GLARE DOWNLIGHT

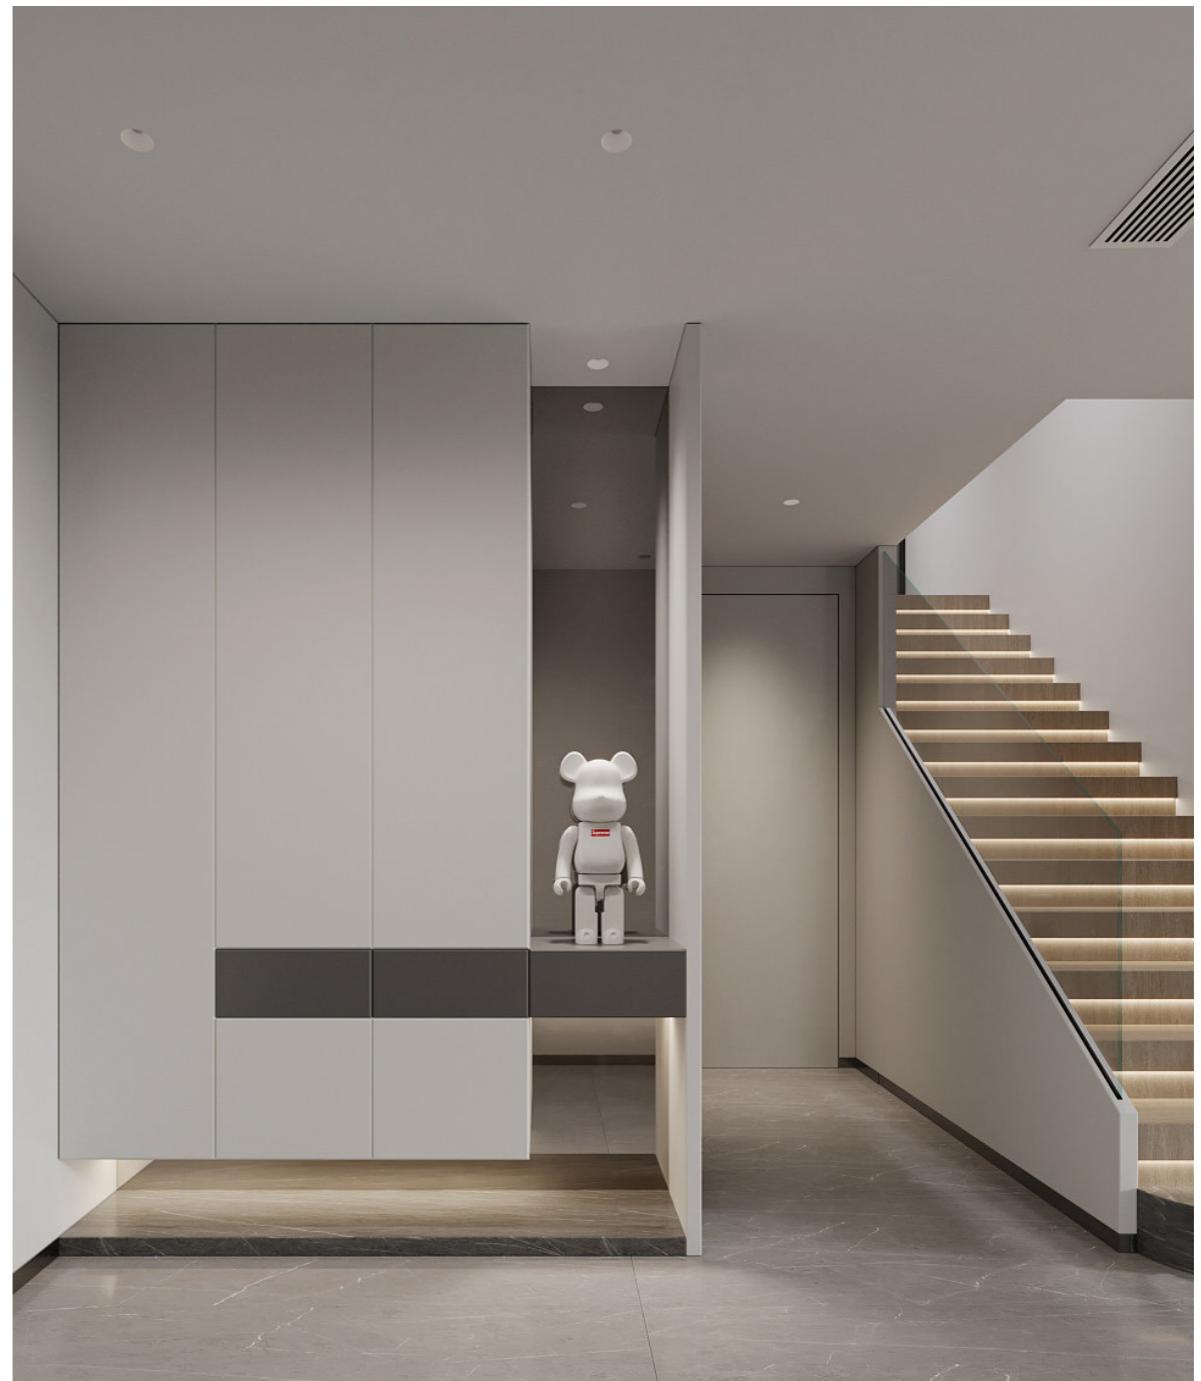

LOW GLARE DOWNLIGHT

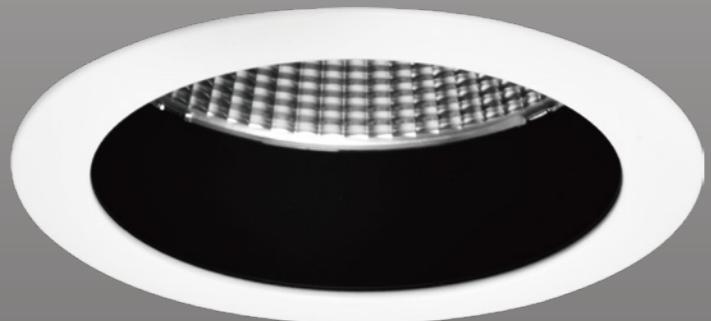

PICCO series

PRODUCT INTRODUCTION

COB lighting source + high-quality optical lens, softens light ; aluminum radiator, extend life.
Lamps trimless installation, better integration of the structure of the room, to retain the original decoration style

PICCO series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX	5W 9W 15W	3000K 4000K 5000K	15° 24° 36°	Fixed	Ra >90	UGR <19	IP20	3	CE
------------	-----------------	-------------------------	-------------------	-------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	5W	AC220-240V	3000K	15°	DL-1012-05-3015-P-C
				24°	DL-1012-05-3024-P-C
				36°	DL-1012-05-3036-P-C
COB LED	5W	AC220-240V	4000K	15°	DL-1012-05-4015-P-C
				24°	DL-1012-05-4024-P-C
				36°	DL-1012-05-4036-P-C
COB LED	5W	AC220-240V	5000K	15°	DL-1012-05-5015-P-C
				24°	DL-1012-05-5024-P-C
				36°	DL-1012-05-5036-P-C
COB LED	9W	AC220-240V	3000K	15°	DL-1013-09-3015-P-C
				24°	DL-1013-09-3024-P-C
				36°	DL-1013-09-3036-P-C
COB LED	9W	AC220-240V	4000K	15°	DL-1013-09-4015-P-C
				24°	DL-1013-09-4024-P-C
				36°	DL-1013-09-4036-P-C
COB LED	9W	AC220-240V	5000K	15°	DL-1013-09-5015-P-C
				24°	DL-1013-09-5024-P-C
				36°	DL-1013-09-5036-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-1014-15-3015-P-C
				24°	DL-1014-15-3024-P-C
				36°	DL-1014-15-3036-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1014-15-4015-P-C
				24°	DL-1014-15-4024-P-C
				36°	DL-1014-15-4036-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1014-15-5015-P-C
				24°	DL-1014-15-5024-P-C
				36°	DL-1014-15-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black)



White Reflector




Black Reflector


Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm


DL-1012-05




DL-1013-09



DL-1014-15



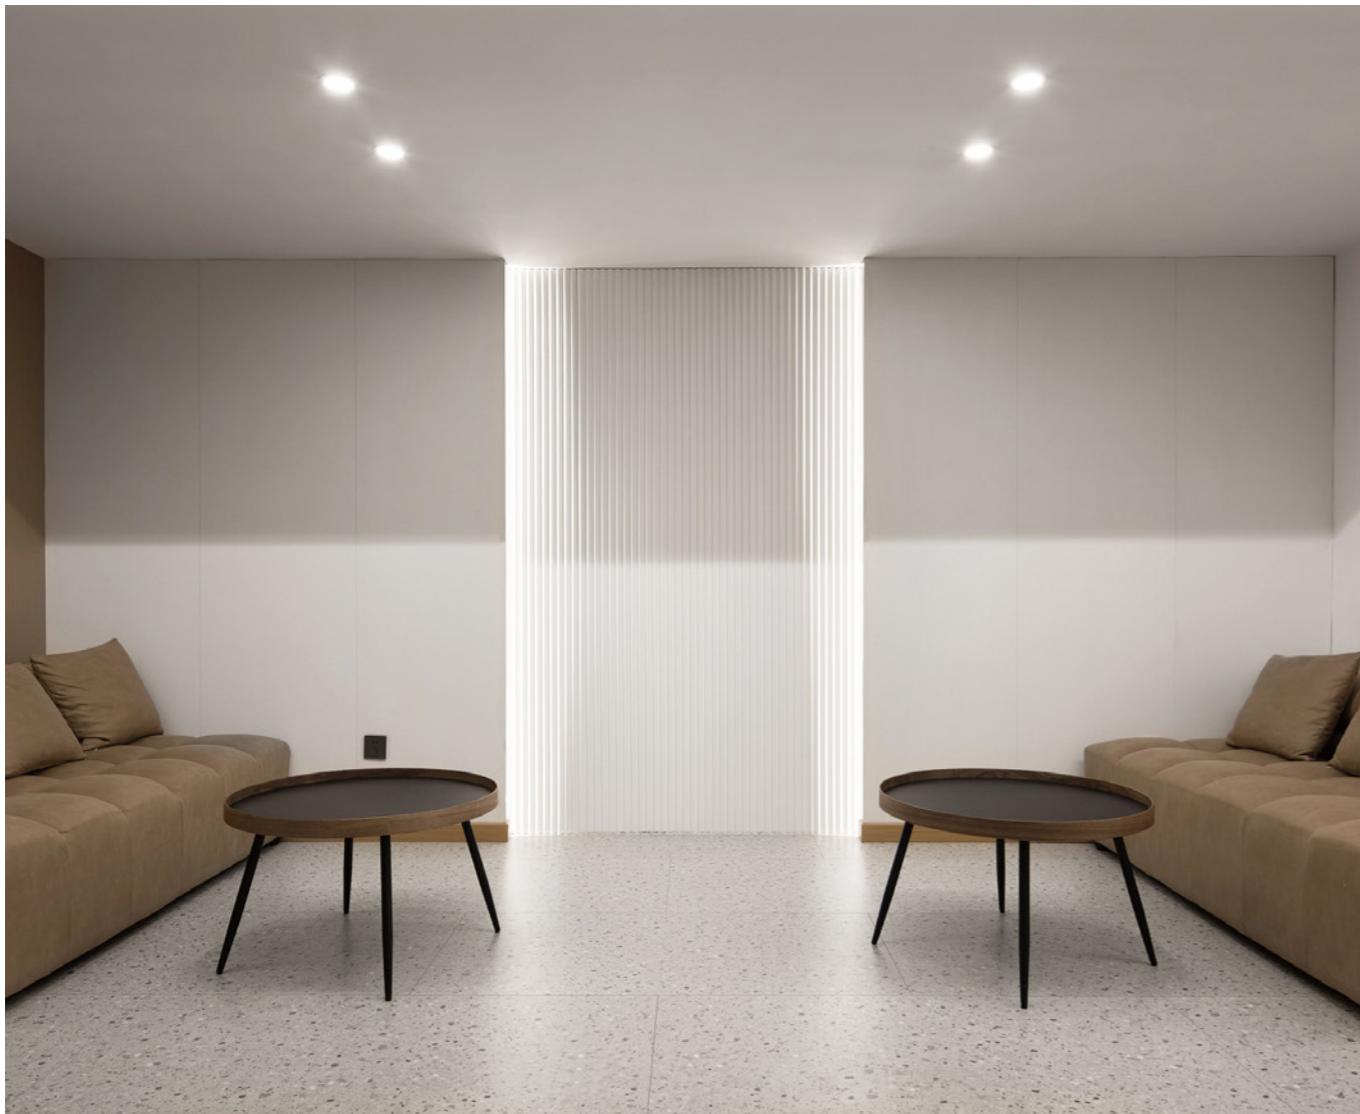

BRAVO series



PRODUCT INTRODUCTION

The spirit of minimalist modern-architecture and the will of the finest integration of light in interior design: are faithfully represented. It's reduced dimensions and its tactful presence conform the essence of this piece, enshrining in its small size, a technical vanguard of the latest generation.

BRAVO series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX	12W	3000K 4000K 5000K	15° 25° 38° 60°	Fixed	Ra >90	UGR <19	IP44	3 DALI	CE
------------	-----	-------------------------	--------------------------	-------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220-240V	3000K	15° 25° 38° 60°	DL-1200-12-3015-P-C DL-1200-12-3025-P-C DL-1200-12-3038-P-C DL-1200-12-3060-P-C
COB LED	12W	AC220-240V	4000K	15° 25° 38° 60°	DL-1200-12-4015-P-C DL-1200-12-4025-P-C DL-1200-12-4038-P-C DL-1200-12-4060-P-C
COB LED	12W	AC220-240V	5000K	15° 25° 38° 60°	DL-1200-12-5015-P-C DL-1200-12-5025-P-C DL-1200-12-5038-P-C DL-1200-12-5060-P-C



Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black)





Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm



BRAVO series

RECESSED FIXED DOWNLIGHT

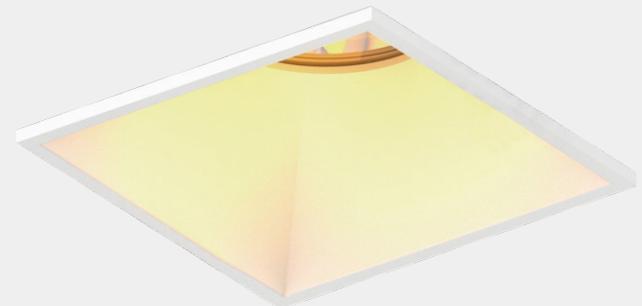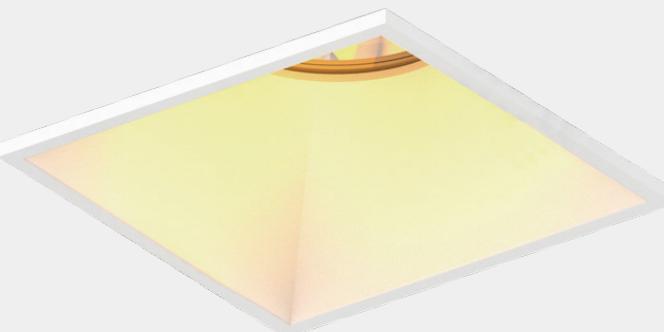

BRAVO series

PRODUCT INTRODUCTION

The spirit of minimalist modern-architecture and the will of the finest integration of light in interior design: are faithfully represented. It's reduced dimensions and its tactful presence conform the essence of this piece, enshrining in its small size, a technical vanguard of the latest generation.

BRIDGE LUX	15W	3000K 4000K 5000K	15° 24° 38° 60°	Fixed	Ra >90	UGR <19	IP20	3	CE
------------	-----	-------------------------	--------------------------	-------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	15°	DL-1025-15-3015-P-C
				25°	DL-1025-15-3025-P-C
				38°	DL-1025-15-3038-P-C
				60°	DL-1025-15-3038-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1025-15-4015-P-C
				25°	DL-1025-15-4025-P-C
				38°	DL-1025-15-4038-P-C
				60°	DL-1025-15-4038-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1025-15-5015-P-C
				25°	DL-1025-15-5025-P-C
				38°	DL-1025-15-5038-P-C
				60°	DL-1025-15-5038-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black)





White Reflector



Black Reflector

Controller: On / Off, Dimmable, DALI

DIMENSION unit:mm



NICO series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX	6.5W	3000K 4000K 5000K	15° 24° 36°	Fixed	Ra >90	UGR <19	IP20	3	CE
------------	------	-------------------------	-------------------	-------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6.5W	AC220-240V	3000K	15°	DL-10010-06-3015-P-C
				24°	DL-10010-06-3024-P-C
				36°	DL-10010-06-3036-P-C
COB LED	6.5W	AC220-240V	4000K	15°	DL-10010-06-4015-P-C
				24°	DL-10010-06-4024-P-C
				36°	DL-10010-06-4036-P-C
COB LED	6.5W	AC220-240V	5000K	15°	DL-10010-06-5015-P-C
				24°	DL-10010-06-5024-P-C
				36°	DL-10010-06-5036-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-10023-15-3015-P-C
				24°	DL-10023-15-3024-P-C
				36°	DL-10023-15-3036-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-10023-15-4015-P-C
				24°	DL-10023-15-4024-P-C
				36°	DL-10023-15-4036-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-10023-15-5015-P-C
				24°	DL-10023-15-5024-P-C
				36°	DL-10023-15-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black)




White Reflector Black Reflector


Controller: On / Off, Dimmable, DALI

DIMENSION unit:mm

DL-10010-06




DL-10023-15

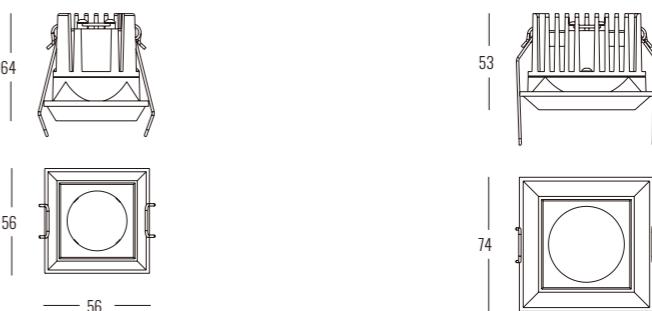

NICO series

PRODUCT INTRODUCTION

The spirit of minimalist modern-architecture and the will of the finest integration of light in interior design; are faithfully represented. It's reduced dimensions and its tactful presence conform the essence of this piece, enshrining in its small size, a technical vanguard of the latest generation.

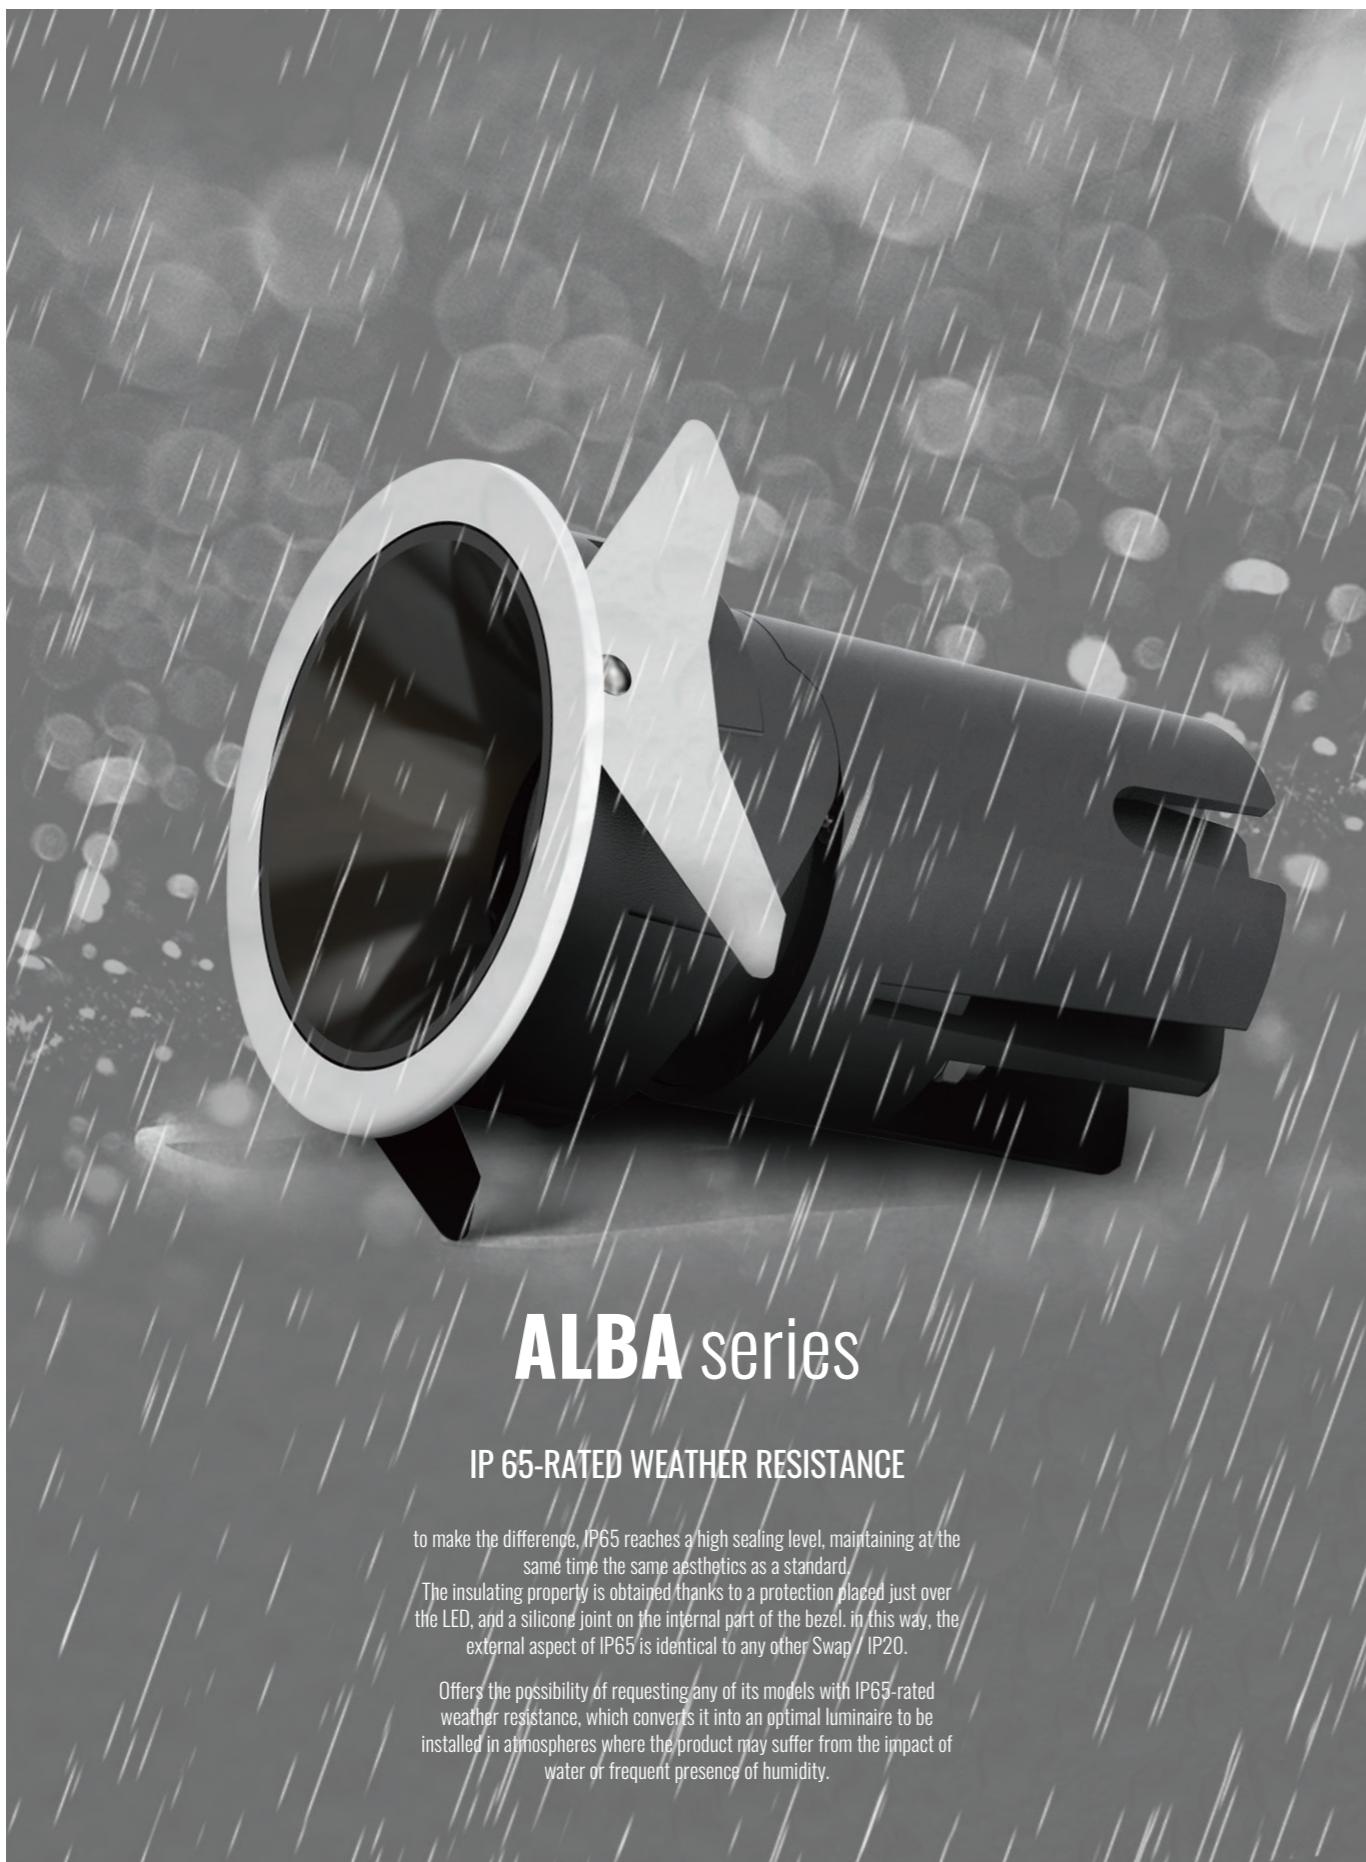

ALBA series

IP 65-RATED WEATHER RESISTANCE

to make the difference, IP65 reaches a high sealing level, maintaining at the same time the same aesthetics as a standard. The insulating property is obtained thanks to a protection placed just over the LED, and a silicone joint on the internal part of the bezel. in this way, the external aspect of IP65 is identical to any other Swap IP20.

Offers the possibility of requesting any of its models with IP65-rated weather resistance, which converts it into an optimal luminaire to be installed in atmospheres where the product may suffer from the impact of water or frequent presence of humidity.



ALBA series

RECESSED FIXED DOWNLIGHT

BRIDGE LUX 50,000hrs	6W 10W	3000K 4000K 5000K	15° 24° 38° 60°	Fixed	Ra >90	UGR <19	IP65	3 DALI	CE
-------------------------	----------	-----------------------	-----------------------	-------	--------	---------	------	--------	----



IP65 DOWNLIGHT

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	15°	DL-1203-06-3015-P-C
				24°	DL-1203-06-3024-P-C
				38°	DL-1203-06-3038-P-C
				60°	DL-1203-06-3060-P-C
COB LED	6W	AC220-240V	4000K	15°	DL-1203-06-4015-P-C
				24°	DL-1203-06-4024-P-C
				38°	DL-1203-06-4038-P-C
				60°	DL-1203-06-4060-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1203-06-5015-P-C
				24°	DL-1203-06-5024-P-C
				38°	DL-1203-06-5038-P-C
				60°	DL-1203-06-5060-P-C
COB LED	10W	AC220-240V	3000K	15°	DL-1205-10-3015-P-C
				24°	DL-1205-10-3024-P-C
				38°	DL-1205-10-3038-P-C
				60°	DL-1205-10-3060-P-C
COB LED	10W	AC220-240V	4000K	15°	DL-1205-10-4015-P-C
				24°	DL-1205-10-4024-P-C
				38°	DL-1205-10-4038-P-C
				60°	DL-1205-10-4060-P-C
COB LED	10W	AC220-240V	5000K	15°	DL-1205-10-5015-P-C
				24°	DL-1205-10-5024-P-C
				38°	DL-1205-10-5038-P-C
				60°	DL-1205-10-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali



DIMENSION

unit:mm

DL-1203-06



DL-1205-10



ALBA series

RECESSED FIXED DOWNLIGHT

BRIDGE LUX 50,000hrs	12W 20W	3000K 4000K 5000K	15° 24° 38° 60°	Fixed	Ra >90	UGR <19	IP65	3 DALI	CE
-------------------------	-----------	-----------------------	-----------------------	-------	--------	---------	------	--------	----



IP65 DOWNLIGHT

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220-240V	3000K	15°	DL-1207-12-3015-P-C
				24°	DL-1207-12-3024-P-C
				38°	DL-1207-12-3038-P-C
				60°	DL-1207-12-3060-P-C
COB LED	12W	AC220-240V	4000K	15°	DL-1207-12-4015-P-C
				24°	DL-1207-12-4024-P-C
				38°	DL-1207-12-4038-P-C
				60°	DL-1207-12-4060-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1207-12-5015-P-C
				24°	DL-1207-12-5024-P-C
				38°	DL-1207-12-5038-P-C
				60°	DL-1207-12-5060-P-C
COB LED	20W	AC220-240V	3000K	15°	DL-1209-20-3015-P-C
				24°	DL-1209-20-3024-P-C
				38°	DL-1209-20-3038-P-C
				60°	DL-1209-20-3060-P-C
COB LED	20W	AC220-240V	4000K	15°	DL-1209-20-4015-P-C
				24°	DL-1209-20-4024-P-C
				38°	DL-1209-20-4038-P-C
				60°	DL-1209-20-4060-P-C
COB LED	20W	AC220-240V	5000K	15°	DL-1209-20-5015-P-C
				24°	DL-1209-20-5024-P-C
				38°	DL-1209-20-5038-P-C
				60°	DL-1209-20-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)





Controller: On / Off, Dimmable, Dali


DIMENSION

unit:mm

DL-1207-12



DL-1209-20



ALBA series

RECESSED ADJUSTABLE DOWNLIGHT

BRIDGE LUX 50,000hrs	6W 10W	3000K 4000K 5000K	15° 24° 38° 60°	Adj.	Ra >90	UGR <19	IP65	3 DALI	CE
-------------------------	----------	-----------------------	-----------------------	------	--------	---------	------	--------	----



IP65 DOWNLIGHT

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	15°	DL-1204-06-3015-P-C
				24°	DL-1204-06-3024-P-C
				38°	DL-1204-06-3038-P-C
				60°	DL-1204-06-3060-P-C
COB LED	6W	AC220-240V	4000K	15°	DL-1204-06-4015-P-C
				24°	DL-1204-06-4024-P-C
				38°	DL-1204-06-4038-P-C
				60°	DL-1204-06-4060-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1204-06-5015-P-C
				24°	DL-1204-06-5024-P-C
				38°	DL-1204-06-5038-P-C
				60°	DL-1204-06-5060-P-C
COB LED	10W	AC220-240V	3000K	15°	DL-1206-10-3015-P-C
				24°	DL-1206-10-3024-P-C
				38°	DL-1206-10-3038-P-C
				60°	DL-1206-10-3060-P-C
COB LED	10W	AC220-240V	4000K	15°	DL-1206-10-4015-P-C
				24°	DL-1206-10-4024-P-C
				38°	DL-1206-10-4038-P-C
				60°	DL-1206-10-4060-P-C
COB LED	10W	AC220-240V	5000K	15°	DL-1206-10-5015-P-C
				24°	DL-1206-10-5024-P-C
				38°	DL-1206-10-5038-P-C
				60°	DL-1206-10-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali


DIMENSION

unit:mm

DL-1204-06



DL-1206-10



ALBA series

RECESSED ADJUSTABLE DOWNLIGHT



IP65 DOWNLIGHT

BRIDGE LUX 50,000hrs	12W 20W	3000K 4000K 5000K	15° 24° 38° 60°	Adj.	Ra >90	UGR <19	IP65	3 DALI	CE
-------------------------	-----------	-----------------------	-----------------------	------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220-240V	3000K	15°	DL-1208-12-3015-P-C
				24°	DL-1208-12-3024-P-C
				38°	DL-1208-12-3038-P-C
				60°	DL-1208-12-3060-P-C
COB LED	12W	AC220-240V	4000K	15°	DL-1208-12-4015-P-C
				24°	DL-1208-12-4024-P-C
				38°	DL-1208-12-4038-P-C
				60°	DL-1208-12-4060-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1208-12-5015-P-C
				24°	DL-1208-12-5024-P-C
				38°	DL-1208-12-5038-P-C
				60°	DL-1208-12-5060-P-C
COB LED	20W	AC220-240V	3000K	15°	DL-1210-20-3015-P-C
				24°	DL-1210-20-3024-P-C
				38°	DL-1210-20-3038-P-C
				60°	DL-1210-20-3060-P-C
COB LED	20W	AC220-240V	4000K	15°	DL-1210-20-4015-P-C
				24°	DL-1210-20-4024-P-C
				38°	DL-1210-20-4038-P-C
				60°	DL-1210-20-4060-P-C
COB LED	20W	AC220-240V	5000K	15°	DL-1210-20-5015-P-C
				24°	DL-1210-20-5024-P-C
				38°	DL-1210-20-5038-P-C
				60°	DL-1210-20-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali


DIMENSION

unit:mm

DL-1208-12



DL-1210-20



ALBA series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGE LUX | 20W | 30W | 3000K | 4000K | 5000K | 15° | 24° | 38° | 60° | Ra >90 | UGR <19 | IP65 | 3 | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	20W	AC220-240V	3000K	15°	DL-WGIP65-20-3015-P-C
				24°	DL-WGIP65-20-3024-P-C
				38°	DL-WGIP65-20-3038-P-C
				60°	DL-WGIP65-20-3060-P-C
COB LED	20W	AC220-240V	4000K	15°	DL-WGIP65-20-4015-P-C
				24°	DL-WGIP65-20-4024-P-C
				38°	DL-WGIP65-20-4038-P-C
				60°	DL-WGIP65-20-4060-P-C
COB LED	20W	AC220-240V	5000K	15°	DL-WGIP65-20-5015-P-C
				24°	DL-WGIP65-20-5024-P-C
				38°	DL-WGIP65-20-5038-P-C
				60°	DL-WGIP65-20-5060-P-C
COB LED	30W	AC220-240V	3000K	15°	DL-WGIP65-30-3015-P-C
				24°	DL-WGIP65-30-3024-P-C
				38°	DL-WGIP65-30-3038-P-C
				60°	DL-WGIP65-30-3060-P-C
COB LED	30W	AC220-240V	4000K	15°	DL-WGIP65-30-4015-P-C
				24°	DL-WGIP65-30-4024-P-C
				38°	DL-WGIP65-30-4038-P-C
				60°	DL-WGIP65-30-4060-P-C
COB LED	30W	AC220-240V	5000K	15°	DL-WGIP65-30-5015-P-C
				24°	DL-WGIP65-30-5024-P-C
				38°	DL-WGIP65-30-5038-P-C
				60°	DL-WGIP65-30-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)



Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)





Controller: On / Off, Dimmable, DALI

DIMENSION
unit:mm

DL-WGIP65-20



DL-WGIP65-30



GINA series

TRIMLESS FIXED DOWNLIGHT



BRIDGE LUX 50,000hrs	6W 10W	3000K 4000K 5000K	15° 24° 38° 60°	Fixed	Ra >90	UGR <19	IP65	3 DALI	CE
-------------------------	----------	-----------------------	-----------------------	-------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	15°	DL-1203A-06-3015-P-C
				24°	DL-1203A-06-3024-P-C
				38°	DL-1203A-06-3038-P-C
				60°	DL-1203A-06-3060-P-C
COB LED	6W	AC220-240V	4000K	15°	DL-1203A-06-4015-P-C
				24°	DL-1203A-06-4024-P-C
				38°	DL-1203A-06-4038-P-C
				60°	DL-1203A-06-4060-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1203A-06-5015-P-C
				24°	DL-1203A-06-5024-P-C
				38°	DL-1203A-06-5038-P-C
				60°	DL-1203A-06-5060-P-C
COB LED	10W	AC220-240V	3000K	15°	DL-1205A-10-3015-P-C
				24°	DL-1205A-10-3024-P-C
				38°	DL-1205A-10-3038-P-C
				60°	DL-1205A-10-3060-P-C
COB LED	10W	AC220-240V	4000K	15°	DL-1205A-10-4015-P-C
				24°	DL-1205A-10-4024-P-C
				38°	DL-1205A-10-4038-P-C
				60°	DL-1205A-10-4060-P-C
COB LED	10W	AC220-240V	5000K	15°	DL-1205A-10-5015-P-C
				24°	DL-1205A-10-5024-P-C
				38°	DL-1205A-10-5038-P-C
				60°	DL-1205A-10-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali


DIMENSION

unit:mm

DL-1203A-06



DL-1205A-10



GINA series

TRIMLESS FIXED DOWNLIGHT



BRIDGE LUX 50,000hrs	12W 20W	3000K 4000K 5000K	15° 24° 38° 60°	Fixed	Ra >90	UGR <19	IP65	3 DALI	CE
-------------------------	-----------	-----------------------	-----------------------	-------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220-240V	3000K	15°	DL-1207A-12-3015-P-C
				24°	DL-1207A-12-3024-P-C
				38°	DL-1207A-12-3038-P-C
				60°	DL-1207A-12-3060-P-C
COB LED	12W	AC220-240V	4000K	15°	DL-1207A-12-4015-P-C
				24°	DL-1207A-12-4024-P-C
				38°	DL-1207A-12-4038-P-C
				60°	DL-1207A-12-4060-P-C
COB LED	20W	AC220-240V	5000K	15°	DL-1207A-12-5015-P-C
				24°	DL-1207A-12-5024-P-C
				38°	DL-1207A-12-5038-P-C
				60°	DL-1207A-12-5060-P-C
COB LED	20W	AC220-240V	3000K	15°	DL-1209A-20-3015-P-C
				24°	DL-1209A-20-3024-P-C
				38°	DL-1209A-20-3038-P-C
				60°	DL-1209A-20-3060-P-C
COB LED	20W	AC220-240V	4000K	15°	DL-1209A-20-4015-P-C
				24°	DL-1209A-20-4024-P-C
				38°	DL-1209A-20-4038-P-C
				60°	DL-1209A-20-4060-P-C
COB LED	20W	AC220-240V	5000K	15°	DL-1209A-20-5015-P-C
				24°	DL-1209A-20-5024-P-C
				38°	DL-1209A-20-5038-P-C
				60°	DL-1209A-20-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali


DIMENSION

unit:mm

DL-1207A-12



DL-1209A-20



GINA series

TRIMLESS ADJUSTABLE DOWNLIGHT



BRIDGE LUX
50,000hrs | 6W | 3000K | 4000K | 5000K | 15° | 24° | 38° | 60° | Adj. | Ra >90 | UGR <19 | IP65 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	15°	DL-1204A-06-3015-P-C
				24°	DL-1204A-06-3024-P-C
				38°	DL-1204A-06-3038-P-C
				60°	DL-1204A-06-3060-P-C
COB LED	6W	AC220-240V	4000K	15°	DL-1204A-06-4015-P-C
				24°	DL-1204A-06-4024-P-C
				38°	DL-1204A-06-4038-P-C
				60°	DL-1204A-06-4060-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1204A-06-5015-P-C
				24°	DL-1204A-06-5024-P-C
				38°	DL-1204A-06-5038-P-C
				60°	DL-1204A-06-5060-P-C
COB LED	10W	AC220-240V	3000K	15°	DL-1206A-10-3015-P-C
				24°	DL-1206A-10-3024-P-C
				38°	DL-1206A-10-3038-P-C
				60°	DL-1206A-10-3060-P-C
COB LED	10W	AC220-240V	4000K	15°	DL-1206A-10-4015-P-C
				24°	DL-1206A-10-4024-P-C
				38°	DL-1206A-10-4038-P-C
				60°	DL-1206A-10-4060-P-C
COB LED	10W	AC220-240V	5000K	15°	DL-1206A-10-5015-P-C
				24°	DL-1206A-10-5024-P-C
				38°	DL-1206A-10-5038-P-C
				60°	DL-1206A-10-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali


DIMENSION

unit:mm

DL-1204A-06



DL-1206A-10



GINA series

TRIMLESS ADJUSTABLE DOWNLIGHT



BRIDGE LUX
50,000hrs | 12W | 3000K | 4000K | 5000K | 15° | 24° | 38° | 60° | Adj. | Ra >90 | UGR <19 | IP65 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220-240V	3000K	15°	DL-1208A-12-3015-P-C
				24°	DL-1208A-12-3024-P-C
				38°	DL-1208A-12-3038-P-C
				60°	DL-1208A-12-3060-P-C
COB LED	12W	AC220-240V	4000K	15°	DL-1208A-12-4015-P-C
				24°	DL-1208A-12-4024-P-C
				38°	DL-1208A-12-4038-P-C
				60°	DL-1208A-12-4060-P-C
COB LED	20W	AC220-240V	3000K	15°	DL-1210A-20-3015-P-C
				24°	DL-1210A-20-3024-P-C
				38°	DL-1210A-20-3038-P-C
				60°	DL-1210A-20-3060-P-C
COB LED	20W	AC220-240V	4000K	15°	DL-1210A-20-4015-P-C
				24°	DL-1210A-20-4024-P-C
				38°	DL-1210A-20-4038-P-C
				60°	DL-1210A-20-4060-P-C
COB LED	20W	AC220-240V	5000K	15°	DL-1210A-20-5015-P-C
				24°	DL-1210A-20-5024-P-C
				38°	DL-1210A-20-5038-P-C
				60°	DL-1210A-20-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali


DIMENSION

unit:mm

DL-1208A-12



DL-1210A-20



GINA series

TRIMLESS FIXED DOWNLIGHT



BRIDGE LUX
50,000hrs | 20W | 30W | 3000K | 4000K | 5000K | 15° | 24° | 38° | 60° | Fixed | Ra >90 | UGR <19 | IP65 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	20W	AC220-240V	3000K	15°	DL-WGIP65A-20-3015-P-C
				24°	DL-WGIP65A-20-3024-P-C
				38°	DL-WGIP65A-20-3038-P-C
				60°	DL-WGIP65A-20-3060-P-C
COB LED	20W	AC220-240V	4000K	15°	DL-WGIP65A-20-4015-P-C
				24°	DL-WGIP65A-20-4024-P-C
				38°	DL-WGIP65A-20-4038-P-C
				60°	DL-WGIP65A-20-4060-P-C
COB LED	20W	AC220-240V	5000K	15°	DL-WGIP65A-20-5015-P-C
				24°	DL-WGIP65A-20-5024-P-C
				38°	DL-WGIP65A-20-5038-P-C
				60°	DL-WGIP65A-20-5060-P-C
COB LED	30W	AC220-240V	3000K	15°	DL-WGIP65A-30-3015-P-C
				24°	DL-WGIP65A-30-3024-P-C
				38°	DL-WGIP65A-30-3038-P-C
				60°	DL-WGIP65A-30-3060-P-C
COB LED	30W	AC220-240V	4000K	15°	DL-WGIP65A-30-4015-P-C
				24°	DL-WGIP65A-30-4024-P-C
				38°	DL-WGIP65A-30-4038-P-C
				60°	DL-WGIP65A-30-4060-P-C
COB LED	30W	AC220-240V	5000K	15°	DL-WGIP65A-30-5015-P-C
				24°	DL-WGIP65A-30-5024-P-C
				38°	DL-WGIP65A-30-5038-P-C
				60°	DL-WGIP65A-30-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-WGIP65A-20



DL-WGIP65A-30



GINA series

TRIMLESS ADJUSTABLE DOWNLIGHT



BRIDGE LUX
50,000hrs | 20W | 30W | 3000K | 4000K | 5000K | 15° | 24° | 38° | 60° | Adj. | Ra >90 | UGR <19 | IP65 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	20W	AC220-240V	3000K	15°	DL-WGIP65AA-20-3015-P-C
				24°	DL-WGIP65AA-20-3024-P-C
				38°	DL-WGIP65AA-20-3038-P-C
				60°	DL-WGIP65AA-20-3060-P-C
COB LED	20W	AC220-240V	4000K	15°	DL-WGIP65AA-20-4015-P-C
				24°	DL-WGIP65AA-20-4024-P-C
				38°	DL-WGIP65AA-20-4038-P-C
				60°	DL-WGIP65AA-20-4060-P-C
COB LED	20W	AC220-240V	5000K	15°	DL-WGIP65AA-20-5015-P-C
				24°	DL-WGIP65AA-20-5024-P-C
				38°	DL-WGIP65AA-20-5038-P-C
				60°	DL-WGIP65AA-20-5060-P-C
COB LED	30W	AC220-240V	3000K	15°	DL-WGIP65AA-30-3015-P-C
				24°	DL-WGIP65AA-30-3024-P-C
				38°	DL-WGIP65AA-30-3038-P-C
				60°	DL-WGIP65AA-30-3060-P-C
COB LED	30W	AC220-240V	4000K	15°	DL-WGIP65AA-30-4015-P-C
				24°	DL-WGIP65AA-30-4024-P-C
				38°	DL-WGIP65AA-30-4038-P-C
				60°	DL-WGIP65AA-30-4060-P-C
COB LED	30W	AC220-240V	5000K	15°	DL-WGIP65AA-30-5015-P-C
				24°	DL-WGIP65AA-30-5024-P-C
				38°	DL-WGIP65AA-30-5038-P-C
				60°	DL-WGIP65AA-30-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-WGIP65AA-20



DL-WGIP65AA-30



GINA series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX 50,000hrs | 7W | 3000K / 4000K / 5000K | Beam Angle: 8°, 15°, 24°, 38°, 60° | Fixed | Ra >90 | UGR <19 | IP20 | 3 | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	7W	AC220-240V	3000K	15°	DL-1105-07-3015-P-C
				24°	DL-1105-07-3024-P-C
				38°	DL-1105-07-3038-P-C
				60°	DL-1105-07-3060-P-C
COB LED	7W	AC220-240V	4000K	15°	DL-1105-07-4015-P-C
				24°	DL-1105-07-4024-P-C
				38°	DL-1105-07-4038-P-C
				60°	DL-1105-07-4060-P-C
COB LED	7W	AC220-240V	5000K	15°	DL-1105-07-5015-P-C
				24°	DL-1105-07-5024-P-C
				38°	DL-1105-07-5038-P-C
				60°	DL-1105-07-5060-P-C
COB LED	12W	AC220-240V	3000K	8°	DL-1107-12-3008-P-C
				15°	DL-1107-12-3015-P-C
				24°	DL-1107-12-3024-P-C
				38°	DL-1107-12-3038-P-C
				60°	DL-1107-12-3060-P-C
COB LED	12W	AC220-240V	4000K	8°	DL-1107-12-4008-P-C
				15°	DL-1107-12-4015-P-C
				24°	DL-1107-12-4024-P-C
				38°	DL-1107-12-4038-P-C
				60°	DL-1107-12-4060-P-C
COB LED	12W	AC220-240V	5000K	8°	DL-1107-12-5008-P-C
				15°	DL-1107-12-5015-P-C
				24°	DL-1107-12-5024-P-C
				38°	DL-1107-12-5038-P-C
				60°	DL-1107-12-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-1105-07



DL-1107-12



GINA series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGE LUX 50,000hrs | 20W | 3000K / 4000K / 5000K | Beam Angle: 8°, 15°, 24°, 38°, 60° | Adj. | Ra >90 | UGR <19 | IP20 | 3 | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	20W	AC220-240V	3000K	8°	DL-WG02-20-3008-P-C
				15°	DL-WG02-20-3015-P-C
				24°	DL-WG02-20-3024-P-C
				38°	DL-WG02-20-3038-P-C
COB LED	20W	AC220-240V	4000K	60°	DL-WG02-20-3060-P-C
				8°	DL-WG02-20-4008-P-C
				15°	DL-WG02-20-4015-P-C
				24°	DL-WG02-20-4024-P-C
COB LED	20W	AC220-240V	5000K	38°	DL-WG02-20-4038-P-C
				60°	DL-WG02-20-4060-P-C
				8°	DL-WG02-20-5008-P-C
				15°	DL-WG02-20-5015-P-C
COB LED	20W	AC220-240V	5000K	24°	DL-WG02-20-5024-P-C
				38°	DL-WG02-20-5038-P-C
				60°	DL-WG02-20-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm



GINA series

TRIMLESS FIXED DOWNLIGHT



BRIDGE LUX | 7W | 12W | 3000K | 4000K | 5000K | 8° 15° 24° 38° 60° | Fixed | Ra >90 | UGR <19 | IP20 | 3 | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	7W	AC220-240V	3000K	15°	DL-1106-07-3015-P-C
				24°	DL-1106-07-3024-P-C
				38°	DL-1106-07-3038-P-C
				60°	DL-1106-07-3060-P-C
COB LED	7W	AC220-240V	4000K	15°	DL-1106-07-4015-P-C
				24°	DL-1106-07-4024-P-C
				38°	DL-1106-07-4038-P-C
				60°	DL-1106-07-4060-P-C
COB LED	7W	AC220-240V	5000K	15°	DL-1106-07-5015-P-C
				24°	DL-1106-07-5024-P-C
				38°	DL-1106-07-5038-P-C
				60°	DL-1106-07-5060-P-C
COB LED	12W	AC220-240V	3000K	8°	DL-1108-12-3008-P-C
				15°	DL-1108-12-3015-P-C
				24°	DL-1108-12-3024-P-C
				38°	DL-1108-12-3038-P-C
				60°	DL-1108-12-3060-P-C
COB LED	12W	AC220-240V	4000K	8°	DL-1108-12-4008-P-C
				15°	DL-1108-12-4015-P-C
				24°	DL-1108-12-4024-P-C
				38°	DL-1108-12-4038-P-C
				60°	DL-1108-12-4060-P-C
COB LED	12W	AC220-240V	5000K	8°	DL-1108-12-5008-P-C
				15°	DL-1108-12-5015-P-C
				24°	DL-1108-12-5024-P-C
				38°	DL-1108-12-5038-P-C
				60°	DL-1108-12-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-1106-07



DL-1108-12



GINA series

TRIMLESS ADJUSTABLE DOWNLIGHT



BRIDGE LUX | 20W | 3000K | 4000K | 5000K | 8° 15° 24° 38° 60° | Adj. | Ra >90 | UGR <19 | IP20 | 3 | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	20W	AC220-240V	3000K	8°	DL-WG-20-3008-P-C
				15°	DL-WG-20-3015-P-C
				24°	DL-WG-20-3024-P-C
				38°	DL-WG-20-3038-P-C
COB LED	20W	AC220-240V	4000K	60°	DL-WG-20-3060-P-C
				8°	DL-WG-20-4008-P-C
				15°	DL-WG-20-4015-P-C
				24°	DL-WG-20-4024-P-C
COB LED	20W	AC220-240V	5000K	38°	DL-WG-20-4038-P-C
				60°	DL-WG-20-4060-P-C
				8°	DL-WG-20-5008-P-C
				15°	DL-WG-20-5015-P-C
COB LED	20W	AC220-240V	5000K	24°	DL-WG-20-5024-P-C
				38°	DL-WG-20-5038-P-C
				60°	DL-WG-20-5060-P-C



Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm



NEMO series



PRODUCT INTRODUCTION

Recessed led spotlight adopt integrated die casting lamp body design.
Flexible replacement Of refector to reach different application effect.


APPLICATION

Fashion shop, jewelry display and other high end accent lighting areas.

REFLECTOR COLOR OPTION






CONFIGURATION



Asymmetric optics

Symmetrical
 $16^\circ / 23^\circ / 35^\circ$

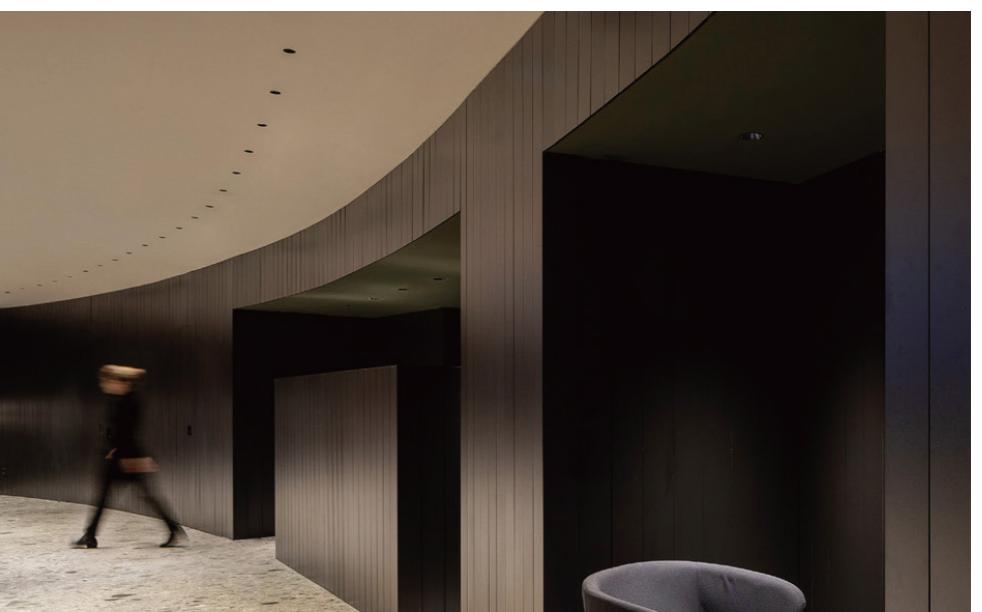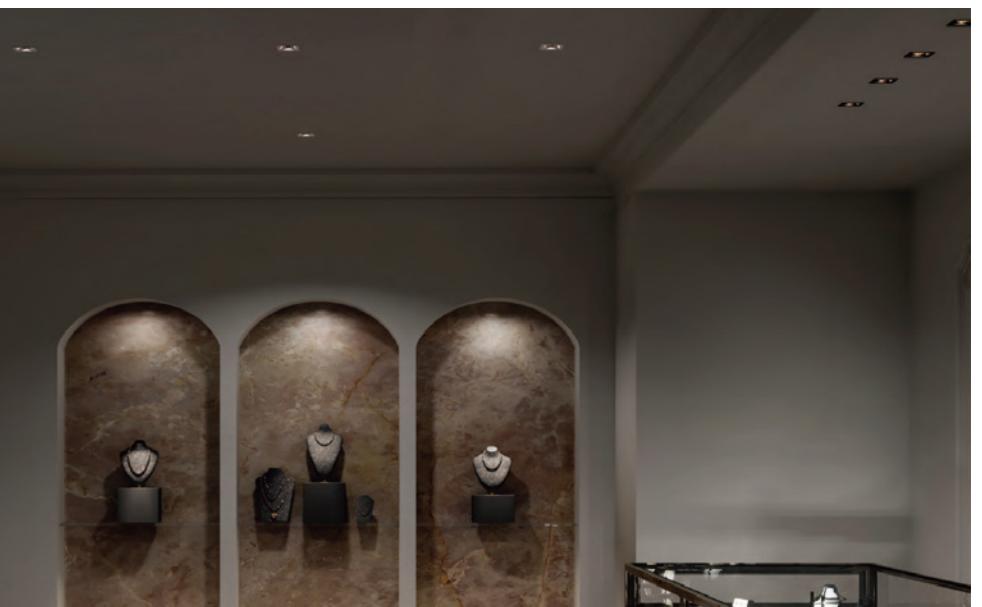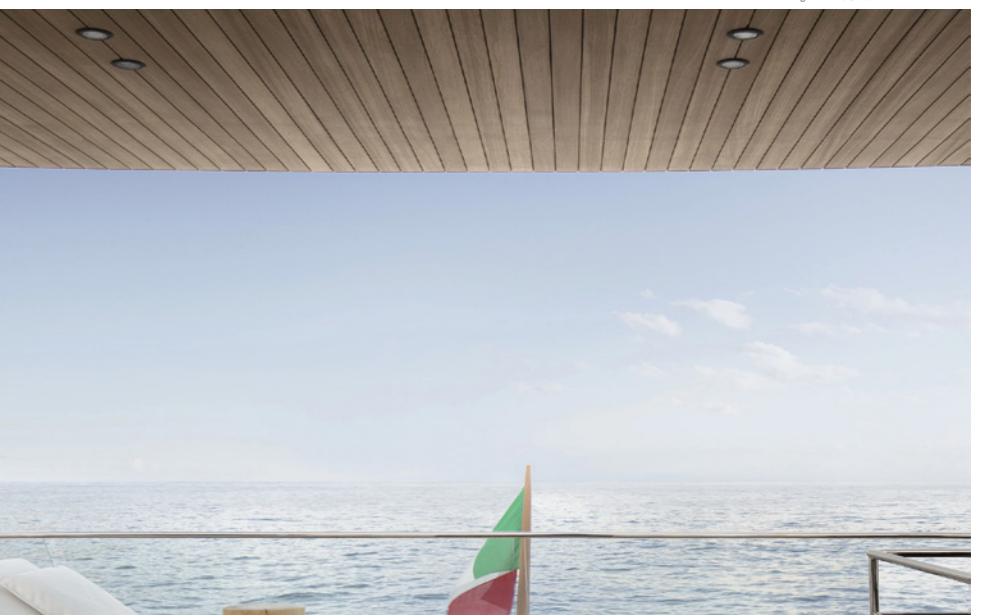

NEMO series

RECESSED FIXED SPOTLIGHT

BRIDGE LUX	8W 15W 20W	3000K 4000K 5000K	16° 18° 23° 35°	Fixed	Ra >90 UGR <19 IP20	3	CE
------------	----------------	-----------------------	-----------------------	-------	-------------------------	---	----



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	8W	AC220-240V	3000K	16°	DL-5207-08-R-3016-P-C
				23°	DL-5207-08-R-3023-P-C
				35°	DL-5207-08-R-3035-P-C
COB LED	8W	AC220-240V	4000K	16°	DL-5207-08-R-4016-P-C
				23°	DL-5207-08-R-4023-P-C
				35°	DL-5207-08-R-4035-P-C
COB LED	8W	AC220-240V	5000K	16°	DL-5207-08-R-5016-P-C
				23°	DL-5207-08-R-5023-P-C
				35°	DL-5207-08-R-5035-P-C
COB LED	15W	AC220-240V	3000K	16°	DL-5207-15-R-3016-P-C
				23°	DL-5207-15-R-3023-P-C
				35°	DL-5207-15-R-3035-P-C
COB LED	15W	AC220-240V	4000K	16°	DL-5207-15-R-4016-P-C
				23°	DL-5207-15-R-4023-P-C
				35°	DL-5207-15-R-4035-P-C
COB LED	15W	AC220-240V	5000K	16°	DL-5207-15-R-5016-P-C
				23°	DL-5207-15-R-5023-P-C
				35°	DL-5207-15-R-5035-P-C
COB LED	20W	AC220-240V	3000K	18°	DL-5207-20-R-3018-P-C
				23°	DL-5207-20-R-3023-P-C
				35°	DL-5207-20-R-3035-P-C
COB LED	20W	AC220-240V	4000K	18°	DL-5207-20-R-4018-P-C
				23°	DL-5207-20-R-4023-P-C
				35°	DL-5207-20-R-4035-P-C
COB LED	20W	AC220-240V	5000K	18°	DL-5207-20-R-5018-P-C
				23°	DL-5207-20-R-5023-P-C
				35°	DL-5207-20-R-5035-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WM-White / Matte Silver WG-Gloss Silver WO-White / Orange WR-White / Rose Gold WG-White / Gold)




Controller: On / Off, Dimmable, DALI


DIMENSION

unit:mm


DL-5207-08-R



DL-5207-15-R



DL-5207-20-R



NEMO series

RECESSED FIXED SPOTLIGHT

BRIDGE LUX	8W 15W 20W	3000K 4000K 5000K	16° 18° 23° 35°	Fixed	Ra >90 UGR <19 IP20	3	CE
------------	----------------	-----------------------	-----------------------	-------	-------------------------	---	----



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	8W	AC220-240V	3000K	16°	DL-5207A-08-R-3016-P-C
				23°	DL-5207A-08-R-3023-P-C
				35°	DL-5207A-08-R-3035-P-C
COB LED	8W	AC220-240V	4000K	16°	DL-5207A-08-R-4016-P-C
				23°	DL-5207A-08-R-4023-P-C
				35°	DL-5207A-08-R-4035-P-C
COB LED	8W	AC220-240V	5000K	16°	DL-5207A-08-R-5016-P-C
				23°	DL-5207A-08-R-5023-P-C
				35°	DL-5207A-08-R-5035-P-C
COB LED	15W	AC220-240V	3000K	16°	DL-5207A-15-R-3016-P-C
				23°	DL-5207A-15-R-3023-P-C
				35°	DL-5207A-15-R-3035-P-C
COB LED	15W	AC220-240V	4000K	16°	DL-5207A-15-R-4016-P-C
				23°	DL-5207A-15-R-4023-P-C
				35°	DL-5207A-15-R-4035-P-C
COB LED	15W	AC220-240V	5000K	16°	DL-5207A-15-R-5016-P-C
				23°	DL-5207A-15-R-5023-P-C
				35°	DL-5207A-15-R-5035-P-C
COB LED	20W	AC220-240V	3000K	18°	DL-5207A-20-R-3018-P-C
				23°	DL-5207A-20-R-3023-P-C
				35°	DL-5207A-20-R-3035-P-C
COB LED	20W	AC220-240V	4000K	18°	DL-5207A-20-R-4018-P-C
				23°	DL-5207A-20-R-4023-P-C
				35°	DL-5207A-20-R-4035-P-C
COB LED	20W	AC220-240V	5000K	18°	DL-5207A-20-R-5018-P-C
				23°	DL-5207A-20-R-5023-P-C
				35°	DL-5207A-20-R-5035-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WM-White / Matte Silver WG-Gloss Silver WO-White / Orange WR-White / Rose Gold WG-White / Gold)




Controller: On / Off, Dimmable, DALI


DIMENSION

unit:mm




DL-5207A-08-R



DL-5207A-15-R



DL-5207A-20-R



ENZO series

SEMI SURFACE DOWNLIGHT



RECESSED FIXED DOWNLIGHT



BRIDGE LUX	9W	3000K 4000K 5000K	15° 24° 36°	Fixed	Ra >90	UGR <19	IP20	3	CE
------------	----	-------------------------	-------------------	-------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	9W	AC220-240V	3000K	15°	DL-9803-09-3015-P-C
				24°	DL-9803-09-3024-P-C
				36°	DL-9803-09-3036-P-C
COB LED	9W	AC220-240V	4000K	15°	DL-9803-09-3015-P-C
				24°	DL-9803-09-3024-P-C
				36°	DL-9803-09-3036-P-C
COB LED	9W	AC220-240V	5000K	15°	DL-9803-09-3015-P-C
				24°	DL-9803-09-3024-P-C
				36°	DL-9803-09-3036-P-C
COB LED	9W	AC220-240V	3000K	15°	DL-9803S1-09-3015-P-C
				24°	DL-9803S1-09-3024-P-C
				36°	DL-9803S1-09-3036-P-C
COB LED	9W	AC220-240V	4000K	15°	DL-9803S1-09-3015-P-C
				24°	DL-9803S1-09-3024-P-C
				36°	DL-9803S1-09-3036-P-C
COB LED	9W	AC220-240V	5000K	15°	DL-9803S1-09-3015-P-C
				24°	DL-9803S1-09-3024-P-C
				36°	DL-9803S1-09-3036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black)





White Reflector Black Reflector


Controller: On / Off, Dimmable, DALI

DIMENSION
unit:mm

DL-9748S1-5



DL-9748S2-10



ENZO series



DASH series

DASH series

SURFACE DOWNLIGHT



BRIDGE LUX	8W	3000K 4000K 5000K	15° 24° 36°	Fixed	Ra >90	UGR <19	IP20	3	CE
------------	----	-------------------------	-------------------	-------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	8W	AC220-240V	3000K	15°	DL-7381-08-3015-P-C
				24°	DL-7381-08-3024-P-C
				36°	DL-7381-08-3036-P-C
COB LED	8W	AC220-240V	4000K	15°	DL-7381-08-4015-P-C
				24°	DL-7381-08-4024-P-C
				36°	DL-7381-08-4036-P-C
COB LED	8W	AC220-240V	5000K	15°	DL-7381-08-5015-P-C
				24°	DL-7381-08-5024-P-C
				36°	DL-7381-08-5036-P-C
COB LED	8W	AC220-240V	3000K	15°	DL-7381S1-08-3015-P-C
				24°	DL-7381S1-08-3024-P-C
				36°	DL-7381S1-08-3036-P-C
COB LED	8W	AC220-240V	4000K	15°	DL-7381S1-08-4015-P-C
				24°	DL-7381S1-08-4024-P-C
				36°	DL-7381S1-08-4036-P-C
COB LED	8W	AC220-240V	5000K	15°	DL-7381S1-08-5015-P-C
				24°	DL-7381S1-08-5024-P-C
				36°	DL-7381S1-08-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, DALI

DIMENSION unit:mm

DL-7381-08



DL-7381S1-08



SEMI SURFACE DOWNLIGHT



KONDA series

SEMI SURFACE DOWNLIGHT



KONDA series



SEMI SURFACE DOWNLIGHT

SEMI SURFACE DOWNLIGHT

RECESSED FIXED DOWNLIGHT



BRIDGE LUX | 13W | 3000K | 4000K | 5000K | 25° | Fixed | Ra >90 | UGR <19 | IP20 | 3 | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	13W	AC220-240V	3000K	25°	DL-9432-13-3025-P-C
COB LED	13W	AC220-240V	4000K	25°	DL-9432-13-4025-P-C
COB LED	13W	AC220-240V	5000K	25°	DL-9432-13-5025-P-C
COB LED	13W	AC220-240V	3000K	25°	DL-9433-13-3025-P-C
COB LED	13W	AC220-240V	4000K	25°	DL-9433-13-4025-P-C
COB LED	13W	AC220-240V	5000K	25°	DL-9433-13-5025-P-C
COB LED	13W	AC220-240V	3000K	25°	DL-9434-13-3025-P-C
COB LED	13W	AC220-240V	4000K	25°	DL-9434-13-4025-P-C
COB LED	13W	AC220-240V	5000K	25°	DL-9434-13-5025-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm


DL-9432-13




DL-9433-13




DL-9434-13



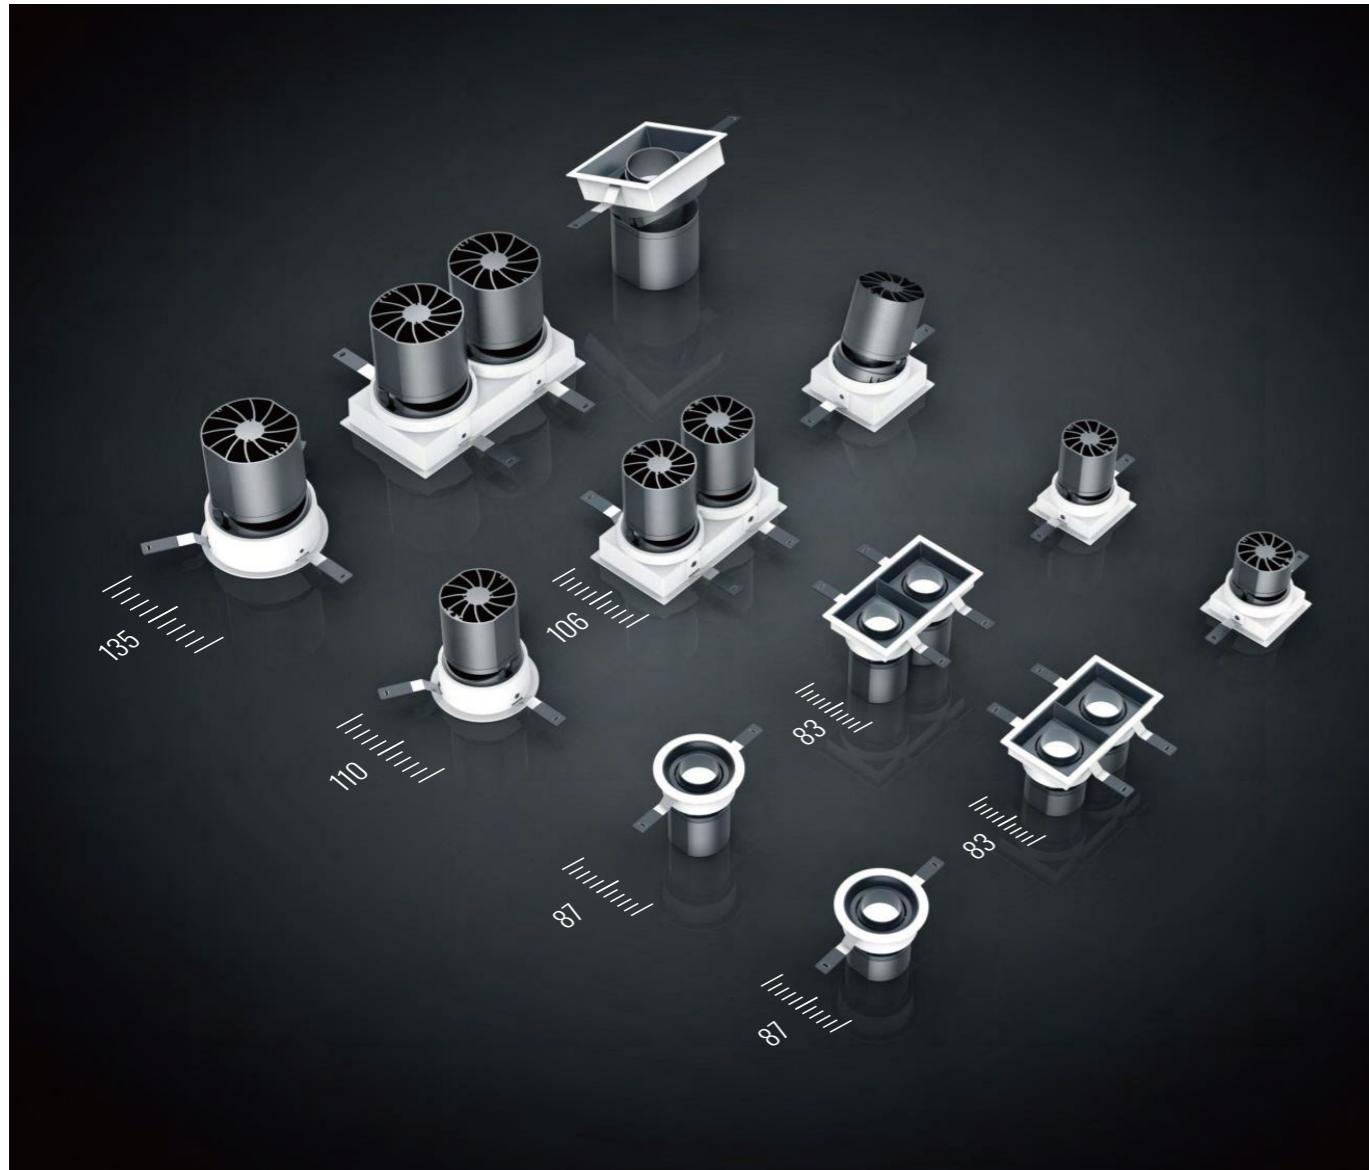

STATION series

9W / 18W / 24W / 48W / 35W / 70W

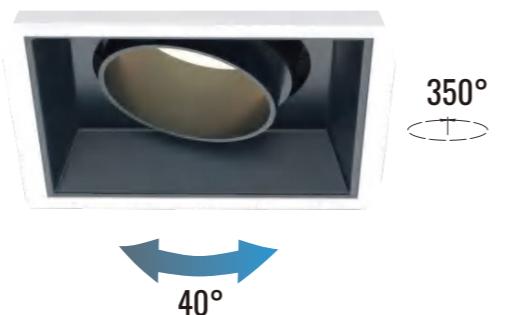

STATION series

RECESSED ADJUSTABLE DOWNLIGHT

BRIDGE LUX 50,000hrs | 9W | 3000K / 4000K / 5000K | 15° / 24° / 36° | Adj. | Ra >90 | UGR <19 | IP20 | 3 | CE



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	9W	AC220-240V	3000K	15°	DL-9800-09-3015-P-C
				24°	DL-9800-09-3024-P-C
				36°	DL-9800-09-3036-P-C
COB LED	9W	AC220-240V	4000K	15°	DL-9800-09-4015-P-C
				24°	DL-9800-09-4024-P-C
				36°	DL-9800-09-4036-P-C
COB LED	9W	AC220-240V	5000K	15°	DL-9800-09-5015-P-C
				24°	DL-9800-09-5024-P-C
				36°	DL-9800-09-5036-P-C
COB LED	9W	AC220-240V	3000K	15°	DL-9800S1-09-3015-P-C
				24°	DL-9800S1-09-3024-P-C
				36°	DL-9800S1-09-3036-P-C
COB LED	9W	AC220-240V	4000K	15°	DL-9800S1-09-4015-P-C
				24°	DL-9800S1-09-4024-P-C
				36°	DL-9800S1-09-4036-P-C
COB LED	9W	AC220-240V	5000K	15°	DL-9800S1-09-5015-P-C
				24°	DL-9800S1-09-5024-P-C
				36°	DL-9800S1-09-5036-P-C
COB LED	2x9W	AC220-240V	3000K	15°	DL-9800S2-18-3015-P-C
				24°	DL-9800S2-18-3024-P-C
				36°	DL-9800S2-18-3036-P-C
COB LED	2x9W	AC220-240V	4000K	15°	DL-9800S2-18-4015-P-C
				24°	DL-9800S2-18-4024-P-C
				36°	DL-9800S2-18-4036-P-C
COB LED	2x9W	AC220-240V	5000K	15°	DL-9800S2-18-5015-P-C
				24°	DL-9800S2-18-5024-P-C
				36°	DL-9800S2-18-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm




DL-9800-09



DL-9800S1-09



DL-9800S2-18



STATION series

RECESSED ADJUSTABLE DOWNLIGHT

BRIDGE LUX 50,000hrs | 15W | 3000K / 4000K / 5000K | 15° / 24° / 36° | Adj. | Ra >90 | UGR <19 | IP20 | 3 | CE



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	15°	DL-9800-15-3015-P-C
				24°	DL-9800-15-3024-P-C
				36°	DL-9800-15-3036-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-9800-15-4015-P-C
				24°	DL-9800-15-4024-P-C
				36°	DL-9800-15-4036-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-9800-15-5015-P-C
				24°	DL-9800-15-5024-P-C
				36°	DL-9800-15-5036-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-9800S1-15-3015-P-C
				24°	DL-9800S1-15-3024-P-C
				36°	DL-9800S1-15-3036-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-9800S1-15-4015-P-C
				24°	DL-9800S1-15-4024-P-C
				36°	DL-9800S1-15-4036-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-9800S1-15-5015-P-C
				24°	DL-9800S1-15-5024-P-C
				36°	DL-9800S1-15-5036-P-C
COB LED	2x15W	AC220-240V	3000K	15°	DL-9800S2-30-3015-P-C
				24°	DL-9800S2-30-3024-P-C
				36°	DL-9800S2-30-3036-P-C
COB LED	2x15W	AC220-240V	4000K	15°	DL-9800S2-30-4015-P-C
				24°	DL-9800S2-30-4024-P-C
				36°	DL-9800S2-30-4036-P-C
COB LED	2x15W	AC220-240V	5000K	15°	DL-9800S2-30-5015-P-C
				24°	DL-9800S2-30-5024-P-C
				36°	DL-9800S2-30-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm



DL-9800-15



DL-9800S1-15



DL-9800S2-30



STATION series

RECESSED ADJUSTABLE DOWNLIGHT

BRIDGELUX 50,000hrs | 24W | 3000K / 4000K / 5000K | 15° / 24° / 36° | Adj. | Ra >90 | UGR <19 | IP20 | 3 | CE



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	24W	AC220-240V	3000K	15°	DL-9801-24-3015-P-C
				24°	DL-9801-24-3024-P-C
				36°	DL-9801-24-3036-P-C
COB LED	24W	AC220-240V	4000K	15°	DL-9801-24-4015-P-C
				24°	DL-9801-24-4024-P-C
				36°	DL-9801-24-4036-P-C
COB LED	24W	AC220-240V	5000K	15°	DL-9801-24-5015-P-C
				24°	DL-9801-24-5024-P-C
				36°	DL-9801-24-5036-P-C
COB LED	24W	AC220-240V	3000K	15°	DL-9801S1-24-3015-P-C
				24°	DL-9801S1-24-3024-P-C
				36°	DL-9801S1-24-3036-P-C
COB LED	24W	AC220-240V	4000K	15°	DL-9801S1-24-4015-P-C
				24°	DL-9801S1-24-4024-P-C
				36°	DL-9801S1-24-4036-P-C
COB LED	24W	AC220-240V	5000K	15°	DL-9801S1-24-5015-P-C
				24°	DL-9801S1-24-5024-P-C
				36°	DL-9801S1-24-5036-P-C
COB LED	2x24W	AC220-240V	3000K	15°	DL-9801S2-48-3015-P-C
				24°	DL-9801S2-48-3024-P-C
				36°	DL-9801S2-48-3036-P-C
COB LED	2x24W	AC220-240V	4000K	15°	DL-9801S2-48-4015-P-C
				24°	DL-9801S2-48-4024-P-C
				36°	DL-9801S2-48-4036-P-C
COB LED	2x24W	AC220-240V	5000K	15°	DL-9801S2-48-5015-P-C
				24°	DL-9801S2-48-5024-P-C
				36°	DL-9801S2-48-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm


DL-9801-24



DL-9801S1-24



DL-9801S2-48



STATION series

RECESSED ADJUSTABLE DOWNLIGHT

BRIDGELUX 50,000hrs | 35W | 3000K / 4000K / 5000K | 15° / 24° / 36° | Adj. | Ra >90 | UGR <19 | IP20 | 3 | CE



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	35W	AC220-240V	3000K	15°	DL-9802-35-3015-P-C
				24°	DL-9802-35-3024-P-C
				36°	DL-9802-35-3036-P-C
COB LED	35W	AC220-240V	4000K	15°	DL-9802-35-4015-P-C
				24°	DL-9802-35-4024-P-C
				36°	DL-9802-35-4036-P-C
COB LED	35W	AC220-240V	5000K	15°	DL-9802-35-5015-P-C
				24°	DL-9802-35-5024-P-C
				36°	DL-9802-35-5036-P-C
COB LED	35W	AC220-240V	3000K	15°	DL-9802S1-35-3015-P-C
				24°	DL-9802S1-35-3024-P-C
				36°	DL-9802S1-35-3036-P-C
COB LED	35W	AC220-240V	4000K	15°	DL-9802S1-35-4015-P-C
				24°	DL-9802S1-35-4024-P-C
				36°	DL-9802S1-35-4036-P-C
COB LED	35W	AC220-240V	5000K	15°	DL-9802S1-35-5015-P-C
				24°	DL-9802S1-35-5024-P-C
				36°	DL-9802S1-35-5036-P-C
COB LED	2x35W	AC220-240V	3000K	15°	DL-9802S2-70-3015-P-C
				24°	DL-9802S2-70-3024-P-C
				36°	DL-9802S2-70-3036-P-C
COB LED	2x35W	AC220-240V	4000K	15°	DL-9802S2-70-4015-P-C
				24°	DL-9802S2-70-4024-P-C
				36°	DL-9802S2-70-4036-P-C
COB LED	2x35W	AC220-240V	5000K	15°	DL-9802S2-70-5015-P-C
				24°	DL-9802S2-70-5024-P-C
				36°	DL-9802S2-70-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm




DL-9802-35



DL-9802S1-35



DL-9802S2-70





DAS series



DAS series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGELUX | 13W | 3000K
50,000hrs | 15W | 4000K | 35W | 5000K | 10° 23° 38° | Adj. | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	13W	AC220-240V	3000K	10°	DL-2027A-13-3010-P-C
				23°	DL-2027A-13-3023-P-C
				38°	DL-2027A-13-3038-P-C
COB LED	13W	AC220-240V	4000K	10°	DL-2027A-13-4015-P-C
				23°	DL-2027A-13-4024-P-C
				38°	DL-2027A-13-4036-P-C
COB LED	13W	AC220-240V	5000K	10°	DL-2027A-13-5015-P-C
				23°	DL-2027A-13-5024-P-C
				38°	DL-2027A-13-5036-P-C
COB LED	15W	AC220-240V	3000K	10°	DL-2023A-15-3010-P-C
				23°	DL-2023A-15-3023-P-C
				38°	DL-2023A-15-3038-P-C
COB LED	15W	AC220-240V	4000K	10°	DL-2023A-15-3010-P-C
				23°	DL-2023A-15-3023-P-C
				38°	DL-2023A-15-3038-P-C
COB LED	15W	AC220-240V	5000K	10°	DL-2023A-15-3010-P-C
				23°	DL-2023A-15-3023-P-C
				38°	DL-2023A-15-3038-P-C
COB LED	35W	AC220-240V	3000K	10°	DL-2019A-35-3010-P-C
				23°	DL-2019A-35-3023-P-C
				38°	DL-2019A-35-3038-P-C
COB LED	35W	AC220-240V	4000K	10°	DL-2019A-35-3010-P-C
				23°	DL-2019A-35-3023-P-C
				38°	DL-2019A-35-3038-P-C
COB LED	35W	AC220-240V	5000K	10°	DL-2019A-35-3010-P-C
				23°	DL-2019A-35-3023-P-C
				38°	DL-2019A-35-3038-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm


DL-2027A-13



DL-2023A-15



DL-2019A-35



DAS series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGELUX | 15W | 3000K
50,000hrs | 15W | 4000K | 35W | 5000K | 10° 23° 38° | Adj. | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	2x15W	AC220-240V	3000K	10°	DL-2022A-30-3010-P-C
				23°	DL-2022A-30-3023-P-C
				38°	DL-2022A-30-3038-P-C
COB LED	2x15W	AC220-240V	4000K	10°	DL-2022A-30-3010-P-C
				23°	DL-2022A-30-3023-P-C
				38°	DL-2022A-30-3038-P-C
COB LED	2x15W	AC220-240V	5000K	10°	DL-2022A-30-3010-P-C
				23°	DL-2022A-30-3023-P-C
				38°	DL-2022A-30-3038-P-C
COB LED	2x35W	AC220-240V	3000K	10°	DL-2018A-70-3010-P-C
				23°	DL-2018A-70-3023-P-C
				38°	DL-2018A-70-3038-P-C
COB LED	2x35W	AC220-240V	4000K	10°	DL-2018A-70-3010-P-C
				23°	DL-2018A-70-3023-P-C
				38°	DL-2018A-70-3038-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-2022A-30



DL-2018A-70



LIMA series



LIMA series

SURFACE DOWNLIGHT

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGE LUX	8W 20W 35W	3000K 4000K 5000K	25° 40° 60°	Adj.	Ra >90	UGR <19	IP20	3	CE
------------	------------------	-------------------------	-------------------	------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	8W	AC220-240V	3000K	25°	DL-9331-08-3025-P-C
				40°	DL-9331-08-3040-P-C
				60°	DL-9331-08-3060-P-C
COB LED	8W	AC220-240V	4000K	25°	DL-9331-08-4025-P-C
				40°	DL-9331-08-4040-P-C
				60°	DL-9331-08-4060-P-C
COB LED	8W	AC220-240V	5000K	25°	DL-9331-08-5025-P-C
				40°	DL-9331-08-5040-P-C
				60°	DL-9331-08-5060-P-C
COB LED	20W	AC220-240V	3000K	25°	DL-9345-20-3025-P-C
				40°	DL-9345-20-3040-P-C
				60°	DL-9345-20-3060-P-C
COB LED	20W	AC220-240V	4000K	25°	DL-9345-20-4025-P-C
				40°	DL-9345-20-4040-P-C
				60°	DL-9345-20-4060-P-C
COB LED	20W	AC220-240V	5000K	25°	DL-9345-20-5025-P-C
				40°	DL-9345-20-5040-P-C
				60°	DL-9345-20-5060-P-C
COB LED	35W	AC220-240V	3000K	25°	DL-9333-35-3025-P-C
				40°	DL-9333-35-3040-P-C
				60°	DL-9333-35-3060-P-C
COB LED	35W	AC220-240V	4000K	25°	DL-9333-35-4025-P-C
				40°	DL-9333-35-4040-P-C
				60°	DL-9333-35-4060-P-C
COB LED	35W	AC220-240V	5000K	25°	DL-9333-35-5025-P-C
				40°	DL-9333-35-5040-P-C
				60°	DL-9333-35-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black WM-White / Matte Silver WO-White / Orange BO-Black / Orange)




Controller: On / Off, Dimmable, DALI

DIMENSION
unit:mm


DL-9331-13



DL-9345-20



DL-9333-35





SCOTT series

SURFACE DOWNLIGHT



SCOTT series

IP65 WEATHER RESISTANCE

its model with IP65 rate wheather resistance, the use of refraction instead of reflection to direct the light outwards from the piece manages to extraordinarily diminish the glare and achieves lightconcentration at a well defined angle.



BRIDGE LUX	12W	3000K 4000K 5000K	30° 45°	Ra >90	UGR <19	IP65	3 DALI	CE
------------	-----	-------------------------	------------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220-240V	3000K	30° 45°	DL-3061-12-3030-P-C DL-3061-12-3045-P-C
COB LED	12W	AC220-240V	4000K	30° 45°	DL-3061-12-4030-P-C DL-3061-12-4045-P-C
COB LED	12W	AC220-240V	5000K	30° 45°	DL-3061-12-5030-P-C DL-3061-12-5045-P-C
COB LED	17W	AC220-240V	3000K	30° 45°	DL-3062-17-3030-P-C DL-3062-17-3045-P-C
COB LED	17W	AC220-240V	4000K	30° 45°	DL-3062-17-4030-P-C DL-3062-17-4045-P-C
COB LED	17W	AC220-240V	5000K	30° 45°	DL-3062-17-5030-P-C DL-3062-17-5045-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION


unit:mm

DL-3061-12




084.3

DL-3062-17




098

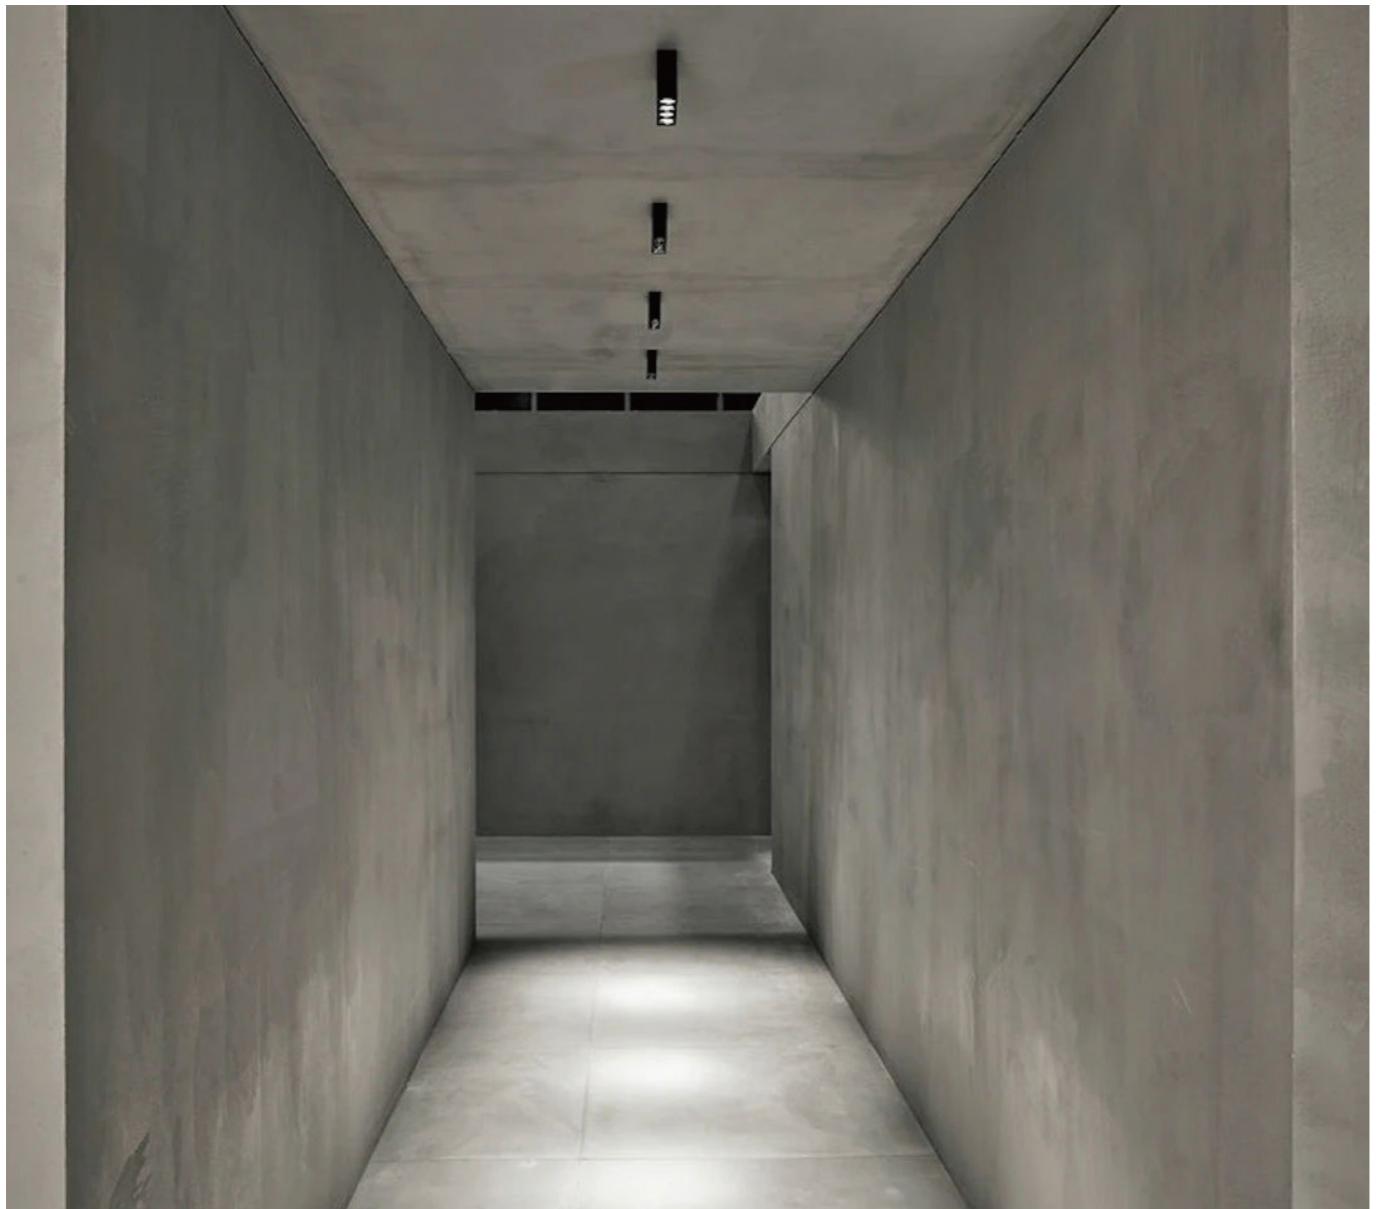

TINO series

FIXED SURFACE DOWN LAMP WITH LEDIL LENS



BRIDGE LUX	12W	3000K 4000K 5000K	13° 30° 46°	Fixed	Ra >90	UGR <19	IP20	3	CE
------------	-----	-------------------------	-------------------	-------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220-240V	3000K	13°	DL-1078A-12-3013-P-C
				30°	DL-1078A-12-3030-P-C
				46°	DL-1078A-12-3046-P-C
COB LED	12W	AC220-240V	4000K	13°	DL-1078A-12-3010-P-C
				30°	DL-1078A-12-3023-P-C
				46°	DL-1078A-12-3038-P-C
COB LED	12W	AC220-240V	5000K	13°	DL-1078A-12-3010-P-C
				30°	DL-1078A-12-3023-P-C
				46°	DL-1078A-12-3038-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black)



White Reflector Black Reflector

Controller: On / Off, Dimmable, Dali


DIMENSION
unit:mm




TINO series

PRODUCT INTRODUCTION

The excellence of comfort: UGR 16 for outstanding glare protection, homogeneity in light distribution and delivered lux compliant to the most strict standards of the industry. Light Shadow reaches extreme cut-off angles without sacrificing high efficiency and very small dimensions.

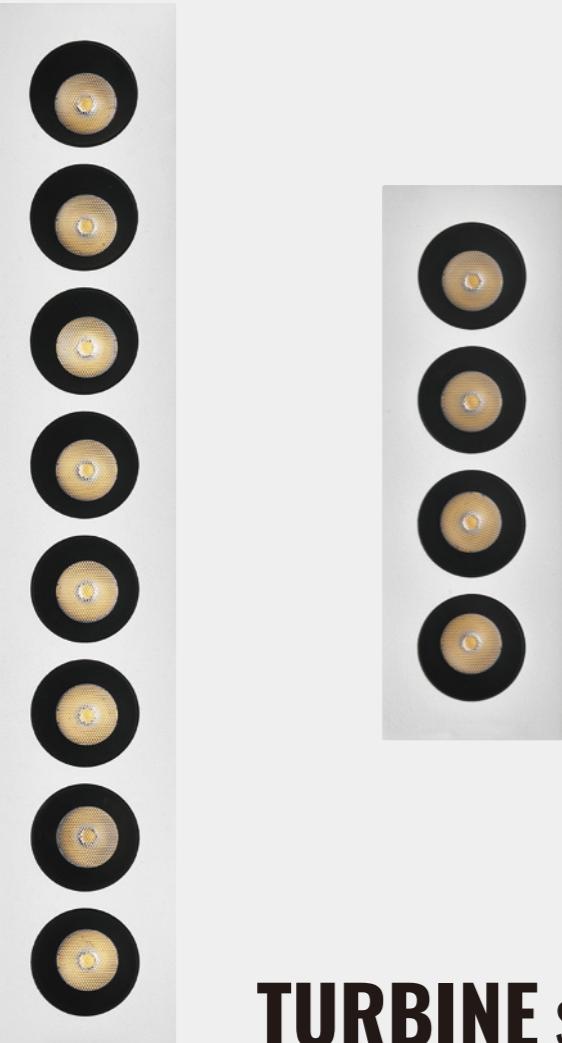

TURBINE series

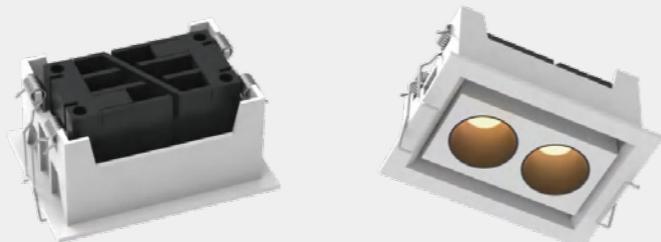

TURBINE series

RECESSED GRILLE DOWNTLIGHT



BRIDGE LUX	2.5W	3000K 4000K 5000K	15° 24° 50°	Fixed	Ra >90	UGR <19	IP20	3	CE
------------	------	-------------------------	-------------------	-------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	2x2.5W	AC220-240V	3000K	15° 24° 50°	DL-9748S1-05-3015-P-C DL-9748S1-05-3024-P-C DL-9748S1-05-3050-P-C
COB LED	2x2.5W	AC220-240V	4000K	15° 24° 50°	DL-9748S1-05-4015-P-C DL-9748S1-05-4024-P-C DL-9748S1-05-4050-P-C
COB LED	2x2.5W	AC220-240V	5000K	15° 24° 50°	DL-9748S1-05-5015-P-C DL-9748S1-05-5024-P-C DL-9748S1-05-5050-P-C
COB LED	4x2.5W	AC220-240V	3000K	15° 24° 50°	DL-9748S2-10-3015-P-C DL-9748S2-10-3024-P-C DL-9748S2-10-3050-P-C
COB LED	4x2.5W	AC220-240V	4000K	15° 24° 50°	DL-9748S2-10-4015-P-C DL-9748S2-10-4024-P-C DL-9748S2-10-4050-P-C
COB LED	4x2.5W	AC220-240V	5000K	15° 24° 50°	DL-9748S2-10-5015-P-C DL-9748S2-10-5024-P-C DL-9748S2-10-5050-P-C
COB LED	8x2.5W	AC220-240V	3000K	15° 24° 50°	DL-9748S2-20-3015-P-C DL-9748S2-20-3024-P-C DL-9748S2-20-3050-P-C
COB LED	8x2.5W	AC220-240V	4000K	15° 24° 50°	DL-9748S2-20-4015-P-C DL-9748S2-20-4024-P-C DL-9748S2-20-4050-P-C
COB LED	8x2.5W	AC220-240V	5000K	15° 24° 50°	DL-9748S2-20-5015-P-C DL-9748S2-20-5024-P-C DL-9748S2-20-5050-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black)




White Reflector Black Reflector


Controller: On / Off, Dimmable, DALI

DIMENSION
unit:mm



DL-9748S1-5




DL-9748S2-10




DL-9748S2-20

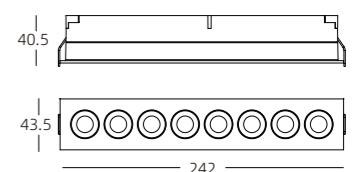


1-25mm
Ceiling Thickness
66x37



1-25mm
Ceiling Thickness
122x37



1-25mm
Ceiling Thickness
236x37

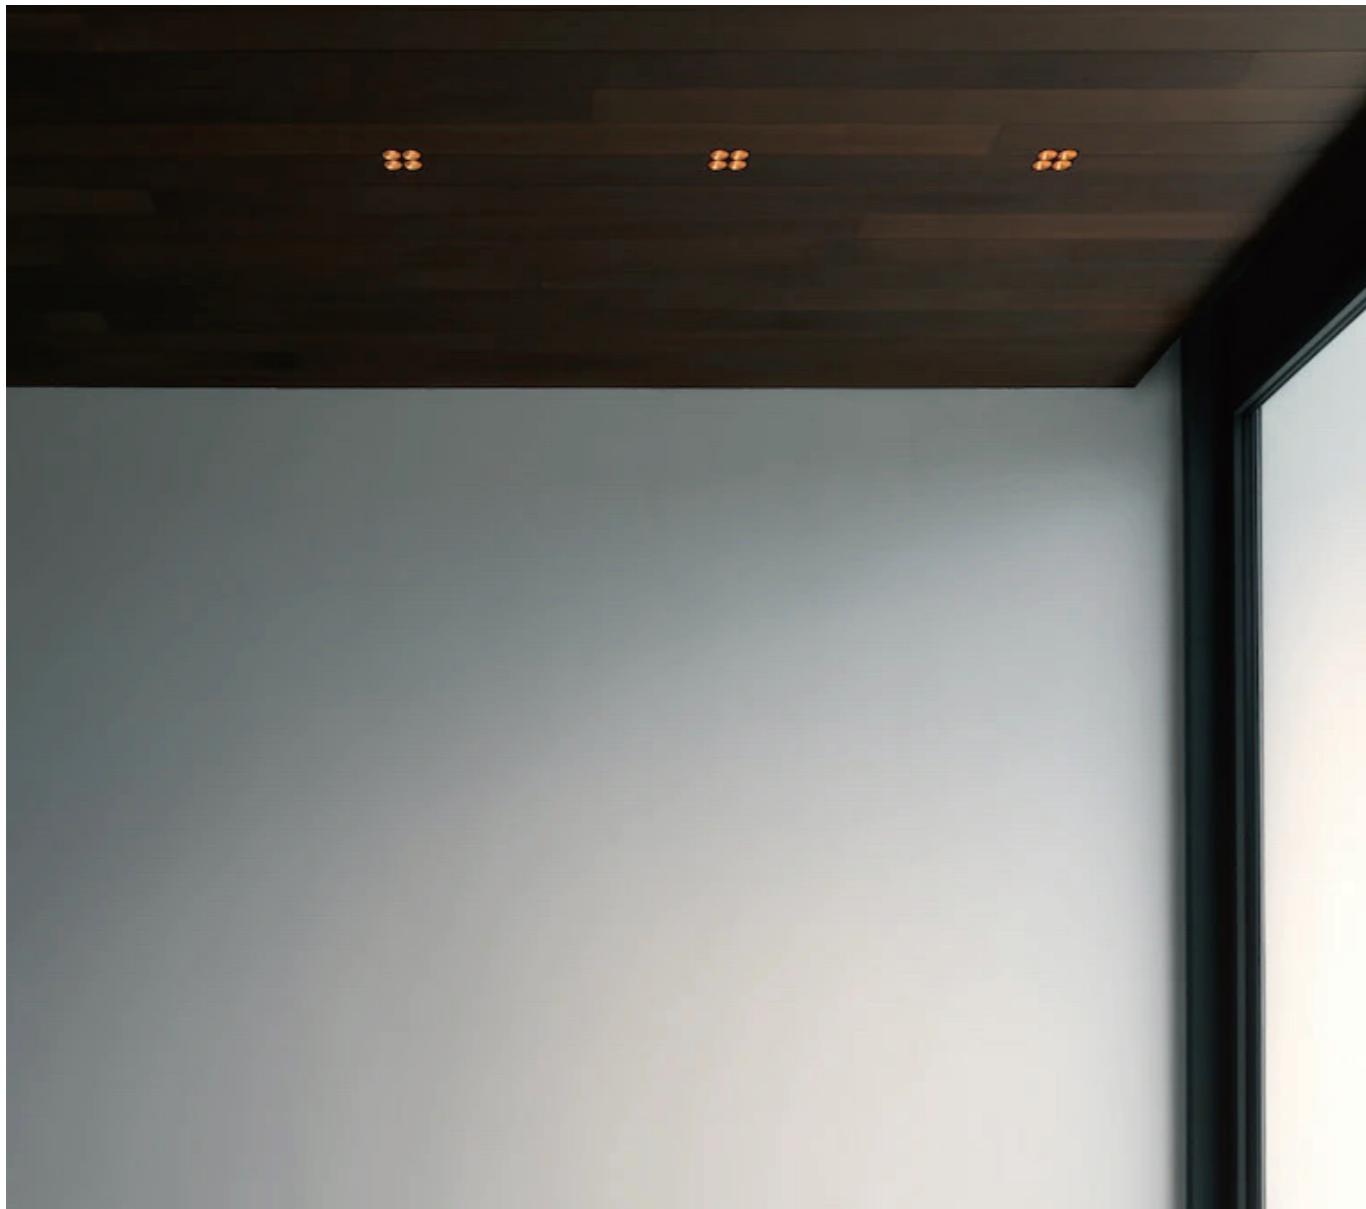

LINEAR DOWNTLIGHT

METZ series

SURFACE CEILING DOWNTLIGHT



BRIDGE LUX	12.5W	3000K 4000K 5000K	20° 40° 60°	Fixed	Ra >90	UGR <19	IP20	3 DALI	CE
------------	-------	-------------------------	-------------------	-------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12.5W	AC220-240V	3000K	20°	DL-3049-12-3020-P-C
				40°	DL-3049-12-3040-P-C
				60°	DL-3049-12-3060-P-C
COB LED	12.5W	AC220-240V	4000K	20°	DL-3049-12-4020-P-C
				40°	DL-3049-12-4040-P-C
				60°	DL-3049-12-4060-P-C
COB LED	12.5W	AC220-240V	5000K	20°	DL-3049-12-5020-P-C
				40°	DL-3049-12-5040-P-C
				60°	DL-3049-12-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black)




White Reflector

Black Reflector

Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm



METZ series

PRODUCT INTRODUCTION

Anti-Glare & focus light design, specialized for luxury homes, villas,

commercial spaces

Round & Square shape with all wattage series included to meet the different design requirement.

METZ series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX 50,000hrs	10W	3000K 4000K 5000K	10° 15° 25° 30°	Fixed	Ra >90	UGR <19	IP20	3	CE
-------------------------	-----	-------------------------	--------------------------	-------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	10W	AC220-240V	3000K	10°	DL-3055-10-3010-P-C
				15°	DL-3055-10-3015-P-C
				25°	DL-3055-10-3025-P-C
COB LED	10W	AC220-240V	4000K	10°	DL-3055-10-4010-P-C
				15°	DL-3055-10-4015-P-C
				25°	DL-3055-10-4025-P-C
COB LED	10W	AC220-240V	5000K	10°	DL-3055-10-5010-P-C
				15°	DL-3055-10-5015-P-C
				25°	DL-3055-10-5025-P-C
COB LED	10W	AC220-240V	3000K	30°	DL-3056-10-3030-P-C
COB LED	10W	AC220-240V	4000K	30°	DL-3056-10-4030-P-C
COB LED	10W	AC220-240V	5000K	30°	DL-3056-10-5030-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)



Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black)





Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-3055-10



DL-3056-10



METZ series

TRIMLESS FIXED DOWNLIGHT



BRIDGE LUX 50,000hrs	10W	3000K 4000K 5000K	25°	Fixed	Ra >90	UGR <19	IP20	3	CE
-------------------------	-----	-------------------------	-----	-------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	10W	AC220-240V	3000K	10°	DL-3055A-10-3010-P-C
				15°	DL-3055A-10-3015-P-C
				25°	DL-3055A-10-3025-P-C
COB LED	10W	AC220-240V	4000K	10°	DL-3055A-10-4010-P-C
				15°	DL-3055A-10-4015-P-C
				25°	DL-3055A-10-4025-P-C
COB LED	10W	AC220-240V	5000K	10°	DL-3055A-10-5010-P-C
				15°	DL-3055A-10-5015-P-C
				25°	DL-3055A-10-5025-P-C
COB LED	10W	AC220-240V	3000K	25°	DL-3056A-10-3025-P-C
COB LED	10W	AC220-240V	4000K	25°	DL-3056A-10-4025-P-C
COB LED	10W	AC220-240V	5000K	25°	DL-3056A-10-5025-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)



Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black)





Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-3055A-10



DL-3056A-10





PACO SERIES

TRIMLESS ADJUSTABLE DOWNLIGHT



BRIDGE LUX | 15W | 3000K | 4000K | 5000K | 20° | 40° | 60° | ADL | RA >90 | UGR <19 | IP20 | 3 | CE

LIGHT SOURCE	POWER	VOLTAGE	CCT	BEAM ANGLE	CODE
COB LED	15W	AC220-240V	3000K	20°	DL-5219-15-3020-P-C
				40°	DL-5219-15-3040-P-C
				60°	DL-5219-15-3060-P-C
COB LED	15W	AC220-240V	4000K	20°	DL-5219-15-4020-P-C
				40°	DL-5219-15-4040-P-C
				60°	DL-5219-15-4060-P-C
COB LED	15W	AC220-240V	5000K	20°	DL-5219-15-5020-P-C
				40°	DL-5219-15-5040-P-C
				60°	DL-5219-15-5060-P-C
COB LED	15W	AC220-240V	3000K	20°	DL-5219A-15-3020-P-C
				40°	DL-5219A-15-3040-P-C
				60°	DL-5219A-15-3060-P-C
COB LED	15W	AC220-240V	4000K	20°	DL-5219A-15-4020-P-C
				40°	DL-5219A-15-4040-P-C
				60°	DL-5219A-15-4060-P-C
COB LED	15W	AC220-240V	5000K	20°	DL-5219A-15-5020-P-C
				40°	DL-5219A-15-5040-P-C
				60°	DL-5219A-15-5060-P-C

POWER SUPPLY: P (1-ON / OFF 2-PHASE DIM 3-DALI DIM 4-1-10V DIM)

COLOUR FINISH: C (WW-WHITE / WHITE BB-BLACK / BLACK)



WHITE REFLECTOR




BLACK REFLECTOR


CONTROLLER: ON / OFF, DIMMABLE, DALI

DIMENSION
UNIT:MM

DL-5219-15



DL-5219A-15



FOCUS DOWNLIGHT



LUCA series

PRODUCT INTRODUCTION

The extruded aluminium heat sink guarantees great thermal management, long life and high efficiency, while providing maximum luminous flux.

Adjustable versions (excluding Everything 80 option) are equipped with a blocking system to guarantee perfect framing. Rotation up to 360, beam angle +30%–30°.

Separate electronic driver: non-dimmable or DALI dimmable options for LED products. Compliant with standard EN60598-1 and other specific regulations.



FOCUS DOWNLIGHT

LUCA series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGELUX | 15W | 3000K | 4000K | 5000K | 15° | 24° | 36° | 55° | Adj. | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	15°	DL-1101-15-3015-P-C
				24°	DL-1101-15-3024-P-C
				36°	DL-1101-15-3036-P-C
				55°	DL-1101-15-3055-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1101-15-4015-P-C
				24°	DL-1101-15-4024-P-C
				36°	DL-1101-15-4036-P-C
				55°	DL-1101-15-4055-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1101-15-5015-P-C
				24°	DL-1101-15-5024-P-C
				36°	DL-1101-15-5036-P-C
				55°	DL-1101-15-5055-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-1102-15-3015-P-C
				24°	DL-1102-15-3024-P-C
				36°	DL-1102-15-3036-P-C
				55°	DL-1102-15-3055-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1102-15-4015-P-C
				24°	DL-1102-15-4024-P-C
				36°	DL-1102-15-4036-P-C
				55°	DL-1102-15-4055-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1102-15-5015-P-C
				24°	DL-1102-15-5024-P-C
				36°	DL-1102-15-5036-P-C
				55°	DL-1102-15-5055-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-1101-15



DL-1102-15



LUCA series

TRIMLESS ADJUSTABLE DOWNLIGHT



BRIDGELUX | 15W | 3000K | 4000K | 5000K | 15° | 24° | 36° | 55° | Adj. | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	15°	DL-1103-15-3015-P-C
				24°	DL-1103-15-3024-P-C
				36°	DL-1103-15-3036-P-C
				55°	DL-1103-15-3055-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1103-15-4015-P-C
				24°	DL-1103-15-4024-P-C
				36°	DL-1103-15-4036-P-C
				55°	DL-1103-15-4055-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1103-15-5015-P-C
				24°	DL-1103-15-5024-P-C
				36°	DL-1103-15-5036-P-C
				55°	DL-1103-15-5055-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-1104-15-3015-P-C
				24°	DL-1104-15-3024-P-C
				36°	DL-1104-15-3036-P-C
				55°	DL-1104-15-3055-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1104-15-4015-P-C
				24°	DL-1104-15-4024-P-C
				36°	DL-1104-15-4036-P-C
				55°	DL-1104-15-4055-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1104-15-5015-P-C
				24°	DL-1104-15-5024-P-C
				36°	DL-1104-15-5036-P-C
				55°	DL-1104-15-5055-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-1103-15



DL-1104-15



LUCA series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGE LUX | 15W | 3000K | 4000K | 5000K | 15° | 24° | 36° | 55° | Adj. | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	15°	DL-2040-15-3015-P-C
				24°	DL-2040-15-3024-P-C
				36°	DL-2040-15-3036-P-C
				55°	DL-2040-15-3055-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-2040-15-4015-P-C
				24°	DL-2040-15-4024-P-C
				36°	DL-2040-15-4036-P-C
				55°	DL-2040-15-4055-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-2040-15-5015-P-C
				24°	DL-2040-15-5024-P-C
				36°	DL-2040-15-5036-P-C
				55°	DL-2040-15-5055-P-C
COB LED	2x15W	AC220-240V	3000K	15°	DL-2040-30-3015-P-C
				24°	DL-2040-30-3024-P-C
				36°	DL-2040-30-3036-P-C
				55°	DL-2040-30-3055-P-C
COB LED	2x15W	AC220-240V	4000K	15°	DL-2040-30-4015-P-C
				24°	DL-2040-30-4024-P-C
				36°	DL-2040-30-4036-P-C
				55°	DL-2040-30-4055-P-C
COB LED	2x15W	AC220-240V	5000K	15°	DL-2040-30-5015-P-C
				24°	DL-2040-30-5024-P-C
				36°	DL-2040-30-5036-P-C
				55°	DL-2040-30-5055-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)



Colour Finish: C (WW-White / White BB-Black / Black)





Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-2040-15



DL-2040-30

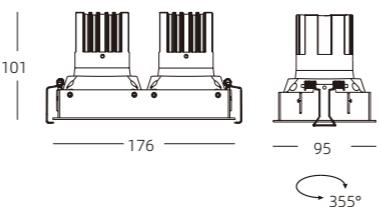

LUCA series

TRIMLESS ADJUSTABLE DOWNLIGHT



BRIDGE LUX | 15W | 3000K | 4000K | 5000K | 15° | 24° | 36° | 55° | Adj. | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	15°	DL-2041-15-3015-P-C
				24°	DL-2041-15-3024-P-C
				36°	DL-2041-15-3036-P-C
				55°	DL-2041-15-3055-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-2041-15-4015-P-C
				24°	DL-2041-15-4024-P-C
				36°	DL-2041-15-4036-P-C
				55°	DL-2041-15-4055-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-2041-15-5015-P-C
				24°	DL-2041-15-5024-P-C
				36°	DL-2041-15-5036-P-C
				55°	DL-2041-15-5055-P-C
COB LED	2x15W	AC220-240V	3000K	15°	DL-2041-30-3015-P-C
				24°	DL-2041-30-3024-P-C
				36°	DL-2041-30-3036-P-C
				55°	DL-2041-30-3055-P-C
COB LED	2x15W	AC220-240V	4000K	15°	DL-2041-30-4015-P-C
				24°	DL-2041-30-4024-P-C
				36°	DL-2041-30-4036-P-C
				55°	DL-2041-30-4055-P-C
COB LED	2x15W	AC220-240V	5000K	15°	DL-2041-30-5015-P-C
				24°	DL-2041-30-5024-P-C
				36°	DL-2041-30-5036-P-C
				55°	DL-2041-30-5055-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)



Colour Finish: C (WW-White / White BB-Black / Black)





Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-2041-15



DL-2041-30

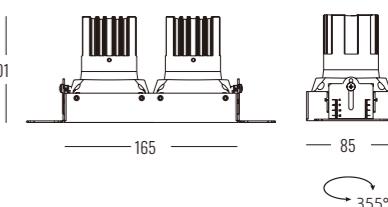



PIRÀ series

PIRÀ series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX | 9W | 3000K | 4000K | 5000K | 15° | 24° | 36° | 38° | 60° | Fixed | Ra >90 | UGR <19 | IP20 | 3 | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	9W	AC220-240V	3000K	15°	DL-5075A-09-3015-P-C
				24°	DL-5075A-09-3024-P-C
				36°	DL-5075A-09-3036-P-C
COB LED	9W	AC220-240V	4000K	15°	DL-5075A-09-4015-P-C
				24°	DL-5075A-09-4024-P-C
				36°	DL-5075A-09-4036-P-C
COB LED	9W	AC220-240V	5000K	15°	DL-5075A-09-5015-P-C
				24°	DL-5075A-09-5024-P-C
				36°	DL-5075A-09-5036-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-5045-15-3015-P-C
				24°	DL-5045-15-3024-P-C
				38°	DL-5045-15-3038-P-C
				60°	DL-5045-15-3060-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-5045-15-4015-P-C
				24°	DL-5045-15-4024-P-C
				38°	DL-5045-15-4038-P-C
				60°	DL-5045-15-4060-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-5045-15-5015-P-C
				24°	DL-5045-15-5024-P-C
				38°	DL-5045-15-5038-P-C
				60°	DL-5045-15-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black)




White Reflector Black Reflector



Controller: On / Off, Dimmable, DALI

DIMENSION unit:mm

DL-5075A-09



DL-5045-15



065



076

1-25mm
Ceiling Thickness

1-25mm
Ceiling Thickness

PIRA series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX | 22W | 30W | 3000K | 4000K | 5000K | 15° | 24° | 36° | 60° | Fixed | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	22W	AC220-240V	3000K	15°	DL-5045-22-3015-P-C
				24°	DL-5045-22-3024-P-C
				38°	DL-5045-22-3038-P-C
				60°	DL-5045-22-3060-P-C
COB LED	22W	AC220-240V	4000K	15°	DL-5045-22-4015-P-C
				24°	DL-5045-22-4024-P-C
				38°	DL-5045-22-4038-P-C
				60°	DL-5045-22-4060-P-C
COB LED	22W	AC220-240V	5000K	15°	DL-5045-22-5015-P-C
				24°	DL-5045-22-5024-P-C
				38°	DL-5045-22-5038-P-C
				60°	DL-5045-22-5060-P-C
COB LED	30W	AC220-240V	3000K	15°	DL-5045-30-3015-P-C
				24°	DL-5045-30-3024-P-C
				38°	DL-5045-30-3038-P-C
				60°	DL-5045-30-3060-P-C
COB LED	30W	AC220-240V	4000K	15°	DL-5045-30-4015-P-C
				24°	DL-5045-30-4024-P-C
				38°	DL-5045-30-4038-P-C
				60°	DL-5045-30-4060-P-C
COB LED	30W	AC220-240V	5000K	15°	DL-5045-30-5015-P-C
				24°	DL-5045-30-5024-P-C
				38°	DL-5045-30-5038-P-C
				60°	DL-5045-30-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-5045-22



DL-5045-30



PIRA series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX | 35W | 40W | 3000K | 4000K | 5000K | 15° | 24° | 36° | 60° | Fixed | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	35W	AC220-240V	3000K	15°	DL-5045-35-3015-P-C
				24°	DL-5045-35-3024-P-C
				36°	DL-5045-35-3036-P-C
				60°	DL-5045-35-3060-P-C
COB LED	35W	AC220-240V	4000K	15°	DL-5045-35-4015-P-C
				24°	DL-5045-35-4024-P-C
				36°	DL-5045-35-4036-P-C
				60°	DL-5045-35-4060-P-C
COB LED	35W	AC220-240V	5000K	15°	DL-5045-35-5015-P-C
				24°	DL-5045-35-5024-P-C
				36°	DL-5045-35-5036-P-C
				60°	DL-5045-35-5060-P-C
COB LED	40W	AC220-240V	3000K	15°	DL-5045-40-3015-P-C
				24°	DL-5045-40-3024-P-C
				36°	DL-5045-40-3036-P-C
				60°	DL-5045-40-3060-P-C
COB LED	40W	AC220-240V	4000K	15°	DL-5045-40-4015-P-C
				24°	DL-5045-40-4024-P-C
				36°	DL-5045-40-4036-P-C
				60°	DL-5045-40-4060-P-C
COB LED	40W	AC220-240V	5000K	15°	DL-5045-40-5015-P-C
				24°	DL-5045-40-5024-P-C
				36°	DL-5045-40-5036-P-C
				60°	DL-5045-40-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)





Controller: On / Off, Dimmable, Dali


DIMENSION
unit:mm

DL-5045-35



DL-5045-40



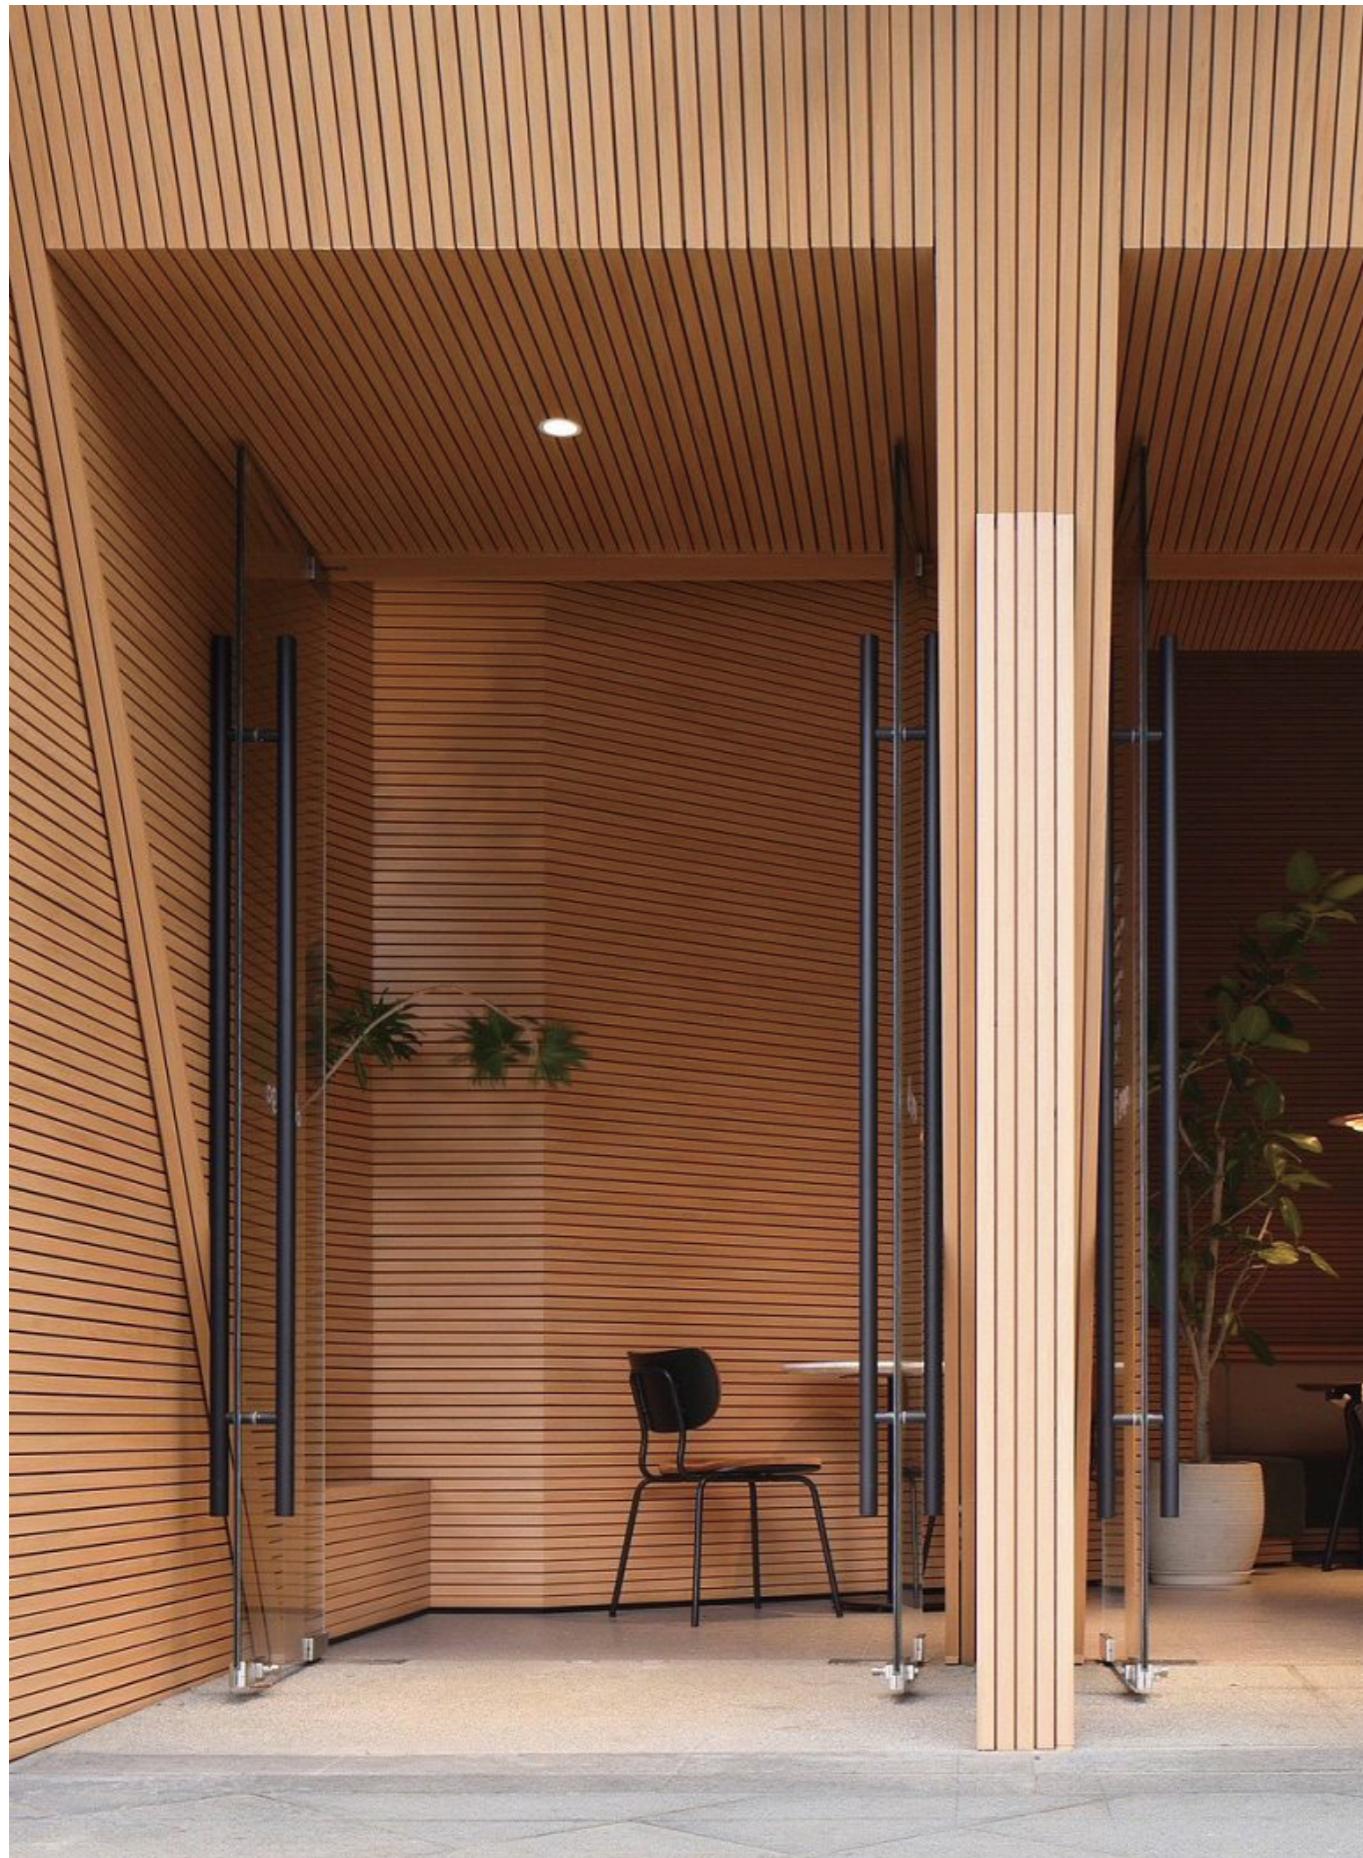

FOCUS DOWNLIGHT

PIRA series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX	15W	3000K 4000K 5000K	15° 24° 38° 60°	Fixed	Ra >90	UGR <19	IP65	3 DALI	CE
------------	-----	-------------------------	--------------------------	-------	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	15° 24° 38° 60°	DL-5045-15-IP65-3015-P-C DL-5045-15-IP65-3024-P-C DL-5045-15-IP65-3038-P-C DL-5045-15-IP65-3060-P-C
COB LED	15W	AC220-240V	4000K	15° 24° 38° 60°	DL-5045-15-IP65-4015-P-C DL-5045-15-IP65-4024-P-C DL-5045-15-IP65-4038-P-C DL-5045-15-IP65-4060-P-C
COB LED	15W	AC220-240V	5000K	15° 24° 38° 60°	DL-5045-15-IP65-5015-P-C DL-5045-15-IP65-5024-P-C DL-5045-15-IP65-5038-P-C DL-5045-15-IP65-5060-P-C



Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)



Colour Finish: C (WW-White / White BB-Black / Black)



Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm



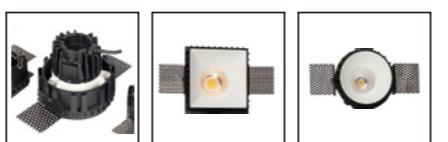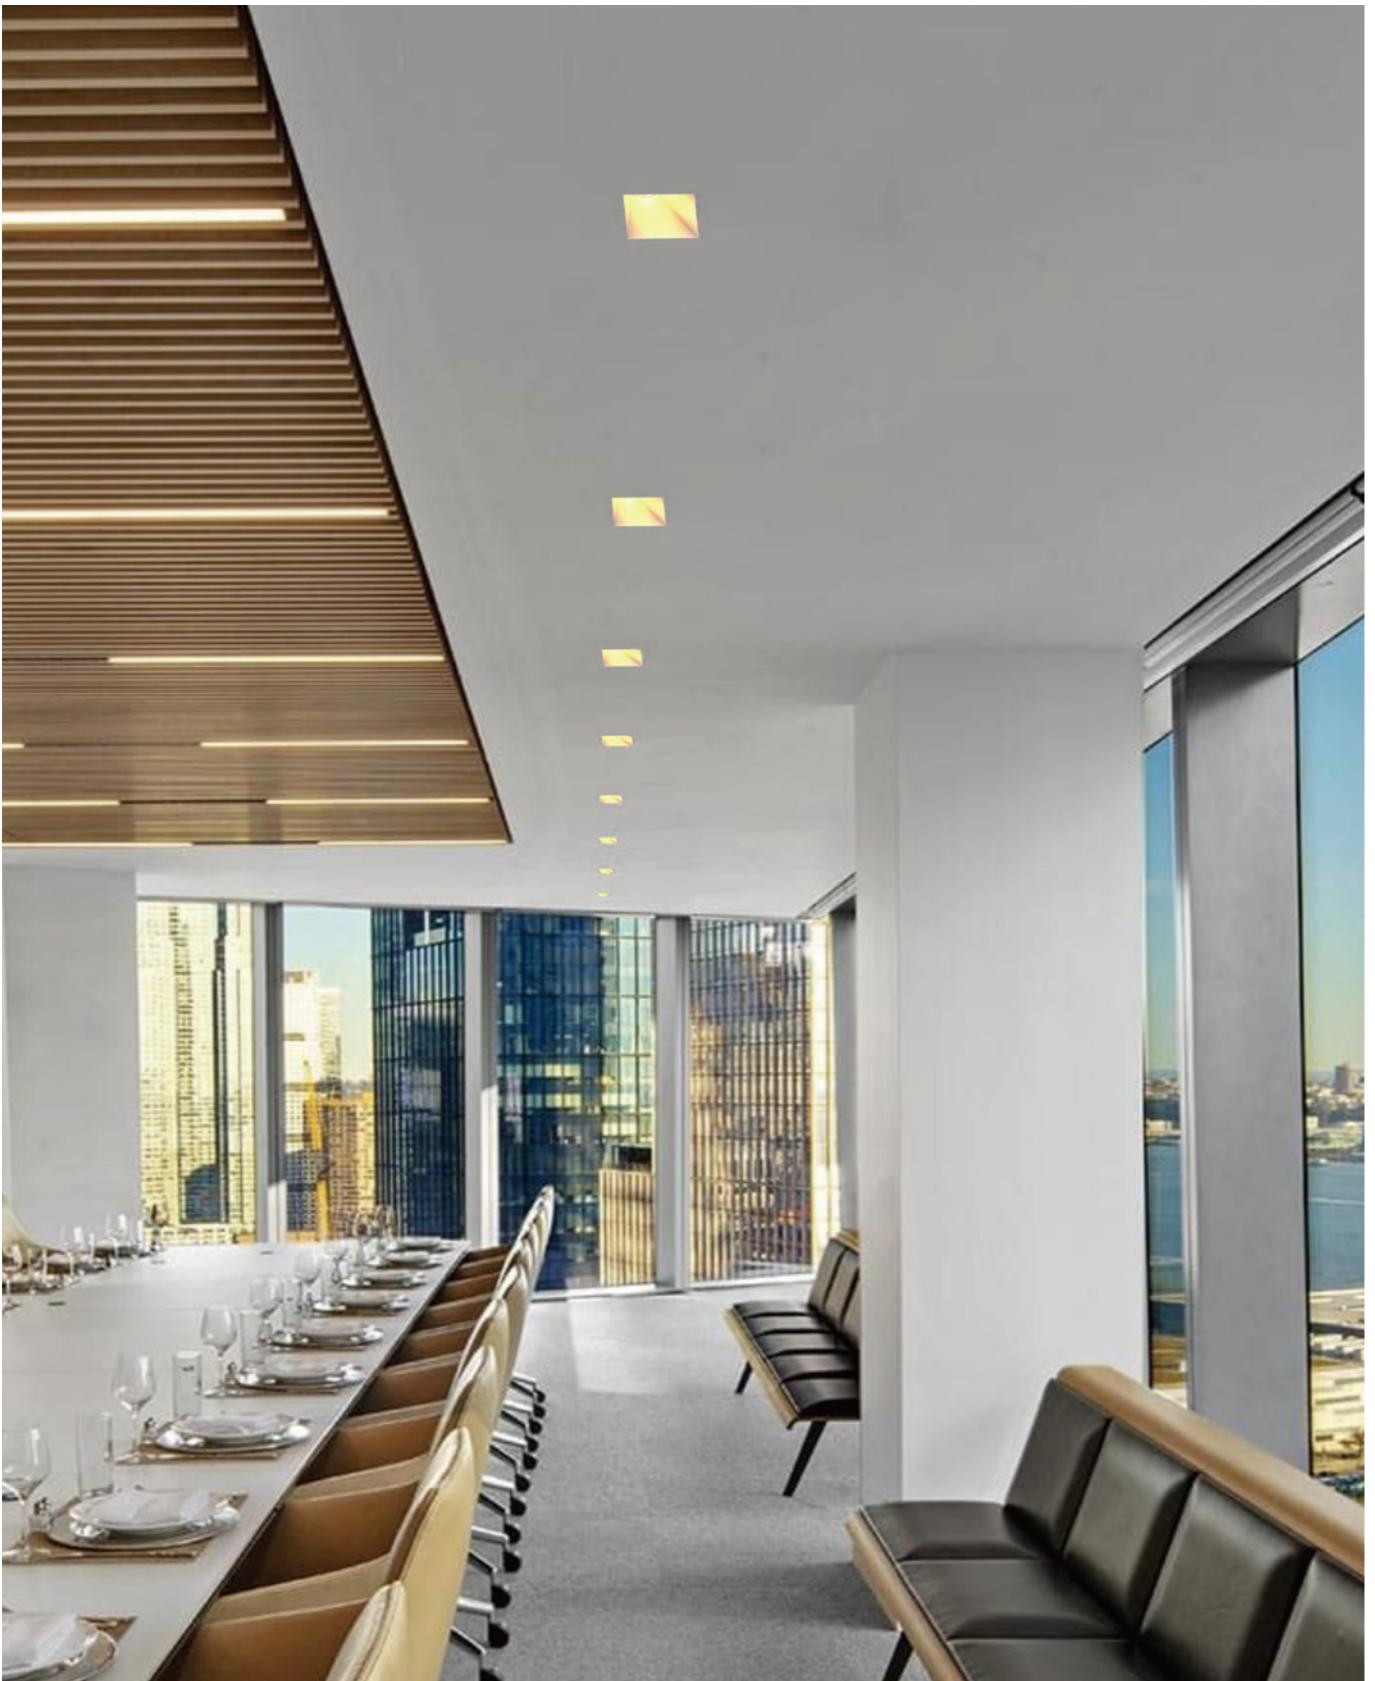

PIRA series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX | 6W | 13W | 3000K | 4000K | 5000K | 15° | 24° | 36° | 38° | 60° | Fixed | Ra >90 | UGR <19 | IP20 | 3 | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	8W	AC220-240V	3000K	15°	DL-10017-06-3015-P-C
				24°	DL-10017-06-3024-P-C
				36°	DL-10017-06-3036-P-C
COB LED	8W	AC220-240V	4000K	15°	DL-10017-06-4015-P-C
				24°	DL-10017-06-4024-P-C
				36°	DL-10017-06-4036-P-C
COB LED	8W	AC220-240V	5000K	15°	DL-10017-06-5015-P-C
				24°	DL-10017-06-5024-P-C
				36°	DL-10017-06-5036-P-C
COB LED	13W	AC220-240V	3000K	15°	DL-10001-13-3015-P-C
				24°	DL-10001-13-3024-P-C
				38°	DL-10001-13-3038-P-C
				60°	DL-10001-13-3060-P-C
COB LED	13W	AC220-240V	4000K	15°	DL-10001-13-4015-P-C
				24°	DL-10001-13-4024-P-C
				38°	DL-10001-13-4038-P-C
				60°	DL-10001-13-4060-P-C
COB LED	13W	AC220-240V	5000K	15°	DL-10001-13-5015-P-C
				24°	DL-10001-13-5024-P-C
				38°	DL-10001-13-5038-P-C
				60°	DL-10001-13-5060-P-C
COB LED	13W	AC220-240V	3000K	15°	DL-10021-13-3015-P-C
				24°	DL-10021-13-3024-P-C
				38°	DL-10021-13-3038-P-C
				60°	DL-10021-13-3060-P-C
COB LED	13W	AC220-240V	4000K	15°	DL-10021-13-4015-P-C
				24°	DL-10021-13-4024-P-C
				38°	DL-10021-13-4038-P-C
				60°	DL-10021-13-4060-P-C
COB LED	13W	AC220-240V	5000K	15°	DL-10021-13-5015-P-C
				24°	DL-10021-13-5024-P-C
				38°	DL-10021-13-5038-P-C
				60°	DL-10021-13-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black BW-Black / White)



White Reflector



Black Reflector

Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm



DL-10017-06



DL-10001-13



DL-10021-13





FOCUS DOWNLIGHT

DIX series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGE LUX 50,000hrs | 8W | 3000K 4000K 5000K | 20° 40° 60° | Adj. Ra >90 UGR <19 IP20 | 3 | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	8W	AC220-240V	3000K	20°	DL-5208-08-3015-P-C
				40°	DL-5208-08-3024-P-C
				60°	DL-5208-08-3036-P-C
COB LED	8W	AC220-240V	4000K	15°	DL-5208-08-4015-P-C
				24°	DL-5208-08-4024-P-C
				36°	DL-5208-08-4036-P-C
COB LED	8W	AC220-240V	5000K	15°	DL-5208-08-5015-P-C
				24°	DL-5208-08-5024-P-C
				36°	DL-5208-08-5036-P-C
COB LED	8W	AC220-240V	3000K	20°	DL-5208A-08-3015-P-C
				40°	DL-5208A-08-3024-P-C
				60°	DL-5208A-08-3036-P-C
COB LED	8W	AC220-240V	4000K	15°	DL-5208A-08-4015-P-C
				24°	DL-5208A-08-4024-P-C
				36°	DL-5208A-08-4036-P-C
COB LED	8W	AC220-240V	5000K	15°	DL-5208A-08-5015-P-C
				24°	DL-5208A-08-5024-P-C
				36°	DL-5208A-08-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White WB-White / Black WS-White / Silver WO-White / Orange BG-Black / Gold)



White Reflector



Black Reflector



Silver Reflector



Orange Reflector



Gold Reflector



Controller: On / Off, Dimmable, DALI

DIMENSION unit:mm

DL-5208-08




DL-5208A-08



DIX series

TRIMLESS ADJUSTABLE DOWNLIGHT

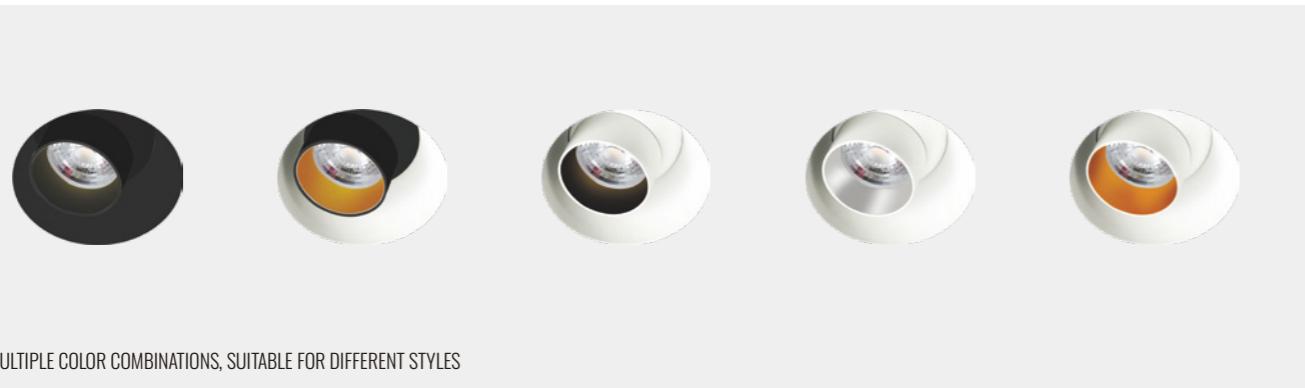

MULTIPLE COLOR COMBINATIONS, SUITABLE FOR DIFFERENT STYLES



MODULE STRUCTURE, EASY TO REPLACE



SURROUND VENT FOR FAST HEAT DISSIPATION

BRIDGE LUX	6W	3000K 4000K 5000K	13° 24° 36° 60°	Adj.	Ra >90	UGR <19	IP20	3	CE
------------	----	-------------------------	--------------------------	------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	13° 24° 36° 60°	DL-5202-06-3013-P-C DL-5202-06-3024-P-C DL-5202-06-3036-P-C DL-5202-06-3060-P-C
COB LED	6W	AC220-240V	4000K	13° 24° 36° 60°	DL-5202-06-4013-P-C DL-5202-06-4024-P-C DL-5202-06-4036-P-C DL-5202-06-4060-P-C
COB LED	6W	AC220-240V	4000K	13° 24° 36° 60°	DL-5202-06-5013-P-C DL-5202-06-5024-P-C DL-5202-06-5036-P-C DL-5202-06-5060-P-C
COB LED	13W	AC220-240V	3000K	13° 24° 36° 60°	DL-5202-13-3013-P-C DL-5202-13-3024-P-C DL-5202-13-3036-P-C DL-5202-13-3060-P-C
COB LED	13W	AC220-240V	4000K	13° 24° 36° 60°	DL-5202-13-4013-P-C DL-5202-13-4024-P-C DL-5202-13-4036-P-C DL-5202-13-4060-P-C
COB LED	13W	AC220-240V	4000K	13° 24° 36° 60°	DL-5202-13-5013-P-C DL-5202-13-5024-P-C DL-5202-13-5036-P-C DL-5202-13-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White WB-White / Black WS-White / Silver WO-White / Orange BG-Black / Gold)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-5202-06

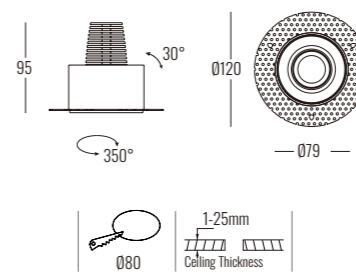

DL-5202-13

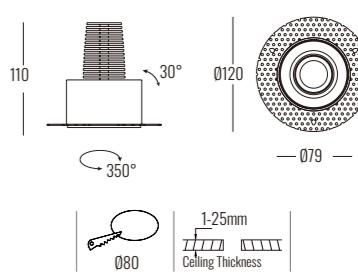

FOCUS DOWNLIGHT

FOCUS DOWNLIGHT



DIX series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGE LUX | 6W | 13W | 3000K | 4000K | 5000K | 13° | 24° | 36° | 60° | Adj. | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	13°	DL-1083A-06-3013-P-C
				24°	DL-1083A-06-3024-P-C
				36°	DL-1083A-06-3036-P-C
				60°	DL-1083A-06-3060-P-C
COB LED	6W	AC220-240V	4000K	13°	DL-1083A-06-4013-P-C
				24°	DL-1083A-06-4024-P-C
				36°	DL-1083A-06-4036-P-C
				60°	DL-1083A-06-4060-P-C
COB LED	6W	AC220-240V	5000K	13°	DL-1083A-06-5013-P-C
				24°	DL-1083A-06-5024-P-C
				36°	DL-1083A-06-5036-P-C
				60°	DL-1083A-06-5060-P-C
COB LED	13W	AC220-240V	3000K	13°	DL-1083A-13-3013-P-C
				24°	DL-1083A-13-3024-P-C
				36°	DL-1083A-13-3036-P-C
				60°	DL-1083A-13-3060-P-C
COB LED	13W	AC220-240V	4000K	13°	DL-1083A-13-4013-P-C
				24°	DL-1083A-13-4024-P-C
				36°	DL-1083A-13-4036-P-C
				60°	DL-1083A-13-4060-P-C
COB LED	13W	AC220-240V	5000K	13°	DL-1083A-13-5013-P-C
				24°	DL-1083A-13-5024-P-C
				36°	DL-1083A-13-5036-P-C
				60°	DL-1083A-13-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White WB-White / Black WS-White / Silver WO-White / Orange BG-Black / Gold)




White Reflector Black Reflector Silver Reflector Orange Reflector Gold Reflector


Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-1083A-06



DL-1083A-13



DIX series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGE LUX | 6W | 13W | 3000K | 4000K | 5000K | 13° | 24° | 36° | 60° | Adj. | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	13°	DL-1083-06-3013-P-C
				24°	DL-1083-06-3024-P-C
				36°	DL-1083-06-3036-P-C
				60°	DL-1083-06-3060-P-C
COB LED	6W	AC220-240V	4000K	13°	DL-1083-06-4013-P-C
				24°	DL-1083-06-4024-P-C
				36°	DL-1083-06-4036-P-C
				60°	DL-1083-06-4060-P-C
COB LED	13W	AC220-240V	5000K	13°	DL-1083-06-5013-P-C
				24°	DL-1083-06-5024-P-C
				36°	DL-1083-06-5036-P-C
				60°	DL-1083-06-5060-P-C
COB LED	13W	AC220-240V	3000K	13°	DL-1083-13-3013-P-C
				24°	DL-1083-13-3024-P-C
				36°	DL-1083-13-3036-P-C
				60°	DL-1083-13-3060-P-C
COB LED	13W	AC220-240V	4000K	13°	DL-1083-13-4013-P-C
				24°	DL-1083-13-4024-P-C
				36°	DL-1083-13-4036-P-C
				60°	DL-1083-13-4060-P-C
COB LED	13W	AC220-240V	5000K	13°	DL-1083-13-5013-P-C
				24°	DL-1083-13-5024-P-C
				36°	DL-1083-13-5036-P-C
				60°	DL-1083-13-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White WB-White / Black WS-White / Silver WO-White / Orange BG-Black / Gold)




White Reflector Black Reflector Silver Reflector Orange Reflector Gold Reflector


Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-1083-06



DL-1083-13





TOM series

TOM series

RECESSED FIXED DOWNLIGHT



BRIDGE LUX 50,000hrs	6W	3000K 4000K 5000K	360°	Fixed	Ra >90	UGR <19	IP20	3 years	CE
-------------------------	----	-------------------------	------	-------	--------	---------	------	---------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	360°	DL-4054A-06-30360-P
COB LED	6W	AC220-240V	4000K	360°	DL-4054A-06-40360-P
COB LED	6W	AC220-240V	5000K	360°	DL-4054A-06-50360-P

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm




FOCUS DOWNLIGHT



FENDI series

9W / 15W / 30W

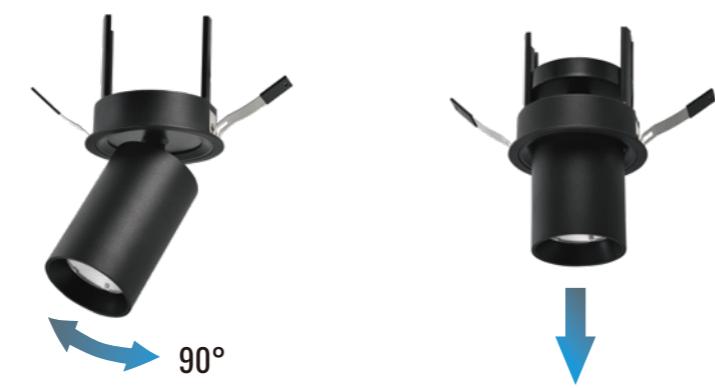

www.divaluce.com

134



www.divaluce.com

134

FENDI series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGELUX 50,000hrs | 5W | 3000K / 4000K / 5000K | 15° / 24° / 36° | Adj. | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	5W	AC220-240V	3000K	15°	DL-9812-05-3015-P-C
				24°	DL-9812-05-3024-P-C
				36°	DL-9812-05-3036-P-C
COB LED	5W	AC220-240V	4000K	15°	DL-9812-05-4015-P-C
				24°	DL-9812-05-4024-P-C
				36°	DL-9812-05-4036-P-C
COB LED	5W	AC220-240V	5000K	15°	DL-9812-05-5015-P-C
				24°	DL-9812-05-5024-P-C
				36°	DL-9812-05-5036-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-9789-15-3015-P-C
				24°	DL-9789-15-3024-P-C
				36°	DL-9789-15-3036-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-9789-15-4015-P-C
				24°	DL-9789-15-4024-P-C
				36°	DL-9789-15-4036-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-9789-15-5015-P-C
				24°	DL-9789-15-5024-P-C
				36°	DL-9789-15-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-9812-05

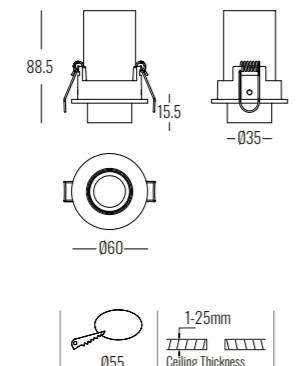

DL-9789-15

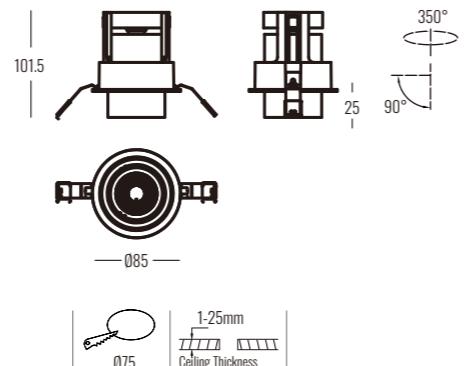

FENDI series

RECESSED ADJUSTABLE DOWNLIGHT



BRIDGELUX 50,000hrs | 24W | 35W | 3000K / 4000K / 5000K | 15° / 24° / 36° | Adj. | Ra >90 | UGR <19 | IP20 | 3 DALI | CE

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	24W	AC220-240V	3000K	15°	DL-9790-24-3015-P-C
				24°	DL-9790-24-3024-P-C
				36°	DL-9790-24-3036-P-C
COB LED	24W	AC220-240V	4000K	15°	DL-9790-24-4015-P-C
				24°	DL-9790-24-4024-P-C
				36°	DL-9790-24-4036-P-C
COB LED	24W	AC220-240V	5000K	15°	DL-9790-24-5015-P-C
				24°	DL-9790-24-5024-P-C
				36°	DL-9790-24-5036-P-C
COB LED	35W	AC220-240V	3000K	15°	DL-9791-35-3015-P-C
				24°	DL-9791-35-3024-P-C
				36°	DL-9791-35-3036-P-C
COB LED	35W	AC220-240V	4000K	15°	DL-9791-35-4015-P-C
				24°	DL-9791-35-4024-P-C
				36°	DL-9791-35-4036-P-C
COB LED	35W	AC220-240V	5000K	15°	DL-9791-35-5015-P-C
				24°	DL-9791-35-5024-P-C
				36°	DL-9791-35-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-9790-24

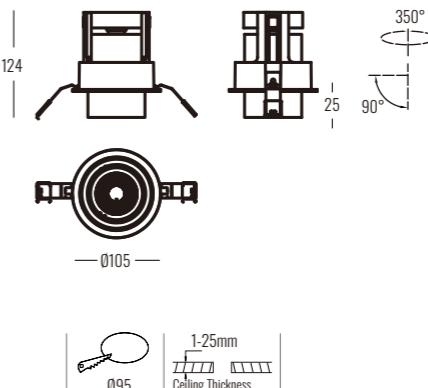

DL-9791-35

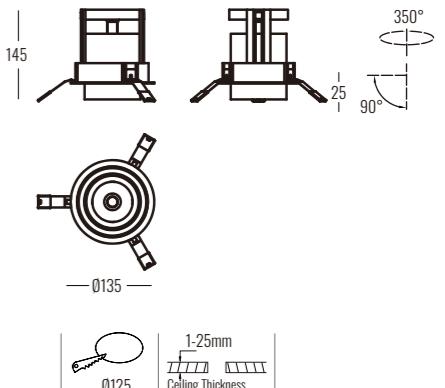



RETAIL TRACK LIGHT



RETAIL TRACK LIGHT

MIA series


PRODUCT INTRODUCTION

Description Lighting system comprising an extruded profile which integrates perfectly in plasterboard ceilings.


It is prepared for the simple integration of lighting with LED or halogen projectors. The projectors are prepared for installation directly on the profile, with Class II remote equipment. Furthermore they are available in two sizes depending on the installation.

It has accessories for visual comfort optimization and colour filters. Additional information can only be installed in 12.5 mm thick plaster-board. It is possible to cut the profiles to any size. IP20 protection grade. Suitable for installation on normally inflammable surfaces.



Standard Compliance and Quality Marks: EN60598-1 European Technical Standards and any subsequent additions.



A TYPE TRACK RAIL, LENGTH: 1M (CLASSIC STYLE)


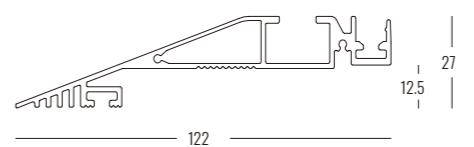


B TYPE TRACK RAIL, LENGTH: 1M (PROFESSIONAL)

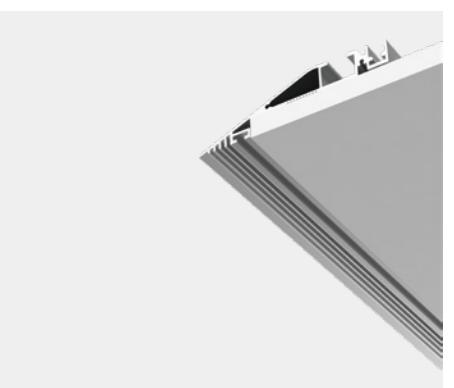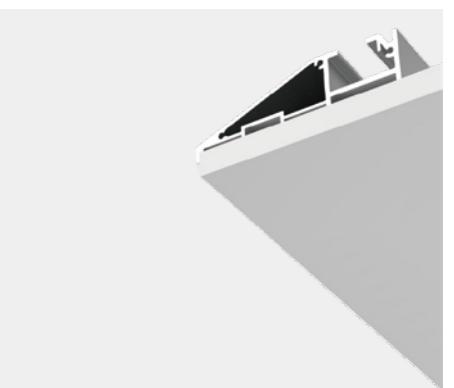


SIDE MOUNTED CEILING INSTALLED DETAILS

RETAIL TRACKLIGHT

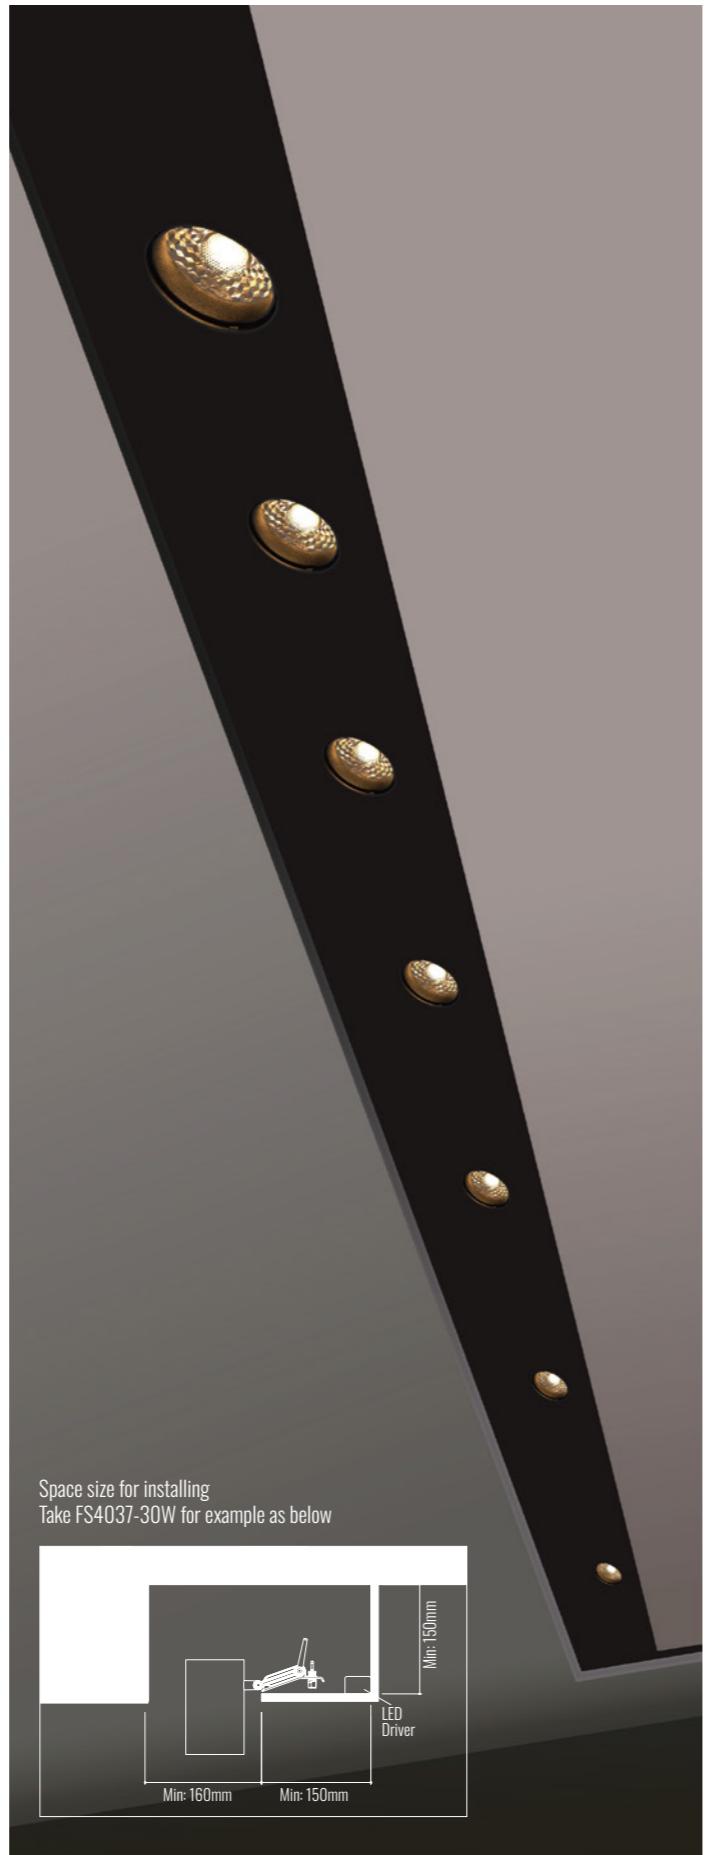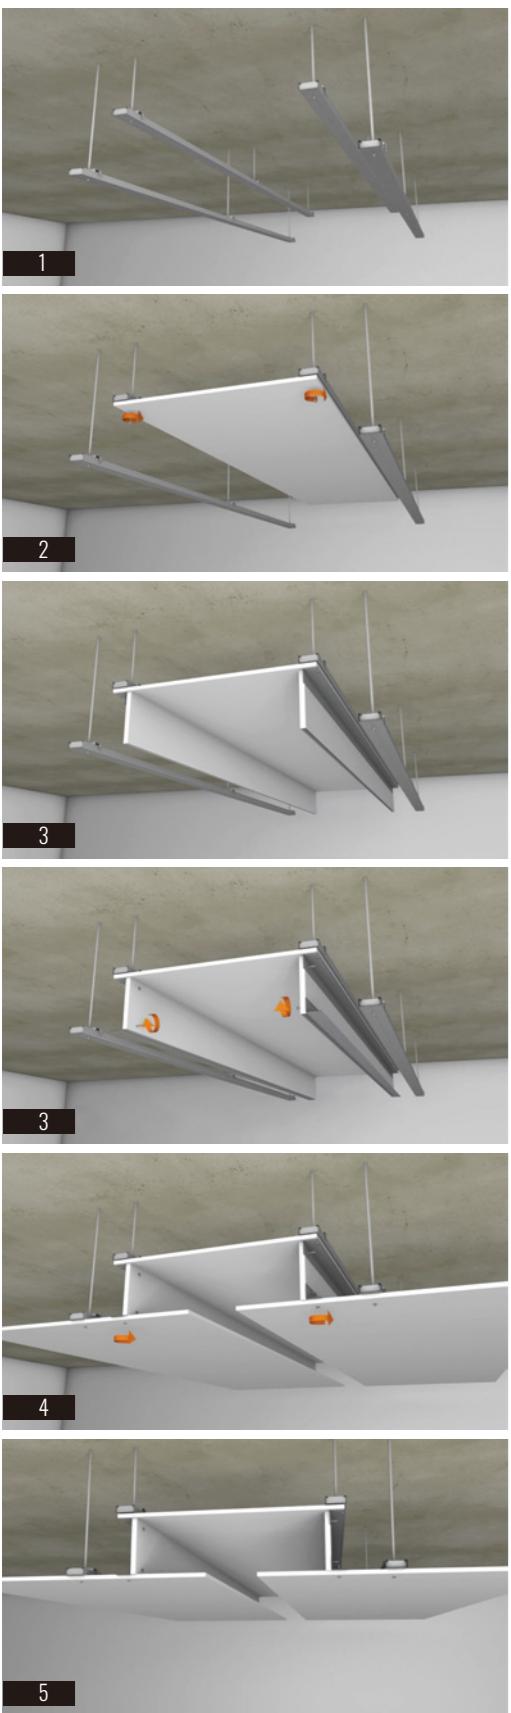

MIA series

CEILING SIDE MOUNTING SPOTLIGHT



BRIDGE LUX	15W 3000K 24W 4000K 32W 5000K	50,000hrs	Adj.	Ra >90	UGR <19	IP20	3 years	CE
------------	---	-----------	------	--------	---------	------	---------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	12° 15° 24° 38° 60°	DL-4037-15-3012-P-C DL-4037-15-3015-P-C DL-4037-15-3024-P-C DL-4037-15-3038-P-C DL-4037-15-3060-P-C
COB LED	15W	AC220-240V	4000K	12° 15° 24° 38° 60°	DL-4037-15-4012-P-C DL-4037-15-4015-P-C DL-4037-15-4024-P-C DL-4037-15-4038-P-C DL-4037-15-4060-P-C
COB LED	15W	AC220-240V	5000K	12° 15° 24° 38° 60°	DL-4037-15-5012-P-C DL-4037-15-5015-P-C DL-4037-15-5024-P-C DL-4037-15-5038-P-C DL-4037-15-5060-P-C
COB LED	24W	AC220-240V	3000K	15° 24° 38°	DL-4037-24-3015-P-C DL-4037-24-3024-P-C DL-4037-24-3038-P-C
COB LED	24W	AC220-240V	4000K	15° 24° 38°	DL-4037-24-4015-P-C DL-4037-24-4024-P-C DL-4037-24-4038-P-C
COB LED	24W	AC220-240V	5000K	15° 24° 38°	DL-4037-24-5015-P-C DL-4037-24-5024-P-C DL-4037-24-5038-P-C
COB LED	32W	AC220-240V	3000K	15° 24° 38°	DL-4037-32-3015-P-C DL-4037-32-3024-P-C DL-4037-32-3038-P-C
COB LED	32W	AC220-240V	4000K	15° 24° 38°	DL-4037-32-4015-P-C DL-4037-32-4024-P-C DL-4037-32-4038-P-C
COB LED	32W	AC220-240V	5000K	15° 24° 38°	DL-4037-32-5012-P-C DL-4037-32-5015-P-C DL-4037-32-5038-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish/Reflector Color: C (WB-White / Black WW-White / White WS-White / Silver WR-White / Rose Gold
WG-White / Gold BB-Black / Black BW-Black / White BS-Black / Silver
BR-Black / Rose Gold BG-Black / Gold)


Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm


DL-4037-15




DL-4037-24



DL-4037-32



RETAIL TRACK LIGHT


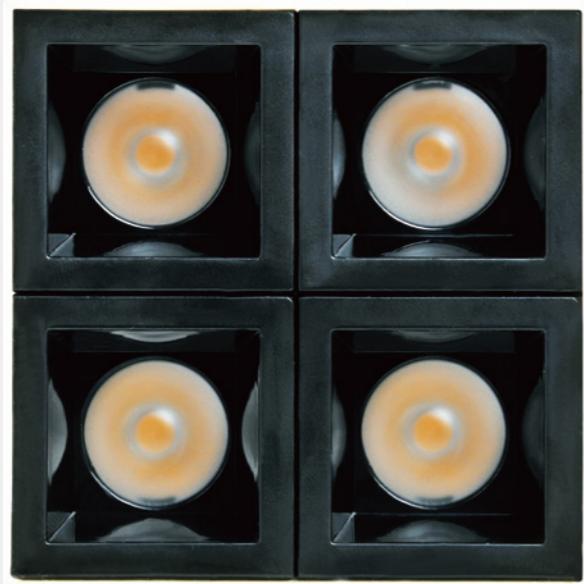


COMO series

PRODUCT INTRODUCTION

Simple and elegant designed led track light with aluminum die-cast housing, with multiple lens angles, specially designed heatsink with excellent dissipation to minimize degradation of the lumens.

APPLICATION
fashion stores, chain store, shopping mall, showrooms, art galleries.

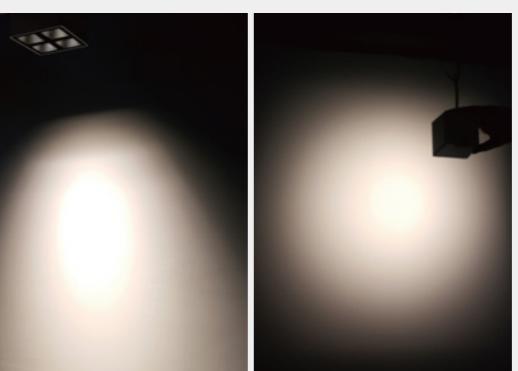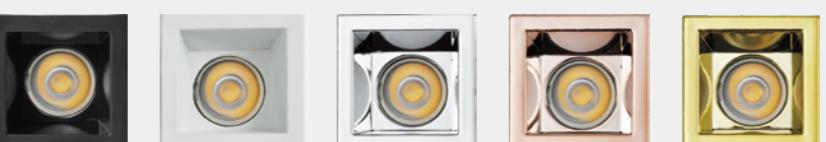

COMO series

SURFACE FIXED DOWNLIGHT



BRIDGE LUX 50,000hrs | 20W | 30W | 3000K | 4000K | 5000K | 13° | 30° | 46° | Fixed | Ra >90 | UGR <19 | IP20 |

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	20W	AC220-240V	3000K	13°	DL-3038-20-3013-P-C
				30°	DL-3038-20-3030-P-C
				46°	DL-3038-20-3046-P-C
COB LED	20W	AC220-240V	4000K	13°	DL-3038-20-4013-P-C
				30°	DL-3038-20-4030-P-C
				46°	DL-3038-20-4046-P-C
COB LED	20W	AC220-240V	5000K	13°	DL-3038-20-5013-P-C
				30°	DL-3038-20-5030-P-C
				46°	DL-3038-20-5046-P-C



Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black BW-Black / White WS-White / Silver
BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm



— 84 —

COMO series

SURFACE CEILING SPOTLIGHT



BRIDGE LUX 50,000hrs | 20W | 30W | 3000K | 4000K | 5000K | 13° | 30° | 46° | Adj. | Ra >90 | UGR <19 | IP20 |

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	20W	AC220-240V	3000K	13°	DL-4027A-20-3013-P-C
				30°	DL-4027A-20-3030-P-C
				46°	DL-4027A-20-3046-P-C
COB LED	20W	AC220-240V	4000K	13°	DL-4027A-20-4013-P-C
				30°	DL-4027A-20-4030-P-C
				46°	DL-4027A-20-4046-P-C
COB LED	20W	AC220-240V	5000K	13°	DL-4027A-20-5013-P-C
				30°	DL-4027A-20-5030-P-C
				46°	DL-4027A-20-5046-P-C
COB LED	30W	AC220-240V	3000K	13°	DL-4028A-30-3013-P-C
				30°	DL-4028A-30-3030-P-C
				46°	DL-4028A-30-3046-P-C
COB LED	30W	AC220-240V	4000K	13°	DL-4028A-30-4013-P-C
				30°	DL-4028A-30-4030-P-C
				46°	DL-4028A-30-4046-P-C
COB LED	30W	AC220-240V	5000K	13°	DL-4028A-30-5013-P-C
				30°	DL-4028A-30-5030-P-C
				46°	DL-4028A-30-5046-P-C


Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black BW-Black / White WS-White / Silver
BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali


DIMENSION unit:mm




— 86 —



— 85 —



— 126 —



— 85 —

ONTI series

RECESSED ROUND LED SPOT LIGHT

BRIDGE LUX | 24W 3000K 48W 4000K 72W 5000K | 36° | Fixed | Ra >90 | UGR <19 | IP20 | 3 | CE



Light Source	Power	Voltage	CCT	Beam Angle	Code
SMD LED	24W	AC220-240V	3000K	36°	DL-9796-24-3036-P-C
SMD LED	24W	AC220-240V	4000K	36°	DL-9796-24-4036-P-C
SMD LED	24W	AC220-240V	5000K	36°	DL-9796-24-5036-P-C
SMD LED	48W	AC220-240V	3000K	36°	DL-9797-48-3036-P-C
SMD LED	48W	AC220-240V	4000K	36°	DL-9797-48-4036-P-C
SMD LED	48W	AC220-240V	5000K	36°	DL-9797-48-5036-P-C
SMD LED	72W	AC220-240V	3000K	36°	DL-9798-72-3036-P-C
SMD LED	72W	AC220-240V	4000K	36°	DL-9798-72-4036-P-C
SMD LED	72W	AC220-240V	5000K	36°	DL-9798-72-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm




DL-9796-24



DL-9797-48



DL-9798-72



ONTI series




Easy to install and easy to replace individually




BAR series

LINEAR LIGHT

GESTURE INTELLIGENCE CONTROL

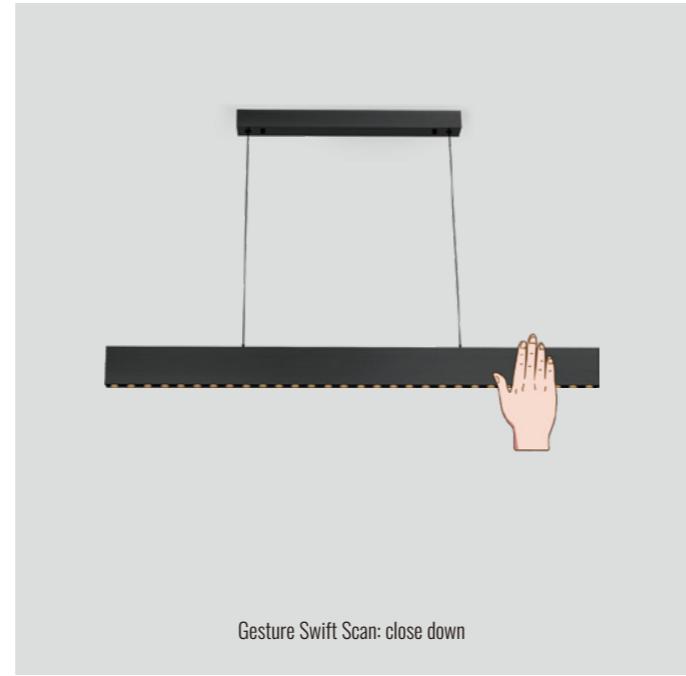

Keep Gesture: dimming up /down

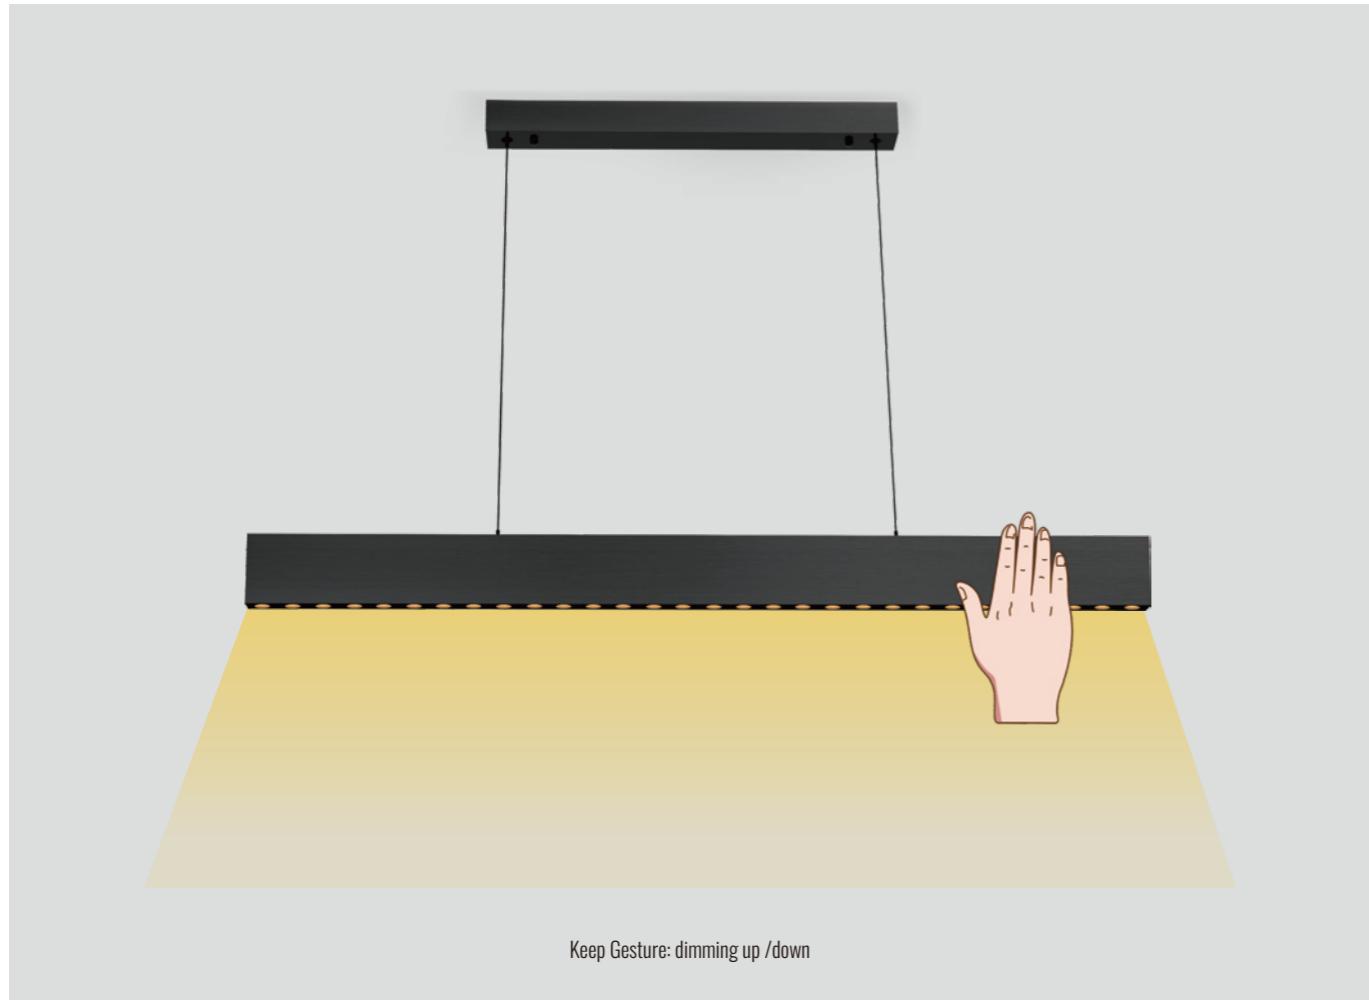

BAR series

SUSPENDED LINEAR LIGHT



BRIDGE LX 50,000hrs	36W 48W	3000K 4000K 5000K	15° 24° 36°	Fixed	Ra >90	UGR <19	IP20	3	CE
------------------------	-----------	-------------------------	-----------------	-------	--------	---------	------	---	----

Light Source	Power	Voltage	CCT	Code
SMD LED	36W	AC220-240V	3000K	DL-5055-1200-36-30-P-C
SMD LED	36W	AC220-240V	4000K	DL-5055-1200-36-40-P-C
SMD LED	36W	AC220-240V	5000K	DL-5055-1200-36-50-P-C
SMD LED	48W	AC220-240V	3000K	DL-5055-1600-48-30-P-C
SMD LED	48W	AC220-240V	4000K	DL-5055-1600-48-40-P-C
SMD LED	48W	AC220-240V	5000K	DL-5055-1600-48-50-P-C


Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black)


Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-5055-1200-36



DL-5055-1600-48



LINEAR LIGHT




LINEAR LIGHT



ORBIT series

PENDANT LAMP


ORBIT series



Modules can be mounted fixed and removed tool-free. You can play with the number and position of the modules (up to 200w) anywhere in the loop, to match aesthetical preferences or to meet the exact lighting requirements of your projects.



Superloop is designed with exclusive arc-shaped structure

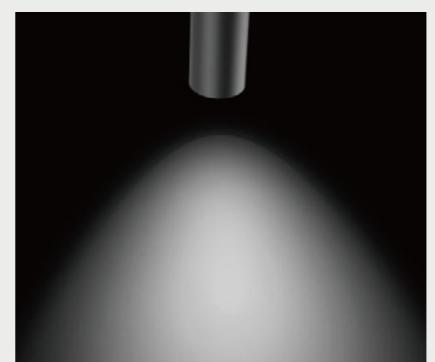

PENDANT LAMP



BRIDGE LUX	7W	3000K 4000K 5000K	36°	Ra >90	UGR <19	IP20	3 DALI	CE
------------	----	-------------------------	-----	--------	---------	------	--------	----

Light Source	Power	Voltage	CCT	Beam Angle	Code
SMD LED	6x7W	AC220-240V	3000K	36°	DL-5037-900-42-3036-P-C
SMD LED	6x7W	AC220-240V	4000K	36°	DL-5037-900-42-4036-P-C
SMD LED	6x7W	AC220-240V	5000K	36°	DL-5037-900-42-5036-P-C
SMD LED	6x7W	AC220-240V	3000K	36°	DL-5037-1200-42-3036-P-C
SMD LED	6x7W	AC220-240V	4000K	36°	DL-5037-1200-42-4036-P-C
SMD LED	6x7W	AC220-240V	5000K	36°	DL-5037-1200-42-5036-P-C
SMD LED	12x7W	AC220-240V	3000K	36°	DL-5037-1500-84-3036-P-C
SMD LED	12x7W	AC220-240V	4000K	36°	DL-5037-1500-84-4036-P-C
SMD LED	12x7W	AC220-240V	5000K	36°	DL-5037-1500-84-5036-P-C


Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish/Reflector Color: C (WB-White / Black WW-White / White WS-White / Silver WR-White / Rose Gold
WG-White / Gold BB-Black / Black BW-Black / White BS-Black / Silver
BR-Black / Rose Gold BG-Black / Gold)

Controller: On / Off, Dimmable, DALI


DIMENSION unit:mm

DL-5037-900




0900

DL-5037-1200



01200

DL-5037-1500



01500



PENDANT LAMP



PENDANT LAMP