

DIVA
LUCE
light & form

www.divaluce.com

OUTDOOR

24 | 25
ARCHITECTURAL⁺

DIVA LUCE
light & form

ARCHITECTURAL LIGHTING +

INDEX


ARCHITECTURAL OUTDOOR

BOLLARD	01-10
WALL LIGHT	01-10
STEP LIGHT	01-10
SPIKE LIGHT	01-10
PARK LIGHTING	01-10

WALL LIGHT



STEP LIGHT

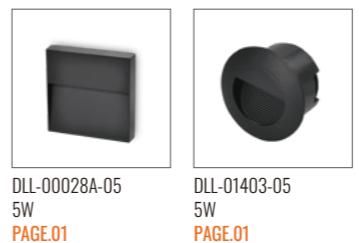

BOLLARD



PARK LIGHTING



SPIKE LIGHT






WALL LIGHT



WALL LIGHT



10W | 1-10V | DALI | IK08 | IP65 | Ⓜ | + | 3 | CE

	Light Source	Power	Voltage	Code
OZO series	SMD LED	10W	90-260V 50/60Hz	DLL-1029-10-K-SB DLL-1029-10-K-DG DLL-1029-10-K-SS DLL-1029-10-K-MG
AVO series	SMD LED	10W	90-260V 50/60Hz	DLL-1122-10-K-SB DLL-1122-10-K-DG DLL-1122-10-K-SS DLL-1122-10-K-MG

Color Temperature: K (3000K ~ 6000K)



Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali



Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear polycarbonate

DIMENSION unit:mm

DLB-1029-10



DLB-1122-10





12W | 1-10V | DALI | IK08 | IP65 | | |

	Light Source	Power	Voltage	Code
CLEO series	SMD LED	10W	90-260V 50/60Hz	DLL-1125-12-K-SB DLL-1125-12-K-DG DLL-1125-12-K-SS DLL-1125-12-K-MG
	SMD LED	10W	90-260V 50/60Hz	DLL-1115-12-K-SB DLL-1115-12-K-DG DLL-1115-12-K-SS DLL-1115-12-K-MG

Color Temperature: K (3000K - 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali




Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear polycarbonate

DIMENSION
unit:mm

DLL-1125-12



DLB-1115-12



WALL LIGHT



3W | 1-10V DALI | IK08 | IP65 | | 3 | CE

	Light Source	Power	Voltage	Code
INTAKE series	SMD LED	3W	90-260V 50/60Hz	DLL-006F-03-K-SB DLL-006F-03-K-DG DLL-006F-03-K-SS DLL-006F-03-K-MG
WAVE series	SMD LED	5W	90-260V 50/60Hz	DLL-8006-05-K-SB DLL-8006-05-K-DG DLL-8006-05-K-SS DLL-8006-05-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear glass

DIMENSION
unit:mm

DLL-006F-03



DLL-8006-05






5W | 10W | DALI | IK08 | IP65 | 3 | CE


Light Source	Power	Voltage	Code
SMD LED	10W	90-260V 50/60Hz	DLL-9205-10-K-SB DLL-9205-10-K-DG DLL-9205-10-K-SS DLL-9205-10-K-MG
SMD LED	5W	90-260V 50/60Hz	DLL-9088-05-K-SB DLL-9088-05-K-DG DLL-9088-05-K-SS DLL-9088-05-K-MG
SMD LED	10W	90-260V 50/60Hz	DLL-9089-10-K-SB DLL-9089-10-K-DG DLL-9089-10-K-SS DLL-9089-10-K-MG
Color Temperature: K (3000K 6000K)			
Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey			
Controller: On / Off, Dimmable, Dali			
Material: Aluminum Coating: Anti-corrosion and UV-proof powder coating Diffuser: Clear glass			

DIMENSION
unit:mm


DLL-9205-10




DLL-9088-05



DLL-9089-10



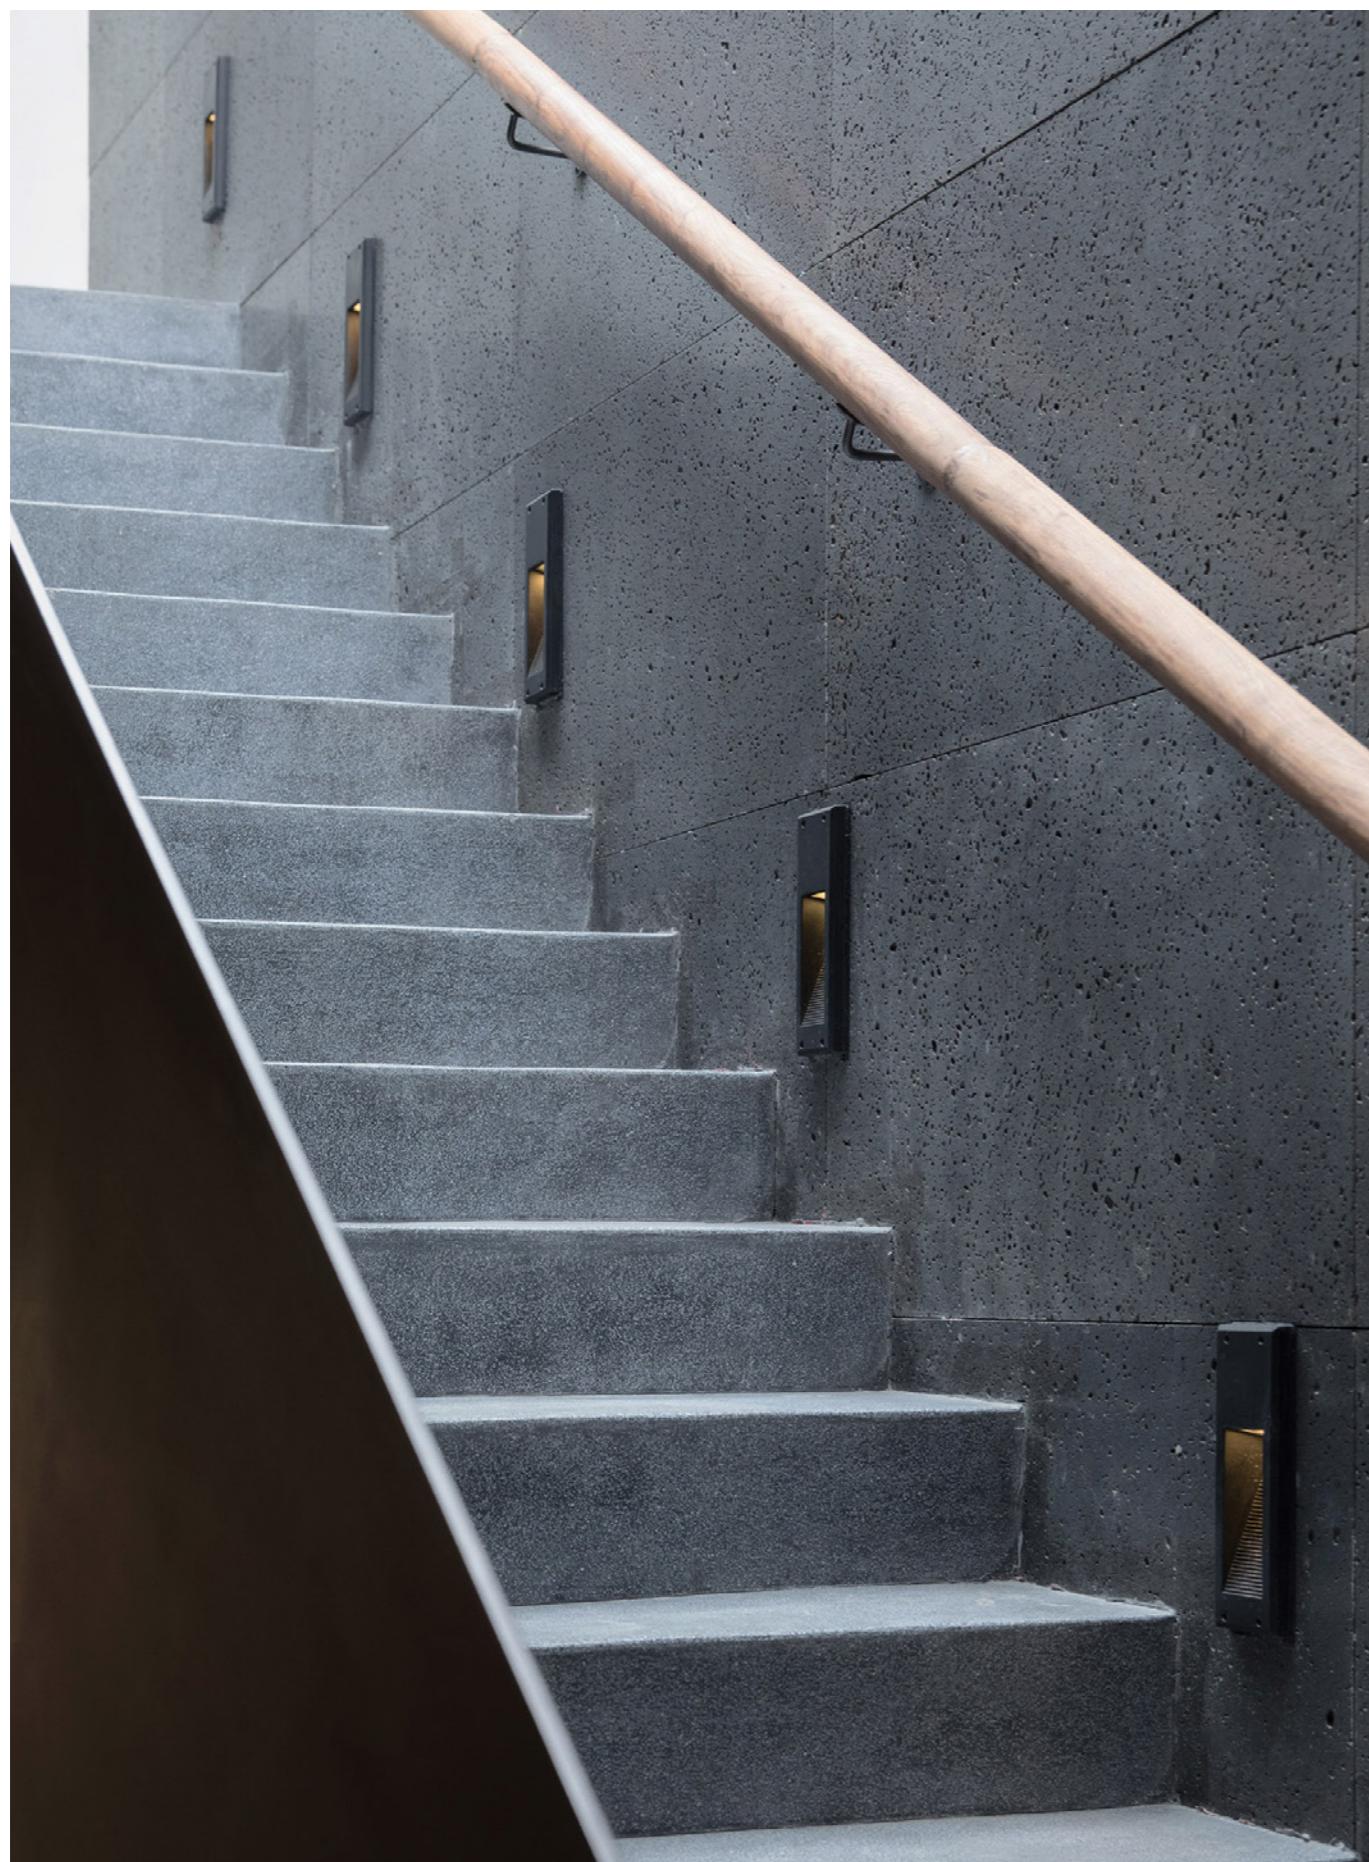

STEP LIGHT



5W |

Light Source	Power	Voltage	Code
SMD LED	5W	90-260V 50/60Hz	DLL-00028A-05-K-SB DLL-00028A-05-K-DG DLL-00028A-05-K-SS DLL-00028A-05-K-MG
SMD LED	5W	90-260V 50/60Hz	DLL-01403-05-K-SB DLL-01403-05-K-DG DLL-01403-05-K-SS DLL-01403-05-K-MG

Color Temperature: K (3000K - 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear glass

DIMENSION
unit:mm

DLL-00028A-05



DLL-01403-05





BOLLARD



BOLLARD

4W | 9W | DALI | IK08 | IP65 | + | 3 | CE

	Light Source	Power	Voltage	Code
ESTA series	SMD LED	4W	90-260V 50/60Hz	DLL-1106-04-K-SB DLL-1106-04-K-DG DLL-1106-04-K-SS DLL-1106-04-K-MG
ESTA series	SMD LED	4W	90-260V 50/60Hz	DLL-1107-04-K-SB DLL-1107-04-K-DG DLL-1107-04-K-SS DLL-1107-04-K-MG
ESTA series	SMD LED	9W	90-260V 50/60Hz	DLL-1108-09-K-SB DLL-1108-09-K-DG DLL-1108-09-K-SS DLL-1108-09-K-MG
ESTA series	SMD LED	9W	90-260V 50/60Hz	DLL-1109-09-K-SB DLL-1109-09-K-DG DLL-1109-09-K-SS DLL-1109-09-K-MG
ESTA series	SMD LED	9W	90-260V 50/60Hz	DLL-1110-09-K-SB DLL-1110-09-K-DG DLL-1110-09-K-SS DLL-1110-09-K-MG
ESTA series	SMD LED	9W	90-260V 50/60Hz	DLL-1111-09-K-SB DLL-1111-09-K-DG DLL-1111-09-K-SS DLL-1111-09-K-MG


Color Temperature: K (3000K - 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: PC

DIMENSION
unit:mm

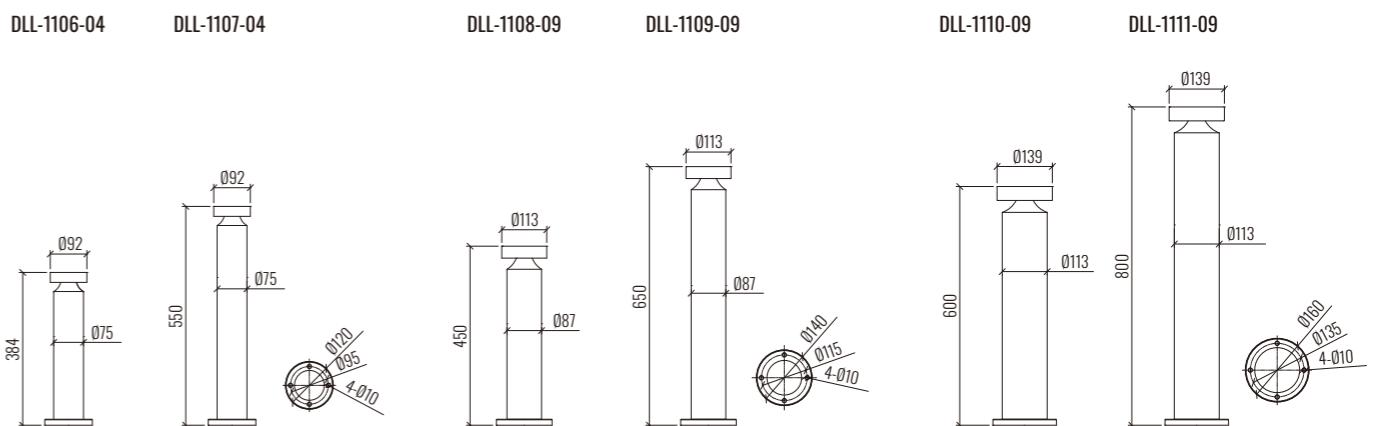

BOLLARD



10W | 20W | DALI | IK08 | IP65 | 3 | CE


	Light Source	Power	Voltage	Code
OZO series	SMD LED	10W	90-260V 50/60Hz	DLL-1031-10-K-SB DLL-1031-10-K-DG DLL-1031-10-K-SS DLL-1031-10-K-MG
OZO series	SMD LED	10W	90-260V 50/60Hz	DLL-1032-10-K-SB DLL-1032-10-K-DG DLL-1032-10-K-SS DLL-1032-10-K-MG
OZO series	SMD LED	20W	90-260V 50/60Hz	DLL-1033-20-K-SB DLL-1033-20-K-DG DLL-1033-20-K-SS DLL-1033-20-K-MG
Color Temperature: K (3000K 6000K)				
Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey				
Controller: On / Off, Dimmable, Dali				
Material: Aluminum Coating: Anti-corrosion and UV-proof powder coating Diffuser: PC				

DIMENSION
unit:mm

DLL-1031-10

DLL-1032-10

DLL-1033-20

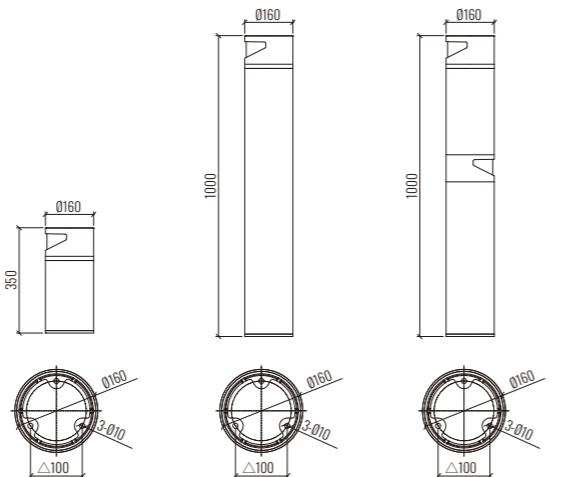

BOLLARD



10W | 1-10V | DALI | IK08 | IP65 | Ⓜ | 3 | CE

	Light Source	Power	Voltage	Code
AVO series	SMD LED	10W	90-260V 50/60Hz	DLL-1123-10-K-SB DLL-1123-10-K-DG DLL-1123-10-K-SS DLL-1123-10-K-MG
AVO series	SMD LED	10W	90-260V 50/60Hz	DLL-1124-10-K-SB DLL-1124-10-K-DG DLL-1124-10-K-SS DLL-1124-10-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: PMMA

DIMENSION
unit:mm

DLL-1123-10



DLL-1124-10

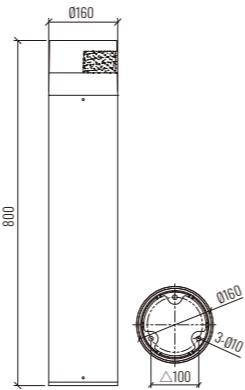



BOLLARD

BOLLARD

12W | 1-10V | DALI | IK08 | IP65 | Ⓜ | Ⓛ | 3 | CE



	Light Source	Power	Voltage	Code
CLEO series	SMD LED	12W	90-260V 50/60Hz	DLL-1126-12-K-SB DLL-1126-12-K-DG DLL-1126-12-K-SS DLL-1126-12-K-MG
CLEO series	SMD LED	12W	90-260V 50/60Hz	DLL-1127-12-K-SB DLL-1127-12-K-DG DLL-1127-12-K-SS DLL-1127-12-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: PMMA

DIMENSION
unit:mm

DLL-1126-12

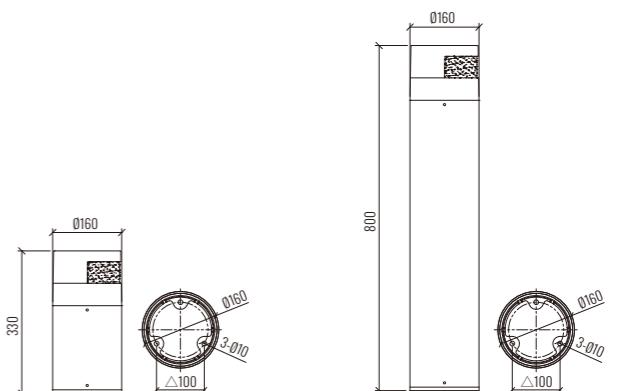

DLL-1127-12



BOLLARD




BOLLARD

5W | 15W | DALI | IK08 | IP65 | 3 | CE

	Light Source	Power	Voltage	Code
PINO series	SMD LED	5W	90-260V 50/60Hz	DLL-1112-05-K-SB DLL-1112-05-K-DG DLL-1112-05-K-SS DLL-1112-05-K-MG
PUK series	SMD LED	15W	90-260V 50/60Hz	DLL-1113-15-K-SB DLL-1113-15-K-DG DLL-1113-15-K-SS DLL-1113-15-K-MG
PUK series	SMD LED	15W	90-260V 50/60Hz	DLL-1114-15-K-SB DLL-1114-15-K-DG DLL-1114-15-K-SS DLL-1114-15-K-MG
Color Temperature: K (3000K 6000K)				
Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey				
Controller: On / Off, Dimmable, Dali				
Material: Aluminum Coating: Anti-corrosion and UV-proof powder coating Diffuser: PC				

DIMENSION
unit:mm

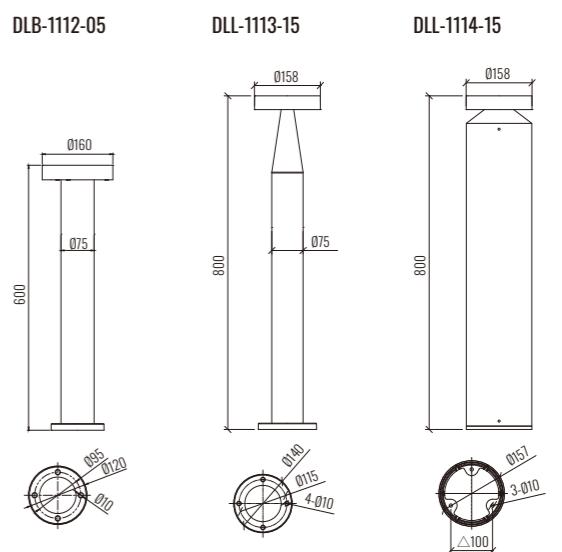

BOLLARD




15W |


	Light Source	Power	Voltage	Code
INDI series	SMD LED	15W+1W	90-260V 50/60Hz	DLL-1118-16-K-SB DLL-1118-16-K-DG DLL-1118-16-K-SS DLL-1118-16-K-MG
INDI series	SMD LED	15W+1W	90-260V 50/60Hz	DLL-1119-16-K-SB DLL-1119-16-K-DG DLL-1119-16-K-SS DLL-1119-16-K-MG
Color Temperature: K (3000K 6000K)				
Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey				
Controller: On / Off, Dimmable, Dali				
Material: Aluminum Coating: Anti-corrosion and UV-proof powder coating Diffuser: PC				

DIMENSION
unit:mm

DLL-1118-16



DLL-1119-16

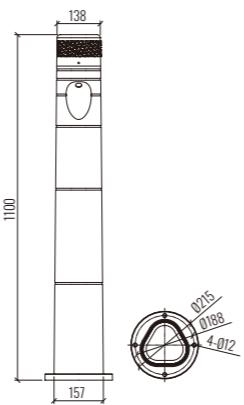

BOLLARD




5W | 7W | DALI | IK08 | IP65 | 3 | CE


	Light Source	Power	Voltage	Code
SAT series	SMD LED	5W	90-260V 50/60Hz	DLL-7024-05-K-SB DLL-7024-05-K-DG DLL-7024-05-K-SS DLL-7024-05-K-MG
ARCO series	SMD LED	5W	90-260V 50/60Hz	DLL-1970-05-K-SB DLL-1970-05-K-DG DLL-1970-05-K-SS DLL-1970-05-K-MG
PICO series	SMD LED	5W	90-260V 50/60Hz	DLL-6039-05-K-SB DLL-6039-05-K-DG DLL-6039-05-K-SS DLL-6039-05-K-MG
Color Temperature: K (3000K 6000K)				
Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey				
Controller: On / Off, Dimmable, Dali				
Material: Aluminum Coating: Anti-corrosion and UV-proof powder coating Diffuser: Clear glass				

DIMENSION
unit:mm



DLL-7024-05



DLL-1970-05



DLL-6039-05

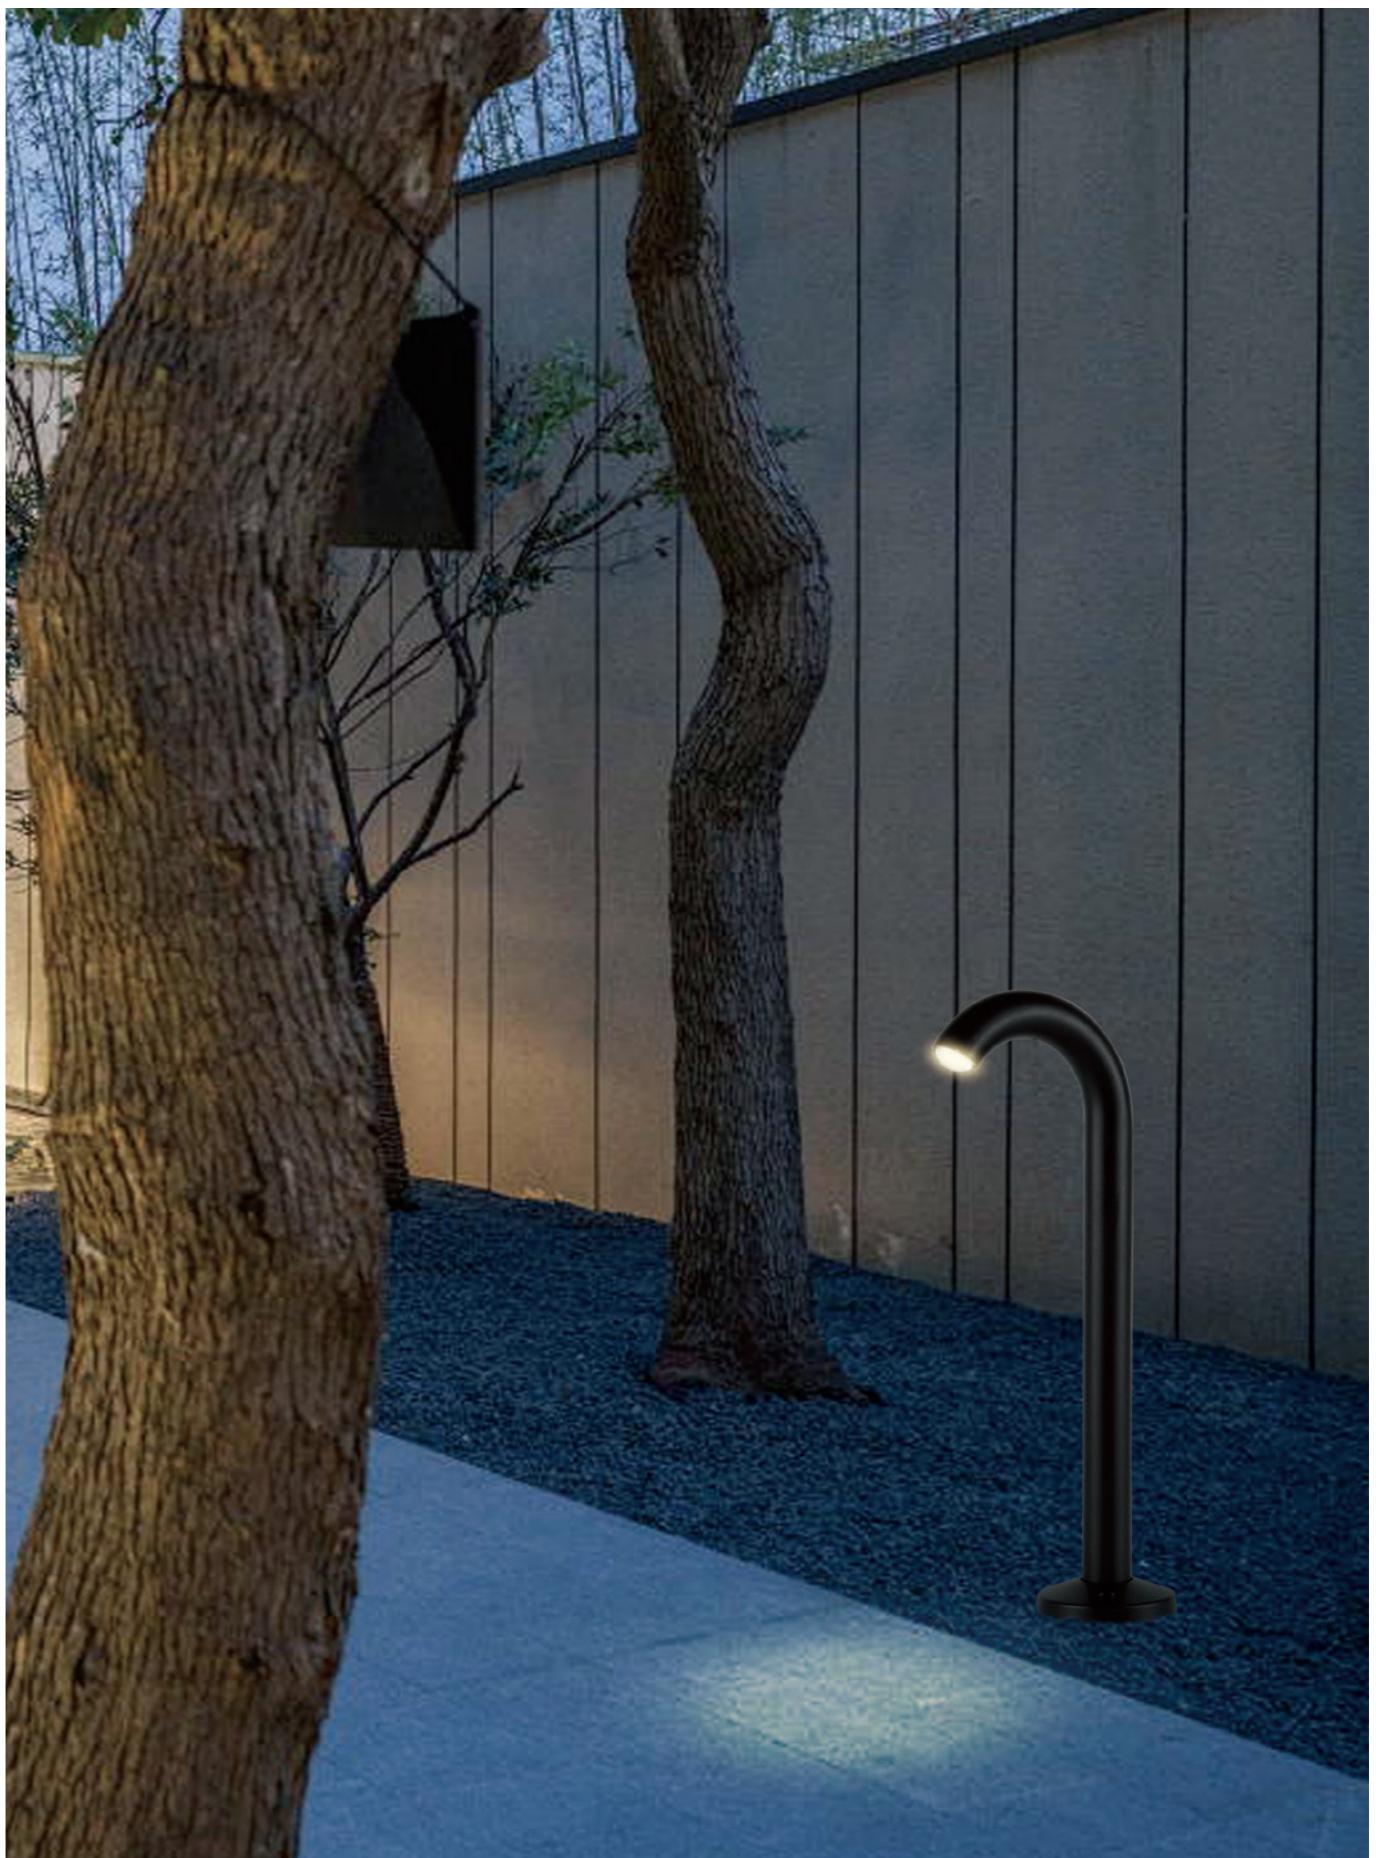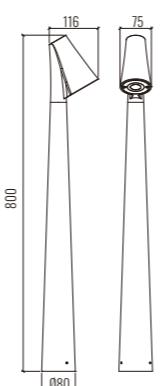



BOLLARD



BOLLARD

7W | 10W | DALI | IK08 | IP65 | 3 | CE

	Light Source	Power	Voltage	Code
BLOCK series	SMD LED	7W	90-260V 50/60Hz	DLL-1136-07-K-SB DLL-1136-07-K-DG DLL-1136-07-K-SS DLL-1136-07-K-MG
BLOCK series	SMD LED	10W	90-260V 50/60Hz	DLL-1137-10-K-SB DLL-1137-10-K-DG DLL-1137-10-K-SS DLL-1137-10-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear glass

DIMENSION
unit:mm

DLL-1136-07



DLL-1137-10





BOLLARD



BOLLARD

9W | 13.5W | DALI | IK08 | IP65 | 3 | CE

	Light Source	Power	Voltage	Code
DUNE series	SMD LED	13.5W	90-260V 50/60Hz	DLL-9110-13-K-SB DLL-9110-13-K-DG DLL-9110-13-K-SS DLL-9110-13-K-MG
DUNE series	SMD LED	9W	90-260V 50/60Hz	DLL-9111-09-K-SB DLL-9111-09-K-DG DLL-9111-09-K-SS DLL-9111-09-K-MG

Color Temperature: K (3000K - 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear glass

DIMENSION
unit:mm

DLL-9110-13

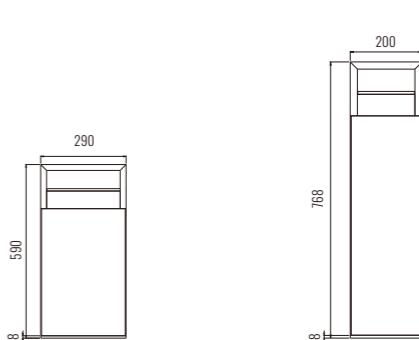

DLL-9111-09



BOLLARD

BOLLARD

5W | 10W | 1-10V | DALI | IK08 | IP65 | | | | CE |

	Light Source	Power	Voltage	Code
PHALT series	SMD LED	5W	90-260V 50/60Hz	DLL-1475-05-K-SB DLL-1475-05-K-DG DLL-1475-05-K-SS DLL-1475-05-K-MG
PHALT series	SMD LED	4W	90-260V 50/60Hz	DLL-1476-05-K-SB DLL-1476-05-K-DG DLL-1476-05-K-SS DLL-1476-05-K-MG
PHALT DOUBLE series	SMD LED	10W	90-260V 50/60Hz	DLL-1477-10-K-SB DLL-1477-10-K-DG DLL-1477-10-K-SS DLL-1477-10-K-MG
PHALT DOUBLE series	SMD LED	10W	90-260V 50/60Hz	DLL-1478-10-K-SB DLL-1478-10-K-DG DLL-1478-10-K-SS DLL-1478-10-K-MG

Color Temperature: K (3000K 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey


Controller: On / Off, Dimmable, Dali

Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: PMMA


DIMENSION

unit:mm


DLL-1475-05




DLL-1476-05




DLL-1477-10



DLL-1478-10



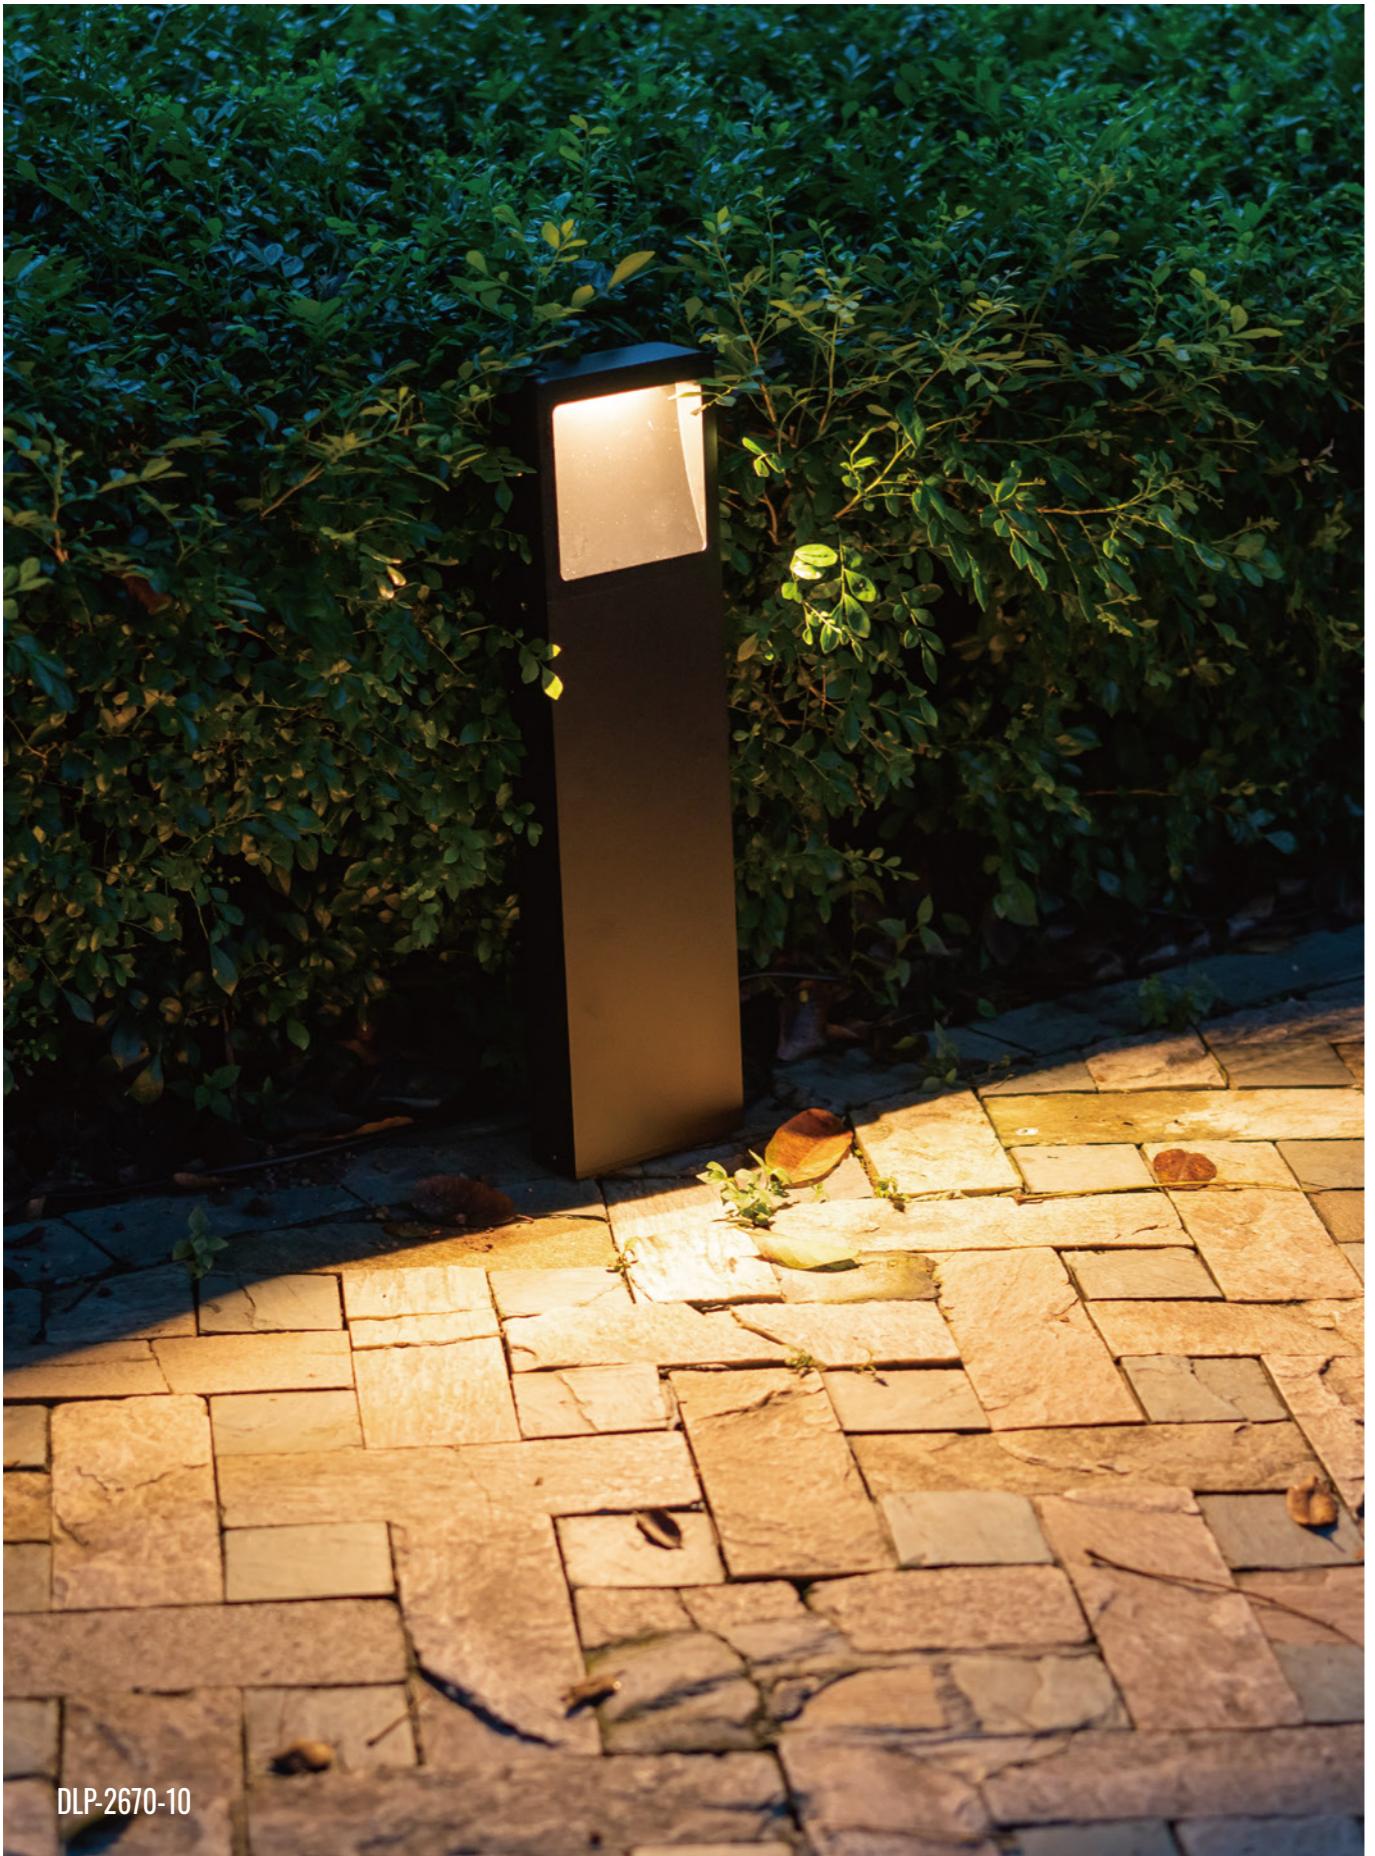

BOLLARD




BOLLARD

5W | 7W | 10W | DALI | IK08 | IP65 | | | | CE

	Light Source	Power	Voltage	Code
DINO series	SMD LED	10W	90-260V 50/60Hz	DLL-2670-10-K-SB DLL-2670-10-K-DG DLL-2670-10-K-SS DLL-2670-10-K-MG
DINO series	SMD LED	5W	90-260V 50/60Hz	DLL-0106-05-K-SB DLL-0106-05-K-DG DLL-0106-05-K-SS DLL-0106-05-K-MG
CAPE series	SMD LED	7W	90-260V 50/60Hz	DLL-1370-07-K-SB DLL-1370-07-K-DG DLL-1370-07-K-SS DLL-1370-07-K-MG
Color Temperature: K (3000K 6000K)				
Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey				
Controller: On / Off, Dimmable, Dali				
Material: Aluminum Coating: Anti-corrosion and UV-proof powder coating Diffuser: Clear glass				

DIMENSION
unit:mm

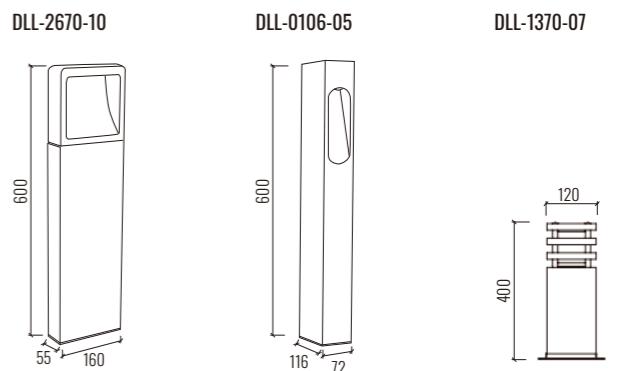



BOLLARD



BOLLARD

5W | 6.5W | DALI | IK08 | IP65 | + | 3 | CE

Light Source	Power	Voltage	Code
SMD LED	6.5W	90-260V 50/60Hz	DLL-13A-TC109-06-K-SB DLL-13A-TC109-06-K-DG DLL-13A-TC109-06-K-SS DLL-13A-TC109-06-K-MG
SMD LED	5W	90-260V 50/60Hz	DLL-1146-05-K-SB DLL-1146-05-K-DG DLL-1146-05-K-SS DLL-1146-05-K-MG

Color Temperature: K (3000K - 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear glass/PMMA

DIMENSION unit:mm

DLL-13A-TC109-06



DLL-1146-05





5W |

Light Source	Power	Voltage	Code
SMD LED	5W	90-260V 50/60Hz	DLL-1167-05-K-SB
			DLL-1167-05-K-DG
			DLL-1167-05-K-SS
			DLL-1167-05-K-MG



Color Temperature: K (3000K 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear glass/PMMA

DIMENSION
unit:mm

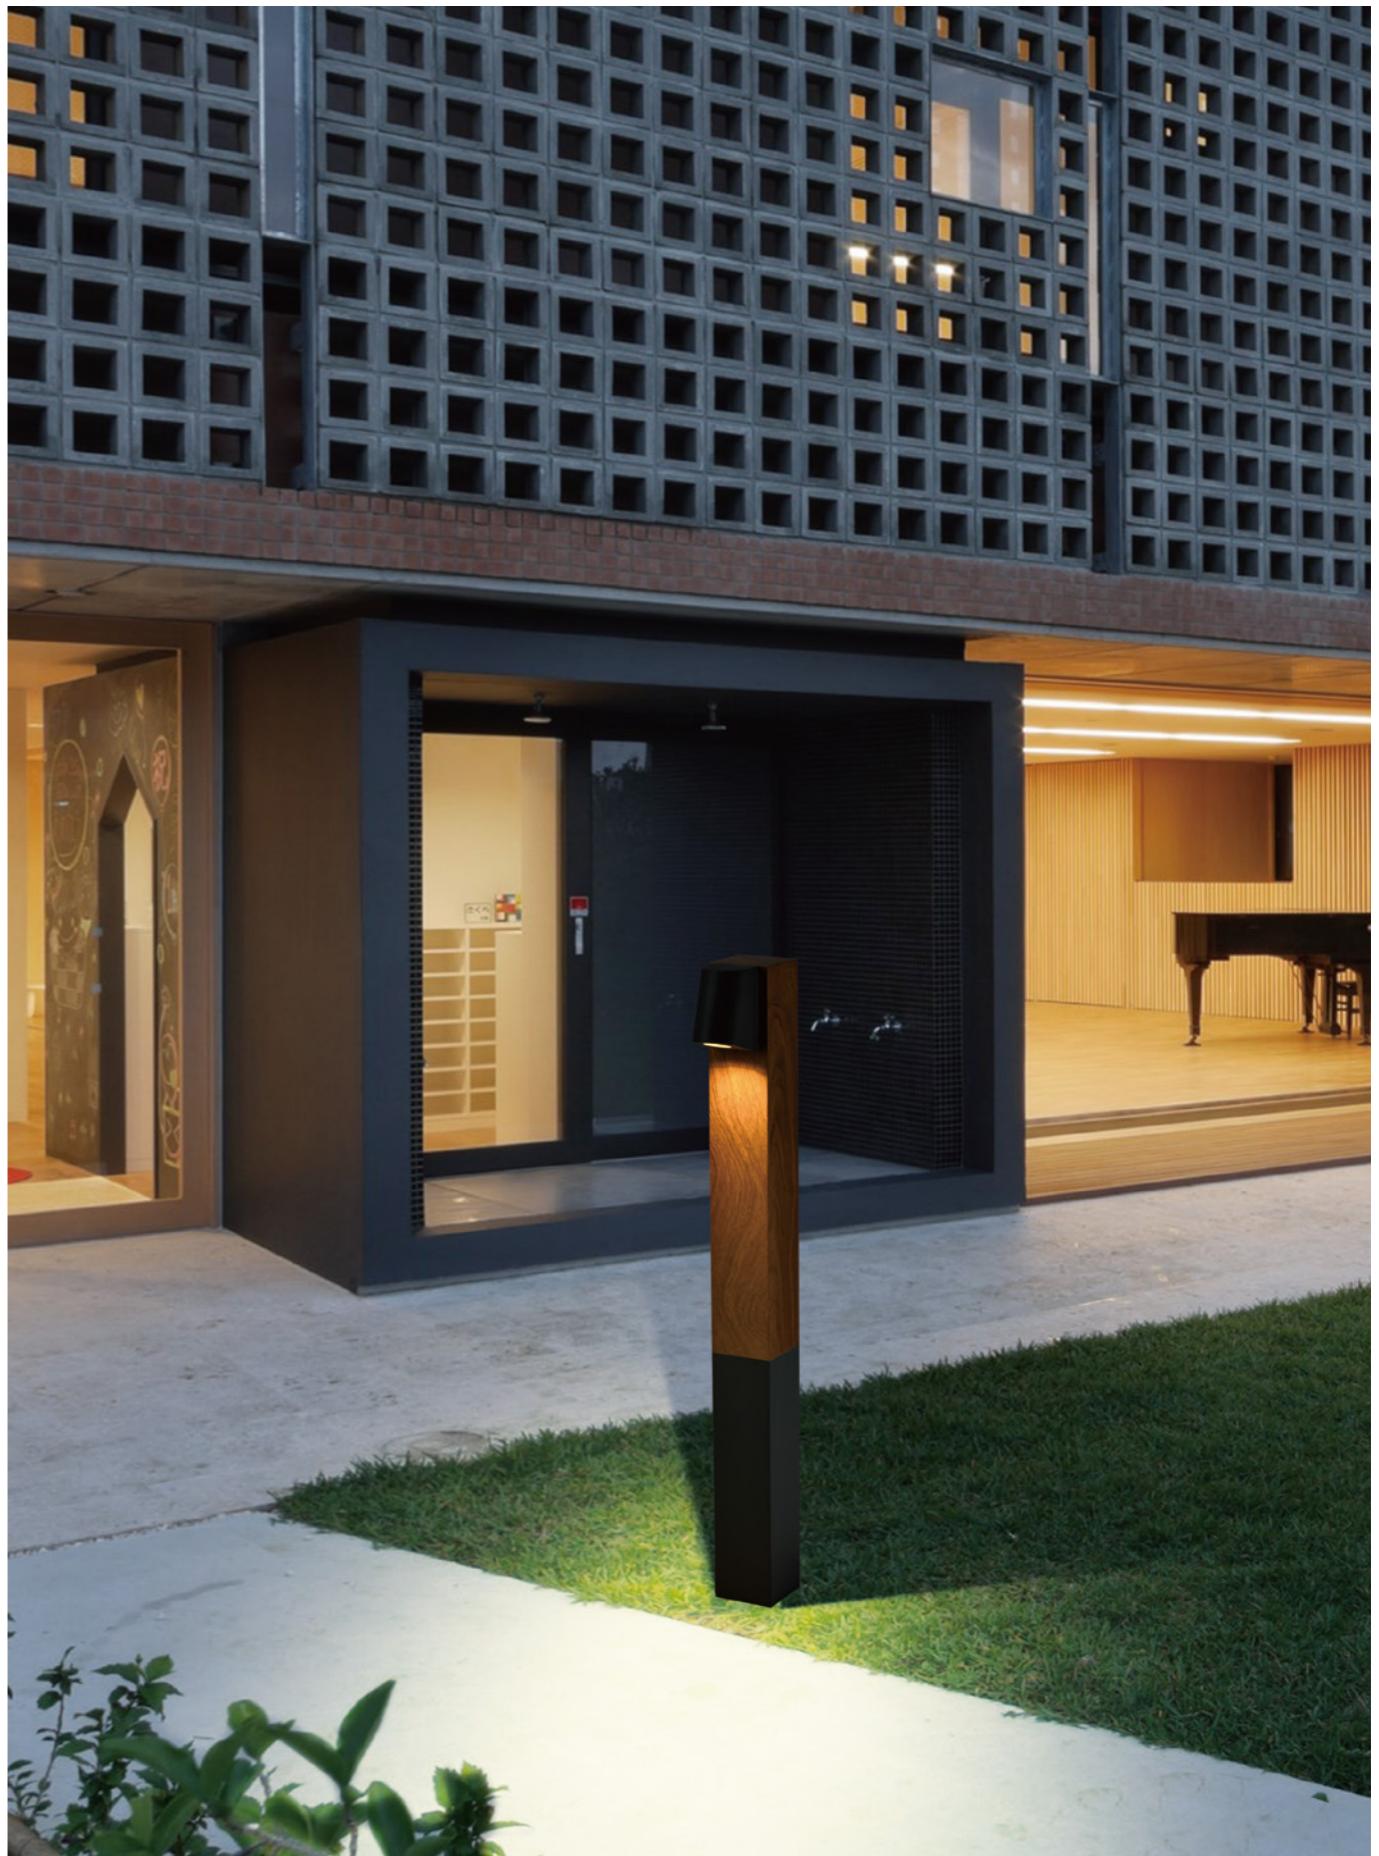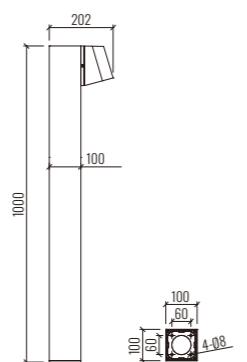




10W | 12W | 1-10V | DALI | IK08 | IP65 | | | CE |


Light Source	Power	Voltage	Code
SMD LED	12W	90-260V 50/60Hz	DLL-9091-12-K-SB DLL-9091-12-K-DG DLL-9091-12-K-SS DLL-9091-12-K-MG
SMD LED	10W	90-260V 50/60Hz	DLL-9095-10-K-SB DLL-9095-10-K-DG DLL-9095-10-K-SS DLL-9095-10-K-MG
Color Temperature: K (3000K 6000K)			
Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey			
Controller: On / Off, Dimmable, Dali			
Material: Aluminum Coating: Anti-corrosion and UV-proof powder coating Diffuser: Clear glass			

DIMENSION
unit:mm

DLL-9091-12



DLL-9095-10





BOLLARD



5W | 12W | 1-10V | DALI | IK08 | IP65 | | | |

	Light Source	Power	Voltage	Code
	SMD LED	12W	90-260V 50/60Hz	DLL-1192-12-K-SB DLL-1192-12-K-DG DLL-1192-12-K-SS DLL-1192-12-K-MG
CAVO 2 series	SMD LED	5W	90-260V 50/60Hz	DLL-0725-05-K-SB DLL-0725-05-K-DG DLL-0725-05-K-SS DLL-0725-05-K-MG

Color Temperature: K (3000K 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey


Controller: On / Off, Dimmable, Dali

Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear glass




DIMENSION
unit:mm

DLL-1192-12



DLL-0725-05





PROJECTOR LIGHT



6W | 10W | DALI | IK08 | IP65 | | | | CE

Light Source	Power	Voltage	Code
SMD LED	6W	90-260V 50/60Hz	DLL-13A-TC104-06-K-SB DLL-13A-TC104-06-K-DG DLL-13A-TC104-06-K-SS DLL-13A-TC104-06-K-MG
SMD LED	10W	90-260V 50/60Hz	DLL-13A-TC102-10-K-SB DLL-13A-TC102-10-K-DG DLL-13A-TC102-10-K-SS DLL-13A-TC102-10-K-MG

Color Temperature: K (3000K - 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Glass

DIMENSION
unit:mm

DLL-13A-TC104-06



DLL-13A-TC102-10





PARK LIGHTING



PARK LIGHTING

20W | 1-10V | DALI | IK08 | IP65 | | | |

Light Source	Power	Voltage	Code
SMD LED	20W	90-260V 50/60Hz	DLL-13A-TC101-20-K-SB
			DLL-13A-TC101-20-K-DG
			DLL-13A-TC101-20-K-SS
			DLL-13A-TC101-20-K-MG


Color Temperature: K (3000K - 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Glass

DIMENSION
unit:mm





45W |

OZO series	Light Source	Power	Voltage	Code
	SMD LED	45W	90-260V 50/60Hz	DLL-1030-45-K-SB
				DLL-1030-45-K-DG
				DLL-1030-45-K-SS
				DLL-1030-45-K-MG


Color Temperature: K (3000K 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear glass

DIMENSION
unit:mm

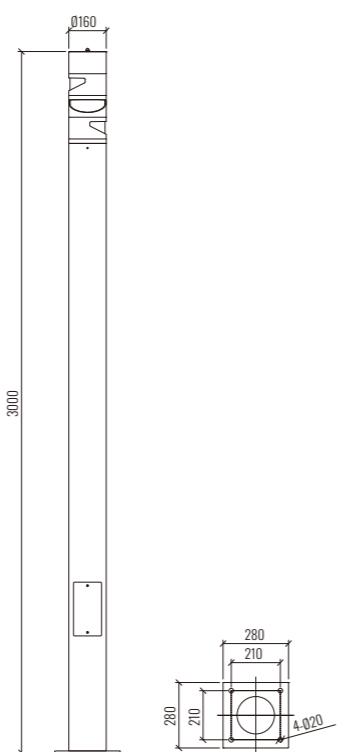



80W | DALI | IK08 | IP65 | 3 | CE |

	Light Source	Power	Voltage	Code
UFO series	SMD LED	80W	90-260V 50/60Hz	DLL-1077-80-K-SB DLL-1077-80-K-DG DLL-1077-80-K-SS DLL-1077-80-K-MG
UFO series	SMD LED	2x80W	90-260V 50/60Hz	DLL-1076-160-K-SB DLL-1076-160-K-DG DLL-1076-160-K-SS DLL-1076-160-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear glass

DIMENSION
unit:mm

DLL-1077-80

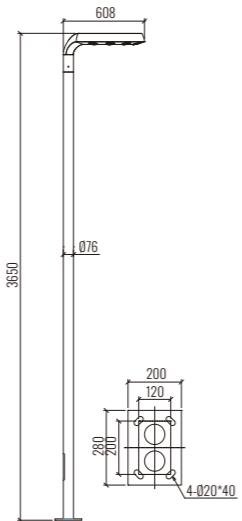


DLL-1076-160

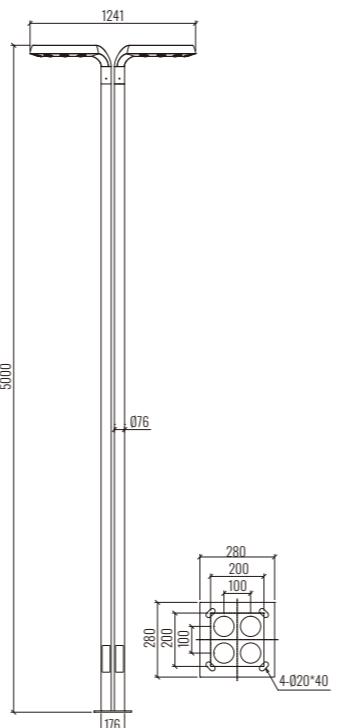



PARK LIGHTING

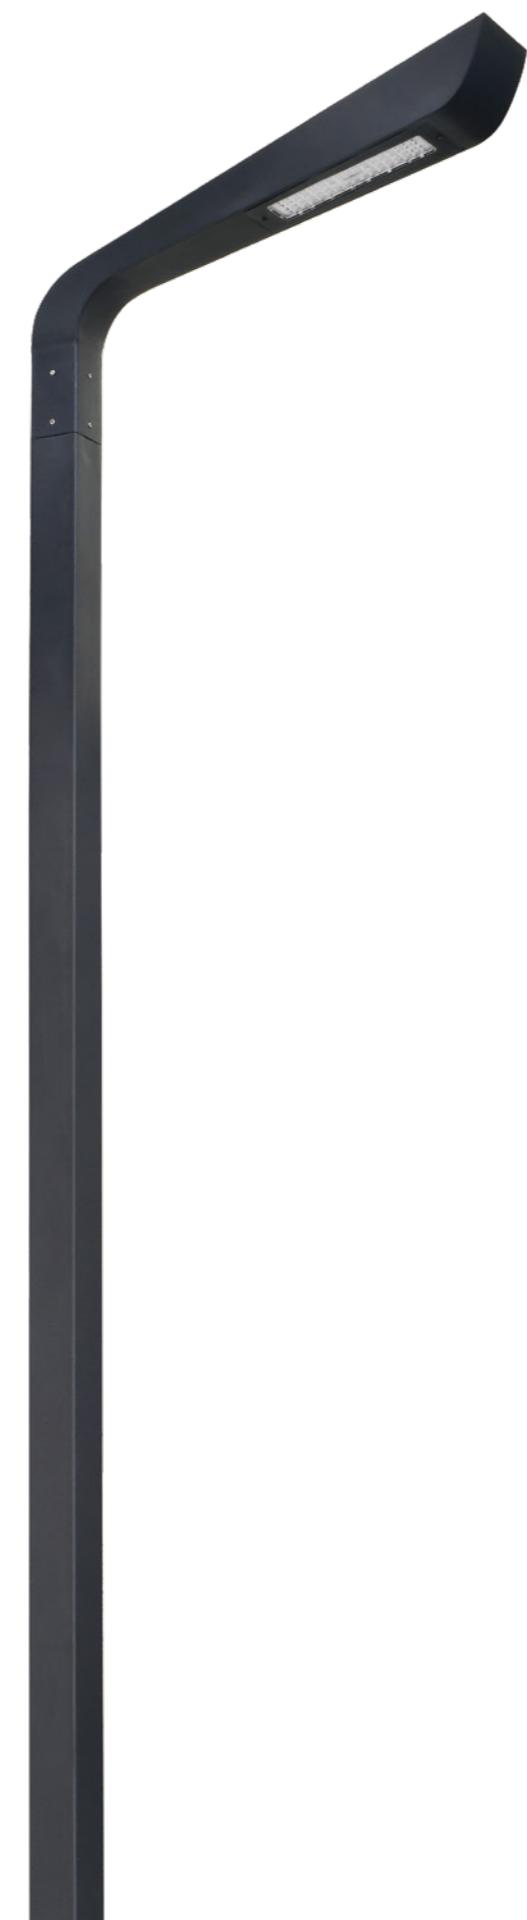

PARK LIGHTING

50W | 1-10V | DALI | IK08 | IP65 | Ⓜ | ☰ | 3 | CE

	Light Source	Power	Voltage	Code
VIVO series	SMD LED	50W	90-260V 50/60Hz	DLL-1090-50-K-SB DLL-1090-50-K-DG DLL-1090-50-K-SS DLL-1090-50-K-MG


Color Temperature: K (3000K - 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear polycarbonate

DIMENSION
unit:mm

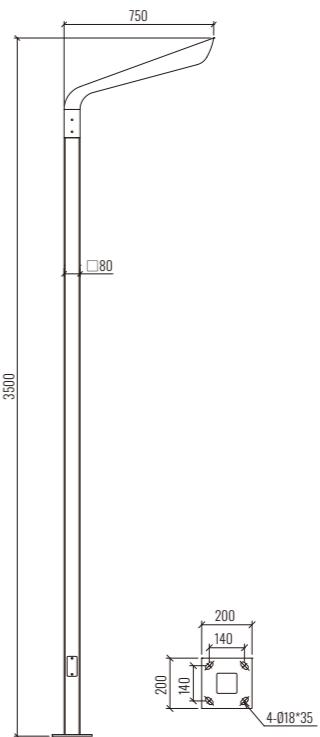



PARK LIGHTING



PARK LIGHTING

60W | 1-10V | DALI | IK08 | IP65 | | | CE

Light Source	Power	Voltage	Code
VIVO DOUBLE series	SMD LED	50W	DHB-1093-60-K-SB
			DHB-1093-60-K-DG
			DHB-1093-60-K-SS
			DHB-1093-60-K-MG


Color Temperature: K (3000K - 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear polycarbonate

DIMENSION
unit:mm

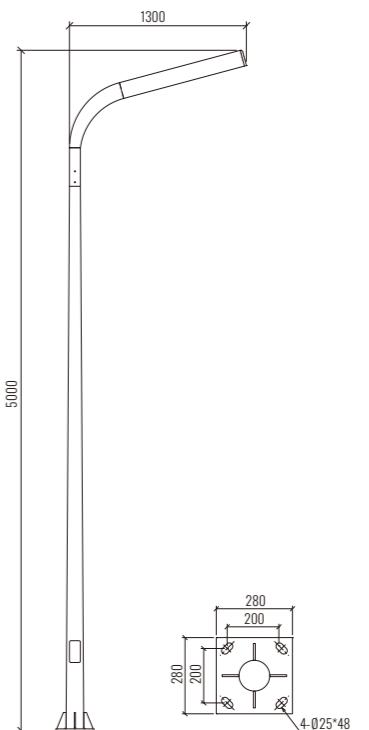



50W |

	Light Source	Power	Voltage	Code
CLUB series	SMD LED	50W	90-260V 50/60Hz	DLL-1091-50-K-SB DLL-1091-50-K-DG DLL-1091-50-K-SS DLL-1091-50-K-MG
CLUB series	SMD LED	2x50W	90-260V 50/60Hz	DLL-1092-100-K-SB DLL-1092-100-K-DG DLL-1092-100-K-SS DLL-1092-100-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear glass



DIMENSION
unit:mm

DLL-1091-50

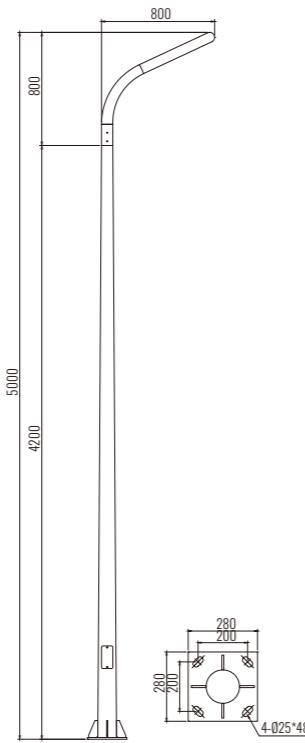

DLL-1092-100

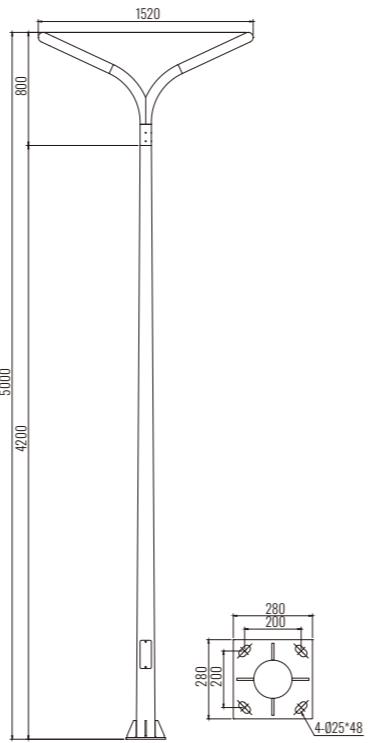

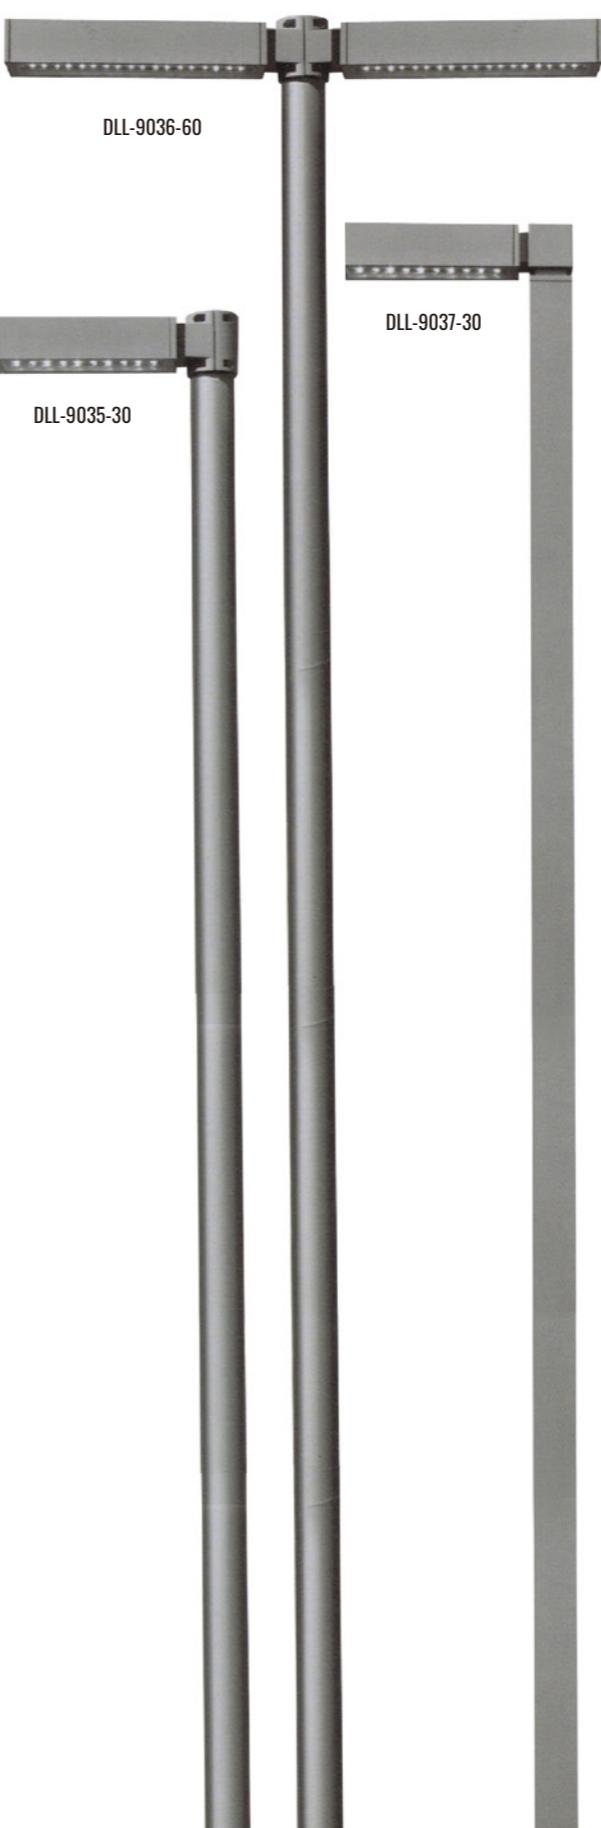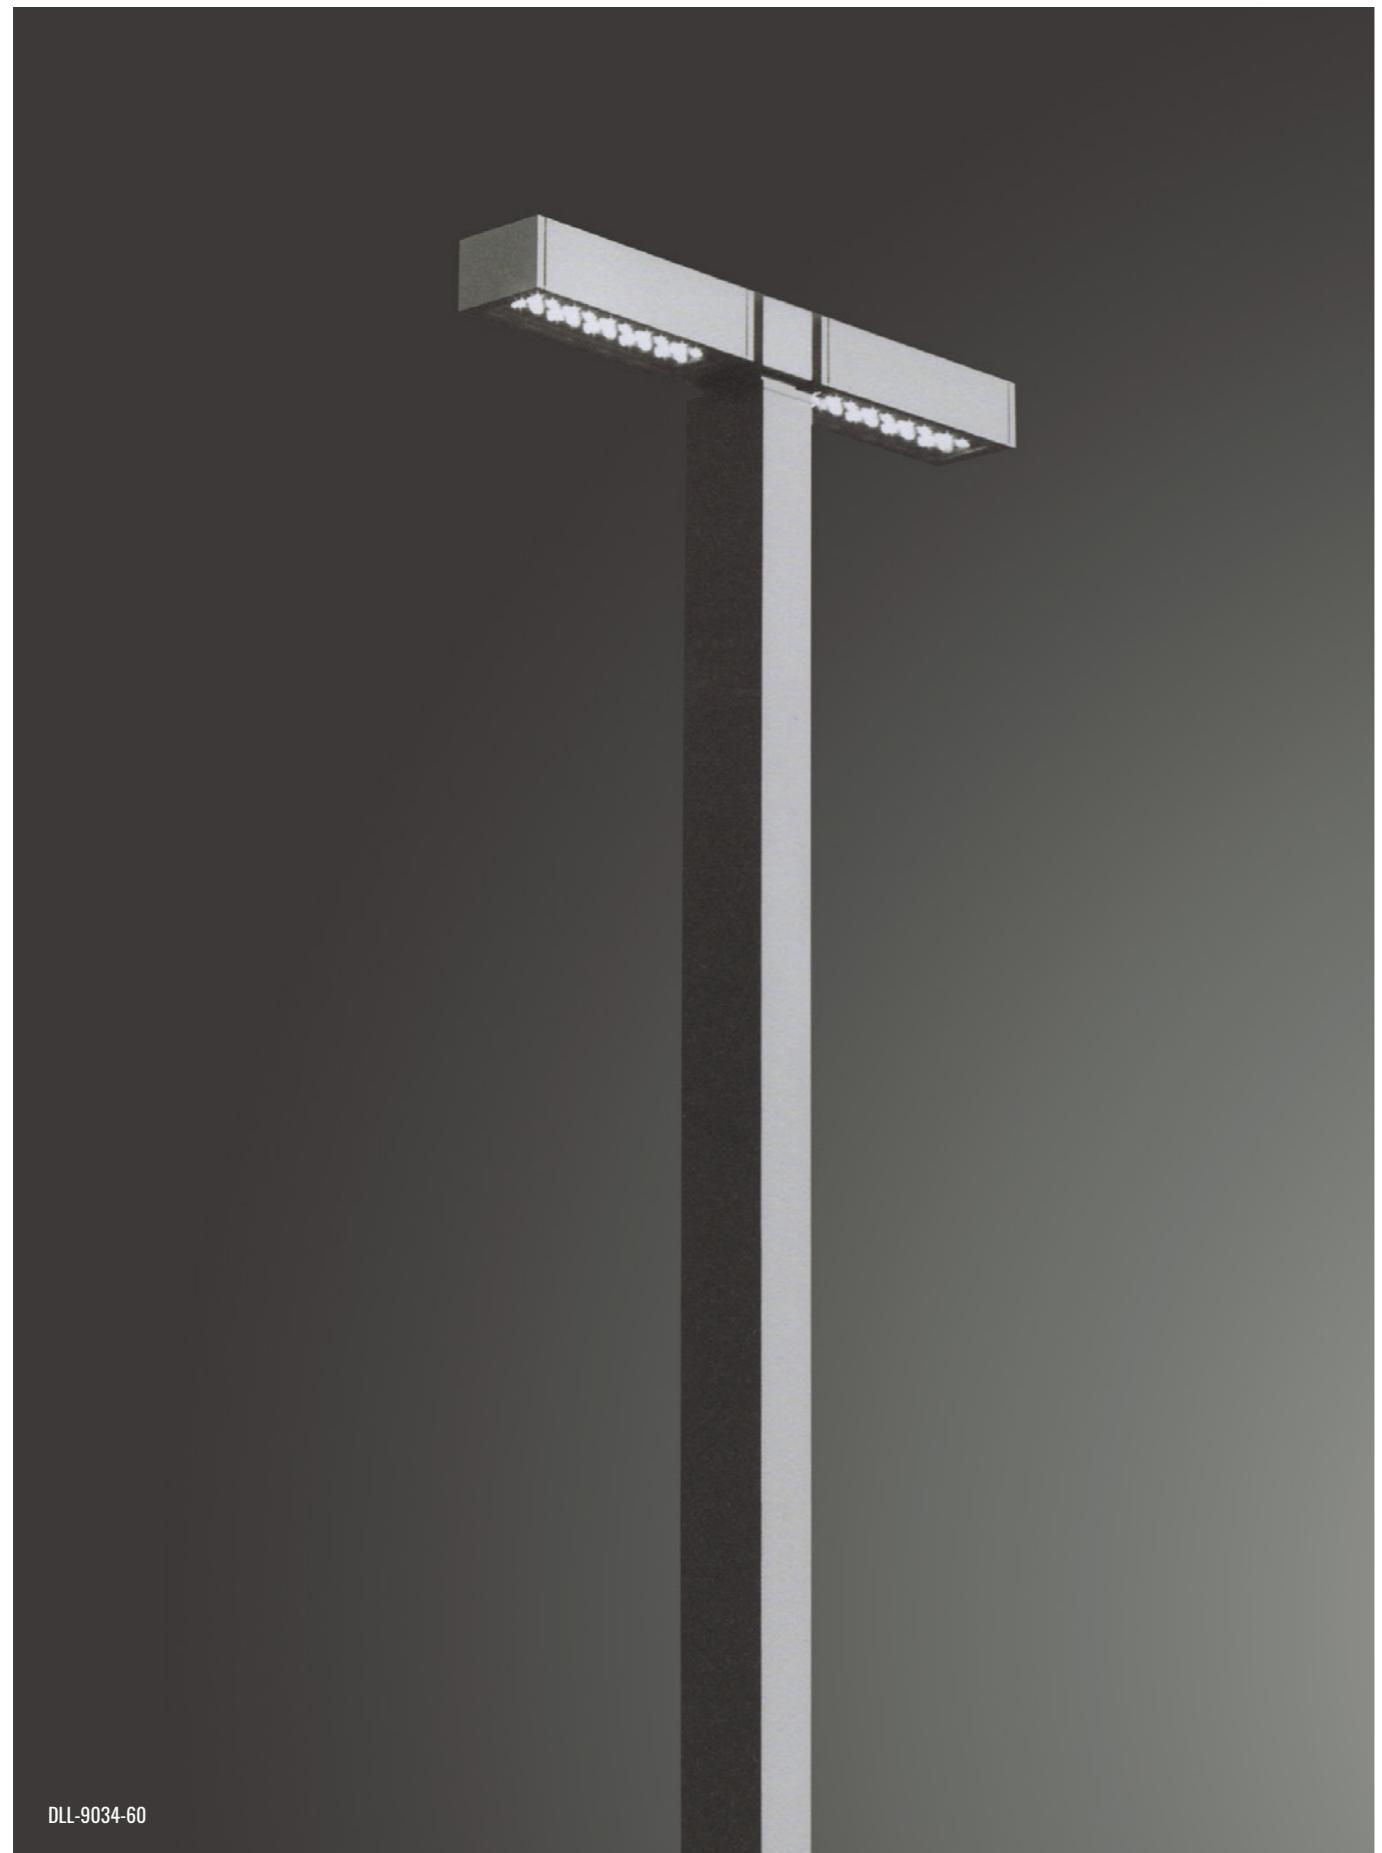

30W |

	Light Source	Power	Voltage	Code
CAVO series	SMD LED	30W	90-260V 50/60Hz	DLL-9035-30-K-SB DLL-9035-30-K-DG DLL-9035-30-K-SS DLL-9035-30-K-MG
CAVO series	SMD LED	2x30W	90-260V 50/60Hz	DLL-9036-60-K-SB DLL-9036-60-K-DG DLL-9036-60-K-SS DLL-9036-60-K-MG
CAVO series	SMD LED	30W	90-260V 50/60Hz	DLL-9037-30-K-SB DLL-9037-30-K-DG DLL-9037-30-K-SS DLL-9037-30-K-MG
CAVO series	SMD LED	2x30W	90-260V 50/60Hz	DLL-9034-60-K-SB DLL-9034-60-K-DG DLL-9034-60-K-SS DLL-9034-60-K-MG

Color Temperature: K (3000K - 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum
Coating: Anti-corrosion and UV-proof powder coating
Diffuser: Clear polycarbonate