DIVA LUCE
light & form

PRODUCT INSTALLATION DIAGRAM

Min: 150mm

LED
Driver

Min: 160mm   Min: 150mm

MIA series

PRODUCT INTRODUCTION

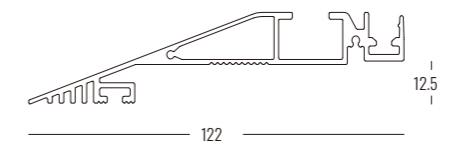DescriptionLighting system comprising an extruded profile which integratesperfectly in plasterboard ceilings. It is prepared for the simple integrationof lighting with LED or halogens projectors.The projectors are prepared forinstallation directly on the profile, with Class II remote equipment. Furthermorethey are available in two sizes depending on the installation.

It has accessories for visual comfort optimization and colour filters.AdditionalInformationCan only be installed in 12.5 mm thick plaster-board.It is possibleto cut the profiles to any size.P20 protection grade.Suitable for installation onnormally inflammable surfaces.
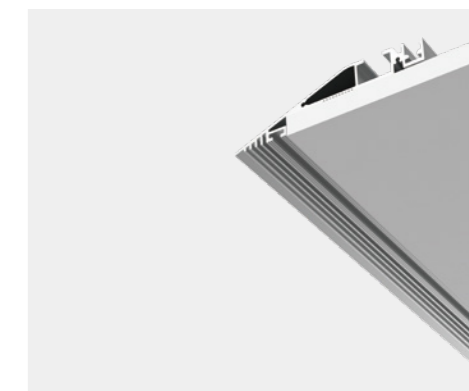
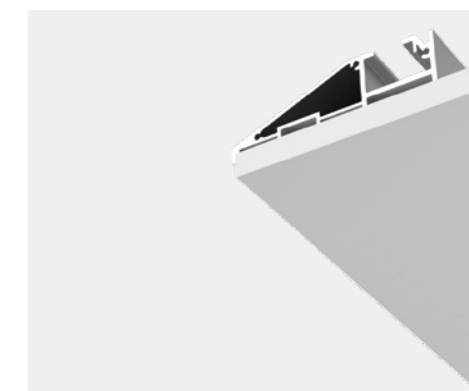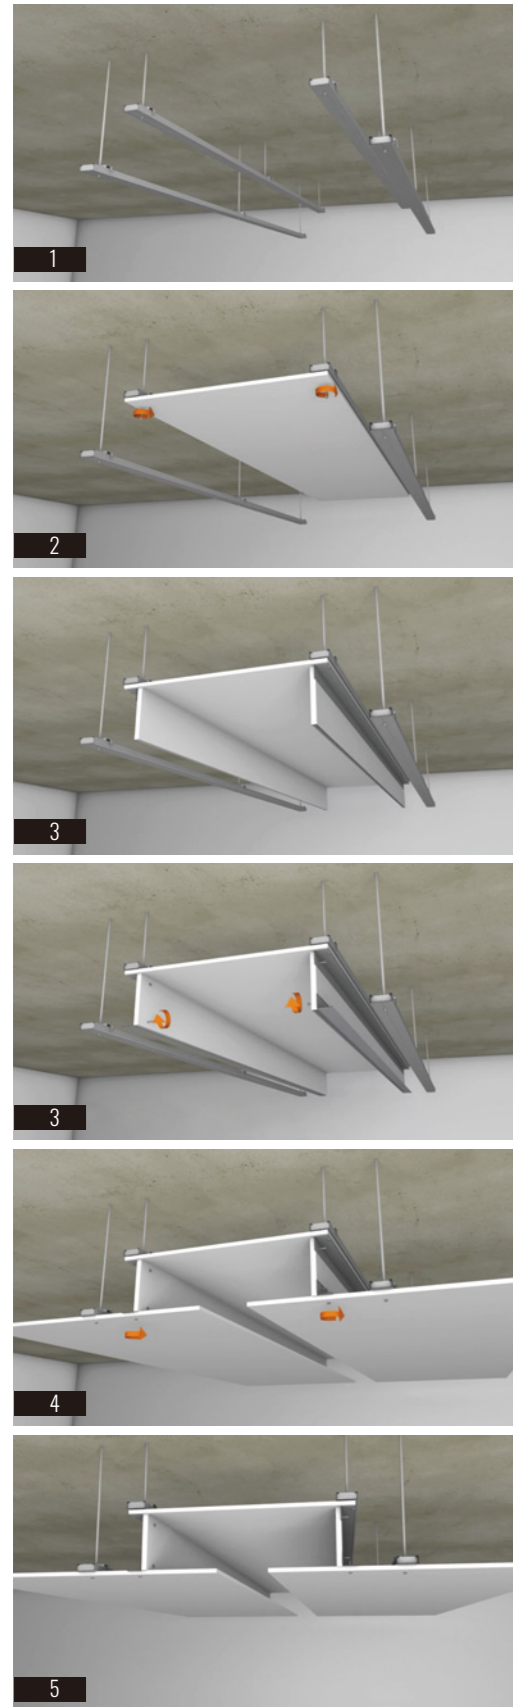Standard Compliance and Quality MarksEN60598-1 European TechnicalStandards and anysubsequent additions.
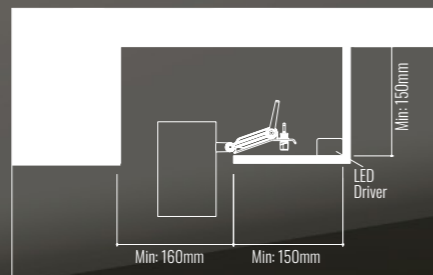
23

90

A TYPE TRACK RAIL, LENGTH: 1M (CLASSIC STYLE)

27

12.5

122

B TYPE TRACK RAIL, LENGTH: 1M (PROFESSIONAL)

SIDE MOUNTED CEILLING INSTALLED DETAILS

1

2

3

3

4

5

Space size for installing
Take FS4037-30W for example as below

Min: 150mm

LED Driver

Min: 160mm   Min: 150mm

MIA series

CEILING SIDE MOUNTING SPOTLIGHT

BRIDGELUX 50,000hrs | 15W 24W 32W | ● 3000K ○ 4000K ○ 5000K | 12° 15° 24° 38° 60° | Adj | Ra >90 | UGR <19 | IP20 | 3 | CE

| Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	12°	DL-4037-15-3012-P-C
				15°	DL-4037-15-3015-P-C
				24°	DL-4037-15-3024-P-C
				38°	DL-4037-15-3038-P-C
				60°	DL-4037-15-3060-P-C
COB LED	15W	AC220-240V	4000K	12°	DL-4037-15-4012-P-C
				15°	DL-4037-15-4015-P-C
				24°	DL-4037-15-4024-P-C
				38°	DL-4037-15-4038-P-C
				60°	DL-4037-15-4060-P-C
COB LED	15W	AC220-240V	5000K	12°	DL-4037-15-5012-P-C
				15°	DL-4037-15-5015-P-C
				24°	DL-4037-15-5024-P-C
				38°	DL-4037-15-5038-P-C
				60°	DL-4037-15-5060-P-C
COB LED	24W	AC220-240V	3000K	15°	DL-4037-24-3015-P-C
				24°	DL-4037-24-3024-P-C
				38°	DL-4037-24-3038-P-C
COB LED	24W	AC220-240V	4000K	15°	DL-4037-24-4015-P-C
				24°	DL-4037-24-4024-P-C
				38°	DL-4037-24-4038-P-C
COB LED	24W	AC220-240V	5000K	15°	DL-4037-24-5015-P-C
				24°	DL-4037-24-5024-P-C
				38°	DL-4037-24-5038-P-C
COB LED	32W	AC220-240V	3000K	15°	DL-4037-32-3015-P-C
				24°	DL-4037-32-3024-P-C
				38°	DL-4037-32-3038-P-C
COB LED	32W	AC220-240V	4000K	15°	DL-4037-32-4015-P-C
				24°	DL-4037-32-4024-P-C
				38°	DL-4037-32-4038-P-C
COB LED	32W	AC220-240V	5000K	15°	DL-4037-32-5012-P-C
				24°	DL-4037-32-5015-P-C
				38°	DL-4037-32-5038-P-C

Power Supply: P (1-On / Off   **2**-Phase Dim   **3**-DALI Dim   **4**-1-10V Dim)

Colour Finish/Reflector Color: C (WB-White / Black   **WW**-White / White   **WS**-White / Silver   **WR**-White / Rose Gold   **WG**-White / Gold   **BB**-Black / Black   **BW**-Black / White   **BS**-Black / Silver   **BR**-Black / Rose Gold   **BG**-Black / Gold)

Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-4037-15   140   Ø55

DL-4037-24   140   Ø65

DL-4037-32   140   Ø80