


ALBA series

IP 65-RATED WEATHER RESISTANCE

to make the difference, IP65 reaches a high sealing level, maintaining at the same time the same aesthetics as a standard.
The insulating property is obtained thanks to a protection placed just over the LED, and a silicone joint on the internal part of the bezel. In this way, the external aspect of IP65 is identical to any other Swap / IP20.

Offers the possibility of requesting any of its models with IP65-rated weather resistance, which converts it into an optimal luminaire to be installed in atmospheres where the product may suffer from the impact of water or frequent presence of humidity.

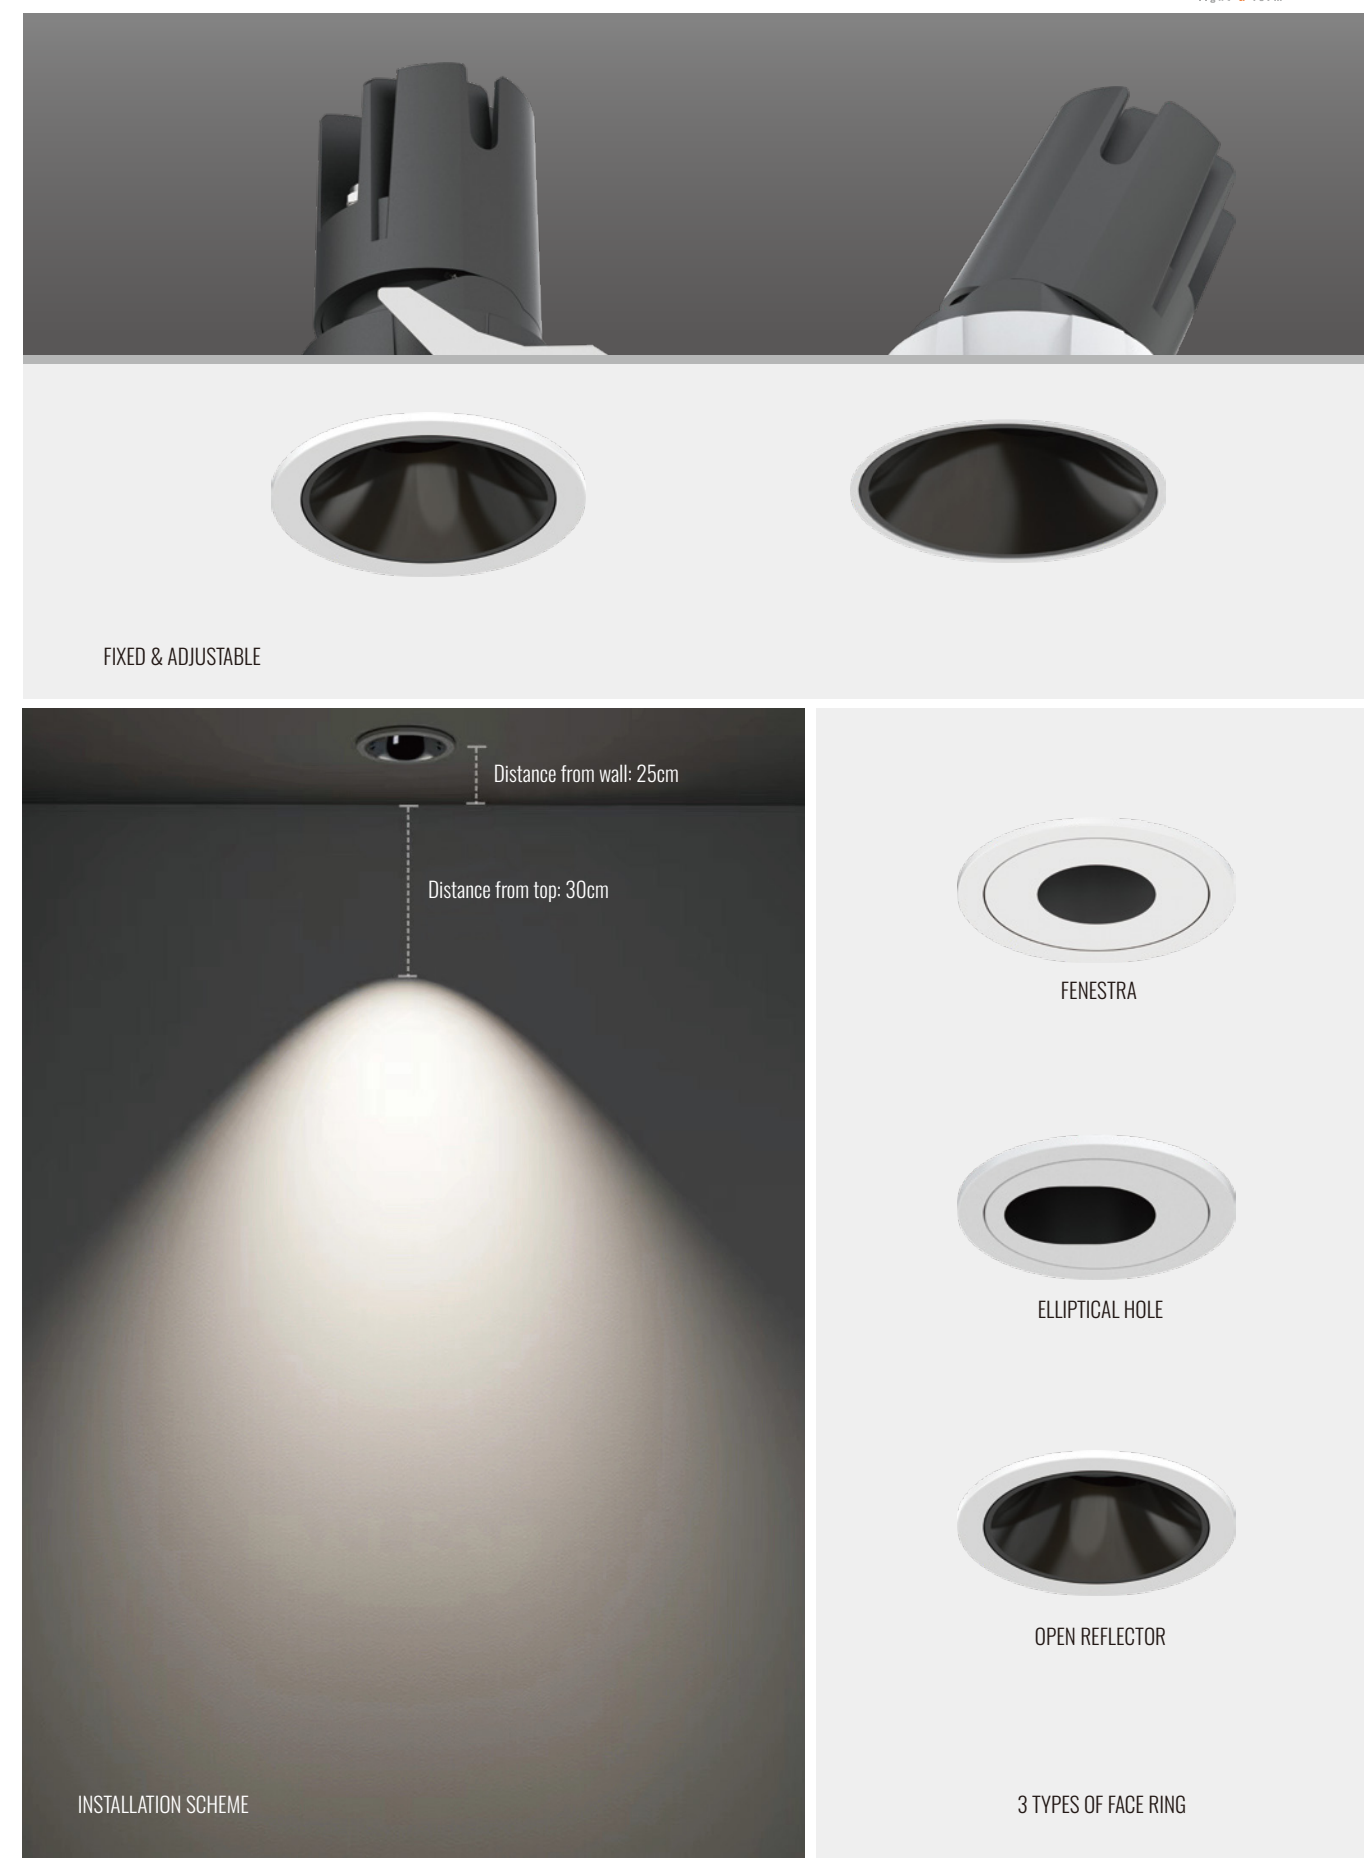

FIXED & ADJUSTABLE

Distance from wall: 25cm

Distance from top: 30cm

FENESTRA

ELLIPTICAL HOLE

OPEN REFLECTOR

3 TYPES OF FACE RING


INSTALLATION SCHEME

ALBA series

RECESSED FIXED DOWNLIGHT



IP65 DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	15°	DL-1203-06-3015-P-C
				24°	DL-1203-06-3024-P-C
				38°	DL-1203-06-3038-P-C
				60°	DL-1203-06-3060-P-C
COB LED	6W	AC220-240V	4000K	15°	DL-1203-06-4015-P-C
				24°	DL-1203-06-4024-P-C
				38°	DL-1203-06-4038-P-C
				60°	DL-1203-06-4060-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1203-06-5015-P-C
				24°	DL-1203-06-5024-P-C
				38°	DL-1203-06-5038-P-C
				60°	DL-1203-06-5060-P-C
COB LED	10W	AC220-240V	3000K	15°	DL-1205-10-3015-P-C
				24°	DL-1205-10-3024-P-C
				38°	DL-1205-10-3038-P-C
				60°	DL-1205-10-3060-P-C
COB LED	10W	AC220-240V	4000K	15°	DL-1205-10-4015-P-C
				24°	DL-1205-10-4024-P-C
				38°	DL-1205-10-4038-P-C
				60°	DL-1205-10-4060-P-C
COB LED	10W	AC220-240V	5000K	15°	DL-1205-10-5015-P-C
				24°	DL-1205-10-5024-P-C
				38°	DL-1205-10-5038-P-C
				60°	DL-1205-10-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



White Reflector



Black Reflector



Dark Light Reflector



Silver Reflector



Rose Gold Reflector



Gold Reflector


Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1203-06



DL-1205-10




ALBA series

RECESSED FIXED DOWNLIGHT



IP65 DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220-240V	3000K	15°	DL-1207-12-3015-P-C
				24°	DL-1207-12-3024-P-C
				38°	DL-1207-12-3038-P-C
				60°	DL-1207-12-3060-P-C
COB LED	12W	AC220-240V	4000K	15°	DL-1207-12-4015-P-C
				24°	DL-1207-12-4024-P-C
				38°	DL-1207-12-4038-P-C
				60°	DL-1207-12-4060-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1207-12-5015-P-C
				24°	DL-1207-12-5024-P-C
				38°	DL-1207-12-5038-P-C
				60°	DL-1207-12-5060-P-C
COB LED	20W	AC220-240V	3000K	15°	DL-1209-20-3015-P-C
				24°	DL-1209-20-3024-P-C
				38°	DL-1209-20-3038-P-C
				60°	DL-1209-20-3060-P-C
COB LED	20W	AC220-240V	4000K	15°	DL-1209-20-4015-P-C
				24°	DL-1209-20-4024-P-C
				38°	DL-1209-20-4038-P-C
				60°	DL-1209-20-4060-P-C
COB LED	20W	AC220-240V	5000K	15°	DL-1209-20-5015-P-C
				24°	DL-1209-20-5024-P-C
				38°	DL-1209-20-5038-P-C
				60°	DL-1209-20-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



White Reflector



Black Reflector



Dark Light Reflector



Silver Reflector



Rose Gold Reflector




Gold Reflector



Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1207-12




DL-1209-20



ALBA series

RECESSED ADJUSTABLE DOWNLIGHT

IP65 DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	15°	DL-1204-06-3015-P-C
				24°	DL-1204-06-3024-P-C
				38°	DL-1204-06-3038-P-C
				60°	DL-1204-06-3060-P-C
COB LED	6W	AC220-240V	4000K	15°	DL-1204-06-4015-P-C
				24°	DL-1204-06-4024-P-C
				38°	DL-1204-06-4038-P-C
				60°	DL-1204-06-4060-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1204-06-5015-P-C
				24°	DL-1204-06-5024-P-C
				38°	DL-1204-06-5038-P-C
				60°	DL-1204-06-5060-P-C
COB LED	10W	AC220-240V	3000K	15°	DL-1206-10-3015-P-C
				24°	DL-1206-10-3024-P-C
				38°	DL-1206-10-3038-P-C
				60°	DL-1206-10-3060-P-C
COB LED	10W	AC220-240V	4000K	15°	DL-1206-10-4015-P-C
				24°	DL-1206-10-4024-P-C
				38°	DL-1206-10-4038-P-C
				60°	DL-1206-10-4060-P-C
COB LED	10W	AC220-240V	5000K	15°	DL-1206-10-5015-P-C
				24°	DL-1206-10-5024-P-C
				38°	DL-1206-10-5038-P-C
				60°	DL-1206-10-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



White Reflector



Black Reflector



Dark Light Reflector



Silver Reflector



Rose Gold Reflector




Gold Reflector


Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1204-06




DL-1206-10



ALBA series

RECESSED ADJUSTABLE DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220-240V	3000K	15°	DL-1208-12-3015-P-C
				24°	DL-1208-12-3024-P-C
				38°	DL-1208-12-3038-P-C
				60°	DL-1208-12-3060-P-C
COB LED	12W	AC220-240V	4000K	15°	DL-1208-12-4015-P-C
				24°	DL-1208-12-4024-P-C
				38°	DL-1208-12-4038-P-C
				60°	DL-1208-12-4060-P-C
COB LED	6W	AC220-240V	5000K	15°	DL-1208-12-5015-P-C
				24°	DL-1208-12-5024-P-C
				38°	DL-1208-12-5038-P-C
				60°	DL-1208-12-5060-P-C
COB LED	20W	AC220-240V	3000K	15°	DL-1210-20-3015-P-C
				24°	DL-1210-20-3024-P-C
				38°	DL-1210-20-3038-P-C
				60°	DL-1210-20-3060-P-C
COB LED	20W	AC220-240V	4000K	15°	DL-1210-20-4015-P-C
				24°	DL-1210-20-4024-P-C
				38°	DL-1210-20-4038-P-C
				60°	DL-1210-20-4060-P-C
COB LED	20W	AC220-240V	5000K	15°	DL-1210-20-5015-P-C
				24°	DL-1210-20-5024-P-C
				38°	DL-1210-20-5038-P-C
				60°	DL-1210-20-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



White Reflector



Black Reflector



Dark Light Reflector



Silver Reflector



Rose Gold Reflector




Gold Reflector


Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1208-12



DL-1210-20




IP65 DOWNLIGHT

ALBA series

RECESSED ADJUSTABLE DOWNLIGHT

IP65 DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	20W	AC220-240V	3000K	15°	DL-WGIP65-20-3015-P-C
				24°	DL-WGIP65-20-3024-P-C
				38°	DL-WGIP65-20-3038-P-C
				60°	DL-WGIP65-20-3060-P-C
COB LED	20W	AC220-240V	4000K	15°	DL-WGIP65-20-4015-P-C
				24°	DL-WGIP65-20-4024-P-C
				38°	DL-WGIP65-20-4038-P-C
				60°	DL-WGIP65-20-4060-P-C
COB LED	20W	AC220-240V	5000K	15°	DL-WGIP65-20-5015-P-C
				24°	DL-WGIP65-20-5024-P-C
				38°	DL-WGIP65-20-5038-P-C
				60°	DL-WGIP65-20-5060-P-C
COB LED	30W	AC220-240V	3000K	15°	DL-WGIP65-30-3015-P-C
				24°	DL-WGIP65-30-3024-P-C
				38°	DL-WGIP65-30-3038-P-C
				60°	DL-WGIP65-30-3060-P-C
COB LED	30W	AC220-240V	4000K	15°	DL-WGIP65-30-4015-P-C
				24°	DL-WGIP65-30-4024-P-C
				38°	DL-WGIP65-30-4038-P-C
				60°	DL-WGIP65-30-4060-P-C
COB LED	30W	AC220-240V	5000K	15°	DL-WGIP65-30-5015-P-C
				24°	DL-WGIP65-30-5024-P-C
				38°	DL-WGIP65-30-5038-P-C
				60°	DL-WGIP65-30-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



White Reflector



Black Reflector



Dark Light Reflector



Silver Reflector



Rose Gold Reflector




Gold Reflector


Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-WGIP65-20



DL-WGIP65-30




IP65 DOWNLIGHT

GINA series

TRIMLESS FIXED DOWNLIGHT



IP65 DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220~240V	3000K	15°	DL-1203A-06-3015- P-C
				24°	DL-1203A-06-3024- P-C
				38°	DL-1203A-06-3038- P-C
				60°	DL-1203A-06-3060- P-C
COB LED	6W	AC220~240V	4000K	15°	DL-1203A-06-4015- P-C
				24°	DL-1203A-06-4024- P-C
				38°	DL-1203A-06-4038- P-C
				60°	DL-1203A-06-4060- P-C
COB LED	6W	AC220~240V	5000K	15°	DL-1203A-06-5015- P-C
				24°	DL-1203A-06-5024- P-C
				38°	DL-1203A-06-5038- P-C
				60°	DL-1203A-06-5060- P-C
COB LED	10W	AC220~240V	3000K	15°	DL-1205A-10-3015- P-C
				24°	DL-1205A-10-3024- P-C
				38°	DL-1205A-10-3038- P-C
				60°	DL-1205A-10-3060- P-C
COB LED	10W	AC220~240V	4000K	15°	DL-1205A-10-4015- P-C
				24°	DL-1205A-10-4024- P-C
				38°	DL-1205A-10-4038- P-C
				60°	DL-1205A-10-4060- P-C
COB LED	10W	AC220~240V	5000K	15°	DL-1205A-10-5015- P-C
				24°	DL-1205A-10-5024- P-C
				38°	DL-1205A-10-5038- P-C
				60°	DL-1205A-10-5060- P-C

Power Supply: **P** (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: **C** (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



White Reflector



Black Reflector



Dark Light Reflector



Silver Reflector



Rose Gold Reflector





Gold Reflector



Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1203A-06



DL-1205A-10




GINA series

TRIMLESS FIXED DOWNLIGHT



IP65 DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220~240V	3000K	15°	DL-1207A-12-3015- P-C
				24°	DL-1207A-12-3024- P-C
				38°	DL-1207A-12-3038- P-C
				60°	DL-1207A-12-3060- P-C
COB LED	12W	AC220~240V	4000K	15°	DL-1207A-12-4015- P-C
				24°	DL-1207A-12-4024- P-C
				38°	DL-1207A-12-4038- P-C
				60°	DL-1207A-12-4060- P-C
COB LED	12W	AC220~240V	5000K	15°	DL-1207A-12-5015- P-C
				24°	DL-1207A-12-5024- P-C
				38°	DL-1207A-12-5038- P-C
				60°	DL-1207A-12-5060- P-C
COB LED	20W	AC220~240V	3000K	15°	DL-1209A-20-3015- P-C
				24°	DL-1209A-20-3024- P-C
				38°	DL-1209A-20-3038- P-C
				60°	DL-1209A-20-3060- P-C
COB LED	20W	AC220~240V	4000K	15°	DL-1209A-20-4015- P-C
				24°	DL-1209A-20-4024- P-C
				38°	DL-1209A-20-4038- P-C
				60°	DL-1209A-20-4060- P-C
COB LED	20W	AC220~240V	5000K	15°	DL-1209A-20-5015- P-C
				24°	DL-1209A-20-5024- P-C
				38°	DL-1209A-20-5038- P-C
				60°	DL-1209A-20-5060- P-C

Power Supply: **P** (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: **C** (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



White Reflector



Black Reflector



Dark Light Reflector



Silver Reflector



Rose Gold Reflector





Gold Reflector



Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1207A-12




DL-1209A-20



GINA series

TRIMLESS ADJUSTABLE DOWNLIGHT

IP65 DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220~240V	3000K	15°	DL-1204A-06-3015- P-C
				24°	DL-1204A-06-3024- P-C
				38°	DL-1204A-06-3038- P-C
				60°	DL-1204A-06-3060- P-C
COB LED	6W	AC220~240V	4000K	15°	DL-1204A-06-4015- P-C
				24°	DL-1204A-06-4024- P-C
				38°	DL-1204A-06-4038- P-C
				60°	DL-1204A-06-4060- P-C
COB LED	6W	AC220~240V	5000K	15°	DL-1204A-06-5015- P-C
				24°	DL-1204A-06-5024- P-C
				38°	DL-1204A-06-5038- P-C
				60°	DL-1204A-06-5060- P-C
COB LED	10W	AC220~240V	3000K	15°	DL-1206A-10-3015- P-C
				24°	DL-1206A-10-3024- P-C
				38°	DL-1206A-10-3038- P-C
				60°	DL-1206A-10-3060- P-C
COB LED	10W	AC220~240V	4000K	15°	DL-1206A-10-4015- P-C
				24°	DL-1206A-10-4024- P-C
				38°	DL-1206A-10-4038- P-C
				60°	DL-1206A-10-4060- P-C
COB LED	10W	AC220~240V	5000K	15°	DL-1206A-10-5015- P-C
				24°	DL-1206A-10-5024- P-C
				38°	DL-1206A-10-5038- P-C
				60°	DL-1206A-10-5060- P-C

Power Supply: **P** (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: **C** (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



White Reflector



Black Reflector



Dark Light Reflector



Silver Reflector



Rose Gold Reflector





Gold Reflector


Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1204A-06




DL-1206A-10



GINA series

TRIMLESS ADJUSTABLE DOWNLIGHT

IP65 DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220~240V	3000K	15°	DL-1208A-12-3015- P-C
				24°	DL-1208A-12-3024- P-C
				38°	DL-1208A-12-3038- P-C
				60°	DL-1208A-12-3060- P-C
COB LED	12W	AC220~240V	4000K	15°	DL-1208A-12-4015- P-C
				24°	DL-1208A-12-4024- P-C
				38°	DL-1208A-12-4038- P-C
				60°	DL-1208A-12-4060- P-C
COB LED	12W	AC220~240V	5000K	15°	DL-1208A-12-5015- P-C
				24°	DL-1208A-12-5024- P-C
				38°	DL-1208A-12-5038- P-C
				60°	DL-1208A-12-5060- P-C
COB LED	20W	AC220~240V	3000K	15°	DL-1210A-20-3015- P-C
				24°	DL-1210A-20-3024- P-C
				38°	DL-1210A-20-3038- P-C
				60°	DL-1210A-20-3060- P-C
COB LED	20W	AC220~240V	4000K	15°	DL-1210A-20-4015- P-C
				24°	DL-1210A-20-4024- P-C
				38°	DL-1210A-20-4038- P-C
				60°	DL-1210A-20-4060- P-C
COB LED	20W	AC220~240V	5000K	15°	DL-1210A-20-5015- P-C
				24°	DL-1210A-20-5024- P-C
				38°	DL-1210A-20-5038- P-C
				60°	DL-1210A-20-5060- P-C

Power Supply: **P** (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: **C** (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



White Reflector



Black Reflector



Dark Light Reflector



Silver Reflector



Rose Gold Reflector





Gold Reflector


Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1208A-12



DL-1210A-20



GINA series

TRIMLESS FIXED DOWNLIGHT



IP65 DOWNLIGHT

<div>BRIDGE LUX50,000hrs</div> <div>20W30W</div> <div>● 3000K○ 4000K○ 5000K</div> <div><div>15°24°38°60°</div><div>Fixed</div></div> <div>Ra>90</div> <div>UGR<19</div> <div>IP65</div> <div>3</div> <div>CE</div>					
Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	20W	AC220~240V	3000K	15°	DL-WGIP65A-20-3015- P-C
				24°	DL-WGIP65A-20-3024- P-C
				38°	DL-WGIP65A-20-3038- P-C
				60°	DL-WGIP65A-20-3060- P-C
COB LED	20W	AC220~240V	4000K	15°	DL-WGIP65A-20-4015- P-C
				24°	DL-WGIP65A-20-4024- P-C
				38°	DL-WGIP65A-20-4038- P-C
				60°	DL-WGIP65A-20-4060- P-C
COB LED	20W	AC220~240V	5000K	15°	DL-WGIP65A-20-5015- P-C
				24°	DL-WGIP65A-20-5024- P-C
				38°	DL-WGIP65A-20-5038- P-C
				60°	DL-WGIP65A-20-5060- P-C
COB LED	30W	AC220~240V	3000K	15°	DL-WGIP65A-30-3015- P-C
				24°	DL-WGIP65A-30-3024- P-C
				38°	DL-WGIP65A-30-3038- P-C
				60°	DL-WGIP65A-30-3060- P-C
COB LED	30W	AC220~240V	4000K	15°	DL-WGIP65A-30-4015- P-C
				24°	DL-WGIP65A-30-4024- P-C
				38°	DL-WGIP65A-30-4038- P-C
				60°	DL-WGIP65A-30-4060- P-C
COB LED	30W	AC220~240V	5000K	15°	DL-WGIP65A-30-5015- P-C
				24°	DL-WGIP65A-30-5024- P-C
				38°	DL-WGIP65A-30-5038- P-C
				60°	DL-WGIP65A-30-5060- P-C

Power Supply: **P** (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: **C** (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



White Reflector



Black Reflector



Dark Light Reflector



Silver Reflector



Rose Gold Reflector




Gold Reflector



Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-WGIP65A-20



DL-WGIP65A-30



GINA series

TRIMLESS ADJUSTABLE DOWNLIGHT



IP65 DOWNLIGHT

<div>BRIDGE LUX50,000hrs</div> <div>20W30W</div> <div>● 3000K○ 4000K○ 5000K</div> <div><div>15°24°38°60°</div><div>Adj.</div></div> <div>Ra>90</div> <div>UGR<19</div> <div>IP65</div> <div>3</div> <div>CE</div>					
Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	20W	AC220~240V	3000K	15°	DL-WGIP65AA-20-3015- P-C
				24°	DL-WGIP65AA-20-3024- P-C
				38°	DL-WGIP65AA-20-3038- P-C
				60°	DL-WGIP65AA-20-3060- P-C
COB LED	20W	AC220~240V	4000K	15°	DL-WGIP65AA-20-4015- P-C
				24°	DL-WGIP65AA-20-4024- P-C
				38°	DL-WGIP65AA-20-4038- P-C
				60°	DL-WGIP65AA-20-4060- P-C
COB LED	20W	AC220~240V	5000K	15°	DL-WGIP65AA-20-5015- P-C
				24°	DL-WGIP65AA-20-5024- P-C
				38°	DL-WGIP65AA-20-5038- P-C
				60°	DL-WGIP65AA-20-5060- P-C
COB LED	30W	AC220~240V	3000K	15°	DL-WGIP65AA-30-3015- P-C
				24°	DL-WGIP65AA-30-3024- P-C
				38°	DL-WGIP65AA-30-3038- P-C
				60°	DL-WGIP65AA-30-3060- P-C
COB LED	30W	AC220~240V	4000K	15°	DL-WGIP65AA-30-4015- P-C
				24°	DL-WGIP65AA-30-4024- P-C
				38°	DL-WGIP65AA-30-4038- P-C
				60°	DL-WGIP65AA-30-4060- P-C
COB LED	30W	AC220~240V	5000K	15°	DL-WGIP65AA-30-5015- P-C
				24°	DL-WGIP65AA-30-5024- P-C
				38°	DL-WGIP65AA-30-5038- P-C
				60°	DL-WGIP65AA-30-5060- P-C

Power Supply: **P** (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: **C** (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)



White Reflector



Black Reflector



Dark Light Reflector



Silver Reflector



Rose Gold Reflector





Gold Reflector



Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-WGIP65AA-20













DL-WGIP65AA-30



GINA series

RECESSED FIXED DOWNLIGHT



											
Light Source	Power	Voltage	CCT	Beam Angle	Code						
COB LED	7W	AC220~240V	3000K	15°	DL-1105-07-3015- P-C						
				24°	DL-1105-07-3024- P-C						
				38°	DL-1105-07-3038- P-C						
				60°	DL-1105-07-3060- P-C						
COB LED	7W	AC220~240V	4000K	15°	DL-1105-07-4015- P-C						
				24°	DL-1105-07-4024- P-C						
				38°	DL-1105-07-4038- P-C						
				60°	DL-1105-07-4060- P-C						
COB LED	7W	AC220~240V	5000K	15°	DL-1105-07-5015- P-C						
				24°	DL-1105-07-5024- P-C						
				38°	DL-1105-07-5038- P-C						
				60°	DL-1105-07-5060- P-C						
COB LED	12W	AC220~240V	3000K	8°	DL-1107-12-3008- P-C						
				15°	DL-1107-12-3015- P-C						
				24°	DL-1107-12-3024- P-C						
				38°	DL-1107-12-3038- P-C						
				60°	DL-1107-12-3060- P-C						
COB LED	12W	AC220~240V	4000K	8°	DL-1107-12-4008- P-C						
				15°	DL-1107-12-4015- P-C						
				24°	DL-1107-12-4024- P-C						
				38°	DL-1107-12-4038- P-C						
				60°	DL-1107-12-4060- P-C						
COB LED	12W	AC220~240V	5000K	8°	DL-1107-12-5008- P-C						
				15°	DL-1107-12-5015- P-C						
				24°	DL-1107-12-5024- P-C						
				38°	DL-1107-12-5038- P-C						
				60°	DL-1107-12-5060- P-C						
Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)											


Colour Finish: **C** (WW-White / White BB-Black / Black WB-White / Black WD-White / Dark Light BW-Black / White
WS-White / Silver BS-Black / Silver BR-Black / Rose Gold BG-Black / Gold)




Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1105-07










DL-1107-12




GINA series

RECESSED ADJUSTABLE DOWNLIGHT



 50,000hrs		20W	<div><div><div>● 3000K</div><div>○ 4000K</div><div>○ 5000K</div></div><div><div>8°</div><div>15°</div><div>24°</div><div>38°</div><div>60°</div></div><div><div>Adj.</div></div></div>	<div>Ra</div> <div>>90</div>	<div>UGR</div> <div><19</div>	IP20	<div><div>3</div><div>Y</div></div>	<div>CE</div>
Light Source	Power	Voltage	CCT	Beam Angle	Code			
COB LED	20W	AC220~240V	3000K	8°	DL-WG02-20-3008- P-C			
				15°	DL-WG02-20-3015- P-C			
				24°	DL-WG02-20-3024- P-C			
				38°	DL-WG02-20-3038- P-C			
				60°	DL-WG02-20-3060- P-C			
COB LED	20W	AC220~240V	4000K	8°	DL-WG02-20-4008- P-C			
				15°	DL-WG02-20-4015- P-C			
				24°	DL-WG02-20-4024- P-C			
				38°	DL-WG02-20-4038- P-C			
				60°	DL-WG02-20-4060- P-C			
COB LED	20W	AC220~240V	5000K	8°	DL-WG02-20-5008- P-C			
				15°	DL-WG02-20-5015- P-C			
				24°	DL-WG02-20-5024- P-C			
				38°	DL-WG02-20-5038- P-C			
				60°	DL-WG02-20-5060- P-C			
Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)								
Colour Finish: C (WW-White / White BB -Black / Black WB -White / Black WD -White / Dark Light BW -Black / White WS -White / Silver BS -Black / Silver BR -Black / Rose Gold BG -Black / Gold)								
<div><div></div><div></div><div></div><div></div><div></div><div></div></div> <div>White ReflectorBlack ReflectorDark Light ReflectorSilver ReflectorRose Gold ReflectorGold Reflector</div>								
Controller: On / Off, Dimmable, Dali								

DIMENSION
unit:mm













GINA series

TRIMLESS FIXED DOWNLIGHT



IP65 DOWNLIGHT

									
Light Source	Power	Voltage	CCT	Beam Angle	Code				
COB LED	7W	AC220-240V	3000K	15°	DL-1106-07-3015- P-C				
				24°	DL-1106-07-3024- P-C				
				38°	DL-1106-07-3038- P-C				
				60°	DL-1106-07-3060- P-C				
COB LED	7W	AC220-240V	4000K	15°	DL-1106-07-4015- P-C				
				24°	DL-1106-07-4024- P-C				
				38°	DL-1106-07-4038- P-C				
				60°	DL-1106-07-4060- P-C				
COB LED	7W	AC220-240V	5000K	15°	DL-1106-07-5015- P-C				
				24°	DL-1106-07-5024- P-C				
				38°	DL-1106-07-5038- P-C				
				60°	DL-1106-07-5060- P-C				
COB LED	12W	AC220-240V	3000K	8°	DL-1108-12-3008- P-C				
				15°	DL-1108-12-3015- P-C				
				24°	DL-1108-12-3024- P-C				
				38°	DL-1108-12-3038- P-C				
				60°	DL-1108-12-3060- P-C				
COB LED	12W	AC220-240V	4000K	8°	DL-1108-12-4008- P-C				
				15°	DL-1108-12-4015- P-C				
				24°	DL-1108-12-4024- P-C				
				38°	DL-1108-12-4038- P-C				
				60°	DL-1108-12-4060- P-C				
COB LED	12W	AC220-240V	5000K	8°	DL-1108-12-5008- P-C				
				15°	DL-1108-12-5015- P-C				
				24°	DL-1108-12-5024- P-C				
				38°	DL-1108-12-5038- P-C				
				60°	DL-1108-12-5060- P-C				
Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)									


Colour Finish: **C** (WW-White / White **BB**-Black / Black **WB**-White / Black **WD**-White / Dark Light **BW**-Black / White
WS-White / Silver **BS**-Black / Silver **BR**-Black / Rose Gold **BG**-Black / Gold)




Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1106-07



DL-1108-12



















GINA series

TRIMLESS ADJUSTABLE DOWNLIGHT



IP65 DOWNLIGHT

									
Light Source	Power	Voltage	CCT	Beam Angle	Code				
COB LED	20W	AC220-240V	3000K	8°	DL-WG-20-3008- P-C				
				15°	DL-WG-20-3015- P-C				
				24°	DL-WG-20-3024- P-C				
				38°	DL-WG-20-3038- P-C				
				60°	DL-WG-20-3060- P-C				
COB LED	20W	AC220-240V	4000K	8°	DL-WG-20-4008- P-C				
				15°	DL-WG-20-4015- P-C				
				24°	DL-WG-20-4024- P-C				
				38°	DL-WG-20-4038- P-C				
				60°	DL-WG-20-4060- P-C				
COB LED	20W	AC220-240V	5000K	8°	DL-WG-20-5008- P-C				
				15°	DL-WG-20-5015- P-C				
				24°	DL-WG-20-5024- P-C				
				38°	DL-WG-20-5038- P-C				
				60°	DL-WG-20-5060- P-C				
Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)									
Colour Finish: C (WW-White / White BB -Black / Black WB -White / Black WD -White / Dark Light BW -Black / White WS-White / Silver BS -Black / Silver BR -Black / Rose Gold BG -Black / Gold)									
<div>     </div>									
Controller: On / Off, Dimmable, Dali									

DIMENSION
unit:mm

