


KATRADIS MARINE ROPES INDUSTRY S.A.

Synthetic Ropes • Steel Wire Ropes • Anodes • Anchors & Studlink Anchor chains • Worldwide Service

DATA SHEET

IMPROVED 8

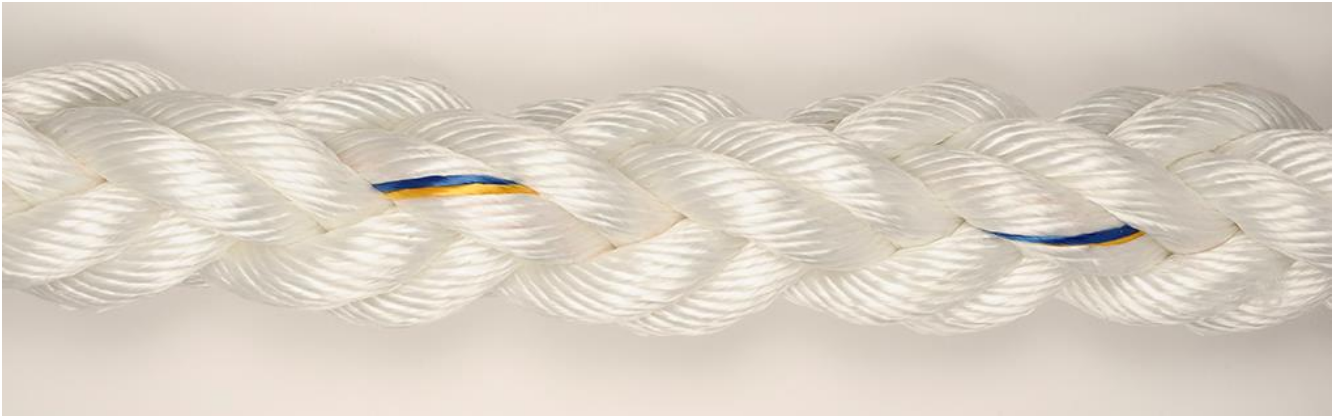

IMPROVED 8 ropes combine strength efficiency and ease of handling. Manufactured by specially twisted yarns of NIKA-Steel® fibers with High Tenacity Polyester fibers (in a 60% - 40% w/w combination respectively) in the outer layers of each strand.

Their mechanically balanced structure, accordant to EN ISO 10556, protects the strands' outer layers against abrasion while achieving high breaking strengths.

They have very good resistance to sunlight & chemicals, good resistance to cyclic loading and their efficiency remains the same both in wet and dry conditions.

Improved Mixed NIKA-Steel® ropes are user friendly, rotation resistant and easy to splice. They comply with the latest regulations and recommendations of OCIMF for the safe mooring of tankers.

APPLICATIONS:

- ✓ MOORING
- ✓ ANCHORING
- ✓ TAILS

KATRADIS MARINE ROPES INDUSTRY S.A.

Synthetic Ropes • Steel Wire Ropes • Anodes • Anchors & Studlink Anchor chains • Worldwide Service

Made from High Tenacity NIKA-Steel® and Polyester fibers



NIKA-Steel® fibers is a special polymer blend of:

- ✓ Polypropylene
- ✓ Polyethylene
- ✓ UV stabilizer

Blended with a unique recipe, our materials result superior mechanical properties compared to conventional polypropylene fibers.
The UV stabilization is included for increased protection against sunlight degradation that normally affects all polymer materials

Effective mixture of NIKA-Steel® with Polyester fibers

- ✓ Technologically advanced machinery equipment
- ✓ Fully controlled yarn twisting
- ✓ Uniformed yarn structure

	Fiber Properties					
	Specific Gravity	Melting point	Tenacity	Elongation at break	Chemical resistance	UV Resistance
NIKA-Steel	0.97	145 °C	> 8.8 gr/den	14 %	Very Good	Excellent
Polyester	1.38	265 °C	> 9.0 gr/den	15 %	Very Good	Excellent

KATRADIS MARINE ROPES INDUSTRY S.A.

Synthetic Ropes • Steel Wire Ropes • Anodes • Anchors & Studlink Anchor chains • Worldwide Service



IMPROVED 8 Mooring Ropes

FEATURES

- ✓ Specific gravity: 0,99 (floating)
- ✓ Elongation at break: 15-18%
- ✓ Melting point: 165 °C (NIKA-Steel®) / 265 °C (Polyester)
- ✓ UV Resistance: Excellent
- ✓ Chemical Resistance: Very Good

BENEFITS

- ✓ Easy to handle – User friendly
- ✓ Easy to inspect
- ✓ Non-rotating when under load
- ✓ Increased service lifetime
- ✓ Compliance with MEG4 requirements (OCIMF)

Table of technical data

Nom. Size (Diam)	Weight (+/- 5%)		MBL (acc. ISO 2307)	LDBF (acc. MEG4)
mm	kg / 100m mtr	kg / 220 mtr	tn	tn
32	59.0	129.8	21.5	19.4
36	66.5	146.3	28.1	25.5
40	79.0	173.8	34.5	31.4
44	96.0	211.2	40.8	37.1
48	115.0	253.0	48.1	43.7
52	136.0	299.2	54.3	49.4
56	156.0	343.2	63.8	58.0
60	180.0	396.0	70.1	63.7
64	208.0	457.6	81.5	74.1
68	234.0	514.8	89.9	81.7
72	260.0	572.0	100.3	91.2
76	290.0	638.0	112.9	102.6
80	321.0	706.2	125.4	114.0
84	352.0	774.4	134.9	122.6

MBL: Minimum Breaking Load (as per ISO 2307)

LDBF: Line Design Break Force (as per MEG4)

