




ONE GREEN FILTER | SALT WATER CONDITIONER

ONE GREEN CONDITIONER

One Green Conditioner™ Series

More than a softener. The **One Green Conditioner** is a **three-medium layered bed** in a premium stainless-steel jacketed tank that does what a standalone softener cannot: **conditions the water** with iron, hydrogen sulfide, and dissolved heavy metals removed *before* the resin softens it, plus bacteriostatic protection inside the bed.

Water enters the top and passes down through **FerroShield™** and **ChloroShield™** redox layers that strip iron, hydrogen sulfide, and dissolved heavy metals (lead, mercury, copper) while inhibiting bacteria, algae and fungi from growing inside the system. The water then enters a deep bed of **SoftShield™** premium ion-exchange resin that removes hardness. Because the contaminants that damage resin are stripped before they reach it, the resin lasts **up to double** the typical service life.

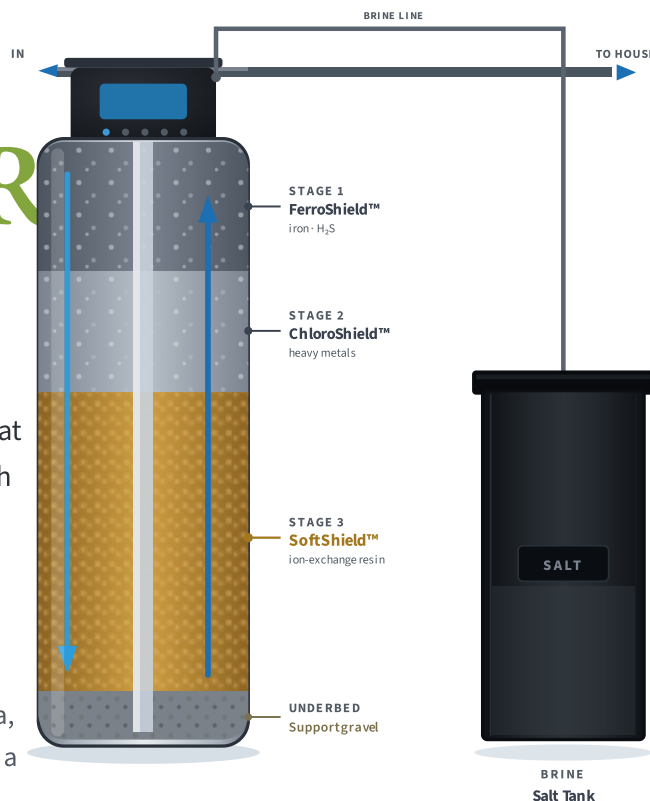

PREMIUM BUILD
Stainless Steel Jacket
premium mineral tank



100% Soft Water
Ion-exchange softening



Resin Protected
Up to double the service life



Whole-Home
Every faucet, every appliance



Stainless Build
Premium full steel jacket



THREE STAGES. ONE SMARTER SOFTENER.

The One Green Conditioner is a **three-medium layered bed** in a single stainless-steel jacketed tank. Water enters the top and passes **straight down through all three layers** before exiting back up the center riser, fully treated. Each layer does a specific job, and the order matters: iron, hydrogen sulfide, and heavy metals are removed *before* the resin ever sees them, and the bed is protected from microbial growth throughout.

1

FERROSHIELD™ PRO REDOX — *Iron, Hydrogen Sulfide & Bacteriostatic*

A high-purity copper-zinc redox medium that converts dissolved ferrous iron into filterable ferric hydroxide and eliminates rotten-egg sulfur (H₂S). Its electrolytic field inhibits bacteria, algae and fungi from growing inside the bed.

2

CHLOROSHIELD™ PRO REDOX — *Heavy Metals & Bacteriostatic Protection*

A high-purity copper-zinc redox medium that removes dissolved heavy metals — lead, mercury, copper, nickel and chromium — before they can reach the resin. Adds to the bacteriostatic protection of the bed, inhibiting bacteria, algae and fungi from growing inside the system. Provides *trace chlorine reduction* as a secondary effect; for full chlorine reduction we recommend pairing with our CarbonShield™ (see the Defender or Guardian series).

3

SOFTSHIELD™ PREMIUM RESIN — *Ion-Exchange Softening*

The deepest layer and the bulk of the bed. The resin beads attract calcium and magnesium hardness ions out of the water and release harmless sodium ions in exchange. When saturated, the metered control valve automatically regenerates the bed with a brine rinse from the salt tank.



ion exchange · hardness captured
metered regeneration · salt-driven



WHY THE LAYERED DESIGN MATTERS

Iron, dissolved heavy metals, and microbial growth inside the bed are the contaminants that shorten the life of softener resin. Iron **fouls** the bed and coats the beads. Heavy metals can damage the resin structure. Bacterial and fungal growth leads to biofouling and channeling. In a standard salt softener with raw water coming in, the resin is exposed to all of it from day one, and replacement is typically needed in **5 to 7 years**. The Conditioner removes iron and heavy metals upstream and protects the bed bacteriostatically — **helping the resin last 10 to 15 years or longer**, up to **double** the typical softener.

FerroShield™ and ChloroShield™ redox media are bacteriostatic — they inhibit microbial growth within the media bed and are not a disinfection system. Pre-treatment may be required for very high iron, manganese or hydrogen sulfide. Resin life depends on incoming water chemistry and usage.

CONDITIONING. SOFTENING. BUILT TO LAST.



FULL SOFTENING

SoftShield™ ion-exchange resin removes calcium and magnesium hardness — truly soft water at every fixture.



IRON & H₂S REMOVED

FerroShield™ converts dissolved iron into filterable form and eliminates rotten-egg sulfur odor at the source.



HEAVY METALS REMOVED

ChloroShield™ redox strips dissolved lead, mercury, copper, nickel and chromium before they reach the resin.



BACTERIOSTATIC

FerroShield™ and ChloroShield™ redox media inhibit bacteria, algae and fungi from growing inside the system.



RESIN PROTECTED

Removing iron and heavy metals upstream helps the resin last up to **double** the typical softener service life.



WHOLE-HOME

Point-of-entry treatment. Every tap, every shower, every appliance gets the same conditioned water.

CONDITIONER VS. STANDARD SOFTENER

	Standard Softener	One Green Conditioner
Removes hardness via ion exchange	✓	✓
Removes iron & hydrogen sulfide	✗	✓ FerroShield
Removes dissolved heavy metals	✗	✓ ChloroShield
Inhibits bacteria, algae & fungi in bed	✗	✓ (redox)
Helps extend resin service life	✗	✓
Typical resin service life	5–7 years	10–15 years
Premium stainless-steel jacket	varies	✓ standard



BATHROOM

Soft skin & hair, no soap scum.



KITCHEN

Spot-free glassware & dishes.



LAUNDRY

Clothes last up to 33% longer.



APPLIANCES

Heaters & washers last 30% longer.

TECHNICAL DATA



RESIDENTIAL SYSTEM SIZING

Model	OGC-9	OGC-12	OGC-13	OGC-18
FerroShield™ (top layer)	0.15 ft ³	0.20 ft ³	0.25 ft ³	0.30 ft ³
ChloroShield™ (middle layer)	0.15 ft ³	0.20 ft ³	0.25 ft ³	0.30 ft ³
SoftShield™ Premium Resin (bulk)	1.0 ft ³	1.5 ft ³	2.0 ft ³	2.5 ft ³
Softener grain capacity	32,000	48,000	64,000	80,000
Peak service flow	9 gpm	12 gpm	13 gpm	18 gpm
Mineral tank size	9" × 48"	10" × 54"	12" × 48"	13" × 54"
Brine tank	14" × 34"	18" × 40"	18" × 40"	24" × 50"
Salt capacity	200 lb	300 lb	300 lb	400 lb
Inlet / outlet connection	1"	1"	1"	1"
Approx. shipping weight	180 lb	230 lb	300 lb	370 lb

Sized for typical residential households. Larger and commercial configurations available on request. Resin service life depends on incoming water chemistry, usage, and upstream protection from iron and heavy metals.

FERROSHIELD™ / CHLOROSHIELD™

Base	High-purity Cu-Zn
Appearance	Gray metallic
Mechanism	Redox (electron exch.)
Reduces	Fe · H ₂ S · heavy metals
Microbial	Bacteriostatic†
Service life	5–8 yrs

OPERATING PARAMETERS

Service flow direction	Down-flow
Operating temperature	40–100 °F
Operating pressure	25–80 psi
Inlet pH range	6.5–9.5
Max. hardness	75 gpg
Electrical	12V transformer

SOFTSHIELD™ PREMIUM RESIN

Base	Premium cation-exchange resin
Appearance	Amber spherical beads
Mesh	16 × 50
Capacity	30K grains/ft ³ at 15 lb salt
Regeneration	Salt brine · metered
Service life	10–15+ yrs (protected)

INCLUDED & PACKAGING

- **Premium stainless-steel jacketed** mineral tank
- 3-layered media bed: FerroShield™ + ChloroShield™ + SoftShield™ Premium Resin
- Graded gravel underbed
- Metered backwashing control valve with LCD display
- High-capacity brine tank with safety float
- Riser, distributor, 12V transformer
- Installation & owner's manual



CERTIFICATIONS & NOTES

FerroShield™ and ChloroShield™ redox media meet EPA/FDA potable-water standards and are certified for safety in drinking water systems. SoftShield™ premium resin is **NSF/ANSI/CAN 61 certified** for ion-exchange materials. †Redox media is bacteriostatic — not a disinfection system. Do not use on microbiologically unsafe water.

Disclaimer: Information is based on media-manufacturer data, provided in good faith without warranty. Actual contaminant reduction varies with water chemistry, flow rate, contact time and concentration. Specifications subject to change without notice.