




ONE GREEN FILTER | DUAL-TANK SOFTENER + FILTER

ONE GREEN GUARDIAN

— One Green Guardian™ Series

Two premium stainless-steel jacketed tanks, engineered to work together. The **One Green Guardian** pairs a deep **CarbonShield™** filter with our **SoftShield™** ion-exchange softener so your home gets **up to 98% PFAS reduction, full softening, and dramatically longer resin life**, all in one integrated system.

Water enters **Tank 1** first, where **CarbonShield™** catalytic carbon, **FerroShield™** and **ChloroShield™** redox media remove PFAS, chlorine, iron, hydrogen sulfide, and heavy metals *before* the softener. Removing chlorine and iron upstream protects the resin and can **double its service life**. The pre-treated water then flows into **Tank 2**, where **SoftShield™** premium resin removes hardness through ion exchange, delivering fully softened water to every fixture in the home.

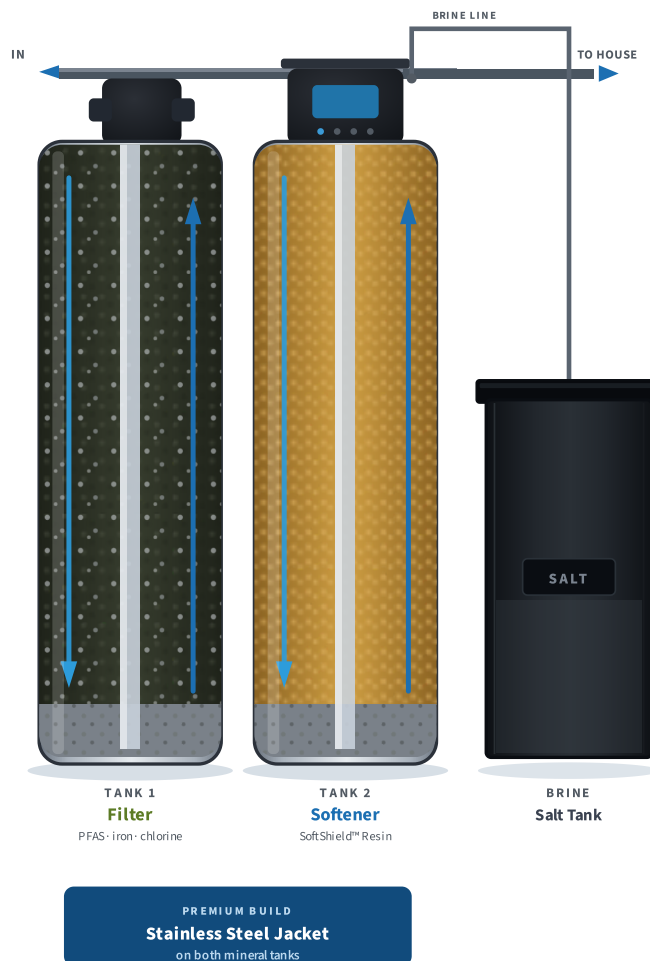

Up to 98%
PFAS / PFOA reduction



100% Soft Water
Ion-exchange softening



Whole-Home
Every faucet, every appliance



Stainless Build
Premium full steel jacket



TWO TANKS. TWO JOBS. ONE BETTER WAY.

The One Green Guardian is a **two-tank system** housed in **premium full stainless-steel jackets**. Water enters **Tank 1** first, where our proprietary multi-media filter removes PFAS, chlorine, iron, hydrogen sulfide, and heavy metals. The fully filtered water then flows into **Tank 2**, where our **SoftShield™** premium ion-exchange resin removes hardness and delivers soft water to every fixture. The two tanks work together to deliver something a standalone softener cannot.

1

FILTER TANK — *Multi-Stage Filtration & Resin Protection*

A mixed-media bed of three proprietary OneGreenFilter media in a single stainless-jacketed tank with an in/out control head. Water flows down through the bed, where each medium does a specific job:

CarbonShield™

PFAS up to 98%, chlorine, taste, odor, sediment to 1 micron

FerroShield™

Iron, hydrogen sulfide, bacteriostatic protection

ChloroShield™

Chlorine removal, heavy metals (lead, mercury, copper)

↓ flows to softener ↓

2

SOFTENER TANK — *SoftShield™ Resin · Ion Exchange*

Pre-filtered water enters Tank 2, where **SoftShield™** premium ion-exchange resin removes hardness. The resin beads attract calcium and magnesium ions out of the water and release harmless sodium ions in exchange. When the resin becomes saturated, the metered control valve regenerates the bed automatically with a brine rinse from the salt tank. The result is fully softened water at every fixture in the home.



ion exchange · hardness captured
metered regeneration · salt-driven



WHY THIS ORDER MATTERS

Chlorine and iron are the two biggest enemies of ion-exchange resin. Chlorine **oxidizes** the resin and breaks down the bead structure. Iron **fouls** the bed and coats the beads, blocking the exchange sites. In a standalone softener with raw water coming in, both attack the resin from day one, and replacement is typically needed in **5 to 7 years**.

The Guardian removes both contaminants in Tank 1 **before** the water ever touches the resin in Tank 2. Combined with the bacteriostatic protection of the redox media, the SoftShield™ resin in your Guardian can last **10 to 15 years or longer** — up to **double the service life** of a conventional softener.

FerroShield™ and ChloroShield™ redox media are bacteriostatic — they inhibit microbial growth within the media bed and are not a disinfection system. Pre-treatment may be required for very high iron, manganese or hydrogen sulfide. Resin life depends on incoming water chemistry and usage.

FILTRATION. SOFTENING. BUILT TO LAST.



PFAS PROTECTION

Targets the "forever chemicals" most softeners can't touch — up to 98% reduction at Tank 1.



FULL SOFTENING

SoftShield™ ion-exchange resin removes calcium and magnesium hardness at Tank 2 — truly soft water.



RESIN PROTECTED

Chlorine and iron removed in Tank 1 mean the resin in Tank 2 can last up to **double** the typical service life.



WHOLE-HOME

Point-of-entry protection. Every tap, every shower, every appliance gets the same treated water.



BACTERIOSTATIC

Proprietary redox media in Tank 1 inhibits bacteria, algae and fungi from growing inside the system.



STAINLESS BUILD

Both mineral tanks come standard with full stainless-steel jackets — built to outlast the plastic competition.

GUARDIAN VS. STANDALONE SOFTENER

	Standalone Softener	One Green Guardian
Removes hardness via ion exchange	✓	✓
Reduces PFAS / forever chemicals	✗	✓ up to 98%
Removes chlorine, taste & odor	✗	✓
Removes iron, H ₂ S & heavy metals	✗	✓
Inhibits bacteria, algae & fungi in bed	✗	✓ (redox)
Resin protected from chlorine & iron	✗	✓
Typical resin service life	5–7 years	10–15 years
Premium stainless-steel jacket	varies	✓ standard



BATHROOM

Soft skin & hair, no soap scum.



KITCHEN

Spot-free glassware & dishes.



LAUNDRY

Clothes last up to 33% longer.



APPLIANCES

Heaters & washers last 30% longer.

TECHNICAL DATA



RESIDENTIAL SYSTEM SIZING

Model	OGG-9	OGG-12	OGG-13	OGG-18
Tank 1 — CarbonShield™	1.0 ft ³	1.5 ft ³	2.0 ft ³	2.5 ft ³
Tank 1 — FerroShield + ChloroShield	0.30 ft ³	0.40 ft ³	0.50 ft ³	0.60 ft ³
Tank 2 — SoftShield™ Resin	1.0 ft ³	1.5 ft ³	2.0 ft ³	2.5 ft ³
Softener grain capacity	32,000	48,000	64,000	80,000
Peak service flow	9 gpm	12 gpm	13 gpm	18 gpm
PFAS-rated flow (EBCT ≥ 90s) ¹	4 gpm	6 gpm	8 gpm	10 gpm
Mineral tank size (each)	9" × 48"	10" × 54"	12" × 48"	13" × 54"
Brine tank	14" × 34"	18" × 40"	18" × 40"	24" × 50"
Salt capacity	200 lb	300 lb	300 lb	400 lb
Inlet / outlet connection	1"	1"	1"	1"
Approx. shipping weight	280 lb	360 lb	460 lb	560 lb

¹PFAS reduction depends on empty-bed contact time (EBCT ≥ 90 sec) and influent water chemistry. Size to the PFAS-rated flow for maximum reduction. Larger and commercial configurations available on request.

CARBONSHIELD™

Base	Coconut carbon, MO/Fe-enhanced
Appearance	Greenish-black
Mesh	8×30 · 0.6–2.4 mm
Surface (BET)	2,000–2,500 m ² /g
Bulk density	630–640 kg/m ³
Service life	2–5 yrs (regen.)

FERROSHIELD /
CHLOROSHIELD

Base	High-purity Cu-Zn
Appearance	Gray metallic
Mechanism	Redox (electron exch.)
Reduces	Cl ₂ · Fe · H ₂ S · metals
Microbial	Bacteriostatic†
Service life	5–8 yrs

SOFTSHIELD™ RESIN

Base	Premium cation resin
Appearance	Amber beads
Mesh	16 × 50
Capacity	30K grains/ft ³
Regeneration	Salt brine · metered
Service life	10–15+ yrs

OPERATING PARAMETERS

Service flow direction	Down-flow
Operating temperature	40–100 °F
Operating pressure	25–80 psi
Inlet pH range	6.5–9.5
Max. TDS / salinity	35,000 ppm
Electrical	None · opt. meter

INCLUDED & PACKAGING

- Two **premium stainless-steel jacketed** mineral tanks
- Tank 1: CarbonShield™ + FerroShield™ + ChloroShield™
- Tank 2: SoftShield™ Premium Resin (ion-exchange)
- Metered backwash valve w/ LCD · in/out head on Tank 1
- High-capacity brine tank w/ safety float
- Risers, distributors, graded gravel underbeds
- Installation & owner's manual



CERTIFICATIONS & NOTES

CarbonShield™ catalytic carbon is **certified through IAPMO to NSF/ANSI/CAN 61 & 372** (same standards as NSF). FerroShield™ and ChloroShield™ meet EPA/FDA potable-water standards. SoftShield™ resin is NSF/ANSI/CAN 61 certified. †Redox media is **bacteriostatic — not a disinfection system. Do not use on microbiologically unsafe water.**

Disclaimer: Information is based on media-manufacturer data, provided in good faith without warranty. Actual contaminant reduction varies with water chemistry, flow rate, contact time and concentration. Specifications subject to change without notice.