




ONE GREEN FILTER | SINGLE-TANK FILTER + SOFTENER

ONE GREEN GUARDIAN SOLO

One Green Guardian™ Series

All-in-one whole-home treatment in a single premium stainless-steel jacketed tank. The **One Green Guardian Solo** layers four proprietary One Green media into one mineral tank — reducing up to 98% of PFAS, removing chlorine, heavy metals, iron and hydrogen sulfide, and softening hardness, all from a single brine tank.

Water enters the top and passes down through **RedoxShield™** and **CarbonShield™** contaminant layers, into a deep bed of **SoftShield™** ion-exchange resin, and finally a **FerroShield™** catalytic layer and graded underbed — then returns up the center riser, fully treated.

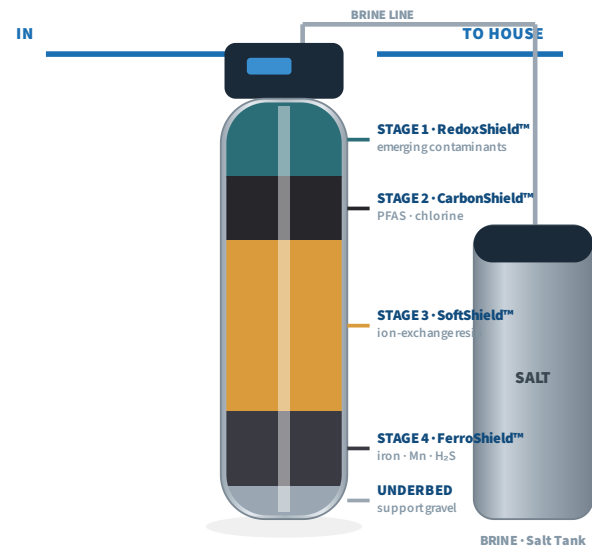

PREMIUM BUILD
Stainless Steel Jacket
premium mineral tank



Up to 98%
PFAS / PFOA reduction



100% Soft Water
ion-exchange softening



Whole-Home
Every faucet, every appliance



Stainless Build
Premium full steel jacket



FOUR MEDIAS. ONE SMART TANK.

The One Green Guardian Solo is a four-medium layered bed in a single premium stainless-steel jacketed tank. Water enters the top and passes straight down through all four layers before returning up the center riser, fully treated. Each layer does a specific job, and the order matters — contaminants that damage softening resin are removed before the water ever reaches it, and the bed is protected from microbial growth throughout.

1 REDOXSHIELD™ PRO REDOX — Emerging Contaminants & Bacteriostatic

A high-redox zinc/copper MOF medium drives a self-sustaining oxidation–reduction cycle that breaks down **emerging contaminants and organics** and inhibits bacteria, algae and fungi from growing inside the bed. Regenerable and sustainable.

2 CARBONSHIELD™ CATALYTIC — PFAS, Chlorine, Taste & Odor

Catalytic carbon enhanced with Zero-Valent Iron reduces **up to 98% of PFAS / PFOA** and captures chlorine, chloramines, THMs, taste, odor and dissolved heavy metals. High-surface-area carbon (2,000–2,500 m²/g) filters sediment to ≤ 1 µm.

3 SOFTSHIELD™ PREMIUM RESIN — Ion-Exchange Softening

The deepest layer and the bulk of the bed. The resin beads attract **calcium and magnesium hardness** ions out of the water and release harmless sodium ions in exchange. When saturated, the metered control valve regenerates the bed with a brine rinse — on roughly **80 g of salt per liter**, far less than a conventional softener.



ION EXCHANGE · HARDNESS CAPTURED
METERED REGENERATION · SALT-DRIVEN

4 FERROSHIELD™ CATALYTIC — Iron, Manganese & Hydrogen Sulfide

A gamma-manganese catalytic medium at the base of the bed oxidizes and captures **iron, manganese and hydrogen sulfide**, clearing rotten-egg odor and protecting the resin above it.



SUPPORT UNDERBED — Flow Distribution & Media Support

A graded gravel underbed evenly distributes service and backwash flow across the tank, supports the four media layers, and keeps fines out of the riser and distributor.

WHY THE LAYERED DESIGN MATTERS

The four medias settle by density into a stable, repeatable order, so every drop is oxidized, filtered, softened and polished on its way down. One brine tank regenerates the entire bed in a **single metered step** using ~80 g of salt per liter of SoftShield™ — delivering multi-stage filtration **and** softening in one compact, stainless-jacketed tank, where the Guardian uses two.

RedoxShield™ and FerroShield™ media are bacteriostatic — they inhibit microbial growth within the media bed and are not a disinfection system. Pre-treatment may be required for very high iron, manganese or hydrogen sulfide. Resin life depends on incoming water chemistry and usage.

FILTRATION. SOFTENING. BUILT TO LAST.

PFAS PROTECTION

Targets the “forever chemicals” most softeners can’t touch — **up to 98% reduction** at the CarbonShield™ layer.

IRON, METALS & CHLORINE

RedoxShield™, CarbonShield™ and FerroShield™ strip **chlorine, heavy metals, iron and H₂S** before the resin.

FULL SOFTENING

SoftShield™ ion-exchange resin removes calcium and magnesium hardness — **truly soft water** at every fixture.

BACTERIOSTATIC

Proprietary redox media **inhibits bacteria, algae and fungi** from growing inside the system.

FILTERS + SOFTENS

One layered bed does the work of a separate filter and softener — **all in a single tank**.

STAINLESS BUILD

Premium full **stainless-steel jacket** — built to outlast the plastic-tank competition.

GUARDIAN SOLO VS. STANDARD SOFTENER

	STANDARD SOFTENER	ONE GREEN GUARDIAN SOLO
Removes hardness via ion exchange	✓	✓
Reduces PFAS / forever chemicals	✗	✓ up to 98%
Removes chlorine, taste & odor	✗	✓ CarbonShield
Removes iron, H ₂ S & heavy metals	✗	✓ Ferro / Redox
Inhibits bacteria, algae & fungi in bed	✗	✓ (redox)
Filter + softener in one tank	✗	✓
Premium stainless-steel jacket	varies	✓ standard

BATHROOM

Soft skin & hair, no soap scum.

KITCHEN

Spot-free glassware & dishes.

LAUNDRY

Clothes last up to 33% longer.

APPLIANCES

Heaters & washers last 30% longer.

RESIDENTIAL SYSTEM SIZING

Model	OGS-9	OGS-12	OGS-13	OGS-18
RedoxShield™ (top layer)	0.22 ft ³	0.30 ft ³	0.40 ft ³	0.50 ft ³
CarbonShield™ (2nd layer)	0.22 ft ³	0.30 ft ³	0.40 ft ³	0.50 ft ³
SoftShield™ Premium Resin (bulk)	0.44 ft ³	0.60 ft ³	0.80 ft ³	1.00 ft ³
FerroShield™ (base layer)	0.22 ft ³	0.30 ft ³	0.40 ft ³	0.50 ft ³
Softener grain capacity	13,000	18,000	24,000	30,000
Peak service flow	7 gpm	9 gpm	11 gpm	14 gpm
PFAS-rated flow (EBCT ≥ 90s) ¹	3 gpm	4 gpm	6 gpm	8 gpm
Mineral tank size	9" × 48"	10" × 54"	12" × 48"	13" × 54"
Brine tank	14" × 34"	18" × 40"	18" × 40"	18" × 40"
Salt capacity	200 lb	300 lb	300 lb	300 lb
Inlet / outlet connection	1"	1"	1"	1"
Approx. shipping weight	180 lb	240 lb	300 lb	380 lb

¹ PFAS reduction depends on empty-bed contact time (EBCT ≥ 90 sec) and influent water chemistry. Size to the PFAS-rated flow for maximum reduction. Single-step regeneration uses ~80 g sodium chloride per liter of SoftShield™ media. Larger and commercial configurations available on request.

CARBONSHIELD™ CATALYTIC

Base	Coconut carbon, MO/Fe
Appearance	Greenish-black
Mesh	8 × 30 • 0.6–2.4 mm
Surface (BET)	2,000–2,500 m ² /g
Reduces	PFAS • Cl ₂ • THM
Service life	2–5 yrs (regen.)

REDOXSHIELD™

Base	Zn/Cu MOF redox
Appearance	Black granules
Mesh	8 × 30
Mechanism	Self-sustaining redox
Microbial	Bacteriostatic†
Service life	~5 yrs

SOFTSHIELD™ / FERROSHIELD™

SoftShield base	Premium cation resin
Capacity	30K grains/ft ³
Regeneration	Salt brine • metered
FerroShield base	Gamma manganese
Reduces	Fe • Mn • H ₂ S
Service life	5–15+ yrs

OPERATING PARAMETERS

Service flow direction	Down-flow
Operating temperature	40–100 °F
Operating pressure	25–80 psi
Inlet pH range	6.5–9.5
Regeneration	Single-step • metered
Electrical	12V transformer

INCLUDED & PACKAGING

- Premium stainless-steel jacketed mineral tank
- 4-layer media bed: RedoxShield™ + CarbonShield™ + SoftShield™ + FerroShield™
- Graded gravel underbed
- Metered backwashing control valve with LCD display
- High-capacity brine tank with safety float
- Riser, distributor, 12V transformer
- Installation & owner's manual



CERTIFICATIONS & NOTES

CarbonShield™ catalytic carbon is certified through IAPMO to NSF/ANSI/CAN 61 & 372. RedoxShield™ and FerroShield™ media meet EPA/FDA potable-water standards; SoftShield™ resin is NSF/ANSI/CAN 61 certified. †Redox media is bacteriostatic — not a disinfection system. Do not use on microbiologically unsafe water. Pre-treatment may be required for very high iron, manganese or hydrogen sulfide.

Disclaimer: Information is based on media-manufacturer data, provided in good faith without warranty. Actual contaminant reduction varies with water chemistry, flow rate, contact time and concentration. Product name and model numbers are working placeholders for this draft; specifications subject to change without notice.