




# ENGINE OIL

## ⚠ CAUTION

Used engine oil may cause skin cancer if repeatedly left in contact with the skin for prolonged periods. Although this is unlikely unless you handle used oil on a daily basis, it is still advisable to thoroughly wash your hands with soap and water as soon as possible after handling used oil.


## OIL LEVEL CHECK

### Dipstick Type:

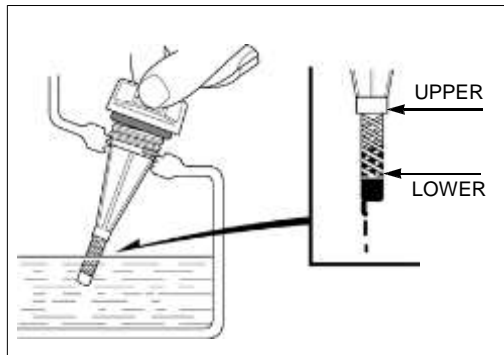


- Support the vehicle on a level surface.
- Let it idle for 3 - 5 minutes
- Stop the engine and wait for 2 - 3 minutes.
- Oil filler cap/dipstick
- Oil filler cap/dipstick (without screwing)
- Check the oil level.
- If the oil level is "LOWER" level, fill the recommended oil up to the "UPPER" level line.
- Oil filler cap/dipstick

### Inspection Window Type:

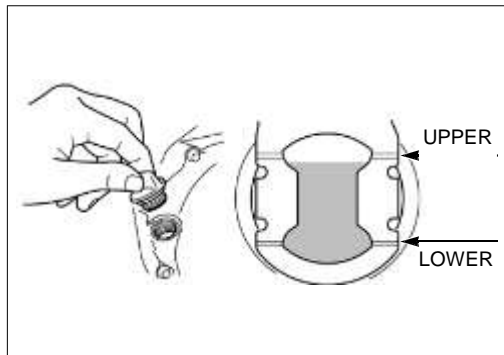

- Support the vehicle on a level surface.
- Let it idle for 3 - 5 minutes
- Stop the engine and wait for 2 - 3 minutes.
- Oil level
- If the oil level is "LOWER" level, remove the oil filler cap and fill the recommended oil up to the "UPPER" level line.

## OIL CHANGE

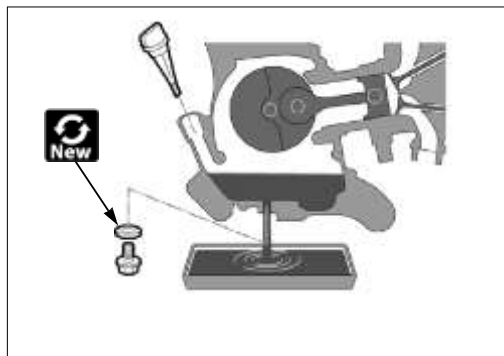


- Oil filler cap
- Drain bolt
- Sealing washer
- Drain oil completely.
- Drain bolt and new sealing washer
- Fill the recommended engine oil.
- Oil level



## ENGINE OIL STRAINER SCREEN

### Basket Type:

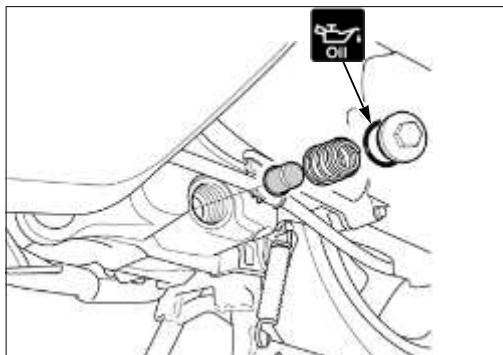

- Drain the engine oil.
- Cap
- O-ring
- Spring
- Oil strainer screen
- Clean the oil strainer screen (using non-flammable or high flash point cleaning solvent).
- Blow dry it with compressed air to clean completely.



O-ring condition




- Oil strainer screen
- Spring
- O-ring
- Cap



Fill the recommended engine oil.

### Flat Type:

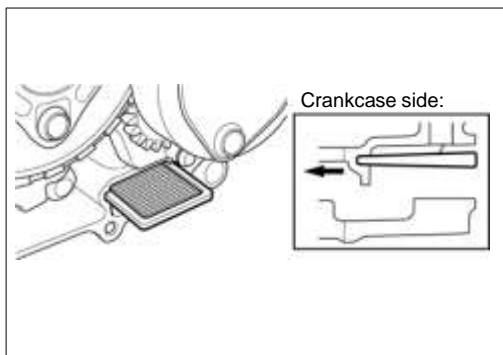


- Drain the engine oil.
- Crankcase cover
- Oil strainer screen
- Clean the oil strainer screen (using non-flammable or high flash point cleaning solvent).
- Oil strainer screen (tapered side facing the crankcase side)
- Crankcase cover
- Fill the recommended engine oil.



## ENGINE OIL FILTER

### Paper Filter Type:

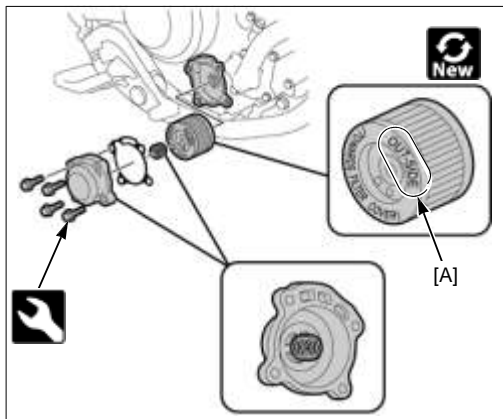

- Drain the engine oil.
- Oil filter cover
- Gasket or O-ring
- Spring
- Oil filter
- Clean the oil strainer screen (using non-flammable or high flash point cleaning solvent).
- O-ring condition
- New oil filter ("OUT-SIDE" mark [A] facing out)
- Spring
- New gasket or O-ring
- Oil filter cover
- Fill the recommended engine oil.

